



Ethernet Over SONET

OPTI-6100® (MX or SMX Chassis) Ethernet Over SONET Module

Product Features

- Three individual Ethernet ports
- Generic Framing Procedure (GFP) as per ITU-T G.7041
- Operates in any mid-speed slot of the OPTI-6100 (MX/SMX chassis)
- 10/100Base-T auto sensing interface
- Front panel RJ-45 connector
- Fully programmable and remotely manageable
- Front panel indicators:
 - Power/status
 - Link (per port)
 - Activity (per port)
- High-order and low-order virtual concatenation
- Industry-leading, 10-year warranty

Carriers are looking to increase revenues and one avenue is to convert existing DS3 clients to Ethernet. This offers higher prices and hence revenue, but at a lower price per bit basis.

The ADTRAN™ OPTI-6100 (MX and SMX chassis), compact SONET access multiplexers set a new standard in price/performance for edge multiplexing. The OPTI-6100 (MX/SMX chassis) Ethernet over SONET module furthers the economics of the system by implementing the industry-standard procedure for provisioning Ethernet services over SONET infrastructures. This permits the new tariff-enabling variable bandwidth transparent LAN services to be provisioned over existing infrastructures and OS systems. This process greatly lowers capital and expense costs while providing an optimized native mode data transport.

ADTRAN's OPTI-6100 (MX/SMX chassis)

Ethernet over SONET module provides:

- Ethernet over SONET (EoS) interfaces for the OPTI-6100 (MX/SMX) systems
- Up to three 10/100Base-T Ethernet ports per card
- Up to 12 modules per OPTI-6100 MX system or 4 modules per OPTI-6100 SMX system
- Each port is provisionable at 10Mb or 100 Mb

- Ethernet frame encapsulation/decapsulation protocols:
 - ITU-T G.7041, Generic Framing Procedure (GFP)
 - ITU-T X.86/X.85, Link Access Procedure SDH (LAPS)
 - ITU-T Q.922, Link Access Procedure Frame Mode (LAPF)
 - RFC1662/2878, PPP Bridging Control Protocol (BCP)
- IEEE 802.3 half duplex and full duplex mode on 10/100Base-T Ethernet ports
- IEEE 802.3 Management Statistics (RMON) support
- Mapping and demapping of encapsulated Ethernet frames into and from low-order (VT1.5 SPE) and high-order (STS-1 SPE) virtual concatenated payloads
- Mapping and demapping of encapsulated Ethernet frames into and from a single contiguous concatenated (STS-3c) payload or a single low-order/high-order (VT1.5/STS-1) payload
- Per-port Ethernet side and SONET/SDH system side loopback for system level diagnostics

OPTI-6100 (MX/SMX chassis) Ethernet Over SONET Module

ADTRAN, Inc.
901 Explorer Boulevard
Huntsville, AL 35890

P.O. Box 140000
Huntsville, AL 35814-0000

256 963 9000 voice
256 963 8030 fax

General Information
800 ADTRAN
info@adtran.com
www.adtran.com

**Pre-Sales
Technical Support**
888 ADTRAN
support@adtran.com
www.adtran.com/support

Where to Buy
800 627 0807
www.adtran.com/wheretobuy

**Post-Sales
Technical Support**
800 726 9953
support@adtran.com
www.adtran.com/support


Regional Offices
Dallas, TX
972 630 9070
Denver, CO
303 471 3150
Kansas City, KS
903 471 8949
Newark, NJ
903 471 8856
Ontario, Canada
416 250 0585
Quebec, Canada
877 923 8726
San Antonio, TX
888 223 7671

International Inquiries
+1 256 963 8716 voice
+1 256 963 8300 fax
international@adtran.com
www.adtran.com/international



ADTRAN is an ISO 9001:2008 and TL 9000 registered company.

61184510L1-8E September 2006
Copyright © 2006 ADTRAN, Inc.
All rights reserved.

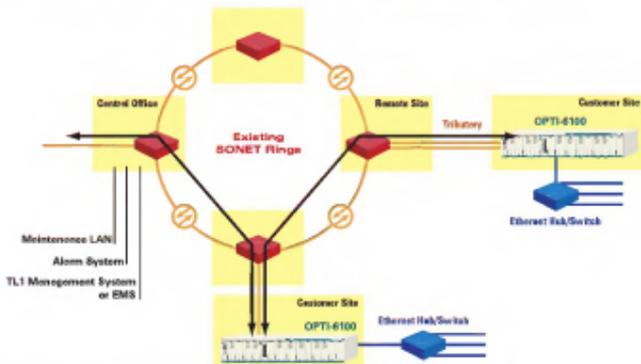

Product Specifications

Front Panel Features

- Power LED
- Status LED
- Link LED
- Activity LED

Mechanical

- **Dimensions:** 3 in. H x 1.1 in. W x 10 in. D
- **Weight:** Less than 1 lb
- **Mounting:** OPTI-6100 MX or OPTI-6100 SMX chassis, any MS slot

Interfaces

Subscriber Interfaces

- 10/100Base-T (3), RJ-45 (1) per card
- Category 5 cabling

Mapping

- STS-1 per port or
- N x STS-1 or per port, n=1 to 3
- N x VT1.5 per port, n=1 to 28

Electrical

- ±24 V or -48 V, nominal
- A and B feeders
- **Power consumption:** 6.5 W

Regulatory Standards

- NEBS Level 3
- GR-1089-CORE, Issue 3
- NRTL Safety Listed

Management

- Menu via the local craft port (SCM)
- Remotely via Telnet
- TL-1
- SNMP

Environment

- **Operating temperature:** -40°C to +65°C
- **Storage temperature:** -40°C to +85°C
- **Relative humidity:** Up to 95 percent, noncondensing

Ordering Information

Equipment	Part #
OPTI-6100 (MX/SMX chassis) Ethernet Over SONET Module	1184510L1

Specifications are subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. All other registered trademarks and trademarks mentioned in this publication are the property of their respective owners.