



Cisco XRV9000

IOS-XR Release 25.1.1

IOS-XR System Upgrade/Downgrade Procedure



Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Asia Pacific Headquarters
Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Europe Headquarters
Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: +31 0 800 020 0791
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0609R)

Cisco Confidential

Contents

Purpose, Scope and Audience	3
Obtain Required Package Files	3
Configuration Backup	4
Pre-Upgrade Tasks	4
Fresh boot	5
M7 Appliance CIMC boot	5
Classic Method	9
Post-Upgrade Tasks	11
Caveats	14

Purpose, Scope and Audience

This document provides information on the two methods Classic and GISO methods available for system upgrade and downgrade for XRV9000 Series platforms from software version 24.4.1 to 25.1.1 and vice versa.

Note: Non-OE (below 24.4.1) to OE Migration image (24.1.1 and above) upgrade is not supported and vice versa. Fresh boot is required.

Upgrade		
V1	V2	Bridge SMU
2441	2511	N/A
2442	2511	N/A

Downgrade		
V1	V2	Bridge SMU
2511	2441	N/A
2511	2442	N/A

Note: Only above path is supported.

Obtain Required Package Files

Mini ISO Package is mandatory to perform the System Upgrade and upgrade needs to be done from XR VM. Additional XR packages listed below are needed depending on the router configuration and required features:

Profile	Image used for Fresh reboot
M7 Appliance	xrv9k-fullk9-x.vrr-25.1.1.iso

Description	Package Name
Boot Image	xrv9k-mini-x-25.1.1.iso
mpls	xrv9k-mpls-1.0.0.0-r2511.x86_64.rpm
mpls-rsvp-te	xrv9k-mpls-te-rsvp-1.0.0.0-r2511.x86_64.rpm
multicast	xrv9k-mcast-1.0.0.0-r2511.x86_64.rpm
ospf	xrv9k-ospf-1.0.0.0-r2511.x86_64.rpm
Isis	xrv9k-isis-1.0.0.0-r2511.x86_64.rpm
Li	xrv9k-li-x-1.0.0.0-r2511.x86_64.rpm
Eigrp	xrv9k-eigrp-1.0.0.0-r2511.x86_64.rpm
k9sec	xrv9k-k9sec-1.0.0.0-r2511.x86_64.rpm
Mgbl	xrv9k-mgbl-1.0.0.0-r2511.x86_64.rpm

Configuration Backup

- Copy the running-configuration to a harddisk on the router.

```
RP/0/RP0/CPU0:XR9000# copy running-config harddisk:/running_config
```

- Verify/fix configuration file system (mandatory):

```
RP/0/RP0/CPU0:XR9000#cfs check
```

- Copy the running-configuration to a remote scp server

```
RP/0/RP0/CPU0:XR9000#scp harddisk:/<file name> root@1.2.3.4:/auto/config/.
```

Pre-Upgrade Tasks

- **Cost-out IGP:** To minimize traffic loss during the upgrade please follow below steps:

For OSPF use “max-metric” command.

```
RP/0/RP0/CPU0:XR9000(config-ospf)# max-metric router-lsa
```

For ISIS use “spf-overload-bit” command.

```
RP/0/RP0/CPU0:XR9000(config-isis)# set-overload-bit
```

- Check available space in install repository and delete unnecessary files/folder if needed to make sure that sufficient memory is available

```
sysadmin-vm:0_RP0# show media
```

Example : Harddisk required minimum 2GB during image staging.

- Check inactive packages and remove them before upgrading.

```
XR: RP/0/RP0/CPU0:XR9000#install remove inactive all  
Sysadmin: sysadmin-vm:0_RP0# show install inactive
```

- Check and delete core files and any other files which are not required in harddisk


```
RP/0/RP0/CPU0:XR9000#run  
[xr-vm_node0_RP0_CPU0:~]$cd /misc/disk1  
[xr-vm_node0_RP0_CPU0:/misc/disk1]$rm *core*
```

Fresh Boot


M7 Appliance – CIMC boot

All System Upgrade related install operations should be done in the XR VM plane.


- Download xrv9k-fullk9-x.vrr-25.1.1.iso from 25.1.1 image from CCO.
- Copy OS installation ISO disk image files to your computer.
- Verify the md5 checksum of the tar/individual rpms with the original MD5 values on CCO
- If CIMC is not open, then log in
- In the Navigation pane, click the Launch KVM

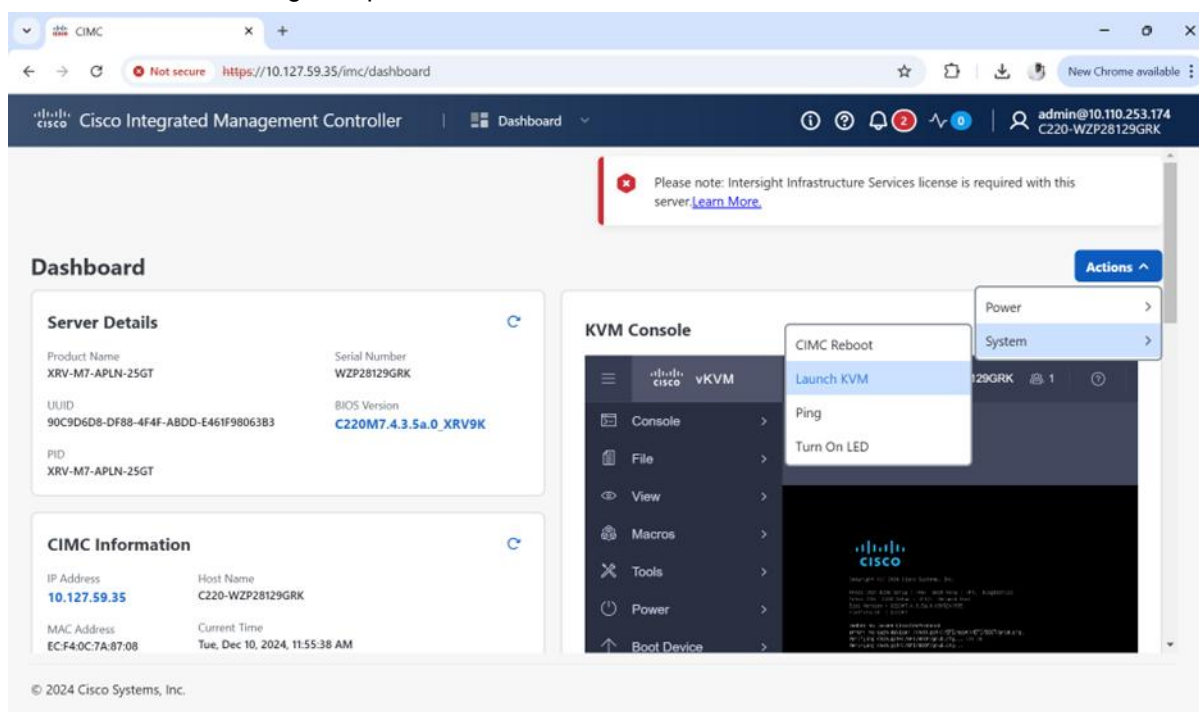


- Select Virtual Media>Activate Virtual Device in the KVM console.

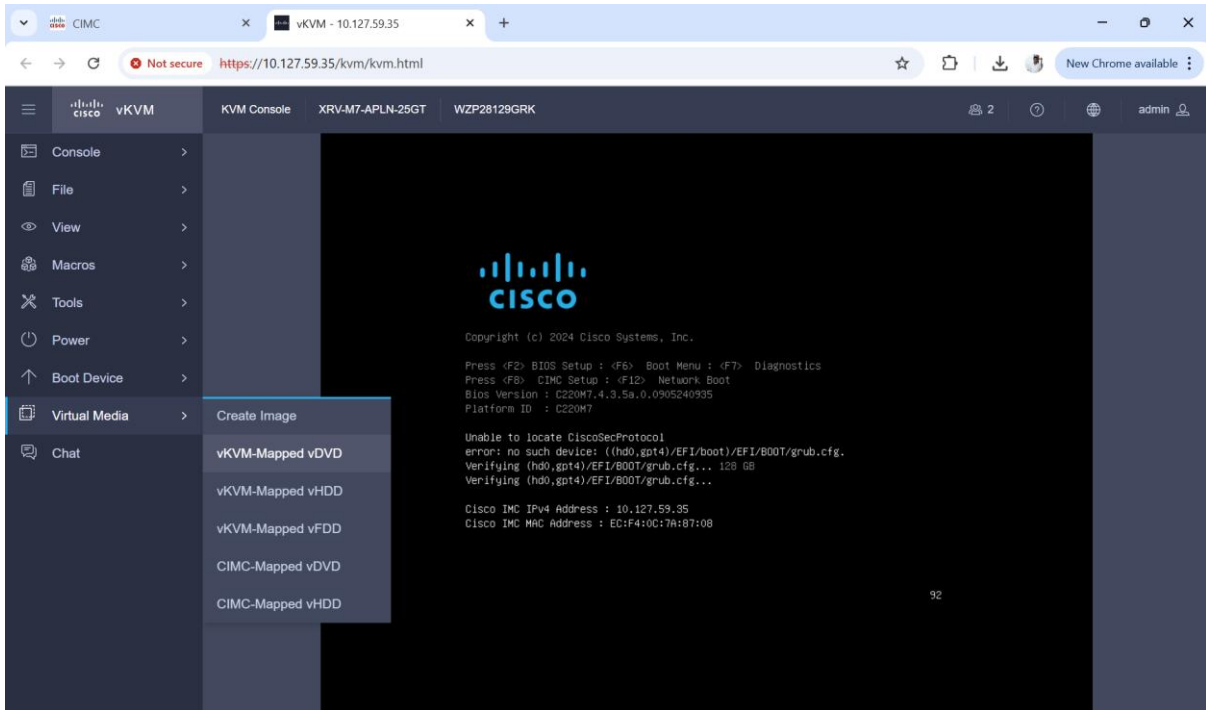

- Select Virtual Media>vKVM Mapped DVD. Then browse the ISO installation disk image stored locally and click Map Device.

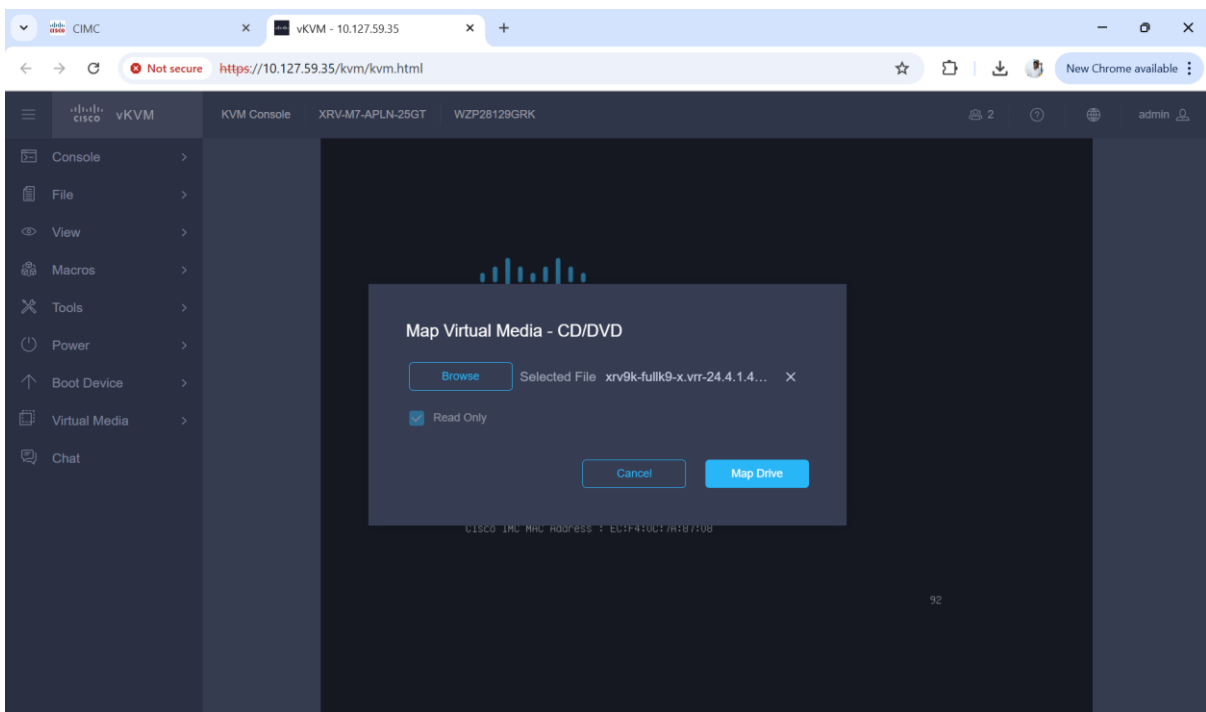



- Select Power>Power cycle System (warm boot) in the KVM console.

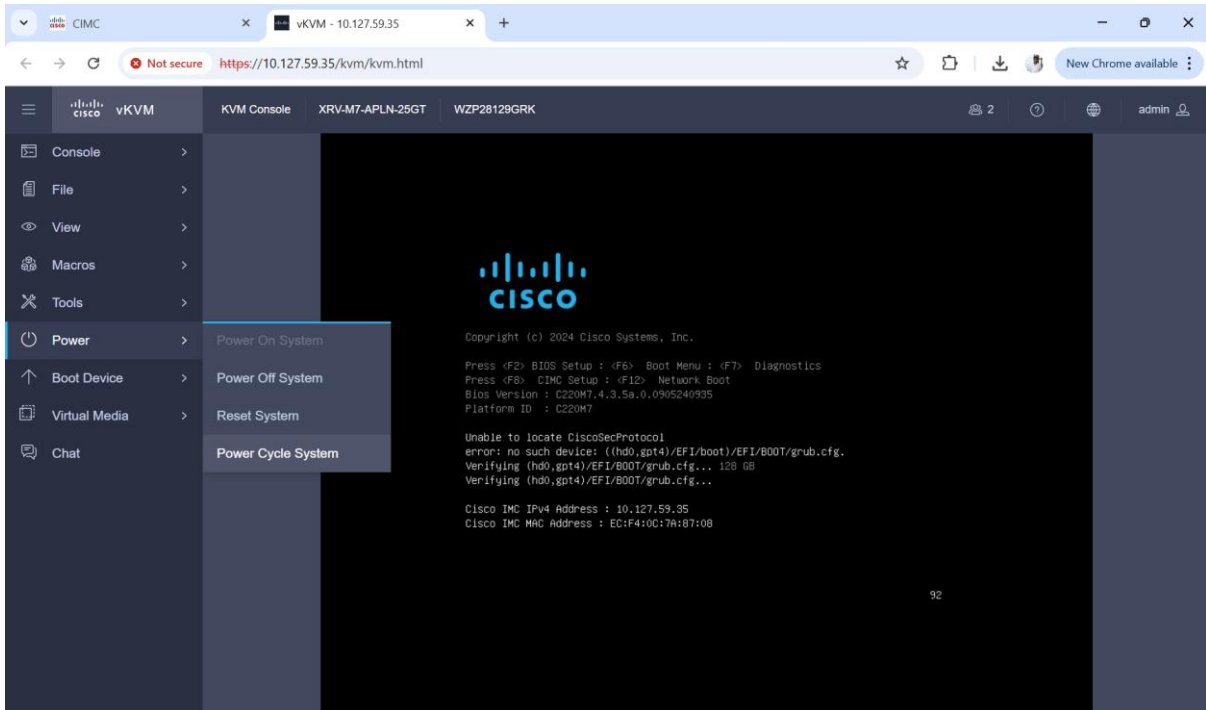

- Press F6 to enter the boot menu. Once you are in the boot menu, select the first DVD which is nothing but the same iso you selected earlier, mounted as a virtual disk. (Eg: Cisco vKVM Mapped vDVD1).

When the server reboots, it begins the installation process. After the installation process completes, system is upgraded and committed with your desired version/25.1.1 as mentioned in page 7.

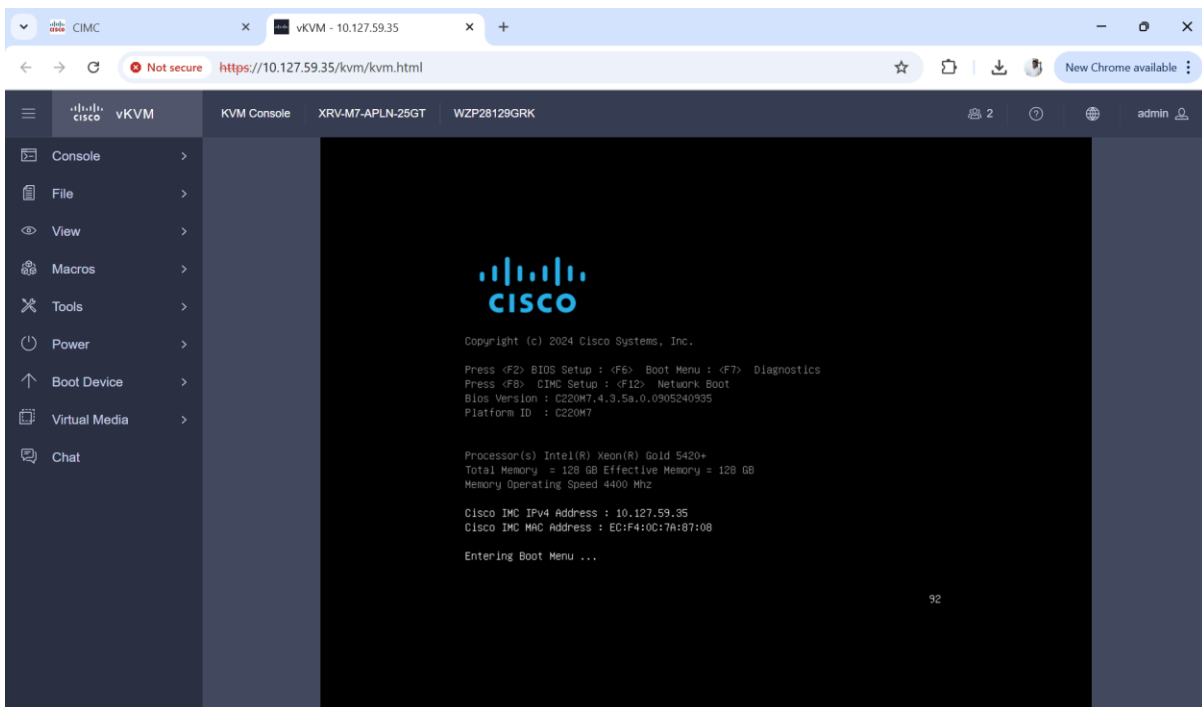

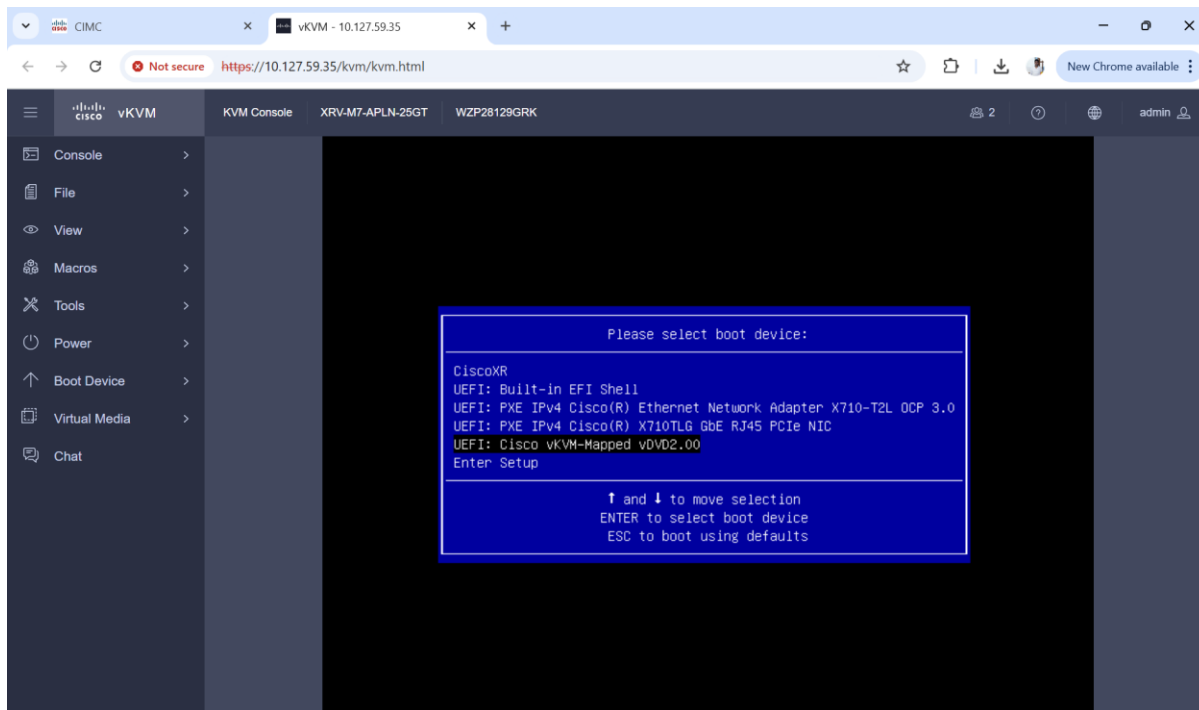

RP/0/RP0/CPU0:ios#

- Verify system stability through commands described under Check System Stability section (3.1) after router comes up with new software
- Verify show version to check router is upgraded to desired image.

```
RP/0/RP0/CPU0:RR3-XRv-M7-APP#sh ver
Thu Mar 27 09:47:32.898 UTC
Cisco IOS XR Software, Version 25.1.1
Copyright (c) 2013-2024 by Cisco Systems, Inc.
```

Build Information:

```
Built By   : swtools
Built On   : Mon Mar 24 17:13:19 PDT 2025
Built Host : iox-ucs-048
Workspace  : /auto/srcarchive12/prod/25.1.1/xrv9k/ws
Version    : 25.1.1
Location   : /opt/cisco/XR/packages/
Label      : 25.1.1
```

```
cisco IOS-XRv 9000 () processor
System uptime is 4 minutes
```

- Check to see if there were any failed startup configurations and use CLI "clear configuration inconsistency" to clear failed configuration to proceed.


```
RP/0/RP0/CPU0:XR9000#show configuration failed startup
```

- Add recommended SMUs for 25.1.1 if not already in initial tarball (optional)

```
RP/0/RP0/CPU0:XR9000#install add source harddisk: <mandatory SMU tar file for 25.1.1>
```

- Activate the recommended SMUs (if recommended smu's were added)

```
RP/0/RP0/CPU0:XR9000#install activate id <add id of previous step>
noprompt synchronous
```

- After system comes up from reload, execute 'install commit'
- Please check below cli commands to make sure your system is upgraded and committed with your desired version/25.1.1
 - "show install committed summary"
 - "show install activate summary"
 - "show install active summary"
 - "show logging"
 - " show install request"
 - .

Classic Method:

For M7 Appliance/:

All System Upgrade related install operations should be done in the XR VM plane. Only OE to OE images upgrade/downgrade is supported in classic method. (From 24.4.1 and above.)

Note:- 24.4.1 only supports fresh bake. 25.1.1 support fresh bake as well as classic install add method for upgrade/downgrade to other supported paths (post 24.4.1) .

- Download fullk9-R-XR9000-2511.tar from CCO.
- Untar the fullk9-R-XR9000-2511.tar. Copy the mini.iso + rpms files to harddisk:
- Copy the 25.1.1 iso image / tar file along with the rpm packages to the router harddisk and verify that files are copied successfully

```
RP/0/RP0/CPU0:XR9000#scp root@1.2.3.4://auto/<image file> /misc/disk1/.
```

- Verify the md5 checksum of the tar/individual rpms with the original MD5 values on CCO

```
[xr-vm_node0_RP0_CPU0:/misc/disk1]$md5sum xrv9k-mini-x-25.1.1.iso
```

- Perform 'install add' of 2511 tar file / iso image and rpm packages:

```
RP/0/RP0/CPU0:XRv9000#install add source harddisk:/ xrv9k-mini-x-25.1.1.iso
+ Required rpms
```

OR

```
RP/0/RP0/CPU0:XRv9000#install add source tftp://auto/... xrv9k-mini-x-25.1.1.iso
+ required rpm pkgs
```

- Take a note of the install operation id generated by the add operation in previous step

```
Install operation 1 finished successfully
```

- Activate all the packages

```
RP/0/RP0/CPU0:XRv9000#install activate id 1 noprompt synchronous
```

- Router will reload at the end of activation operation for new packages to take effect.
- Verify that all the packages are installed correctly in XR and SysAdmin

```
RP/0/RP0/CPU0:XRv9000#show install active
sysadmin-vm:0_RP0# show install active
```

- Execute 'install commit' to commit the newly active software (install commit is required after any install activate operation else after router reload, nodes will go back to previously committed software)

```
RP/0/RP0/CPU0:XRv9000#install commit
```

- Verify system stability through commands described under Check System Stability section (3.1) after router comes up with new software

- Verify show version to check router is upgraded to desired image.

```
RP/0/RP0/CPU0:RR3-XRv-M7-APP#sh ver
Thu Mar 27 09:47:32.898 UTC
Cisco IOS XR Software, Version 25.1.1
Copyright (c) 2013-2024 by Cisco Systems, Inc.
```

Build Information:

```
Built By   : swtools
Built On   : Mon Mar 24 17:13:19 PDT 2025
Built Host  : iox-ucs-048
Workspace  : /auto/srcarchive12/prod/25.1.1/xrv9k/ws
Version    : 25.1.1
Location   : /opt/cisco/XR/packages/
Label      : 25.1.1
```

```
cisco IOS-XRv 9000 () processor
System uptime is 4 minutes
```

- Check to see if there were any failed startup configurations and use CLI "clear configuration inconsistency" to clear failed configuration to proceed.

```
RP/0/RP0/CPU0:XRv9000#show configuration failed startup
```

- Add recommended SMUs for 25.1.1 if not already in initial tarball (optional)

```
RP/0/RP0/CPU0:XRv9000#install add source harddisk: <mandatory SMU tar file for 25.1.1>
```

- Activate the recommended SMUs (if recommended smu's were added)

```
RP/0/RP0/CPU0:XRv9000#install activate id <add id of previous step>
noprompt synchronous
```

- After system comes up from reload, execute 'install commit'
- Please check below cli commands to make sure your system is upgraded and committed with your desired version/25.1.1
 - "show install committed summary"
 - "show install activate summary"
 - "show install active summary"
 - "show logging"
 - " show install request"

Post-Upgrade Tasks

- Disk cleanup: Once software upgrade has been completed, disk space can be recovered by removing any inactive packages that are no longer needed (if the packages are required at a later time, they can be re-added):

```
RP/0/RP0/CPU0:XRv9000#install remove inactive all
```

- Verify/fix configuration file system (mandatory):

```
RP/0/RP0/CPU0:XRv9000#cfs check
```

- Restore IGP metric if changed before the upgrade (this is done from xr vm)

OSPF

```
RP/0/RP0/CPU0:XRv9000# (config-ospf)# no max-metric router-lsa
```

ISIS

```
RP/0/RP0/CPU0:XRv9000# (config-isis)# no set-overload-bit
```

Software Downgrade:

Classic Method

All System Upgrade related install operations should be done in the XR VM plane.

- Download 24.4.1 mini-ISO and packages tar and SMUs from CCO.
Copy iso image to tftp / scp / ftp server. Verify the contents of the tar file/iso image”
- Copy the 24.4.1 iso image/tar file to the router harddisk and verify that file is copied successfully

```
RP/0/RP0/CPU0:XR9000#scp root@1.2.3.4://image/CCO/ xrv9k-mini-x-24.4.1.iso
```

```
RP/0/RP0/CPU0:XR9000#scp root@1.2.3.4://image/CCO/ rpm.tar
```

- Verify the md5 checksum of the tar/individual rpms with the original MD5 values on CCO
- Perform ‘install add’ of 2441 iso image / tar file:

```
RP/0/RP0/CPU0:XR9000#install add source harddisk:/ xrv9k-mini-x-24.4.1.iso + Required Rpm tar
```

OR

```
RP/0/RP0/CPU0:XR9000#install add source tftp://auto/./ xrv9k-mini-x-24.4.1.iso + required rpm pkgs
```

- Take a note of the install operation id generated by the add operation in previous step

```
Install operation 9 finished successfully
```

- Activate all the packages

```
RP/0/RP0/CPU0:XR9000#install activate id 9 noprompt synchronous
```

- Router will reload at the end of activation operation for new packages to take effect.
- Verify that all the packages are installed correctly in XR and SysAdmin

```
RP/0/RP0/CPU0:XR9000#show install active  
sysadmin-vm:0_RP0# show install active
```

- Execute ‘install commit’ to commit the newly active software (install commit is required after any install activate operation else after router reload, nodes will go back to previously committed software)

```
RP/0/RP0/CPU0:XR9000#install commit
```

- Verify system stability through commands described under Check System Stability section (3.1) after router comes up with new software
- Verify show version to check router is upgraded to desired image.

```
RP/0/RP0/CPU0:XRV9000#show version
```

- Check to see if there were any failed startup configurations and use CLI "clear configuration inconsistency" to clear failed configuration to proceed.

```
RP/0/RP0/CPU0:XRV9000#show configuration failed startup
```

- Add recommended SMUs for 24.4.1 if not already in initial tarball (optional)

```
RP/0/RP0/CPU0:XRV9000#install add source harddisk: <mandatory SMU tar file for 24.4.1>
```

- Activate the recommended SMUs (if recommended smu's were added)

```
RP/0/RP0/CPU0:XRV9000#install activate id <add id of previous step> noprompt
synchronous
```

- After system comes up from reload, execute 'install commit'
- Please check "show install committed summary" to make sure your system is downgraded and committed with your desired version/24.4.1

Post-Downgrade Tasks

- Disk cleanup: Once software upgrade has been completed, disk space can be recovered by removing any inactive packages that are no longer needed (if the packages are required at a later time, they can be re-added):

```
RP/0/RP0/CPU0:XRV9000#install remove inactive all
```

- Verify/fix configuration file system (mandatory):

```
RP/0/RP0/CPU0:XRV9000#cfs check
```

- Restore IGP metric if changed before the upgrade (this is done from xr vm)

OSPF

```
RP/0/RP0/CPU0:XRV9000# (config-ospf)# no max-metric router-lsa
```

ISIS

```
RP/0/RP0/CPU0:XRV9000# (config-isis)# no set-overload-bit
```

GISO Upgrade:

For GISO, please refer to the chapter "Customize Installation using Golden ISO" in "System Setup and Software Installation Guide for XRv9k. Please refer to below link.

<https://www.cisco.com/c/en/us/td/docs/routers/virtual-routers/configuration/guide/b-xrv9k-cg/m-golden-iso-xrv9k.html>

Caveats

No Caveats.