



SLC-5 U-BRITE

ISDN Range Extension

PRODUCT FEATURES

- Conforms to ANSI T1.601-1992
- Built in NULL function
- Compatible with AT&T SLC® Series 5 COT and RT channel banks
- Basic Rate up to 2B+D service
- Three DS0 format per TR-NWT-000397
- T1 facility performance monitoring per TR-NWT-00397 and TR-NWT-000829
- Loop and carrier status LEDs
- Optional sealing current
- 18,000 feet nominal range, mixed gauge
- Compatible with AT&T SLC Series 2000, SLC Mode 1 operation
- Standard 10 year warranty

The ADTRAN SLC-5 U-BRITE is an ISDN range extension product for delivering Basic Rate ISDN to remote locations across SLC Series 5 Digital Loop Carrier (DLC) systems. In addition, the U-BRITE will operate in SLC Series 2000 DLC configured for SLC Mode 1 operation. The SLC-5 U-BRITE provides a standard U-interface that operates at 160 kbps full-duplex over a single twisted pair. The U-interface converts to a three DS0 format, allowing transportation of 2B+D data as well as end-to-end maintenance, performance, and test information. The ADTRAN SLC-5 U-BRITE operates in both Central Office Terminals (COT) and the Remote Terminals (RT); conforms to applicable standards and requirements; and performs all Layer 1 maintenance and performance monitoring functions per TR-NWT-00397 and TR-NWT-000829. The SLC-5 U-BRITE provides a distinctive metallic DC test signature for identifying the LT or NT operating mode and is compatible with the Metallic Loop Test (MLT).

The SLC-5 U-BRITE occupies one physical slot in a SLC-5 channel bank. To deliver 2B+D service, the SLC-5 U-BRITE uses the DS0 time slots associated with the occupied physical slot and the required remaining time slots of the adjacent physical slot. SLC-T U-BRITE provides a NULL function which allows an older SLC-5 channel bank to provide 2B+D ISDN without upgrading the common equipment. The SLC-5 U-BRITE meets the Is density requirements of the T1 carrier system through zero byte substitution and associated flags in the D channel DS0 time slot as specified in TR-NWT-000397.

Maintenance, testing, and status information is displayed on the front panel. An RJ-45 jack provides DS0 access to B1 and B2 for testing with standard digital test sets. The rotary Address Select Knob along with a DS0 test set allows for local B1 or B2 loopback test access of up to six ISDN network addresses and the NT1 in the network-to-customer direction. The CR and LP indicators provide instantaneous synchronization and loopback status for the T1 carrier facility (CR) and the U-interface (LP) and the status of the Layer 1 activation is provided with ACT indicator. The ADTRAN SLC-5 responds to network initiated mp-eoc commands including B1, B2, and 2B+D loopbacks.

Adtran

CORPORATE OFFICE

901 Explorer Boulevard
Huntsville, AL 35895

800 8ADTRAN
Local: 256 963-8000
Fax: 256 963-8899
Fax Back: 256 963-8200
http://www.adtran.com
email: info@adtran.com

SALES OFFICES

Irving, CA
800 789-5408

Hartford, CT
800 471-8950

Denver, CO
800 471-8951

Atlanta, GA
800 332-6945

Chicago, IL
800 471-8955

Kansas City, KS
800 471-8949

Tabernacle, NJ
800 471-8952

New York, NY
800 471-8957

Philadelphia, PA
800 471-8956

Dallas, TX
800 471-8948

Washington, D.C.
800 471-8954


Canada
800 232-8911



ADTRAN is an ISO 9001
registered company.



Printed in U.S.A. on recycled paper
0109.002, 01, May 1998
©ADTRAN, Inc. 1998

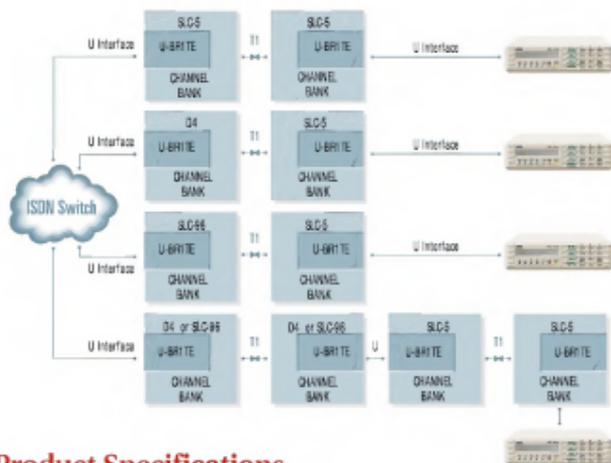

Product Specifications

LOOP INTERFACE

Line

- 2-wire (Tip and Ring)
- Operating Mode
- Full-duplex
- Data Rate
- 160 kbps; 144 kbps available to customer
- Signal Format
- 2B1Q
- Output Amplitude
- 2.5 volt, zero-to-peak
- TX and TX Source Impedance
- Per ANSI T1.601-1992
- Receiver Sensitivity
- Per ANSI T1.601-1992
- DS1 Facility Interface
- Fully compatible with AT&T SLC Series 5 CDT and RT channel banks

FACEPLATE FEATURES

Controls

- Eight-position rotary address switch for loopback of downstream network elements

LEDs

- CR status indicator - indicates synchronization and loopback status of carrier side
- LP status indicator - indicates synchronization and loopback status of loop side
- ACT BIT - indicates ACT BIT exchange between NT1 and Network

Jacks

- RJ-45 jack for DSD access to B1 and B2 for TPI 108/109 or equivalent test sets

ENVIRONMENTAL

Operating Temperature

- -40°C to 70°C (-40°F to 158°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Relative Humidity

- Up to 95%, non-condensing

PHYSICAL

Dimensions

- 3.75" H x 0.65" W x 10.69" L

Weight

- 7 oz, nominal

Power

- Current drain: 40 mA (in LUNT mode)
- On-card dissipation: 1.95 W, maximum

Ordering Information

EQUIPMENT

PART

SLC-5 U-BRITE with NULL Function.....	1102040L2
SLC-5 Blank Card	1102041L1