



EXPRESS L1.5

HDSL CAMPUS CONNECTIVITY

PRODUCT FEATURES

- HDSL remote access at 1.5 Mbps
- RFC 1490 Frame Relay encapsulation for virtual dedicated access
- IP and IPX routing
- Concurrent bridging
- Internet and central site LAN access via Frame Relay
- Campus connectivity
- Frame Relay or PPP mode
- Six levels of security
- NIC/HUB switch eliminates need for cross-over cables
- SNMP management
- Extensive logs provide operational feedback
- PAP, CHAP, EAP, Radius, Caller-ID, password protection
- Five-year warranty

The ADTRAN Express L1.5 is an HDSL bridge/router that connects LAN segments or provides remote access to a computer or network over two twisted pairs of copper. The ADTRAN Express L1.5 is designed to work back-to-back as a cost-effective LAN extension device.


The Express L1.5 provides a cost-effective campus connectivity solution. When used in a leased copper setting, the Express L1.5 delivers 1.536 Mbps bi-directionally over two twisted pairs of copper. The Express L1.5 is also capable of transmitting at sub-rates ranging from 128 kbps to 1.536 Mbps. This solution can be used to extend a LAN or provide remote access to a single user or LAN segment. When used in the sub-rate mode, the Express L1.5 can be used with a single pair of twisted copper.

Six levels of security in the Express L1.5 provide a wide selection of security options. Network Address Translation (NAT) allows a single IP address to be downloaded through Dynamic Host Configuration Protocol (DHCP) to the Express L1.5. Up to ten users can have a private IP network address downloaded from the L1.5.

The Express L1.5 can route IP and IPX packets and bridge all other protocols. Routing and bridging can be performed independently or concurrently. The Express L1.5 can operate in the Frame Relay mode providing up to ten PVCs or in a PPP mode over the LAN.

Five LEDs provide constant feedback about the L1.5's operation. A unique slide switch on the rear panel eliminates the need for separate cables when connecting to a HUB or NIC card. Extensive logs are provided to monitor the operation of the Express L1.5.

Telnet, SNMP and a serial EIA-232 port provide multiple methods of configuration and management.

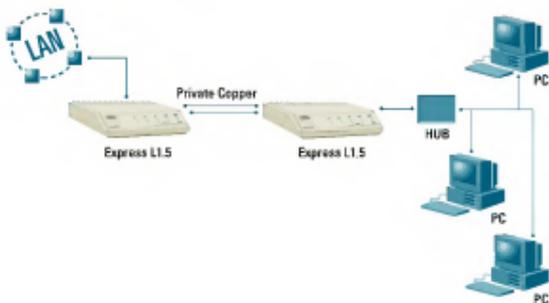

ADTRAN

CORPORATE OFFICE

ADTRAN, Inc.
801 Explorer Boulevard
P.O. Box 146000
Huntsville, AL 35814-4000

800 9AOTRAN
256 963-8000
fax: 256 963-8639
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Chicago, IL
800 436-4217

Seattle, WA
800 380-1573

Washington, D.C.
800 794-9788

FIELD OFFICES

Atlanta, GA
800 289-0895

Chicago, IL
800 471-8855

Columbus, OH
888 965-2237

Dallas, TX
800 471-8848

Denver, CO
800 471-8851

Irvine, CA
800 788-5403

Kansas City, KS
800 471-8849

Los Angeles, CA
888 223-7668

Nashville, TN
888 223-7657

New York, NY
800 471-8857

Portland, OR
888 223-7669

Richmond, VA
800 689-8915

San Jose, CA
888 223-7655

Hong Kong
852 2824-6283

Montreal, Canada
800 232-6811



18, 88, 888881
ADTRAN is an ISO 9001
registered company.



Printed in the U.S.A. on recycled paper.
6/202102.2-88 August 1998
©1998 ADTRAN, Inc. All rights reserved.

Product Specifications

NETWORK INTERFACE

- RJ-45 for ISDN Basic Rate HDSL 1.5 Mbps

LAN INTERFACE

- Ethernet 10 Base-T (RJ-45)
- IEEE 802.3

ROUTING AND BRIDGING

- IP Routing
- IPX Routing
- IEEE 802.1D MAC Bridging and Spanning Tree Filtering Capabilities

PROTOCOLS

IP:

- TCP, RIP V1 and V2, UDP, ICMP, DHCP, ARP, UDP Relay, SYSLOG

IPX:

- IPX, RIP, SAP

PPP:

- LCP, IPCP, BCP, IPXCP

NETWORK ADDRESS TRANSLATION

- DHCP for IP address assignment

FRAME RELAY

- RFC 1490 Frame Relay Encapsulation

PACKET FILTERING

- Pattern, IP, IPX, Bridge

SECURITY

- PAP, CHAP, EAP, Radius, Caller-ID, Password Protection

CONFIGURATION

- VT100 terminal interface
- Local: EIA-232 interface
- Remote: Telnet or SNMP MIB-II, Enterprise MIB

DIAGNOSTICS AND MAINTENANCE

- Loopbacks
- Ping Utility
- FLASH Upgradable—Local and Remote
- Telnet Client and Server
- TFTP Client and Server
- DHCP/Boot Server, SNMP V1 MIB II, Enterprise MIB, TRAPS
- Performance Logs

PHYSICAL

Size

- 1.5" H, 6.25" D, 9" W

Weight

- 9.5 ounces

Power

- 115VAC, 60Hz, 8W

ENVIRONMENTAL

Operating Temperature

- 0° C to 50° C
- 32° F to 122° F

Storage Temperature

- -20° C to 70° C
- -4° F to 158° F

Relative Humidity

- Up to 95% non-condensing

PRODUCT INCLUDES:

- Express L1.5
- 110V Wall Mount Power Supply
- 6-Foot CAT-5 10Base-T Cable
- 6-Foot RJ-45 Cable
- ADTRAN Utility Software
- User Manual

Ordering Information

EQUIPMENT

PART

Express L1.5, data only1202192L2

Specifications subject to change without notice.

