

TDU 110DC

T1-FT1 Rackmounted DSU/CSU



FEATURES

- T1 facility interface compatible with D4(SF), ANSI ESF, or AT&T ESF framing with B8ZS or AMI coding
- 1U high 19" rackmount enclosure
- DB15 network interface
- Provides a base DB15 DSX-1 interface
- Slot accepts option modules used in ADTRAN's TSU units providing flexibility or path for growth
- Ability to store two DS0 maps and switch configurations at predetermined times
- Front panel test and monitor jacks
- LEDs on the front panel indicate the status of each port
- Easy to follow menu system accessed with a terminal or a computer using T-Watch PRO
- 19 to 60 VDC powering

The TDU 110DC (T1 Distribution Unit) is an intelligent, full-featured, T1 DSU/CSU in a 1U high 19-inch rackmount enclosure. Designed to interface customers data terminal equipment (DTE) to T1 or Fractional T1 services, the TDU 110DC is fully compatible with D4 or ESF framing formats with AMI or B8ZS coding. When in ESF framing mode, the unit satisfies ANSI T1.403 and AT&T 54016 modes for utilization of the facility data link (FDL). It uses option modules identical to those used with other ADTRAN TSU units.

A base DB15 DSX-1 (PBX) interface is provided on the rear of the unit. The DSX-1 interface is a short haul T1 interface intended for connection to a PBX, cellular/PCS switch or similar device. The channels used by the DSX-1 port can be selected at random.

A major feature of the TDU 110DC is an option slot on the rear of the unit that accepts a single expansion module. A number of application-specific modules are available to provide flexibility and room for growth. The optional plug-in modules currently available include a Nx56/64 (V35), Dual Nx56/64, DSX-1, OCU DP, DBU, FXS, FXO, 4-wire E&M, and Drop and Insert. Additionally, the plug-in modules are designed to accept a plug-on version of many of these modules.

Specialized applications such as Cellular and PCS infrastructure can benefit from the features of the Digital Cross Connect Module and the flexibility of the TSU/TDU family. The Digital Cross Connect Module provides a timeslot interchange function in the TDU between an incoming T1 signal and the module's secondary T1 interface. When used in the TDU 110/120, DS0s can arrive on a timeslot, be reassigned a different timeslot and passed through to the next destination.

The TDU 110DC is configured using a terminal or computer through a craft port located on the front of the unit or a rear-mounted daisy chainable control port. The terminal displays an easy-to-follow menu structure allowing the user to configure, monitor, and test the TDU 110DC. An optional software package, called T-Watch PROSM, is available to interface to the TDU 110DC. The T-Watch PRO software runs on a PC under Windows[®], and allows full access to monitor and test several local and remote TDU devices. Pop-up menus provide complete configuration and diagnostic control with a few clicks of the mouse. Management of remote units may be in-band or out-of-band. Optional SNMP management is available using the Agent Module.

ADTRAN

CORPORATE OFFICE

901 Explorer Boulevard
Huntsville, Alabama 35896
800 9ADTRAN
Local: 205 963-8000
Fax: 205 963-8699
FaxBack: 205 963-8200
http://www.adtran.com
email: info@adtran.com

SALES OFFICES

Irvine, CA
800 788-5408

Hartford, CT
800 471-8650

Denver, CO
800 471-8651

Atlanta, GA
800 332-6945

Chicago, IL
800 471-8655

Kansas City, KS
800 471-8649

Tabernacle, NJ
800 471-8652

New York, NY
800 471-8657

Philadelphia, PA
800 471-8656

Dallas, TX
800 471-8648

Washington, D.C.
800 471-8654


Canada
800 232-6811



ADTRAN is an ISO 9001
registered company.



Printed in U.S.A. on recycled paper
01200 193L1-0A February 1997
©ADTRAN, Inc. 1997

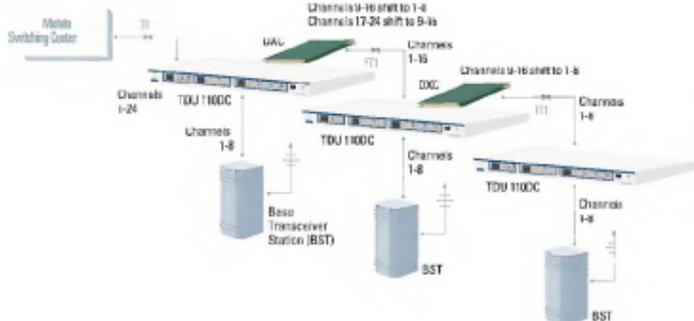

Product Specifications

Network Interface

- Line Rate: T1 (1.544 Mbps)
- Physical: DB15 (M)
- Framing: D4/ESF
- Line Code: AMI/B8ZS
- ESF: AT&T 54016 or ANSI T1.403
- Input Signal: 0 to -36 dB
- DSO Assignment: User selectable
- T1 Transmit Timing: Loop timed, internal, Base DSX-1, or secondary interface (if installed)

OSX-1 Interface

- Line Length: 0-655 ft
- Physical: DB15 (F)
- Framing: D4/ESF
- Line Coding: AMI/B8ZS

Tests

- Local Payload/Line (NI)
- Remote: Payload/Line (NI)
- Pattern:
 - 511 (selectable DSOs)
 - QRSS (selectable DSOs)
- All 1's & All 0's

Front Panel Test Jack Access

- CSU: In, Out and Monitor
- DSX: In, Out and Monitor

Performance Monitor

- Error Counts: ES, SES, UAS, % AS, % EFSEC, Alarms, error rates
- Reports: NI information stored for last 24 hours in 15 minute increments
- PRMS: ANSI Performance Report Messages (selectable)

Management Options

- Management Systems: T-Watch PRO or SNMP Agent
- Management Channels: FDL

Physical

- Size: 1.7" H, 11.625" D, 17" W fits 1U high 19" rack space
- Weight: 7 lbs
- Power: 120 VAC, 9W
- 23" Rack Kit: 1200.171L1

Environment

- Operating Temperature:
 - 0°C to 50°C
 - 32°F to 122°F
- Storage Temperature:
 - 20°C to 70°C
 - 4°F to 158°F

Ordering Information

TOU 110 DC

- PART NUMBER: 1200190L1

Other Products for Cellular/PCS Infrastructure

EQUIPMENT	PART NUMBER
2FXS+ Module	1200080L1 #HS
DSU III Module	1200127L1 #HS
RS 232 I/F Cable	1200167L2
DXC P/O Module	1200168L1

Specifications are subject to change without notice. Call for individual module information.

T-Watch PRO is a trademark of ADTRAN, Inc.
Windows is a registered trademark of Microsoft Corporation.