

Critical Release Notice

Publication number: 297-8021-547
Publication release: Standard 17.04

The content of this customer NTP supports the
SN07 (DMS) software release.

Bookmarks used in this NTP highlight the changes between the NA015 baseline and the current release. The bookmarks provided are color-coded to identify release-specific content changes. NTP volumes that do not contain bookmarks indicate that the NA015 baseline remains unchanged and is valid for the current release.

Bookmark Color Legend

Black: Applies to content for the NA015 baseline that is valid through the current release.

Red: Applies to new or modified content for NA017 that is valid through the current release.

Blue: Applies to new or modified content for NA018 (SN05 DMS) that is valid through the current release.

Green: Applies to new or modified content for SN06 (DMS) that is valid through the current release.

Purple: Applies to new or modified content for SN07 (DMS) that is valid through the current release.

Attention!

Adobe® Acrobat® Reader™ 5.0 or higher is required to view bookmarks in color.

Publication History

September 2004

Standard release 17.04 for software release SN07 (DMS). This release is current for the SN07 (DMS) software release, although no changes have been made for SN07 (DMS) features.

Volume 2

Modified procedure - Bus interface cards in an LCD

Modified procedure - NTB71 in an LCME

Modified procedure - NT9X30 in an LPP LIS

Volume 3

Modified procedure - NT2X70 in an XPM

Volumes 5

All of the changes below are due to CR Q00855532:

Modified procedure - NT6X40 in an SMA

Modified procedure - NT6X40 in an SMA-MVI-20

Modified procedure - NT6X40 in an SMA2

Modified procedure - NT6X40 in an SMS

Modified procedure - NT6X40 in an SMU

March 2004

Standard release 17.03 for software release SN06 (DMS). Updates made for this release are shown below:

Volume 1

Modified card replacement procedure: Power converter cards in a SuperNode SE 16k ENET - Card NT9X30AB is Manufacture Discontinued and is replaced by new card NT9X30AC (Note - there is a bookmark for each changed reference).

Volume 2

No changes

Volume 3

Modified card replacement procedure: Power converter cards in trunk and service modules.

Volumes 4 - 7

No changes

September 2003

Standard release 17.02 for software release SN06 (DMS). Updates made for this release are shown below:

Volume 1

Modified card replacement procedure: Power converter cards in a Supernode SE CM/SLM.

Volume 2

Modified card replacement procedure: NT6X30 in LCE-type frames.

Volumes 3 - 7

No changes

June 2003

Preliminary release 17.01 for software release SN06 (DMS). Updates for this release are shown below:

Volume 1

No changes

Volume 2

No changes

Volume 3

Added new card replacement procedure: SPM NTLX99BA STM-1 for DMS Spectrum Peripheral Module.

Volumes 4 - 7

No changes

This page is intentionally blank

297-8021-547

DMS-100 Family

North American DMS-100

Card Replacement Procedures

Volume 7 of 7

LET0012 and up Standard 14.02 May 2001

DMS-100 Family

North American DMS-100

Card Replacement Procedures

Volume 7 of 7

Publication number: 297-8021-547

Product release: LET0012 and up

Document release: Standard 14.02

Date: May 2001

Copyright © 1996-2001 Nortel Networks,
All Rights Reserved

Printed in the United States of America

NORTEL NETWORKS CONFIDENTIAL: The information contained herein is the property of Nortel Networks and is strictly confidential. Except as expressly authorized in writing by Nortel Networks, the holder shall keep all information contained herein confidential, shall disclose the information only to its employees with a need to know, and shall protect the information, in whole or in part, from disclosure and dissemination to third parties with the same degree of care it uses to protect its own confidential information, but with no less than reasonable care. Except as expressly authorized in writing by Nortel Networks, the holder is granted no rights to use the information contained herein.

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress and manufacturing may warrant. Changes or modification to the DMS-100 without the express consent of Nortel Networks may void its warranty and void the user's authority to operate the equipment.

Nortel Networks, the Nortel Networks logo, the Globemark, How the World Shares Ideas, Unified Networks, DMS, DMS-100, Helmsman, MAP, Meridian, Nortel, Northern Telecom, NT, SuperNode, and TOPS are trademarks of Nortel Networks.

Contents

Card Replacement Procedures Volume 7 of 7

NTP Summary Contents

vii

1	XPM card replacement procedures (continued)	1-1
	NTMX73 in an RSC-M 1-2	
	NTMX73 in an RSC RCC2 1-9	
	NTMX73 in an RSC-S (DS-1) Model A RCC2 1-17	
	NTMX73 in an RSC-S (DS-1) Model B RCC2 1-26	
	NTMX73 in an RSC-S (PCM-30) Model A RCO2 1-36	
	NTMX73 in an RSC-S (PCM-30) Model B RCO2 1-45	
	NTMX73 in an SMA2 1-54	
	NTMX74 in an RSC-M 1-60	
	NTMX74 in an RSC RCC2 1-69	
	NTMX74 in an RSC-S (DS-1) Model A RCC2 1-77	
	NTMX74 in an RSC-S (DS-1) Model B RCC2 1-86	
	NTMX74 in an RSC-S (PCM-30) Model A RCO2 1-95	
	NTMX74 in an RSC-S (PCM-30) Model B RCO2 1-104	
	NTMX75 in an RSC-M 1-113	
	NTMX75 in an RSC RCC2 1-120	
	NTMX75 in an RSC-S (DS-1) Model A RCC2 1-128	
	NTMX75 in an RSC-S (DS-1) Model B RCC2 1-136	
	NTMX75 in an RSC-S (PCM-30) Model A RCO2 1-144	
	NTMX75 in an RSC-S (PCM-30) Model B RCO2 1-153	
	NTMX75 in an SMA2 1-162	
	NTMX76 in an RSC-M 1-168	
	NTMX76 in an RSC RCC2 1-175	
	NTMX76 in an RSC-S (DS-1) Model A RCC2 1-182	
	NTMX76 in an RSC-S (DS-1) Model B RCC2 1-188	
	NTMX76 in an RSC-S (PCM-30) Model A RCO2 1-195	
	NTMX76 in an RSC-S (PCM-30) Model B RCO2 1-205	
	NTMX76 in an SMA2 1-214	
	NTMX77 in an RSC 1-221	
	NTMX77 in an RSC-M 1-234	
	NTMX77 in an RSC-S (DS-1) Model A RCC2 1-241	
	NTMX77 in an RSC-S (DS-1) Model B RCC2 1-254	
	NTMX77 in an RSC-S (PCM-30) Model A RCO2 1-267	

NTMX77 in an RSC-S (PCM-30) Model B RCO2	1-280
NTMX77 in an SMS	1-293
NTMX77 in an SMS-R	1-306
NTMX77 in an SMU	1-318
NTMX79 in an RSC EXT	1-333
NTMX79 in an RSC-M	1-343
NTMX79 in an RSC-S (DS-1) Model A EXT	1-349
NTMX79 in an RSC-S (DS-1) Model B EXT	1-359
NTMX79 in an RSC-S (PCM-30) Model A EXT	1-370
NTMX79 in an RSC-S (PCM-30) Model B EXT	1-380
NTMX79 in an SMA2	1-390
NTMX81 in an RSC RCC2	1-397
NTMX81 in an RSC-S (DS-1) Model A RCC2	1-409
NTMX81 in an RSC-S (DS-1) Model B RCC2	1-421
NTMX81 in an SMA2	1-435
NTMX81 in a STAR	1-451
NTMX82 in an RSC-M	1-465
NTMX82 in an RSC-S (PCM-30) Model A RCO2	1-476
NTMX82 in an RSC-S (PCM-30) Model B RCO2	1-486
NTMX87 in an RSC-M	1-496
NTMX87 in an RSC RCC2	1-508
NTMX87 in an RSC-S (DS-1) Model A RCC2	1-528
NTMX87 in an RSC-S (DS-1) Model B RCC2	1-548
NTMX87 in an RSC-S (PCM-30) Model A RCO2	1-571
NTMX87 in an RSC-S (PCM-30) Model B RCO2	1-592
NTMX87 in an SMA2	1-613
NTRX41 in an IOPAC MSP	1-630
NTRX41 in an OPAC MSP	1-635
NTRX41 in an RSC-M/MSP	1-640
NTRX41 in an RSC MSP	1-645
NTRX41 in an RSC-S (DS-1) Model B MSP	1-650
NTRX41 in an SMA2 MSP	1-655
NTRX42 in an IOPAC MSP	1-660
NTRX42 in an OPAC MSP	1-677
NTRX42 in an RSC-M/MSP	1-695
NTRX42 in an RSC MSP	1-707
NTRX42 in an RSC-S (DS-1) Model B MSP	1-726
NTRX42 in an RSC-S (PCM-30) Model B MSP	1-746
NTRX42 in an SMA2 MSP	1-766
NTRX43 in an IOPAC MSP	1-778
NTRX43 in an OPAC MSP	1-785
NTRX43 in an RSC-M/MSP	1-792
NTRX43 in an RSC MSP	1-800
NTRX43 in an RSC-S (DS-1) Model B MSP	1-808
NTRX43 in an SMA2 MSP	1-816
NTRX44 in an IOPAC MSP	1-824
NTRX44 in an OPAC MSP	1-836
NTRX44 in an RSC MSP	1-848
NTRX44 in an RSC-S (DS-1) Model B MSP	1-858
NTRX54 in an RSC-M/MSP	1-868
NTRX54 in an RSC MSP	1-875

NTRX54 in an RSC-S (DS-1) Model B MSP	1-882
NTRX54 in an SMA2 MSP	1-889
NTRX66 MSP	1-896
NTTR46 in an RLD	1-902
NTTR47 in an RLD	1-908
NTTR60 in a STAR	1-914
NTTR66 in an RLD	1-921
NTTR67 in an RLD	1-927
NTTR70 in an RLD	1-934
NTTR71 in an RLD	1-941
NTTR72 in an RLD	1-946
NTTR73 in a STAR	1-952
NTTR74 in a STAR	1-956
NTTR75 in a STAR	1-962
NTTR76 in a STAR	1-970
NTTR77 in a STAR	1-979
NTTR87 in a STAR	1-986

NTP Summary Contents

Card Replacement Procedures Volume 1 of 7

About this document **Vol. 1, xxvii**

- How to check the version and issue of this document Vol. 1, xxvii
- References in this document Vol. 1, xxvii
- What precautionary messages mean Vol. 1, xxviii
- How commands, parameters, and responses are represented Vol. 1, xxix
 - Input prompt (>) Vol. 1, xxix
 - Commands and fixed parameters Vol. 1, xxix
 - Variables Vol. 1, xxix
 - Responses Vol. 1, xxix

1 Breaker interface panel card replacement procedures **Vol. 1, 1-1**

- Introduction Vol. 1, 1-1
 - Application Vol. 1, 1-1
 - Common procedures Vol. 1, 1-1
 - Action Vol. 1, 1-1
- Recording card replacement activities Vol. 1, 1-2
- Circuit breaker in a BIP Vol. 1, 1-3
- NTNY24 in a BIP Vol. 1, 1-7
- NTNY25 in a BIP Vol. 1, 1-11

2 SuperNode computing module card replacement procedures **Vol. 1, 2-1**

- Introduction Vol. 1, 2-1
 - Application Vol. 1, 2-1
 - Common procedures Vol. 1, 2-1
 - Action Vol. 1, 2-2
- Recording card replacement activities Vol. 1, 2-2
- SuperNode CM shelf layouts Vol. 1, 2-3
- NT9X20 in a SuperNode CM Vol. 1, 2-5
- System cards in a SuperNode CM Vol. 1, 2-22

3 SuperNode SE computing module and system load module card replacement procedures **Vol. 1, 3-1**

Introduction Vol. 1, 3-1
Application Vol. 1, 3-1
Common procedures Vol. 1, 3-1
Action Vol. 1, 3-2
Recording card replacement activities Vol. 1, 3-2
SuperNode SE CM/SLM shelf layouts Vol. 1, 3-3
NT9X44 in a SuperNode SE CM/SLM Vol. 1, 3-5
NT9X46 in a SuperNode SE CM/SLM Vol. 1, 3-27
NT9X62 in a SuperNode SE CM/SLM Vol. 1, 3-45
Power converter cards in a SuperNode SE CM/SLM Vol. 1, 3-67
Replace system cards in a SuperNode SE CM/SLM Vol. 1, 3-85

4 Digital carrier module card replacement procedures **Vol. 1, 4-1**

Introduction Vol. 1, 4-1
Application Vol. 1, 4-1
Common procedures Vol. 1, 4-1
Action Vol. 1, 4-1
Recording card replacement activities Vol. 1, 4-2
DCM shelf layouts Vol. 1, 4-3
Control complex cards in a digital carrier module Vol. 1, 4-8
NT2X35 in a digital carrier module Vol. 1, 4-13
NT2X36 in a digital carrier module Vol. 1, 4-27
NT3X65 in a digital echo suppressor Vol. 1, 4-37
Power converter cards in a digital carrier module Vol. 1, 4-47

5 Enhanced link peripheral processor card replacement procedures **Vol. 1, 5-1**

Introduction Vol. 1, 5-1
Application Vol. 1, 5-1
Common procedures Vol. 1, 5-1
Action Vol. 1, 5-1
Recording card replacement activities Vol. 1, 5-2
ELPP shelf layouts Vol. 1, 5-3
Common fill paddle boards in an ELPP LIS Vol. 1, 5-9
HLIU cards in an ELPP LIS Vol. 1, 5-17
HSLR cards in an ELPP LIS Vol. 1, 5-27
NT9X13 in an ELPP LIM unit Vol. 1, 5-36
System and power cards in an ELPP LIM unit Vol. 1, 5-48

6 SuperNode SE enhanced network card replacement procedures **Vol. 1, 6-1**

Introduction Vol. 1, 6-1
Application Vol. 1, 6-1
Common procedures Vol. 1, 6-1
Action Vol. 1, 6-2

Recording card replacement activities Vol. 1, 6-2
 SuperNode SE ENET shelf designs Vol. 1, 6-3
 Crosspoint and interface cards in a SuperNode SE 16k ENET Vol. 1, 6-7
 Crosspoint and interface cards in a SuperNode SE 32k ENET Vol. 1, 6-31
 Power converter cards in a SuperNode SE 16k ENET Vol. 1, 6-53
 System cards in a SuperNode SE 16k ENET Vol. 1, 6-77
 System cards in a SuperNode SE 32k ENET Vol. 1, 6-100

7 File processor card replacement procedures Vol. 1, 7-1

Introduction Vol. 1, 7-1
 Application Vol. 1, 7-1
 Common procedures Vol. 1, 7-1
 Action Vol. 1, 7-1
 Recording card replacement activities Vol. 1, 7-2
 SuperNode Multicomputing Base shelf layouts Vol. 1, 7-3
 NT9X89 in a storage device shelf in a file processor Vol. 1, 7-6
 NT9X90 in a storage device shelf in a file processor Vol. 1, 7-18
 NT9X91 in a storage device shelf in a file processor Vol. 1, 7-33
 System cards in a file processor Vol. 1, 7-43

8 Frame supervisory panel and modular supervisory panel card replacement procedures Vol. 1, 8-1

Introduction Vol. 1, 8-1
 Application Vol. 1, 8-1
 Common procedures Vol. 1, 8-1
 Action Vol. 1, 8-1
 Recording card replacement activities Vol. 1, 8-2
 FSP cards in a 42-in. (106.7-cm) SuperNode cabinet Vol. 1, 8-3
 NT0X36 in a cabinetized input/output equipment frame Vol. 1, 8-8
 NT0X36 in a cabinetized trunk module equipment frame Vol. 1, 8-29
 NT0X36 in an input/output equipment frame Vol. 1, 8-53
 NT0X36 in an international cabinet auxiliary module Vol. 1, 8-74
 NT0X91 in a CPCE frame Vol. 1, 8-98
 NT0X91 in a digital carrier equipment frame Vol. 1, 8-112
 NT0X91 in a line module equipment frame Vol. 1, 8-123
 NT0X91 in an MS6E Vol. 1, 8-133
 NT0X91 in an MS7E, ST7E, or ST6E Vol. 1, 8-147
 NT0X91 in a network equipment frame Vol. 1, 8-159
 NT0X91 in a trunk module equipment frame Vol. 1, 8-172
 NT6X36 in LCE-type frames and CLCE Vol. 1, 8-192
 NTRX41 in MSP in streamline B cabinets Vol. 1, 8-197

9 Input/output device card replacement procedures Vol. 1, 9-1

Introduction Vol. 1, 9-1
 Application Vol. 1, 9-1
 Common procedures Vol. 1, 9-1
 Action Vol. 1, 9-1

Recording card replacement activities Vol. 1, 9-2
IOD shelf layouts Vol. 1, 9-3
Disk drive and magnetic tape controller cards in an IOC Vol. 1, 9-10
NT1X67 in an IOC Vol. 1, 9-21
NT1X78 in an IOE DDU shelf Vol. 1, 9-28
NT1X89 in an IOC shelf Vol. 1, 9-37
NT2X70 in an IOC Vol. 1, 9-44
NTFX30 in an ISM Vol. 1, 9-61
NTFX31 in an ISM Vol. 1, 9-77
NTFX32AA in an ISM Vol. 1, 9-92
System cards in an IOC Vol. 1, 9-97

Card Replacement Procedures

Volume 2 of 7

1 Line concentrating module card replacement procedures **Vol. 2, 1-1**

Introduction Vol. 2, 1-1
Application Vol. 2, 1-1
Common procedures Vol. 2, 1-1
Action Vol. 2, 1-1
Recording card replacement activities Vol. 2, 1-2
LCM shelf layouts Vol. 2, 1-3
Bus interface cards in an LCD Vol. 2, 1-13
Control complex cards in LCM-type PMs Vol. 2, 1-31
Line cards in an LCE line drawer Vol. 2, 1-39
NT6X30 in LCE-type frames Vol. 2, 1-47
NTBX71 in an LCME Vol. 2, 1-62
Power cards in an LCE line drawer Vol. 2, 1-73
Power cards in LCM-type PMs Vol. 2, 1-79

2 Line module card replacement procedures **Vol. 2, 2-1**

Introduction Vol. 2, 2-1
Application Vol. 2, 2-1
Common procedures Vol. 2, 2-1
Action Vol. 2, 2-1
Recording card replacement activities Vol. 2, 2-2
LM shelf layouts Vol. 2, 2-3
Control complex cards in a line module controller Vol. 2, 2-9
Interface and power converter cards in an LM line drawer Vol. 2, 2-16
Line cards in an LM line drawer Vol. 2, 2-24
NT2X05 in a line module controller Vol. 2, 2-30
NT2X70 in a line module controller Vol. 2, 2-36

3 Link peripheral processor card replacement procedures

Vol. 2, 3-1

Introduction Vol. 2, 3-1
 Application Vol. 2, 3-1
 Common procedures Vol. 2, 3-1
 Action Vol. 2, 3-1
 Recording card replacement activities Vol. 2, 3-2
 LPP shelf layouts Vol. 2, 3-3
 APU cards in an LPP LIS Vol. 2, 3-9
 Common fill paddle boards in an LPP LIS Vol. 2, 3-36
 EIU cards in an LPP LIS Vol. 2, 3-47
 LIU7 cards in an LPP LIS Vol. 2, 3-57
 FRIU cards in an LPP LIS Vol. 2, 3-68
 NIU processor and controller cards in an LPP LIS Vol. 2, 3-82
 NT9X13 in an LPP LIM unit Vol. 2, 3-89
 NT9X30 in an LPP LIS Vol. 2, 3-100
 NT9X74 in an LPP LIS Vol. 2, 3-126
 NTDX16 in an LPP LIS Vol. 2, 3-140
 NTEX28 in an NIU in an LPP LIS Vol. 2, 3-145
 System and power cards in an LPP LIM unit Vol. 2, 3-155
 VPU cards in an LPP LIS Vol. 2, 3-168
 XLIU cards in an LPP LIS Vol. 2, 3-177

4 SuperNode SE LIS or ENI card replacement procedures

Vol. 2, 4-1

Introduction Vol. 2, 4-1
 Application Vol. 2, 4-1
 Common procedures Vol. 2, 4-1
 Action Vol. 2, 4-1
 Recording card replacement activities Vol. 2, 4-2
 SuperNode SE link interface shelf layouts Vol. 2, 4-3
 Common fill cards in a SuperNode SE LIS or ENI shelf Vol. 2, 4-6
 EIU cards in a SuperNode SE LIS Vol. 2, 4-13
 FRIU cards in a SuperNode SE LIS Vol. 2, 4-24
 LIU7 cards in a SuperNode SE LIS or ENI shelf Vol. 2, 4-38
 NIU cards in a SuperNode SE LIS Vol. 2, 4-49
 NT9X30 in a SuperNode SE LIS Vol. 2, 4-64
 XLIU cards in a SuperNode SE LIS Vol. 2, 4-91

5 MTM card replacement procedures

Vol. 2, 5-1

NT1X76 in an MTM Vol. 2, 5-2
 NT3X67 in an MTM Vol. 2, 5-10

6 SuperNode message switch card replacement procedures

Vol. 2, 6-1

Introduction Vol. 2, 6-1
 Application Vol. 2, 6-1
 Common procedures Vol. 2, 6-1
 Action Vol. 2, 6-2

Recording card replacement activities Vol. 2, 6-2
SuperNode MS shelf layouts Vol. 2, 6-3
Interface cards in a SuperNode MS Vol. 2, 6-5
Manually busying LIM-to-MS SR128 links Vol. 2, 6-26
Returning LIM-to-MS SR128 links to service Vol. 2, 6-33
System cards in a SuperNode MS Vol. 2, 6-39

7 SuperNode SE message switch card replacement procedures **Vol. 2, 7-1**

Introduction Vol. 2, 7-1
Application Vol. 2, 7-1
Common procedures Vol. 2, 7-1
Action Vol. 2, 7-2
Recording card replacement activities Vol. 2, 7-2
SuperNode SE message switch shelf layouts Vol. 2, 7-3
Interface paddle boards in a SuperNode SE MS Vol. 2, 7-5
System cards in a SuperNode SE MS Vol. 2, 7-25

8 Message switch and buffer card replacement procedures **Vol. 2, 8-1**

Introduction Vol. 2, 8-1
Application Vol. 2, 8-1
Common procedures Vol. 2, 8-1
Action Vol. 2, 8-1
Recording card replacement activities Vol. 2, 8-2
MSB shelf layouts Vol. 2, 8-3
Control complex cards in an MSB Vol. 2, 8-12
NT2X70 in an MSB Vol. 2, 8-20
NT2X70 in an ST7G or STCM Vol. 2, 8-35
NT6X40 in an MSB Vol. 2, 8-48
NT6X68 in an MSB Vol. 2, 8-55
Processor and memory cards in an MSB Vol. 2, 8-62
Signaling terminal cards in an MSB Vol. 2, 8-70

9 SuperNode network card replacement procedures **Vol. 2, 9-1**

Introduction Vol. 2, 9-1
Application Vol. 2, 9-1
Common procedures Vol. 2, 9-1
Action Vol. 2, 9-2
Recording card replacement activities Vol. 2, 9-2
Network shelf layouts Vol. 2, 9-3
Crosspoint and interface cards in a 64k or 128k ENET Vol. 2, 9-15
Power converter cards in JNET shelves Vol. 2, 9-40
System cards in a 64k or 128k ENET Vol. 2, 9-49
System, interface, and crosspoint cards in JNET shelves Vol. 2, 9-72

10 Office alarm unit card replacement procedures Vol. 2, 10-1

Introduction Vol. 2, 10-1
 Application Vol. 2, 10-1
 Common procedures Vol. 2, 10-1
 Action Vol. 2, 10-1
 Recording card replacement activities Vol. 2, 10-2
 OAU shelf layouts Vol. 2, 10-3
 Control and circuit cards in the office alarm unit Vol. 2, 10-7
 Power converter cards in the office alarm unit Vol. 2, 10-14

11 Remote line module card replacement procedures Vol. 2, 11-1

Introduction Vol. 2, 11-1
 Application Vol. 2, 11-1
 Common procedures Vol. 2, 11-1
 Action Vol. 2, 11-1
 Recording card replacement activities Vol. 2, 11-2
 RLM shelf layouts Vol. 2, 11-3
 Control complex cards in a remote line controller Vol. 2, 11-9
 Line cards in an RLM line drawer Vol. 2, 11-16
 NT2X05 in a remote line controller Vol. 2, 11-22
 NT2X70 in a remote line controller Vol. 2, 11-28

Card Replacement Procedures

Volume 3 of 7

1 Remote oscillator shelf card replacement procedures Vol. 3, 1-1

Introduction Vol. 3, 1-1
 Application Vol. 3, 1-1
 Common procedures Vol. 3, 1-1
 Action Vol. 3, 1-1
 Recording card replacement activities Vol. 3, 1-2
 Remote oscillator shelf layouts Vol. 3, 1-3
 NT1X78 in a remote oscillator shelf Vol. 3, 1-5
 NT3X16 in a remote oscillator shelf Vol. 3, 1-14

2 Single shelf link peripheral processor card replacement procedures Vol. 3, 2-1

Introduction Vol. 3, 2-1
 Application Vol. 3, 2-1
 Common procedures Vol. 3, 2-1
 Action Vol. 3, 2-1
 Recording card replacement activities Vol. 3, 2-2
 SSLPP shelf layouts Vol. 3, 2-3
 Common fill cards in an SSLPP Vol. 3, 2-7

EIU cards in an SSLPP Vol. 3, 2-17
FRIU cards in an SSLPP Vol. 3, 2-29
LIU7 cards in an SSLPP Vol. 3, 2-44
NIU cards in an SSLPP Vol. 3, 2-57
Power converter cards in an SSLPP Vol. 3, 2-74
XLIU cards in an SSLPP Vol. 3, 2-105

3 SuperNode system load module card replacement procedures **Vol. 3, 3-1**

Introduction Vol. 3, 3-1
Application Vol. 3, 3-1
Common procedures Vol. 3, 3-1
Action Vol. 3, 3-2
Recording card replacement activities Vol. 3, 3-2
SuperNode SLM shelf layouts Vol. 3, 3-3
NT9X44 in a SuperNode SLM Vol. 3, 3-5
SPM NTLX60AA FIL with DSP RM DMS-Spectrum Peripheral Module Vol. 3, 3-26
SPM NTLX61AA SIM card DMS-Spectrum Peripheral Module Vol. 3, 3-37
SPM NTLX63AA CEM card DMS-Spectrum Peripheral Module Vol. 3, 3-45
SPM NTLX65BA DSP RM DMS-Spectrum Peripheral Module Vol. 3, 3-64
SPM NTLX71AA OC3 card DMS-Spectrum Peripheral Module Vol. 3, 3-78
SPM NTLX82AA CEM card DMS-Spectrum Peripheral Module Vol. 3, 3-99
SPM NTLX82BA CEM card DMS-Spectrum Peripheral Module Vol. 3, 3-118
System cards in a SuperNode SLM Vol. 3, 3-137

4 TOPS message switch card replacement procedures **Vol. 3, 4-1**

TMS shelf layouts Vol. 3, 4-2
NT2X70 in a TMS Vol. 3, 4-8
NT6X series in a TMS Vol. 3, 4-17
NT6X69 in a TMS Vol. 3, 4-19
NTBX01 in a TMS Vol. 3, 4-30
NTBX02 in a TMS Vol. 3, 4-37
NTMX77 in a TMS Vol. 3, 4-48

5 TOPS MP card replacement procedures **Vol. 3, 5-1**

NT2X70 in a TPC Vol. 3, 5-2
NTNX62 in a TPC Vol. 3, 5-7
NTNX63 in a TPC Vol. 3, 5-12
NTNX64 in a TPC Vol. 3, 5-17
NTNX65 in a TPC Vol. 3, 5-22
NTNX66 in a TPC Vol. 3, 5-27
NTNX68 in a TPC Vol. 3, 5-33
NTOM36 Keyboard Vol. 3, 5-40
NTOM90 in an MP Vol. 3, 5-45

NTOM92 in an MP Vol. 3, 5-52
 Placing an MP position in service (integrated) Vol. 3, 5-57
 Removing an MP position from service (integrated) Vol. 3, 5-62

6 Trunk module card replacement procedures Vol. 3, 6-1

Introduction Vol. 3, 6-1
 Application Vol. 3, 6-1
 Common procedures Vol. 3, 6-1
 Action Vol. 3, 6-1
 Recording card replacement activities Vol. 3, 6-2
 TM shelf layouts Vol. 3, 6-3
 Control complex cards in trunk and service modules Vol. 3, 6-27
 Enhanced digital test unit or digital test unit cards in trunk and service modules Vol. 3, 6-37
 Metallic test unit cards in trunk and service modules Vol. 3, 6-44
 NT3X08AA in an MTM Vol. 3, 6-64
 Power converter cards in trunk and service modules Vol. 3, 6-69
 Single-card PMs in trunk and service modules Vol. 3, 6-84
 Trunk, maintenance, and service cards in trunk and service modules Vol. 3, 6-93

7 Universal Edge 9000 card replacement procedures Vol. 3, 7-1

Introduction Vol. 3, 7-1
 Application Vol. 3, 7-1
 Common procedures Vol. 3, 7-1
 Action Vol. 3, 7-1
 Recording card replacement activities Vol. 3, 7-2
 UEN shelf layout Vol. 3, 7-3
 Control cards in a UEN shelf Vol. 3, 7-5
 Line cards in a UEN shelf Vol. 3, 7-14
 NTNP20 in a UEN shelf Vol. 3, 7-19

8 XPM card replacement procedures Vol. 3, 8-1

Introduction Vol. 3, 8-1
 Application Vol. 3, 8-1
 Common procedures Vol. 3, 8-1
 Action Vol. 3, 8-1
 Recording card replacement activities Vol. 3, 8-2
 XPM shelf layouts Vol. 3, 8-3
 Back plane cards in an XPM Vol. 3, 8-19
 Control complex cards in an XPM Vol. 3, 8-31
 NT2X70 in an XPM Vol. 3, 8-42
 NT6X40 in an XPM Vol. 3, 8-59
 NT6X48 in LGC, PLGC, LTC, PLTC Vol. 3, 8-72
 NT6X48 in MSB7 Vol. 3, 8-82
 NT6X78 in an XPM Vol. 3, 8-90
 NT7X03 in an XPM Vol. 3, 8-97
 NT7X07AA in an LTCL Vol. 3, 8-106
 NTBX02 in an XPM Vol. 3, 8-115

P-side interface cards in an XPM Vol. 3, 8-124
 Processor and memory cards in an XPM Vol. 3, 8-147

9 Card replacement common procedures Vol. 3, 9-1

Introduction Vol. 3, 9-1
 Application Vol. 3, 9-1
 Action Vol. 3, 9-1
 Activating CCS7 links Vol. 3, 9-2
 Activity switch with memory match Vol. 3, 9-11
 Card removal and replacement process Vol. 3, 9-19
 Cleaning fiber-optic components and assemblies Vol. 3, 9-24
 Correcting a load mismatch Vol. 3, 9-32
 Deactivating CCS7 links Vol. 3, 9-47
 Failure to switch clock mastership Vol. 3, 9-55
 Loading a PM Vol. 3, 9-64
 Manually busying LIM-to-MS DS30 links Vol. 3, 9-76
 Manually busying Series II PM and CPM C-side links Vol. 3, 9-82
 Manually busying SMA C-side links Vol. 3, 9-89
 Manually busying SMA2 C-side links Vol. 3, 9-95
 Memory extension in the SuperNode CM Vol. 3, 9-101
 Memory extension in the SuperNode SE CM Vol. 3, 9-119
 Moving an XSG to a spare XLIU Vol. 3, 9-137
 Placing an MP position in service (standalone) Vol. 3, 9-145
 Removing an MP position from service (standalone) Vol. 3, 9-150
 Removing and replacing a card Vol. 3, 9-156
 Replacing a card Vol. 3, 9-160
 Replacing a card STAR or RLD Vol. 3, 9-166
 Replacing a line card Vol. 3, 9-172
 Reseating cards in equipment shelves Vol. 3, 9-179
 Returning a card for repair or replacement Vol. 3, 9-184
 Returning LIM-to-MS DS30 links to service Vol. 3, 9-188
 Switching the clock source Vol. 3, 9-193
 Unseating cards in equipment shelves Vol. 3, 9-200
 Verifying load compatibility of SuperNode cards Vol. 3, 9-204

Card Replacement Procedures Volume 4 of 7

1 XPM card replacement procedures Vol. 4, 1-1

NT0X10 in an IOPAC RMM Vol. 4, 1-2
 NT0X10 in an OPM RMM Vol. 4, 1-6
 NT0X10 in an RLCM-EDC RMM Vol. 4, 1-10
 NT0X10 in an RLCM RMM Vol. 4, 1-14
 NT0X10 in an RSC RMM Vol. 4, 1-18
 NT0X10 in an RSC-S (DS-1) Model A RMM Vol. 4, 1-25
 NT0X10 in an RSC-S (DS-1) Model B RMM Vol. 4, 1-31
 NT0X10 in an RSC-S (PCM-30) Model A RMM Vol. 4, 1-37
 NT0X10 in an RSC-S (PCM-30) Model B RMM Vol. 4, 1-43

NT0X91 in an IOPAC FSP	Vol. 4, 1-49
NT0X91 in an RLCM	Vol. 4, 1-61
NT0X91 in an RSC	Vol. 4, 1-74
NT0X91AA in an OPM	Vol. 4, 1-90
NT0X91AE in an OPM	Vol. 4, 1-96
NT0X91AE in an RLCE	Vol. 4, 1-105
NT2X06 in an IOPAC RMM	Vol. 4, 1-114
NT2X06 in an OPM RMM	Vol. 4, 1-121
NT2X06 in an RLCM RMM	Vol. 4, 1-129
NT2X06 in an RSC RMM	Vol. 4, 1-136
NT2X06 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-144
NT2X06 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-153
NT2X06 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-162
NT2X09 in an IOPAC RMM	Vol. 4, 1-171
NT2X09 in an OPM RMM	Vol. 4, 1-178
NT2X09 in an RLCM RMM	Vol. 4, 1-186
NT2X09 in an RSC RMM	Vol. 4, 1-194
NT2X09 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-202
NT2X09 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-211
NT2X09 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-220
NT2X10 in an OPM RMM	Vol. 4, 1-229
NT2X10 in an RLCM RMM	Vol. 4, 1-233
NT2X10 in an RSC RMM	Vol. 4, 1-237
NT2X10 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-244
NT2X10 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-251
NT2X10 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-258
NT2X11 in an OPAC RMM	Vol. 4, 1-265
NT2X11 in an OPM RMM	Vol. 4, 1-270
NT2X11 in an RLCM-EDC RMM	Vol. 4, 1-274
NT2X11 in an RLCM RMM	Vol. 4, 1-278
NT2X11 in an RSC RMM	Vol. 4, 1-282
NT2X11 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-289
NT2X11 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-298
NT2X11 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-307
NT2X48 in an IOPAC RMM	Vol. 4, 1-316
NT2X48 in an OPM RMM	Vol. 4, 1-321
NT2X48 in an RLCM RMM	Vol. 4, 1-326
NT2X55 in an RSC RMM	Vol. 4, 1-331
NT2X57 in an IOPAC RMM	Vol. 4, 1-338
NT2X57 in an OPM RMM	Vol. 4, 1-342
NT2X57 in an RLCM-EDC RMM	Vol. 4, 1-346
NT2X57 in an RLCM RMM	Vol. 4, 1-350
NT2X57 in an RSC RMM	Vol. 4, 1-355
NT2X57 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-362
NT2X57 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-369
NT2X57 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-376
NT2X59 in an IOPAC RMM	Vol. 4, 1-383
NT2X59 in an OPM RMM	Vol. 4, 1-387
NT2X59 in an RLCM-EDC RMM	Vol. 4, 1-394
NT2X59 in an RLCM RMM	Vol. 4, 1-401
NT2X59 in an RSC RMM	Vol. 4, 1-406

NT2X59 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-413
NT2X59 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-420
NT2X59 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-427
NT2X70 in an IOPAC HIE	Vol. 4, 1-434
NT2X70 in an OPM HIE	Vol. 4, 1-441
NT2X70 in an RLCM-EDC HIE	Vol. 4, 1-455
NT2X70 in an RLCM HIE	Vol. 4, 1-464
NT2X70 in an RSC	Vol. 4, 1-478
NT2X70 in an SMA	Vol. 4, 1-490
NT2X70 in an SMA-MVI-20	Vol. 4, 1-498
NT2X70 in an SMS	Vol. 4, 1-506
NT2X70 in an SMS-R	Vol. 4, 1-517
NT2X70 in an SMU	Vol. 4, 1-526
NT2X90 in an IOPAC RMM	Vol. 4, 1-533
NT2X90 in an OPAC RMM	Vol. 4, 1-538
NT2X90 in an OPM RMM	Vol. 4, 1-543
NT2X90 in an RLCM-EDC RMM	Vol. 4, 1-551
NT2X90 in an RLCM RMM	Vol. 4, 1-557
NT2X90 in an RSC RMM	Vol. 4, 1-562
NT2X90 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-569
NT2X90 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-576
NT3X04 in an RSC RMM	Vol. 4, 1-583
NT3X09 in an IOPAC RMM	Vol. 4, 1-590
NT3X09 in an OPAC RMM	Vol. 4, 1-596
NT3X09 in an OPM RMM	Vol. 4, 1-601
NT3X09 in an RLCM-EDC RMM	Vol. 4, 1-607
NT3X09 in an RLCM RMM	Vol. 4, 1-612
NT3X09 in an RSC RMM	Vol. 4, 1-617
NT3X09 in an RSC-S (DS-1) Model A RMM	Vol. 4, 1-624
NT3X09 in an RSC-S (DS-1) Model B RMM	Vol. 4, 1-634
NT3X09 in an RSC-S (PCM-30) Model B RMM	Vol. 4, 1-644
NT3X82 in an RSC RMM	Vol. 4, 1-653
NT3X83 in an RSC RMM	Vol. 4, 1-660
NT4X97 in an IOPAC RMM	Vol. 4, 1-668
NT4X97 in an RSC-S (PCM-30) Model A RMM	Vol. 4, 1-673
NT4X97 in an RSC-S (PCM-30) Model B RMM	Vol. 4, 1-680
NT4X98 in an IOPAC RMM	Vol. 4, 1-687
NT4X98 in an RSC-S (PCM-30) Model B RMM	Vol. 4, 1-694
NT6X17 in an IOPAC ILCM	Vol. 4, 1-703
NT6X17 in an OPM	Vol. 4, 1-707
NT6X17 in an RLCM	Vol. 4, 1-711
NT6X17 in an RSC LCM	Vol. 4, 1-715
NT6X17 in an RSC-S (DS-1) Model A LCME	Vol. 4, 1-723
NT6X17 in an RSC-S (DS-1) Model B LCME	Vol. 4, 1-731
NT6X17 in a STAR or RLD	Vol. 4, 1-739
NT6X18 in an IOPAC ILCM	Vol. 4, 1-743
NT6X18 in an OPAC LCM	Vol. 4, 1-747
NT6X18 in an OPM	Vol. 4, 1-751
NT6X18 in an RLCM	Vol. 4, 1-755
NT6X18 in an RSC LCM	Vol. 4, 1-759
NT6X18 in an RSC-S (DS-1) Model A LCME	Vol. 4, 1-767

NT6X18 in an RSC-S (DS-1) Model B LCME	Vol. 4, 1-775
NT6X18 in a STAR or RLD	Vol. 4, 1-783
NT6X19 in an IOPAC ILCM	Vol. 4, 1-787
NT6X19 in an OPM	Vol. 4, 1-791
NT6X19 in an RLCM	Vol. 4, 1-795
NT6X19 in an RSC LCM	Vol. 4, 1-799
NT6X19 in an RSC-S (DS-1) Model A LCME	Vol. 4, 1-807
NT6X19 in an RSC-S (DS-1) Model B LCME	Vol. 4, 1-815
NT6X19 in a STAR or RLD	Vol. 4, 1-823
NT6X20 in an IOPAC ILCM	Vol. 4, 1-827
NT6X20 in an OPM	Vol. 4, 1-831
NT6X20 in an RLCM	Vol. 4, 1-835
NT6X20 in an RSC LCM	Vol. 4, 1-839
NT6X20 in an RSC-S (DS-1) Model A LCME	Vol. 4, 1-847
NT6X20 in an RSC-S (DS-1) Model B LCME	Vol. 4, 1-855
NT6X20 in a STAR or RLD	Vol. 4, 1-863
NT6X21 in an IOPAC ILCM	Vol. 4, 1-867
NT6X21 in an OPM	Vol. 4, 1-871
NT6X21 in an RLCM	Vol. 4, 1-875
NT6X21 in an RLCM-EDC LCM	Vol. 4, 1-879
NT6X21 in an RSC-S (DS-1) Model A LCME	Vol. 4, 1-883
NT6X21 in an RSC-S (DS-1) Model B LCME	Vol. 4, 1-893
NT6X21 in an RSC-S (PCM-30) Model A LCME	Vol. 4, 1-902
NT6X21 in an RSC-S (PCM-30) Model B LCME	Vol. 4, 1-911
NT6X21 in a STAR or RLD	Vol. 4, 1-920
NT6X27 in an IOPAC HIE	Vol. 4, 1-924
NT6X27 in an OPM HIE	Vol. 4, 1-931
NT6X27 in an RLCM HIE	Vol. 4, 1-938
NT6X30 in an RSC LCM	Vol. 4, 1-945
NT6X30 in an RSC-S (DS-1) Model A LCME	Vol. 4, 1-960
NT6X30 in an RSC-S (DS-1) Model B LCME	Vol. 4, 1-974
NT6X30 in an RSC-S (PCM-30) Model A LCME	Vol. 4, 1-988
NT6X30 in an RSC-S (PCM-30) Model B LCME	Vol. 4, 1-1002
NT6X36 in an IOPAC FSP	Vol. 4, 1-1016
NT6X36 in an OPM	Vol. 4, 1-1021
NT6X36 in an RLCM-EDC FSP	Vol. 4, 1-1026
NT6X36 in an RLCM FSP	Vol. 4, 1-1031
NT6X36 in an RSC-S FSP for CRSC or CEXT	Vol. 4, 1-1036

Card Replacement Procedures

Volume 5 of 7

1	XPM card replacement procedures (continued)	Vol. 5, 1-1
	NT6X40 in an SMA	Vol. 5, 1-2
	NT6X40 in an SMA-MVI-20	Vol. 5, 1-14
	NT6X40 in an SMA2	Vol. 5, 1-26
	NT6X40 in an SMS	Vol. 5, 1-38
	NT6X40 in an SMU	Vol. 5, 1-51

NT6X41 in an SMA	Vol. 5, 1-64
NT6X41 in an SMA-MVI-20	Vol. 5, 1-71
NT6X41 in an SMS	Vol. 5, 1-78
NT6X41 in an SMS-R	Vol. 5, 1-87
NT6X41 in an SMU	Vol. 5, 1-95
NT6X42 in an SMA	Vol. 5, 1-101
NT6X42 in an SMA-MVI-20	Vol. 5, 1-107
NT6X42 in an SMS	Vol. 5, 1-114
NT6X42 in an SMS-R	Vol. 5, 1-122
NT6X44 in an RSC	Vol. 5, 1-130
NT6X44 in an SMA	Vol. 5, 1-138
NT6X44 in an SMA-MVI-20	Vol. 5, 1-144
NT6X44 in an SMS	Vol. 5, 1-150
NT6X44 in an SMS-R	Vol. 5, 1-158
NT6X45 in an IOPAC HIE	Vol. 5, 1-166
NT6X45 in an OPAC HIE	Vol. 5, 1-172
NT6X45 in an OPM HIE	Vol. 5, 1-178
NT6X45 in an RLCM HIE	Vol. 5, 1-184
NT6X47 in an IOPAC HIE	Vol. 5, 1-190
NT6X47 in an OPM HIE	Vol. 5, 1-196
NT6X47 in an RLCM HIE	Vol. 5, 1-202
NT6X48 in an RSC	Vol. 5, 1-208
NT6X50 in an OPAC HIE	Vol. 5, 1-216
NT6X50 in an OPM HIE	Vol. 5, 1-223
NT6X50 in an RLCM-EDC HIE	Vol. 5, 1-230
NT6X50 in an RLCM HIE	Vol. 5, 1-237
NT6X50 in an RSC	Vol. 5, 1-244
NT6X50 in an SMA	Vol. 5, 1-259
NT6X50 in an SMA-MVI-20	Vol. 5, 1-275
NT6X51 in an IOPAC ILCM	Vol. 5, 1-291
NT6X51 in an OPAC LCM	Vol. 5, 1-298
NT6X51 in an OPM	Vol. 5, 1-305
NT6X51 in an RLCM	Vol. 5, 1-312
NT6X51 in an RLCM-EDC	Vol. 5, 1-319
NT6X51 in an RSC-S (DS-1) Model A LCM	Vol. 5, 1-324
NT6X51 in an RSC-S (DS-1) Model B LCME	Vol. 5, 1-332
NT6X51 in an RSC-S (PCM-30) Model A LCM	Vol. 5, 1-339
NT6X51 in an RSC-S (PCM-30) Model B LCM	Vol. 5, 1-347
NT6X52 in an IOPAC ILCM	Vol. 5, 1-355
NT6X52 in an OPAC LCM	Vol. 5, 1-361
NT6X52 in an OPM	Vol. 5, 1-367
NT6X52 in an RLCM	Vol. 5, 1-373
NT6X52 in an RLCM-EDC	Vol. 5, 1-379
NT6X52 in an RSC LCM	Vol. 5, 1-384
NT6X52 in an RSC-S (DS-1) Model A LCME	Vol. 5, 1-392
NT6X52 in an RSC-S (DS-1) Model B LCME	Vol. 5, 1-401
NT6X52 in an RSC-S (PCM-30) Model A LCME	Vol. 5, 1-410
NT6X53 in an IOPAC ILCM	Vol. 5, 1-418
NT6X53 in an OPAC LCM	Vol. 5, 1-425
NT6X53 in an OPM	Vol. 5, 1-432
NT6X53 in an RLCM	Vol. 5, 1-444

NT6X53 in an RLCM-EDC	Vol. 5, 1-453
NT6X53 in an RSC LCM	Vol. 5, 1-460
NT6X53 in an RSC-S (DS-1) Model A LCM(E)	Vol. 5, 1-469
NT6X53 in an RSC-S (DS-1) Model B LCM(E)	Vol. 5, 1-478
NT6X53 in a STAR	Vol. 5, 1-487
NT6X54 in an IOPAC ILCM	Vol. 5, 1-493
NT6X54 in an OPAC LCM	Vol. 5, 1-500
NT6X54 in an OPM	Vol. 5, 1-509
NT6X54 in an RLCM	Vol. 5, 1-518
NT6X54 in an RLCM-EDC	Vol. 5, 1-527
NT6X54 in an RSC	Vol. 5, 1-533
NT6X54 in an RSC-S (DS-1) Model A LCM(E)	Vol. 5, 1-542
NT6X54 in an RSC-S (DS-1) Model B LCM(E)	Vol. 5, 1-549
NT6X54 in a STAR	Vol. 5, 1-556
NT6X60 in an IOPAC HIE	Vol. 5, 1-565
NT6X60 in an OPAC HIE	Vol. 5, 1-572
NT6X60 in an OPM HIE	Vol. 5, 1-579
NT6X60 in an RLCM HIE	Vol. 5, 1-587
NT6X69 in an RSC-M	Vol. 5, 1-595
NT6X69 in an RSC RCC/RCC2	Vol. 5, 1-605
NT6X69 in an RSC-S (DS-1) Model A RCC2	Vol. 5, 1-613
NT6X69 in an RSC-S (DS-1) Model B RCC2	Vol. 5, 1-622
NT6X69 in an RSC-S (PCM-30) Model A RCO2	Vol. 5, 1-630
NT6X69 in an RSC-S (PCM-30) Model B RCO2	Vol. 5, 1-639
NT6X69 in an SMA	Vol. 5, 1-648
NT6X69 in an SMA-MVI-20	Vol. 5, 1-654
NT6X69 in an SMS	Vol. 5, 1-661
NT6X69 in an SMS-R	Vol. 5, 1-670
NT6X69 in an SMU	Vol. 5, 1-678
NT6X71 in an IOPAC ILCM	Vol. 5, 1-684
NT6X71 in an OPM	Vol. 5, 1-688
NT6X71 in an RLCM	Vol. 5, 1-692
NT6X71 in an RSC LCM	Vol. 5, 1-696
NT6X71 in an RSC-S (DS-1) Model A LCME	Vol. 5, 1-705
NT6X71 in an RSC-S (DS-1) Model B LCME	Vol. 5, 1-713
NT6X71 in a STAR or RLD	Vol. 5, 1-721
NT6X72 in an RSC	Vol. 5, 1-725
NT6X73 in an IOPAC HIE	Vol. 5, 1-734
NT6X73 in an OPAC HIE	Vol. 5, 1-738
NT6X73 in an OPM HIE	Vol. 5, 1-742
NT6X73 in an RLCM-EDC HIE	Vol. 5, 1-746
NT6X73 in an RLCM HIE	Vol. 5, 1-751
NT6X74 in an IOPAC RMM	Vol. 5, 1-755
NT6X74 in an OPM RMM	Vol. 5, 1-761
NT6X74 in an RLCM-EDC RMM	Vol. 5, 1-768
NT6X74 in an RLCM RMM	Vol. 5, 1-775
NT6X74 in an RSC RMM	Vol. 5, 1-782
NT6X74 in an RSC-S (DS-1) Model A RMM	Vol. 5, 1-790
NT6X74 in an RSC-S (DS-1) Model B RMM	Vol. 5, 1-799
NT6X74 in an RSC-S (PCM-30) Model A RMM	Vol. 5, 1-808
NT6X75 in an IOPAC HIE	Vol. 5, 1-817

NT6X75 in an OPAC HIE Vol. 5, 1-824
NT6X75 in an OPM HIE Vol. 5, 1-831
NT6X75 in an RLCM HIE Vol. 5, 1-838
NT6X76 in an RSC LCME Vol. 5, 1-845
NT6X76 in an RSC-S (DS-1) Model A LCME Vol. 5, 1-853
NT6X76 in an RSC-S (DS-1) Model B LCME Vol. 5, 1-861
NT6X76 in a STAR or RLD Vol. 5, 1-869
NT6X78 in an RSC-M Vol. 5, 1-876
NT6X78 in an RSC RCC/RCC2 Vol. 5, 1-883
NT6X78 in an RSC-S (DS-1) Model A RCC2 Vol. 5, 1-891
NT6X78 in an RSC-S (DS-1) Model B RCC2 Vol. 5, 1-898
NT6X78 in an RSC-S (PCM-30) Model A RCO2 Vol. 5, 1-905
NT6X78 in an RSC-S (PCM-30) Model B RCO2 Vol. 5, 1-912
NT6X78 in an SMA Vol. 5, 1-919
NT6X78 in an SMA-MVI-20 Vol. 5, 1-925
NT6X78 in an SMA2 Vol. 5, 1-932
NT6X78 in an SMS Vol. 5, 1-939
NT6X78 in an SMU Vol. 5, 1-946
NT6X80 in an SMA Vol. 5, 1-951
NT6X80 in an SMA-MVI-20 Vol. 5, 1-957
NT6X80 in an SMS Vol. 5, 1-964
NT6X80 in an SMS-R Vol. 5, 1-972
NT6X80 in an SMU Vol. 5, 1-981

Card Replacement Procedures

Volume 6 of 7

1 XPM card replacement procedures (continued) Vol. 6, 1-1

NT6X85 in an SMS Vol. 6, 1-2
NT6X85 in an SMS-R Vol. 6, 1-13
NT6X85 in an SMU Vol. 6, 1-24
NT6X86 in an SMS Vol. 6, 1-30
NT6X86 in an SMS-R Vol. 6, 1-39
NT6X87 in an RSC LCME Vol. 6, 1-48
NT6X87 in an RSC-S (DS-1) Model B LCME Vol. 6, 1-56
NT6X92 in an RSC-M Vol. 6, 1-64
NT6X92 in an RSC RCC/RCC2 Vol. 6, 1-71
NT6X92 in an RSC-S (DS-1) Model A RCC2 Vol. 6, 1-79
NT6X92 in an RSC-S (DS-1) Model B RCC2 Vol. 6, 1-87
NT6X92 in an RSC-S (PCM-30) Model A RCO2 Vol. 6, 1-95
NT6X92 in an RSC-S (PCM-30) Model B RCO2 Vol. 6, 1-104
NT6X92 in an SMA Vol. 6, 1-112
NT6X92 in an SMA-MVI-20 Vol. 6, 1-118
NT6X92 in an SMA2 Vol. 6, 1-125
NT6X92 in an SMS Vol. 6, 1-132
NT6X92 in an SMU Vol. 6, 1-140
NT6X99 in an IOPAC ILCM Vol. 6, 1-146
NT6X99 in an OPAC LCM Vol. 6, 1-150

NT6X99 in an OPM	Vol. 6, 1-154
NT6X99 in an RLCM	Vol. 6, 1-158
NT6X99 in an RSC LCM	Vol. 6, 1-162
NT6X99 in an RSC-S (DS-1) Model A LCME	Vol. 6, 1-170
NT6X99 in an RSC-S (DS-1) Model B LCME	Vol. 6, 1-178
NT6X99 in a STAR or RLD	Vol. 6, 1-186
NT7X05 in an RSC RCC/RCC2	Vol. 6, 1-190
NT7X05 in an RSC-S (DS-1) Model A RCC2	Vol. 6, 1-198
NT7X05 in an RSC-S (DS-1) Model B RCC2	Vol. 6, 1-207
NT7X05 in an RSC-S (PCM-30) Model A RCO2	Vol. 6, 1-216
NT7X05 in an RSC-S (PCM-30) Model B RCO2	Vol. 6, 1-225
NT7X05 in an SMS	Vol. 6, 1-234
NT7X05 in an SMS-R	Vol. 6, 1-243
NT7X05 in an SMU	Vol. 6, 1-252
NT8X02 in an OPAC BCU	Vol. 6, 1-261
NT8X02 in an OPM BCU	Vol. 6, 1-265
NT8X18 in an SMS-R	Vol. 6, 1-270
NTAX74 in an RSC-S (DS-1) Model A RCC2	Vol. 6, 1-281
NTAX74 in an RSC-S (DS-1) Model B RCC2	Vol. 6, 1-292
NTAX74 in an RSC-S (PCM-30) Model A RCO2	Vol. 6, 1-303
NTAX74 in an RSC-S (PCM-30) Model B RCO2	Vol. 6, 1-315
NTAX74 in an SMA	Vol. 6, 1-327
NTAX74 in an SMA-MVI-20	Vol. 6, 1-337
NTAX74 in an SMA2	Vol. 6, 1-347
NTAX78 in an SMA	Vol. 6, 1-355
NTAX78 in an SMA-MVI-20	Vol. 6, 1-362
NTAX78 in an SMU	Vol. 6, 1-369
NTBX01 in an RSC RCC2	Vol. 6, 1-374
NTBX01 in an RSC-S (DS-1) Model A RCC2	Vol. 6, 1-381
NTBX01 in an RSC-S (DS-1) Model B RCC2	Vol. 6, 1-390
NTBX01 in an RSC-S (PCM-30) Model A RCO2	Vol. 6, 1-399
NTBX01 in an RSC-S (PCM-30) Model B RCO2	Vol. 6, 1-408
NTBX01 in an SMA	Vol. 6, 1-417
NTBX01 in an SMA-MVI-20	Vol. 6, 1-423
NTBX01 in an SMA2	Vol. 6, 1-430
NTBX01 in an SMU	Vol. 6, 1-437
NTBX02 in an RSC RCC2	Vol. 6, 1-443
NTBX02 in an RSC-S (DS-1) Model A RCC2	Vol. 6, 1-456
NTBX02 in an RSC-S (DS-1) Model B RCC2	Vol. 6, 1-469
NTBX02 in an RSC-S (PCM-30) Model A RCO2	Vol. 6, 1-482
NTBX02 in an RSC-S (PCM-30) Model B RCO2	Vol. 6, 1-495
NTBX02 in an SMA	Vol. 6, 1-508
NTBX02 in an SMA-MVI-20	Vol. 6, 1-515
NTBX02 in an SMA2	Vol. 6, 1-523
NTBX02 in an SMU	Vol. 6, 1-529
NTBX26 in an RSC LCME	Vol. 6, 1-538
NTBX26 in an RSC-S (DS-1) Model A LCME	Vol. 6, 1-546
NTBX26 in an RSC-S (DS-1) Model B LCME	Vol. 6, 1-554
NTBX27 in an RSC LCME	Vol. 6, 1-562
NTBX27 in an RSC-S (DS-1) Model A LCME	Vol. 6, 1-570
NTBX27 in an RSC-S (DS-1) Model B LCME	Vol. 6, 1-578

NTBX27 in a STAR or RLD Vol. 6, 1-586
NTBX34 in an RSC LCME Vol. 6, 1-593
NTBX34 in an RSC-S (DS-1) Model A LCME Vol. 6, 1-601
NTBX34 in an RSC-S (DS-1) Model B LCME Vol. 6, 1-611
NTBX34 in an RSC-S (PCM-30) Model A LCME Vol. 6, 1-621
NTBX35 in an RSC LCME Vol. 6, 1-630
NTBX35 in an RSC-S (DS-1) Model A LCME Vol. 6, 1-638
NTBX35 in an RSC-S (DS-1) Model B LCME Vol. 6, 1-648
NTBX35 in an RSC-S (PCM-30) Model A LCME Vol. 6, 1-658
NTBX36 in an RSC LCME Vol. 6, 1-667
NTBX36 in an RSC-S (DS-1) Model A LCME Vol. 6, 1-677
NTBX36 in an RSC-S (DS-1) Model B LCME Vol. 6, 1-687
NTBX72 in an RSC LCME Vol. 6, 1-697
NTBX72 in an RSC-S (DS-1) Model A LCME Vol. 6, 1-706
NTBX72 in an RSC-S (DS-1) Model B LCME Vol. 6, 1-715
NTBX72 in an RSC-S (PCM-30) Model A LCME Vol. 6, 1-724
NTEX17 in an RLCM Vol. 6, 1-733
NTEX17 in an RSC LCM Vol. 6, 1-743
NTEX17 in an RSC-S (DS-1) Model A LCME Vol. 6, 1-753
NTEX17 in an RSC-S (DS-1) Model B LCM Vol. 6, 1-763
NTEX17 in a STAR Vol. 6, 1-773
NTEX54 in an RLCM Vol. 6, 1-783
NTEX54 in an RSC LCM Vol. 6, 1-800
NTEX54 in an RSC-S (DS-1) Model A LCME Vol. 6, 1-817
NTEX54 in an RSC-S (DS-1) Model B LCM Vol. 6, 1-834
NTEX54 in a STAR Vol. 6, 1-851
NTMX45 in an IOPAC HIE Vol. 6, 1-868
NTMX45 in an OPAC HIE Vol. 6, 1-878
NTMX45 in an OPM HIE Vol. 6, 1-888
NTMX45 in an RLCM HIE Vol. 6, 1-898
NTMX71 in an RSC Vol. 6, 1-908
NTMX71 in an SMA Vol. 6, 1-916
NTMX71 in an SMA-MVI-20 Vol. 6, 1-924
NTMX71 in an SMS Vol. 6, 1-932
NTMX71 in an SMU Vol. 6, 1-940
NTMX72 in an RSC-M Vol. 6, 1-949
NTMX72 in an RSC RCC2 Vol. 6, 1-957
NTMX72 in an RSC-S (DS-1) Model A RCC2 Vol. 6, 1-966
NTMX72 in an RSC-S (DS-1) Model B RCC2 Vol. 6, 1-975
NTMX72 in an RSC-S (PCM-30) Model A RCO2 Vol. 6, 1-984
NTMX72 in an RSC-S (PCM-30) Model B RCO2 Vol. 6, 1-993
NTMX72 in an SMA2 Vol. 6, 1-1002

Card Replacement Procedures

Volume 7 of 7

- 1 XPM card replacement procedures (continued) Vol. 7, 1-1**
NTMX73 in an RSC-M Vol. 7, 1-2

NTMX73 in an RSC RCC2	Vol. 7, 1-9
NTMX73 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-17
NTMX73 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-26
NTMX73 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-36
NTMX73 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-45
NTMX73 in an SMA2	Vol. 7, 1-54
NTMX74 in an RSC-M	Vol. 7, 1-60
NTMX74 in an RSC RCC2	Vol. 7, 1-69
NTMX74 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-77
NTMX74 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-86
NTMX74 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-95
NTMX74 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-104
NTMX75 in an RSC-M	Vol. 7, 1-113
NTMX75 in an RSC RCC2	Vol. 7, 1-120
NTMX75 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-128
NTMX75 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-136
NTMX75 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-144
NTMX75 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-153
NTMX75 in an SMA2	Vol. 7, 1-162
NTMX76 in an RSC-M	Vol. 7, 1-168
NTMX76 in an RSC RCC2	Vol. 7, 1-175
NTMX76 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-182
NTMX76 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-188
NTMX76 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-195
NTMX76 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-205
NTMX76 in an SMA2	Vol. 7, 1-214
NTMX77 in an RSC	Vol. 7, 1-221
NTMX77 in an RSC-M	Vol. 7, 1-234
NTMX77 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-241
NTMX77 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-254
NTMX77 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-267
NTMX77 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-280
NTMX77 in an SMS	Vol. 7, 1-293
NTMX77 in an SMS-R	Vol. 7, 1-306
NTMX77 in an SMU	Vol. 7, 1-318
NTMX79 in an RSC EXT	Vol. 7, 1-333
NTMX79 in an RSC-M	Vol. 7, 1-343
NTMX79 in an RSC-S (DS-1) Model A EXT	Vol. 7, 1-349
NTMX79 in an RSC-S (DS-1) Model B EXT	Vol. 7, 1-359
NTMX79 in an RSC-S (PCM-30) Model A EXT	Vol. 7, 1-370
NTMX79 in an RSC-S (PCM-30) Model B EXT	Vol. 7, 1-380
NTMX79 in an SMA2	Vol. 7, 1-390
NTMX81 in an RSC RCC2	Vol. 7, 1-397
NTMX81 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-409
NTMX81 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-421
NTMX81 in an SMA2	Vol. 7, 1-435
NTMX81 in a STAR	Vol. 7, 1-451
NTMX82 in an RSC-M	Vol. 7, 1-465
NTMX82 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-476
NTMX82 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-486
NTMX87 in an RSC-M	Vol. 7, 1-496

NTMX87 in an RSC RCC2	Vol. 7, 1-508
NTMX87 in an RSC-S (DS-1) Model A RCC2	Vol. 7, 1-528
NTMX87 in an RSC-S (DS-1) Model B RCC2	Vol. 7, 1-548
NTMX87 in an RSC-S (PCM-30) Model A RCO2	Vol. 7, 1-571
NTMX87 in an RSC-S (PCM-30) Model B RCO2	Vol. 7, 1-592
NTMX87 in an SMA2	Vol. 7, 1-613
NTRX41 in an IOPAC MSP	Vol. 7, 1-630
NTRX41 in an OPAC MSP	Vol. 7, 1-635
NTRX41 in an RSC-M/MSP	Vol. 7, 1-640
NTRX41 in an RSC MSP	Vol. 7, 1-645
NTRX41 in an RSC-S (DS-1) Model B MSP	Vol. 7, 1-650
NTRX41 in an SMA2 MSP	Vol. 7, 1-655
NTRX42 in an IOPAC MSP	Vol. 7, 1-660
NTRX42 in an OPAC MSP	Vol. 7, 1-677
NTRX42 in an RSC-M/MSP	Vol. 7, 1-695
NTRX42 in an RSC MSP	Vol. 7, 1-707
NTRX42 in an RSC-S (DS-1) Model B MSP	Vol. 7, 1-726
NTRX42 in an RSC-S (PCM-30) Model B MSP	Vol. 7, 1-746
NTRX42 in an SMA2 MSP	Vol. 7, 1-766
NTRX43 in an IOPAC MSP	Vol. 7, 1-778
NTRX43 in an OPAC MSP	Vol. 7, 1-785
NTRX43 in an RSC-M/MSP	Vol. 7, 1-792
NTRX43 in an RSC MSP	Vol. 7, 1-800
NTRX43 in an RSC-S (DS-1) Model B MSP	Vol. 7, 1-808
NTRX43 in an SMA2 MSP	Vol. 7, 1-816
NTRX44 in an IOPAC MSP	Vol. 7, 1-824
NTRX44 in an OPAC MSP	Vol. 7, 1-836
NTRX44 in an RSC MSP	Vol. 7, 1-848
NTRX44 in an RSC-S (DS-1) Model B MSP	Vol. 7, 1-858
NTRX54 in an RSC-M/MSP	Vol. 7, 1-868
NTRX54 in an RSC MSP	Vol. 7, 1-875
NTRX54 in an RSC-S (DS-1) Model B MSP	Vol. 7, 1-882
NTRX54 in an SMA2 MSP	Vol. 7, 1-889
NTRX66 MSP	Vol. 7, 1-896
NTTR46 in an RLD	Vol. 7, 1-902
NTTR47 in an RLD	Vol. 7, 1-908
NTTR60 in a STAR	Vol. 7, 1-914
NTTR66 in an RLD	Vol. 7, 1-921
NTTR67 in an RLD	Vol. 7, 1-927
NTTR70 in an RLD	Vol. 7, 1-934
NTTR71 in an RLD	Vol. 7, 1-941
NTTR72 in an RLD	Vol. 7, 1-946
NTTR73 in a STAR	Vol. 7, 1-952
NTTR74 in a STAR	Vol. 7, 1-956
NTTR75 in a STAR	Vol. 7, 1-962
NTTR76 in a STAR	Vol. 7, 1-970
NTTR77 in a STAR	Vol. 7, 1-979
NTTR87 in a STAR	Vol. 7, 1-986

1 XPM card replacement procedures (continued)

This chapter provides card replacement procedures for XMS-based peripheral modules (XPM).

NTMX73 in an RSC-M

Application

Use this procedure to replace an NTMX73 circuit card in a Remote Switching Center Multi-access (RSC-M) main shelf.

Note: In this section, RSC-M is referred to as RCO2 in the examples. When software outputs messages to the MAP terminal, the software does not differentiate between the two types of RCO2.

PEC	Suffixes	Name
NTMX73	AB	pulse code modulation (PCM) signaling card

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX73 in an RSC-M (continued)

Summary of replacing an NTMX73 in an RSC-M

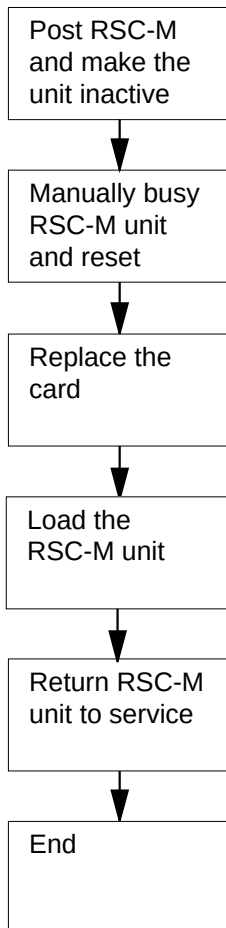

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX73 in an RSC-M (continued)

Replacing an NTMX73 in an RSC-M

At the MAP display

- 1 Proceed if:
 - a step in a maintenance procedure directs you to this card replacement procedure
 - you use the procedure to verify or accept cards
 - your maintenance support group directs you to this procedure.
- 2



WARNING

Loss of service

When you replace a card in the RSC-M, make sure the unit in which you replace the card is *inactive*. Make sure that the mate unit is *active*.

Obtain an NTMX73 replacement circuit card. Make sure the replacement circuit card has the same product engineering code (PEC), and PEC suffix, as the circuit card you remove.

At the MAP terminal

- 3 Make sure the peripheral module (PM) level appears on the MAP display. To post the RSC-M/RCO2, type:

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 with the defective card

Example of a MAP response:

NTMX73 in an RSC-M (continued)

```

RCO2          SysB      ManB      OffL      CBsy      ISTb      InSv
0 Quit        PM        0          0          2          0          25
2 Post_       RCO2      0          0          0          0          1
3 ListSet
4             RCO2      0 ISTb Links_00S: CSide 1, PSide 1
5 TRNSL       Unit0:    Inact ISTb
6 TST         Unit1:    Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_

```

- 4 To determine the location of the RCO2 that contains the circuit card you must replace, type:

>QUERYPM

and press the Enter key.

Example of a MAP response:

```

PM Type: RSC-M PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname:KRI07BI1 EEPROM Load:MX77NG03
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
HOST 00 C02 RSC-M 00 05 RCO2: 000 MX85AA
HOST 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA

```

- 5 Determine the state of the RCO2 unit that associates with the circuit card to replace.

If the state of the RCO2 unit is	Do
active	step 6
inactive	step 8

- 6 To perform a Switch of Activity (SWACT) of the units, type:

>SWACT

and press the Enter key.

Example of a MAP response:

NTMX73

in an RSC-M (continued)

RC02 0 A Warm SwAct will be performed after
 data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):

If	Do
the system prompts you to confirm a warm SWACT	step 7
the system rejects the SWACT	step 22

- 7 To confirm the command, type:

>YES

and press the Enter key.

Example of a MAP response:

Unit0: Inact SysB Mtce
Unit1: Act ISTb

RC02 0 SwAct Passed

If the MAP response is	Do
SWACT passed	step 8
other	step 21

- 8 A maintenance flag (Mtce) can appear that indicates that system-initiated maintenance tasks are in progress. When the flag disappears from the status lines for both RCO2 units, you can proceed to the next step.

At the cabinet

- 9 Place a sign on the active unit that bears the words *Active unit-Do not touch*. Do not use magnets or tape to attach the sign.

- 10 To manually busy (ManB) the inactive unit, type:

>BSY INACTIVE

and press the Enter key.

Example of a MAP response:

NTMX73 in an RSC-M (continued)

```
RSC-M      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:     Inact ManB
Unit1:     Act   ISTb
bsy INACTIVE
RCO2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passes	step 11
fails	step 21

- 11** To reset the inactive RCO2 unit, type:

>PMRESET UNIT unit_no NORUN

and press the Enter key.

where

unit_no

is the RCO2 unit number zero or one

At the shelf

12



WARNING

Static electricity damage

Wear a wrist strap that connects to the wrist-strap grounding point of the modular supervisory panel (MSP) to handle circuit cards. The wrist strap protects the cards against static electricity damage.

Locate the circuit card you must replace.

Note: The NTMX73 circuit cards, are in slot 11 of unit zero, and slot 17 of unit one.

- 13** To replace the card, use the common replacing a card procedure in this document. When the procedure is complete, return to this point.

Note: If the circuit card you must replace has switches, make sure the switches on the replacement circuit card have the same settings.

- 14** The next action depends on the reason you perform this procedure.

If	Do
a maintenance procedure directs you to this procedure	step 15

NTMX73

in an RSC-M (end)

	If	Do
	a maintenance procedure does not direct you to this procedure	step 16
15	Remove the sign from the active unit. Return to the maintenance procedure that sent you to this procedure and continue as directed. At the point where the system produces a defective card list, identify the next defective card on the list. Go to the correct card replacement procedure for that card in this manual.	
	At the MAP terminal	
16	To load the inactive unit, type: >LOADPM INACTIVE and press the Enter key.	
	If the LOADPM command	Do
	fails	step 21
	passes	step 17
17	To return the inactive unit to service, type: >RTS INACTIVE and press the Enter key.	
	If the RTS command	Do
	passes	step 18
	fails	step 21
18	Remove the sign from the active unit.	
19	Go to the common returning a card procedure in this document.	
20	The procedure is complete.	
21	For additional help, contact the next level of maintenance.	
22	For additional help with a SWACT, contact the next level of maintenance.	
	Note: The system can recommend that you use the SWACT command with the FORCE option. Consult office personnel to determine if you must use the FORCE option.	

**NTMX73
in an RSC RCC2**

Application

Use this procedure to replace an NTMX73 card in an RSCE RCC2.

PEC	Suffixes	Name
NTMX73	AA, AB	PCM Signaling Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX73 in an RSC RCC2 (continued)

Summary of card replacement procedure for an NTMX73 card in RSC RCC2

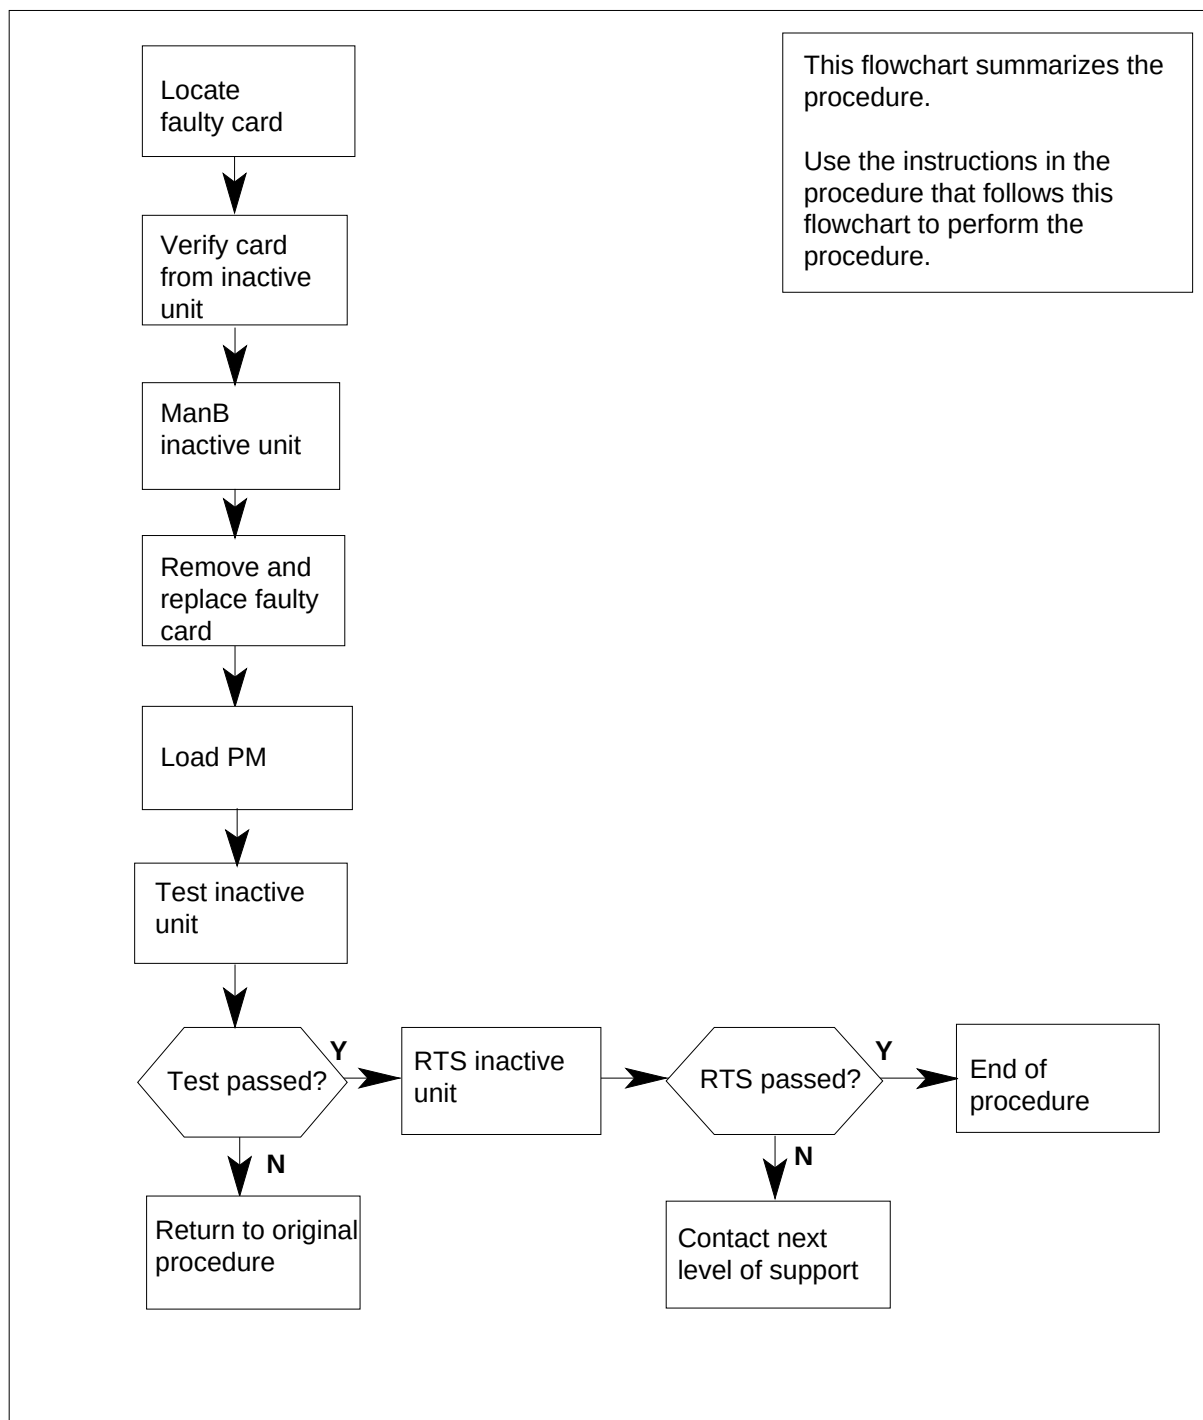

NTMX73 in an RSC RCC2 (continued)

Replacing an NTMX73 card in RSC RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX73 replacement card. Verify that the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP display

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where
rcc2_no
is the number of the RCC2 with the faulty card
Example of a MAP display:

NTMX73 in an RSC RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0	Quit	PM	0	0	0	0	1	25	
2	Post_	RCC2	0	0	0	0	1	0	
3	ListSet								
4		RCC2	0	ISTb	Links_00S:	CSide	0, PSide	0	
5	TRNSL	Unit0:	Inact	SYSB					
6	TST	Unit1:	Act	InSv					
7	BSY								
8	RTS								
9	OffL								
10	LoadPM_								
11	Disp_								
12	Next_								
13									
14	QueryPM								
15									
16									
17									
18									

- 4 By observing the MAP display, be sure the card that is to be removed is on the inactive unit.

At the RSCE frame

- 5 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 6 Busy the inactive PM unit by typing

>bsy INACTIVE

and pressing the Enter key.

Example of a MAP response:

```
RCC2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
Bsy INACTIVE
RCC2 0 Unit 0      Bsy Passed
```

- 7 Reset the inactive RCC2 unit to the ROM level by typing

>PMRESET UNIT rcc2_unit_no NORUN

and pressing the Enter key.

where

NTMX73
in an RSC RCC2 (continued)**rcc2_unit_no**

is the number of the inactive RCC2 unit (0 or 1)

At the frame**8****WARNING****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.


Put on a wrist strap.

9**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Remove the NTMX73 card as shown in the following figures.

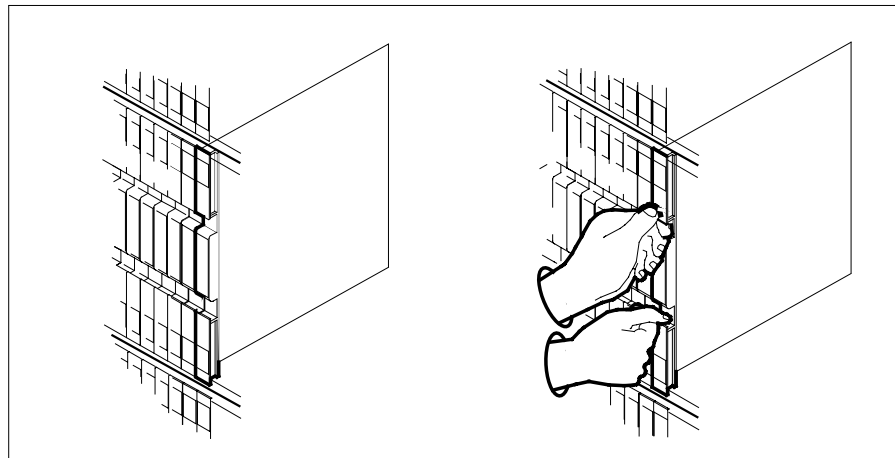a Locate the card to be removed on the appropriate shelf.

NTMX73 in an RSC RCC2 (continued)


- b Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

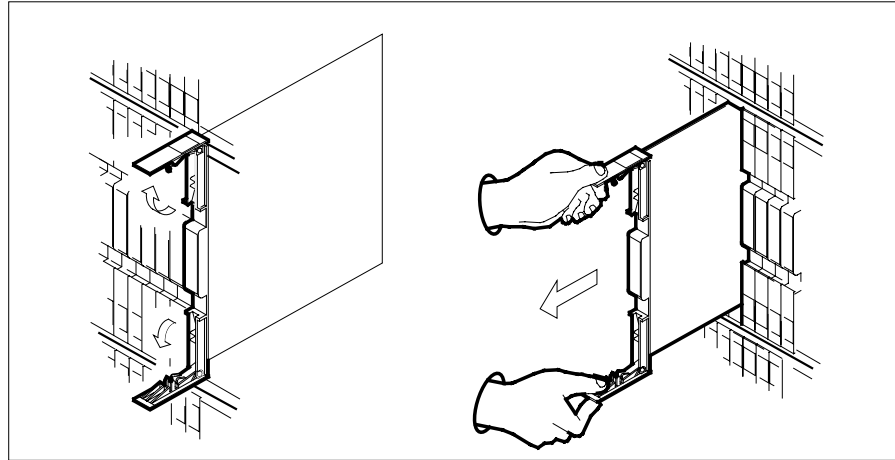

- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


Note: Set dip switch S1 toward IC U1.

- 10 Open the locking levers on the replacement card.
 - a Align the card with the slots in the shelf.
 - b Gently slide the card into the shelf.

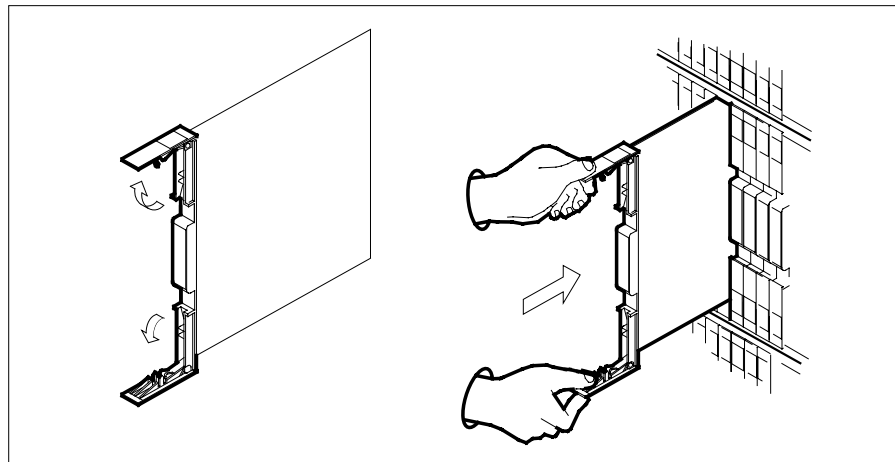

- 11 Seat and lock the card.
 - a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b Close the locking levers.

NTMX73 in an RSC RCC2 (continued)

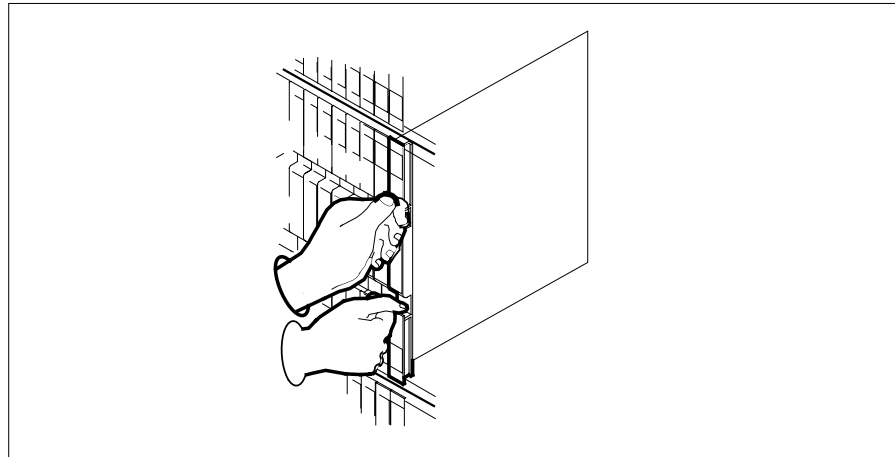

At the MAP display

- 12** Load the inactive RCC2 unit by typing

>loadpm unit unit_no CC

and pressing the Enter key.

where

unit_no

is the number of the faulty RCC2 unit

If load	Do
passed	step 13
failed	step 16

- 13** Use the following information to determine where to proceed.

If you entered this procedure from	Do
alarm clearing procedures	step 15
other	step 14

- 14** Return the inactive RCC2 unit to service by typing

>RTS UNIT unit_no

and pressing the Enter key.

where

NTMX73

in an RSC RCC2 (end)

unit_no
is the number of the faulty RCC2 unit

	If RTS	Do
	passed	step 17
	failed	step 16
15	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.	
16	Obtain further assistance in replacing this card by contacting operating company maintenance personnel.	
17	Remove the sign from the active RCC2 unit.	
18	Send any faulty cards for repair according to local procedure.	
19	Note in office records the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.	
20	You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.	

NTMX73 in an RSC-S (DS-1) Model A RCC2

Application

Use this procedure to replace an NTMX73 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX73	AA, AB	PCM Signaling Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX73 in an RSC-S (DS-1) Model A RCC2 (continued)

Summary of card replacement procedure for an NTMX73 card in RSC-S RCC2

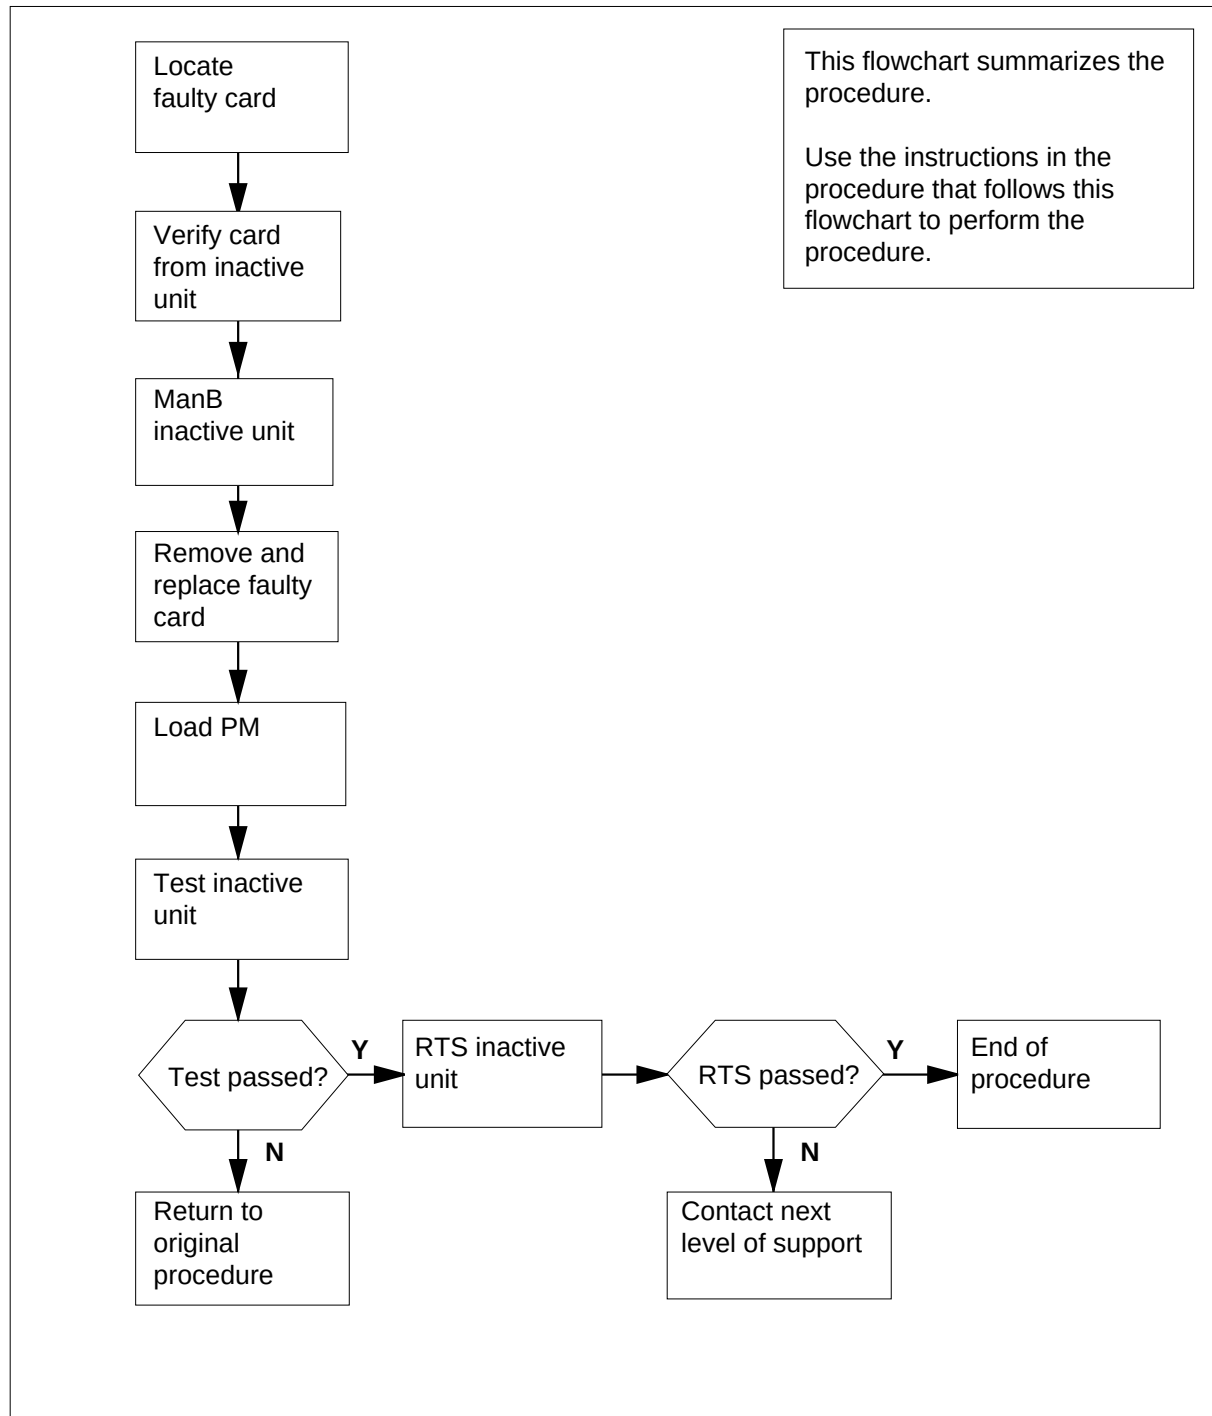

NTMX73

in an RSC-S (DS-1) Model A RCC2 (continued)

Replacing an NTMX73 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX73 replacement card. Verify that the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP display

- 3 Set the MAP display to the PM level and post the RCC2 by typing

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 with the faulty card

Example of a MAP display:

NTMX73
in an RSC-S (DS-1) Model A RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	0	0	0	0	25
2 Post_	RCC2		0	0	0	0	0	0	0
3 ListSet									
4	RCC2		0 ISTb	Links_00S:	CSide	0,	PSide	0	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, be sure the card that is to be removed is on the inactive unit.
Example of a MAP display:

NTMX73

in an RSC-S (DS-1) Model A RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RCC2			SysB	ManB	OffL		CBSy	ISTb	InSv
0 Quit	PM		0	0	0		0	0	25
2 Post_	RCC2		0	0	0		0	0	0
3 ListSet									
4	RCC2		0 ISTb	Links_00S:	CSide		0, PSide	0	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

If the faulty card is on the	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
and pressing the Enter key.
- 6 Confirm the system prompt by typing
>YES
and pressing the Enter key.
After both units are in-service, proceed to the next step.
- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*.
This sign should not be attached by magnets or tape.

At the MAP display

- 8 Busy the inactive PM unit by typing
>bsy unit unit_no
and pressing the Enter key.
where

NTMX73 in an RSC-S (DS-1) Model A RCC2 (continued)

unit_no

is the number of the unit to be busied (0 or 1)

When both units are in-service, proceed to the next step.

At the frame

9



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

10



DANGER


Equipment damage

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX73 card as shown in the following figures.

a Locate the card to be removed on the appropriate shelf.

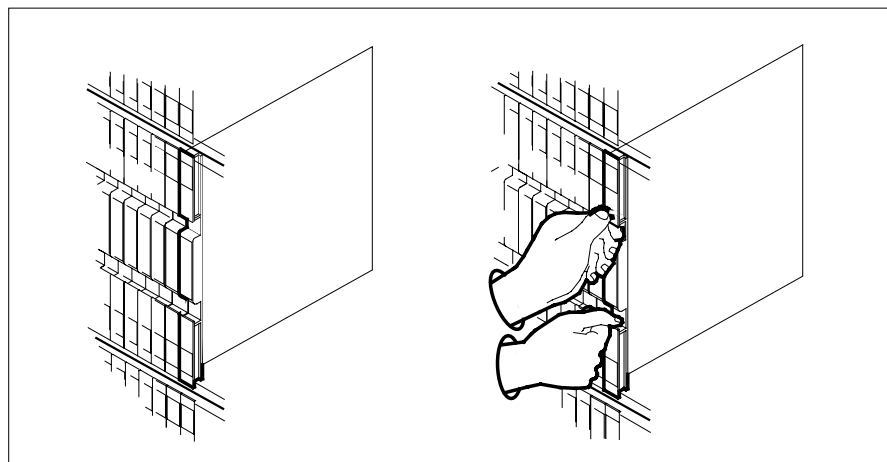

NTMX73 in an RSC-S (DS-1) Model A RCC2 (continued)


- b Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

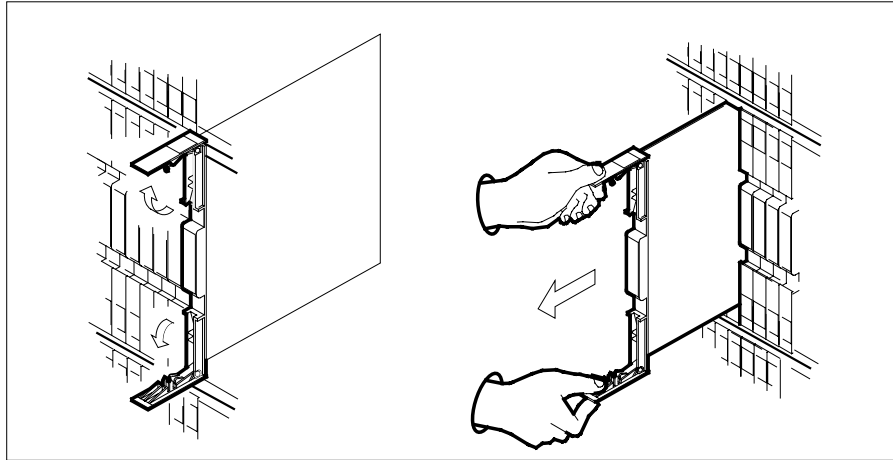

- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

Note: Set dip switch S1 toward IC U1.


- 11 Open the locking levers on the replacement card.
- a Align the card with the slots in the shelf.
 - b Gently slide the card into the shelf.

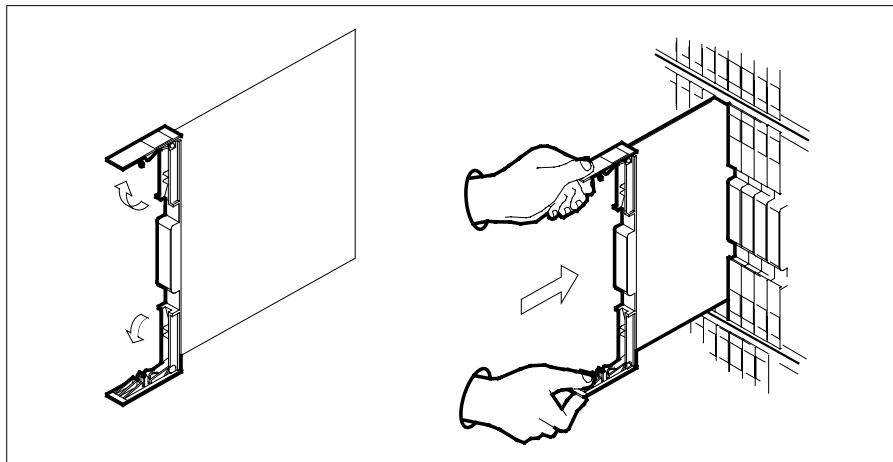

- 12 Seat and lock the card.
- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b Close the locking levers.

NTMX73

in an RSC-S (DS-1) Model A RCC2 (continued)

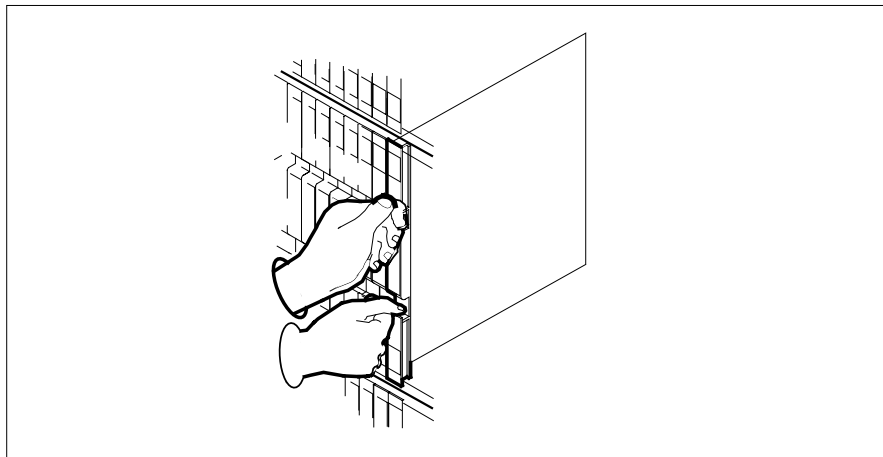

At the MAP display

- 13** Load the inactive RCC2 unit by typing

>loadpm unit unit_no CC

and pressing the Enter key.

where

unit_no

is the number of the faulty RCC2 unit

If load	Do
passed	step 14
failed	step 18

- 14** Test the inactive unit by typing

>TST UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the faulty RCC2 unit

If TST	Do
passed	step 15
failed	step 17

NTMX73

in an RSC-S (DS-1) Model A RCC2 (end)

- 15** Use the following information to determine where to proceed.

If you entered this procedure from	Do
alarm clearing procedures	step 17
other	step 16

- 16** Return the inactive RCC2 unit to service by typing

>RTS UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the faulty RCC2 unit

If RTS	Do
passed	step 19
failed	step 18

- 17** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 18** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 19** Remove the sign from the active RCC2 unit.
- 20** Send any faulty cards for repair according to local procedure.
- 21** Note in office records the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 22** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX73 in an RSC-S (DS-1) Model B RCC2

Application

Use this procedure to replace an NTMX73 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX73	AA, AB	PCM Signaling Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX73 in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for an NTMX73 card in RSC-S RCC2

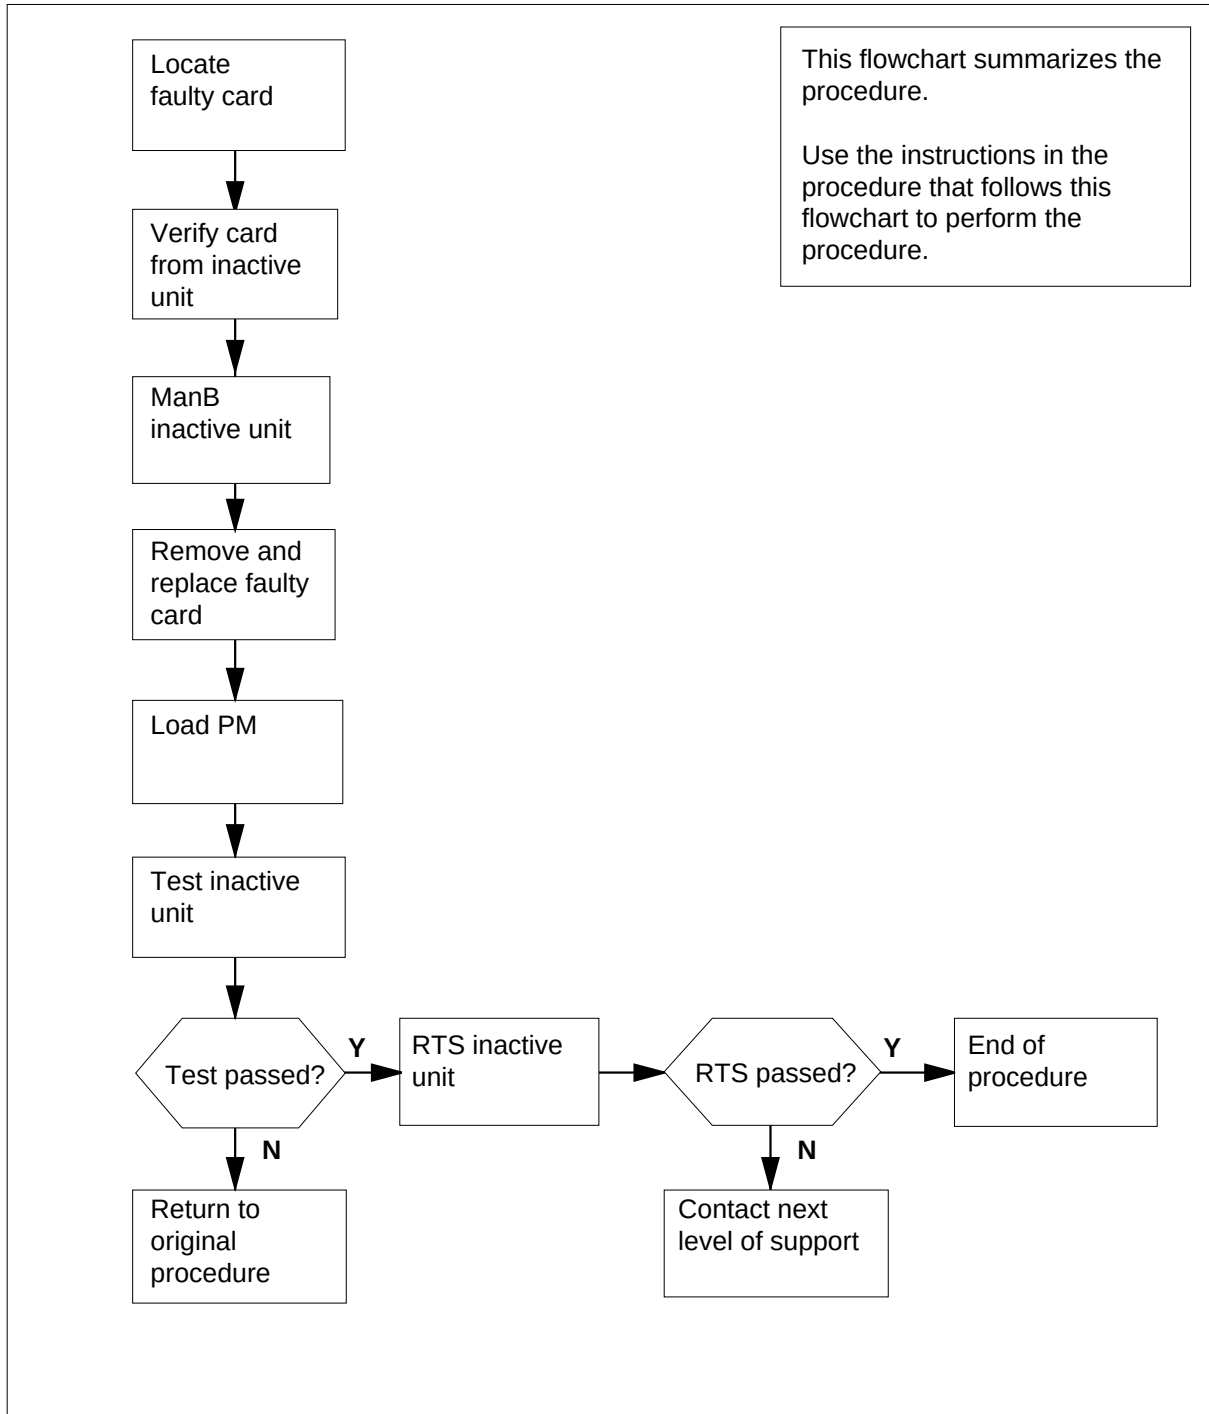

NTMX73 in an RSC-S (DS-1) Model B RCC2 (continued)

Replacing an NTMX73 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX73 replacement card. Verify that the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP display

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 with the faulty card

Example of a MAP display:

NTMX73

in an RSC-S (DS-1) Model B RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	0	0	0	25	
2 Post_	RCC2		0	0	0	0	0	0	
3 ListSet									
4	RCC2		0 ISTb	Links_00S:	CSide	0, PSide	0		
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, be sure the card that is to be removed is on the inactive unit.

Example of a MAP display:

NTMX73**in an RSC-S (DS-1) Model B RCC2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RCC2			SysB	ManB	OffL		CBsy	ISTb	InSv
0 Quit	PM		0	0	0		0	0	25
2 Post_	RCC2		0	0	0		0	0	0
3 ListSet									
4	RCC2		0 ISTb	Links_00S:	CSide		0, PSide	0	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

If the faulty card is on the	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
and pressing the Enter key.
- 6 Confirm the system prompt by typing
>YES
and pressing the Enter key.
After both units are in-service, proceed to the next step.
- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*.
This sign should not be attached by magnets or tape.

At the MAP display

- 8 Busy the inactive PM unit by typing
>bsy unit unit_no
and pressing the Enter key.
where

NTMX73 in an RSC-S (DS-1) Model B RCC2 (continued)

unit_no

is the number of the unit to be busied (0 or 1)

When both units are in-service, proceed to the next step.

At the frame

9



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

10



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX73 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

NTMX73 in an RSC-S (DS-1) Model B RCC2 (continued)

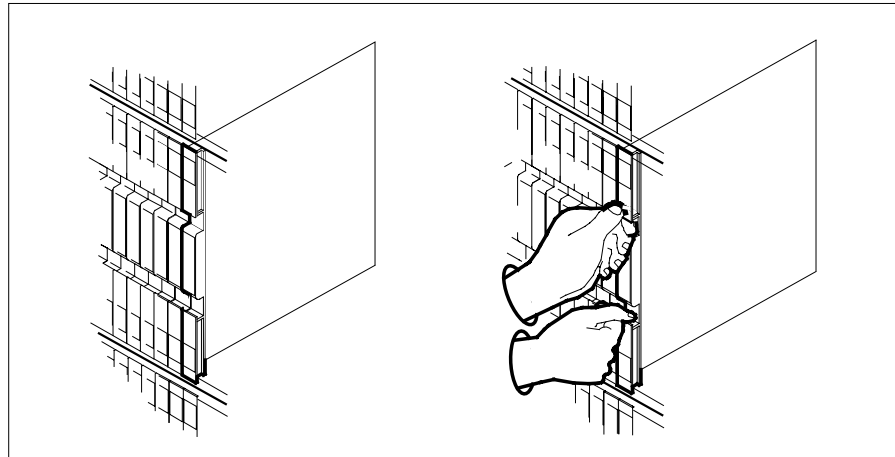

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

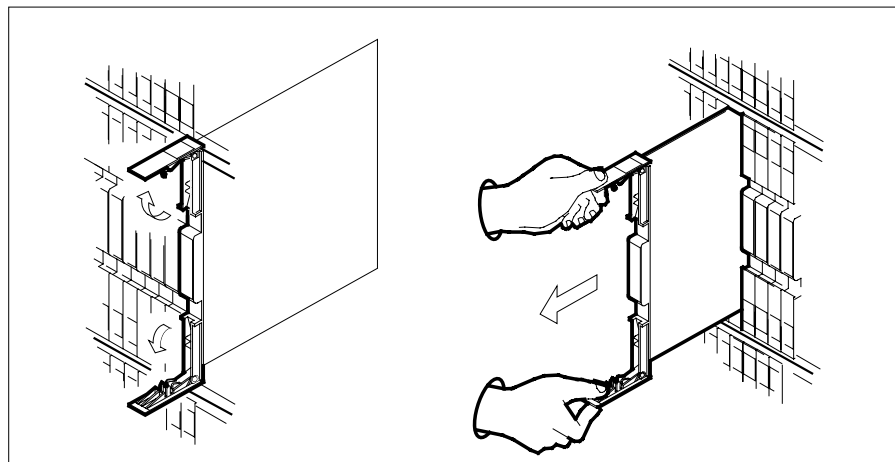


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

Note: Set dip switch S1 toward IC U1.


- 11** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
 - b** Gently slide the card into the shelf.

NTMX73

in an RSC-S (DS-1) Model B RCC2 (continued)

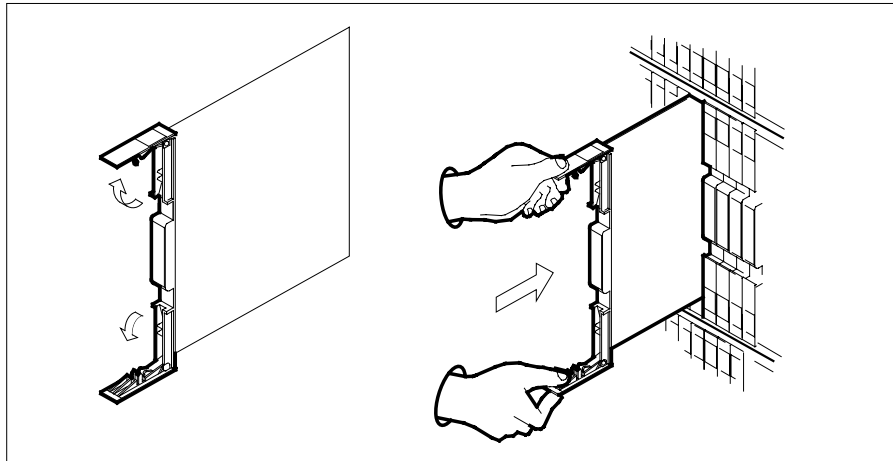

- 12** Seat and lock the card.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

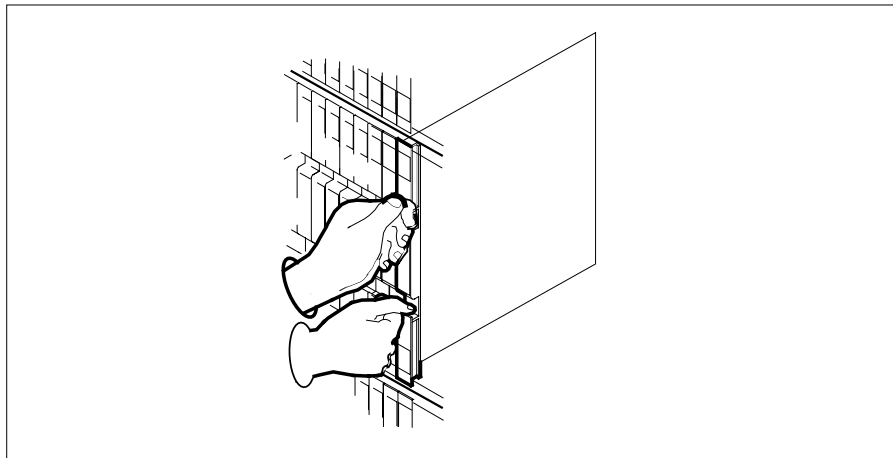

At the MAP display

- 13** Load the inactive RCC2 unit by typing
>loadpm unit unit_no CC
and pressing the Enter key.
where

NTMX73**in an RSC-S (DS-1) Model B RCC2** (continued)

unit_no is the number of the faulty RCC2 unit	
If load	Do
passed	step 14
failed	step 18
14	Test the inactive unit by typing >TST UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty RCC2 unit
If TST	Do
passed	step 15
failed	step 17
15	Use the following information to determine where to proceed.
If you entered this procedure from	Do
alarm clearing procedures	step 17
other	step 16
16	Return the inactive RCC2 unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty RCC2 unit
If RTS	Do
passed	step 19
failed	step 18
17	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

NTMX73

in an RSC-S (DS-1) Model B RCC2 (end)

- 18** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 19** Remove the sign from the active RCC2 unit.
- 20** Send any faulty cards for repair according to local procedure.
- 21** Note in office records the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 22** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX73 in an RSC-S (PCM-30) Model A RCO2

Application

Use this procedure to replace an NTMX73 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX73	AA	PCM Signaling Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX73 in an RSC-S (PCM-30) Model A RCO2 (continued)

Summary of card replacement procedure for an NTMX73 card in RSC-S RCO2

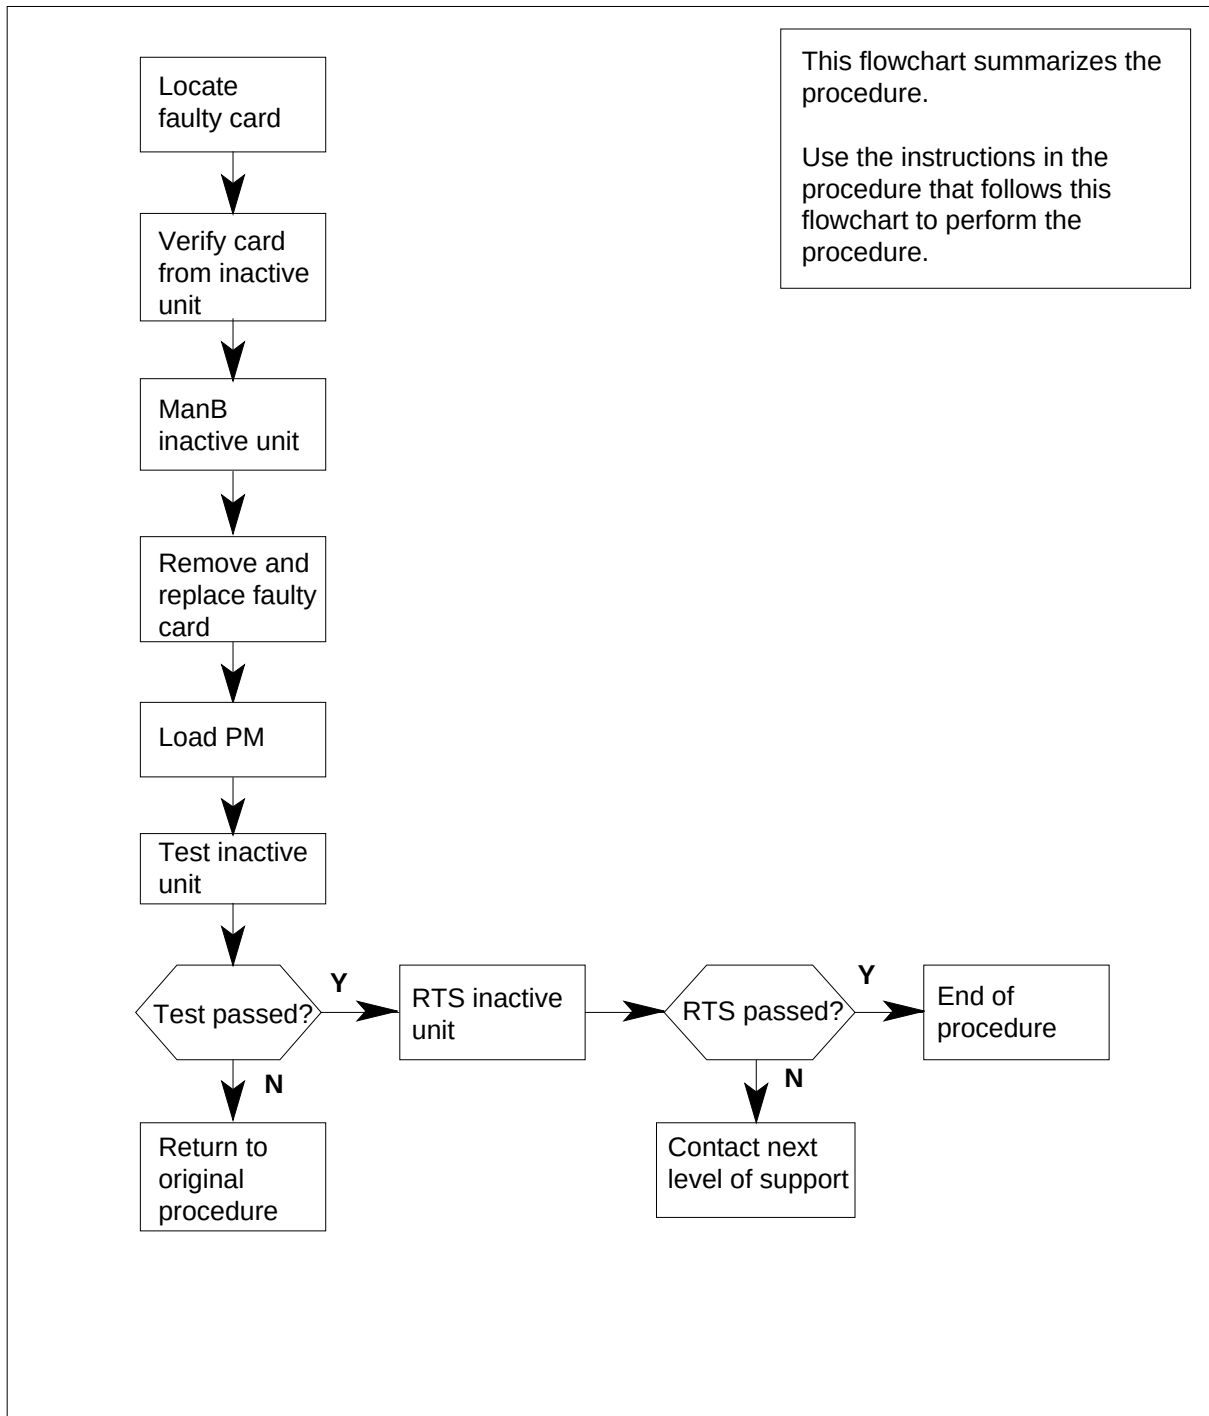

NTMX73 in an RSC-S (PCM-30) Model A RCO2 (continued)

Replacing an NTMX73 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX73 replacement card. Verify that the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP display

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.
where
rco2_no
is the number of the RCO2 to be posted (0 or 1)
- 4 By observing the MAP display, be sure that the card to be removed is on the inactive unit.

Example of a MAP display:

NTMX73

in an RSC-S (PCM-30) Model A RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RCO2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	0	0	0	0	25
2 Post_	RCO2		0	0	0	0	0	0	0
3 ListSet									
4	RCO2		0 ISTb	Links_00S:	CSide	0,	PSide	0	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

If faulty card is on**Do**

active unit

step 5

inactive unit

step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
 and pressing the Enter key.
Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 6 Confirm the system prompt by typing
>YES
 and pressing the Enter key.
 After both units are in-service, proceed to the next step.
- 7 Place a sign on the *active* unit bearing the words "Active unit—Do not touch." This sign should not be attached by magnets or tape.

NTMX73 in an RSC-S (PCM-30) Model A RCO2 (continued)

At the MAP display

- 8 Busy the inactive PM unit by typing
>bsy unit unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.

At the frame

9



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

10



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Remove the NTMX73 card as shown in the following figures.


- a** Locate the card to be removed on the appropriate shelf.

NTMX73

in an RSC-S (PCM-30) Model A RCO2 (continued)

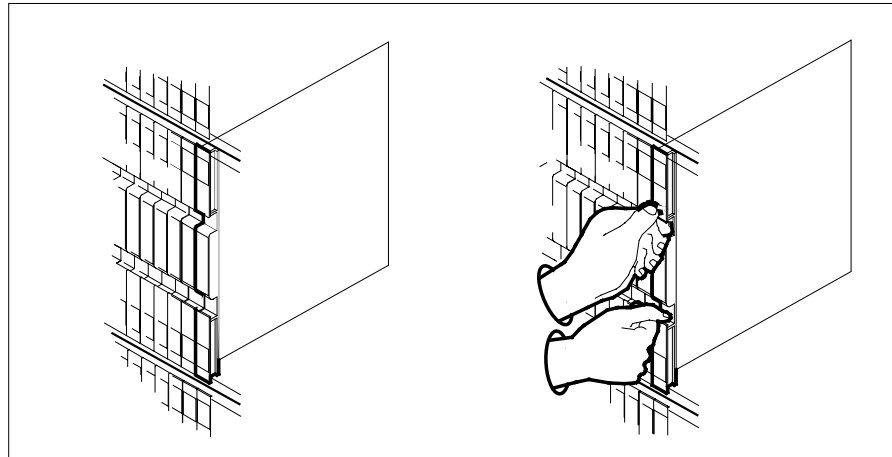

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

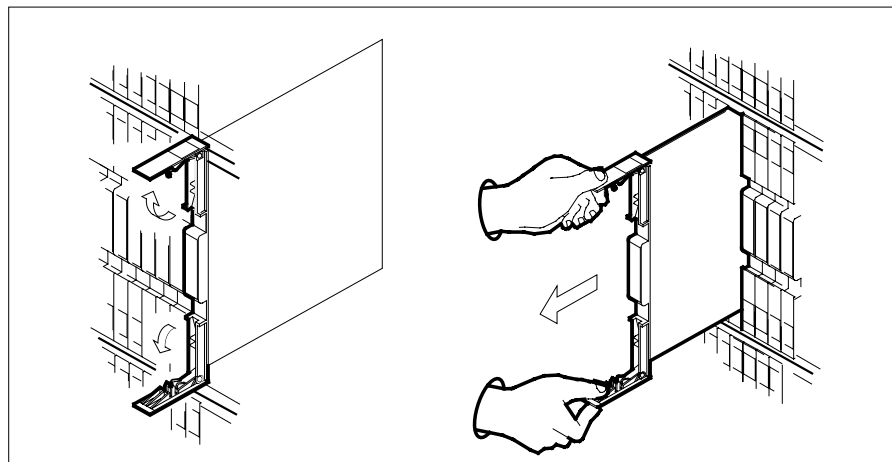


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


Note: Set dip switch S1 toward IC U1.

- 11** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
 - b** Gently slide the card into the shelf.

NTMX73 in an RSC-S (PCM-30) Model A RCO2 (continued)

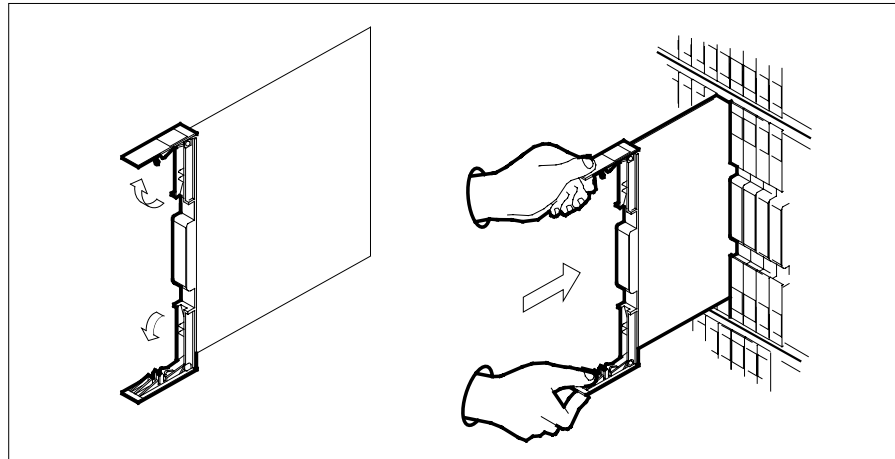

- 12** Seat and lock the card.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

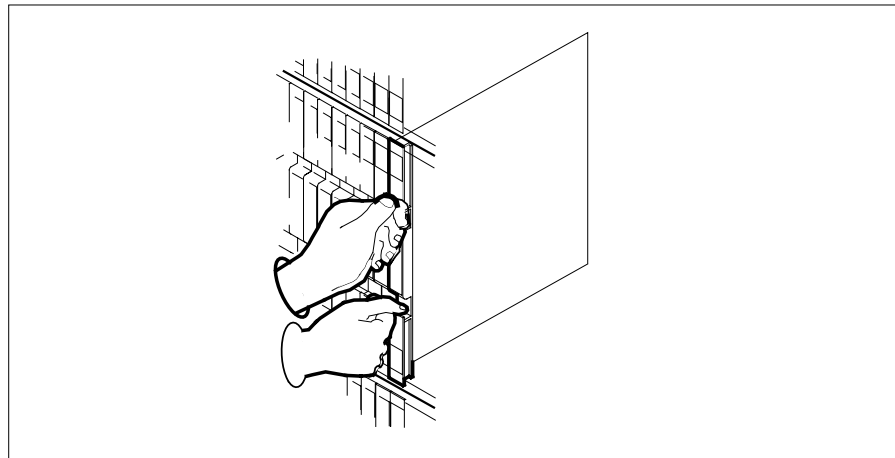

At the MAP display

- 13** Load the inactive RCO2 unit by typing
>loadpm unit unit_no CC
and pressing the Enter key.
where

NTMX73

in an RSC-S (PCM-30) Model A RCO2 (continued)

- unit_no**
is the number of the faulty RCO2 unit
- | If LOADPM | Do |
|-----------|---------|
| passed | step 14 |
| failed | step 18 |
- 14** Test the inactive unit by typing
>TST UNIT unit_no
 and pressing the Enter key.
where
unit_no
 is the number of the faulty RCO2 unit
- | If TST | Do |
|--------|---------|
| passed | step 15 |
| failed | step 17 |
- 15** Use the following information to determine where to proceed.
- | If you entered this procedure from | Do |
|------------------------------------|---------|
| alarm clearing procedures | step 17 |
| other | step 16 |
- 16** Return the inactive RCO2 unit to service by typing
>RTS UNIT unit_no
 and pressing the Enter key.
where
unit_no
 is the number of the faulty RCO2 unit
- | If RTS | Do |
|--------|---------|
| passed | step 19 |
| failed | step 18 |
- 17** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

NTMX73
in an RSC-S (PCM-30) Model A RCO2 (end)

- 18 Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 19 Remove the sign from the active RCO2 unit.
- 20 Send any faulty cards for repair according to local procedure.
- 21 Note in office records the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 22 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX73
in an RSC-S (PCM-30) Model B RCO2

Application

Use this procedure to replace an NTMX73 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX73	AA	PCM Signaling Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX73 in an RSC-S (PCM-30) Model B RCO2 (continued)

Summary of card replacement procedure for an NTMX73 card in RSC-S RCO2

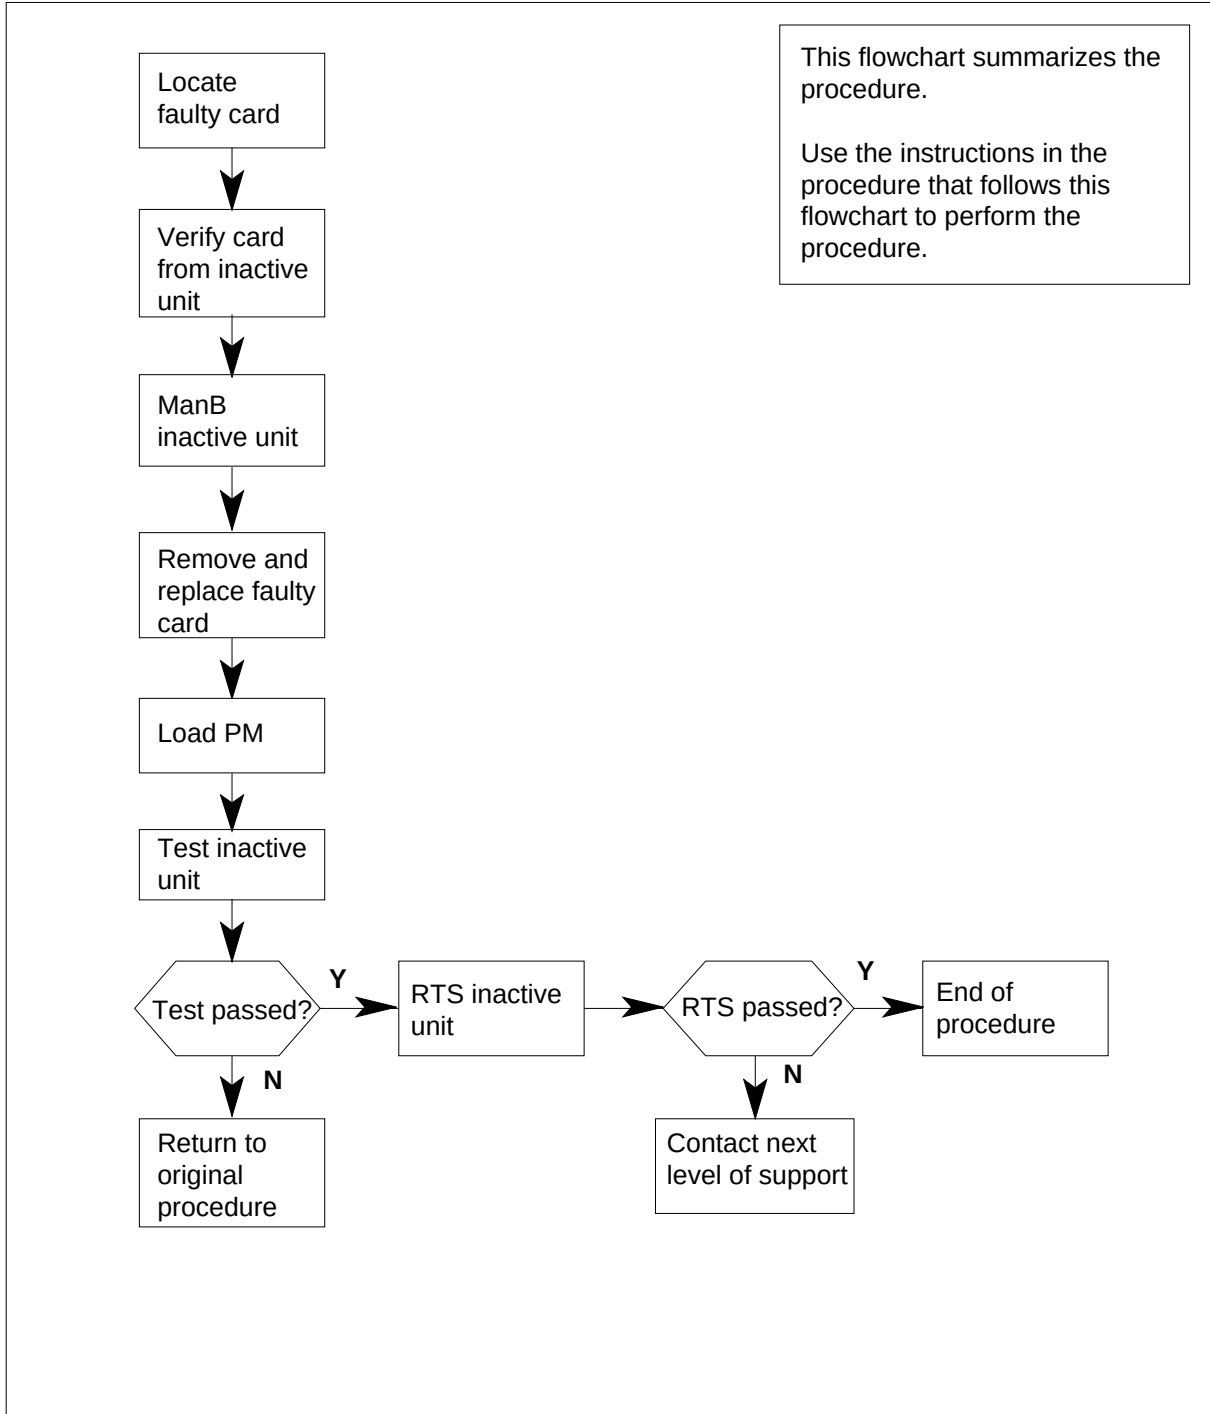

NTMX73 in an RSC-S (PCM-30) Model B RCO2 (continued)

Replacing an NTMX73 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX73 replacement card. Verify that the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP display

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.
where
rco2_no
is the number of the RCO2 to be posted (0 or 1)
- 4 By observing the MAP display, be sure that the card to be removed is on the inactive unit.

Example of a MAP display:

NTMX73 in an RSC-S (PCM-30) Model B RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	.	.	.	.	.	.
RC02			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	0	0	0	0	25
2 Post_	RC02		0	0	0	0	0	0	0
3 ListSet									
4	RC02		0 ISTb	Links_00S:	CSide	0, PSide	0		
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

If faulty card is on

Do

active unit

step 5

inactive unit

step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
and pressing the Enter key.
Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 6 Confirm the system prompt by typing
>YES
and pressing the Enter key.
After both units are in-service, proceed to the next step.
- 7 Place a sign on the *active* unit bearing the words "Active unit—Do not touch." This sign should not be attached by magnets or tape.

NTMX73 in an RSC-S (PCM-30) Model B RCO2 (continued)

At the MAP display

- 8 Busy the inactive PM unit by typing
>bsy unit unit_no
and pressing the Enter key.
where
 unit_no
 is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.

At the frame

9



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

10



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Remove the NTMX73 card as shown in the following figures.


- a** Locate the card to be removed on the appropriate shelf.

NTMX73

in an RSC-S (PCM-30) Model B RCO2 (continued)

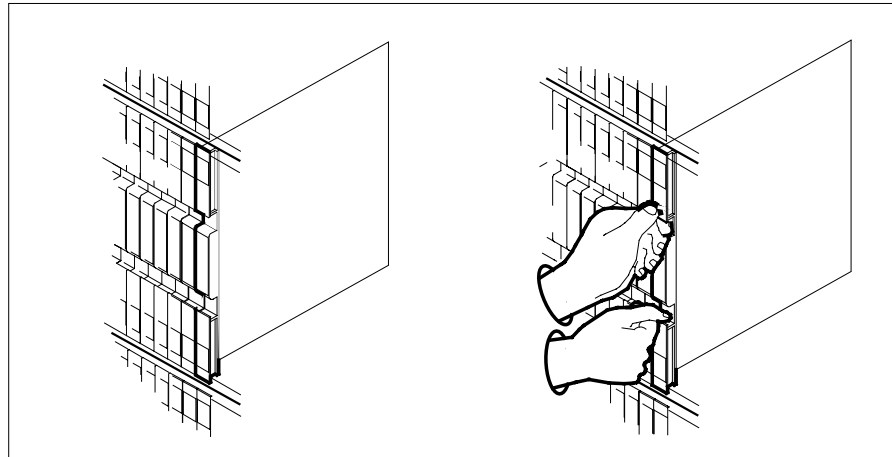

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

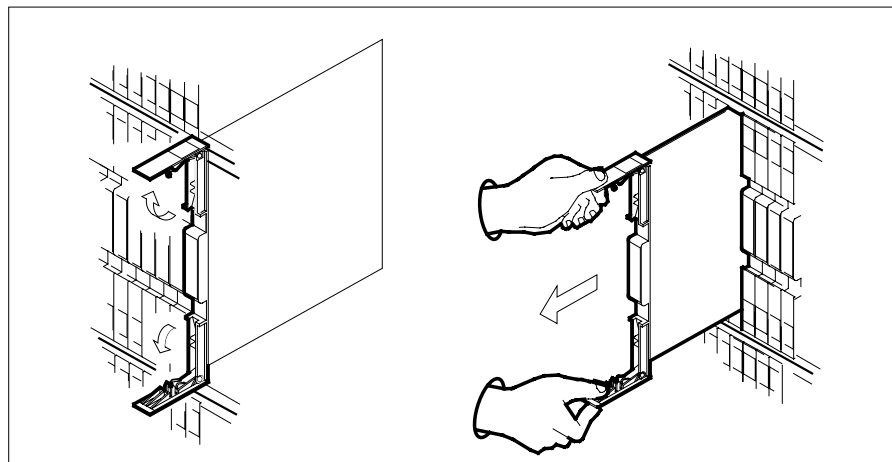


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


Note: Set dip switch S1 toward IC U1.

- 11** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
 - b** Gently slide the card into the shelf.

NTMX73 in an RSC-S (PCM-30) Model B RCO2 (continued)

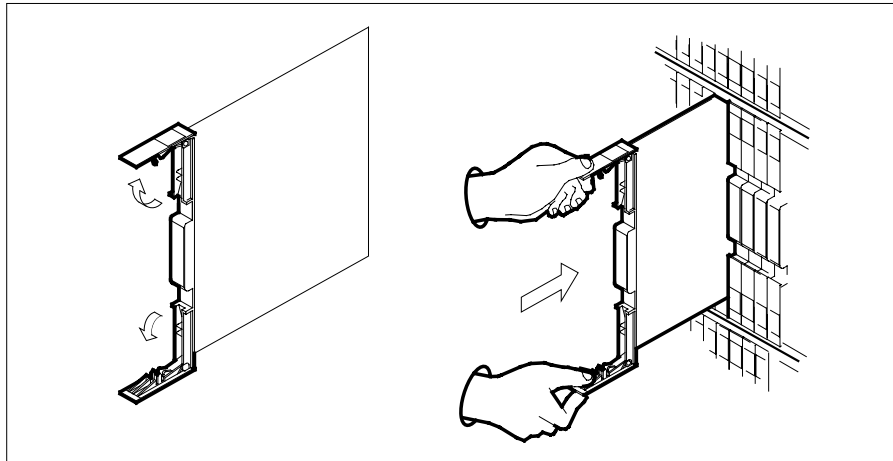

- 12** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

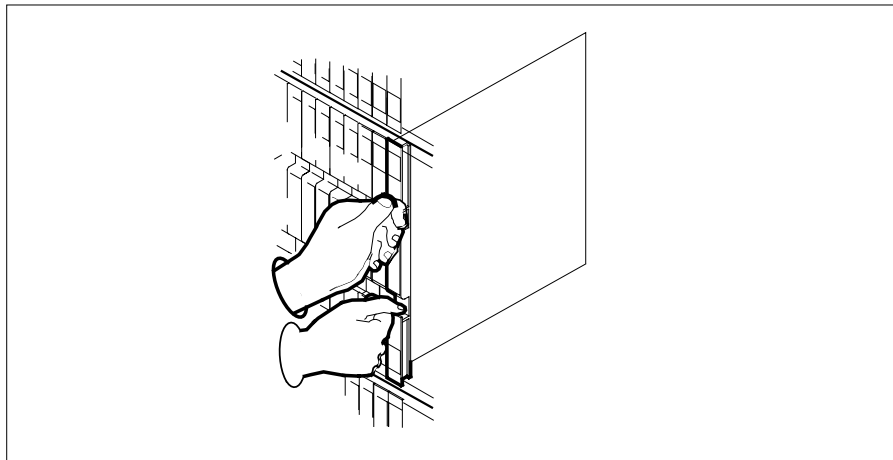

At the MAP display

- 13** Load the inactive RCO2 unit by typing
>loadpm unit unit_no CC
and pressing the Enter key.
where

NTMX73**in an RSC-S (PCM-30) Model B RCO2** (continued)

unit_no is the number of the faulty RCO2 unit							
If LOADPM	Do						
passed	step 14						
failed	step 18						
14	Test the inactive unit by typing >TST UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty RCO2 unit						
If TST	Do						
passed	step 15						
failed	step 17						
15	Use the following information to determine where to proceed. <table> <tr> <td>If you entered this procedure from</td><td>Do</td></tr> <tr> <td>alarm clearing procedures</td><td>step 17</td></tr> <tr> <td>other</td><td>step 16</td></tr> </table>	If you entered this procedure from	Do	alarm clearing procedures	step 17	other	step 16
If you entered this procedure from	Do						
alarm clearing procedures	step 17						
other	step 16						
16	Return the inactive RCO2 unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty RCO2 unit						
If RTS	Do						
passed	step 19						
failed	step 18						
17	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.						

NTMX73

in an RSC-S (PCM-30) Model B RCO2 (end)

- 18** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 19** Remove the sign from the active RCO2 unit.
- 20** Send any faulty cards for repair according to local procedure.
- 21** Note in office records the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 22** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX73 in an SMA2

Application

Use this procedure to replace an NTMX73 card in an SMA2.

PEC	Suffixes	Name
NTMX73	BA	PCM Signaling Processor

Common procedures


The following procedures are referenced in this procedure:

- “Locating a faulty card in an SMA2”
- replacing a card
- returning a card

Do not go to a common procedure unless directed to do so in the step-action procedure.

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

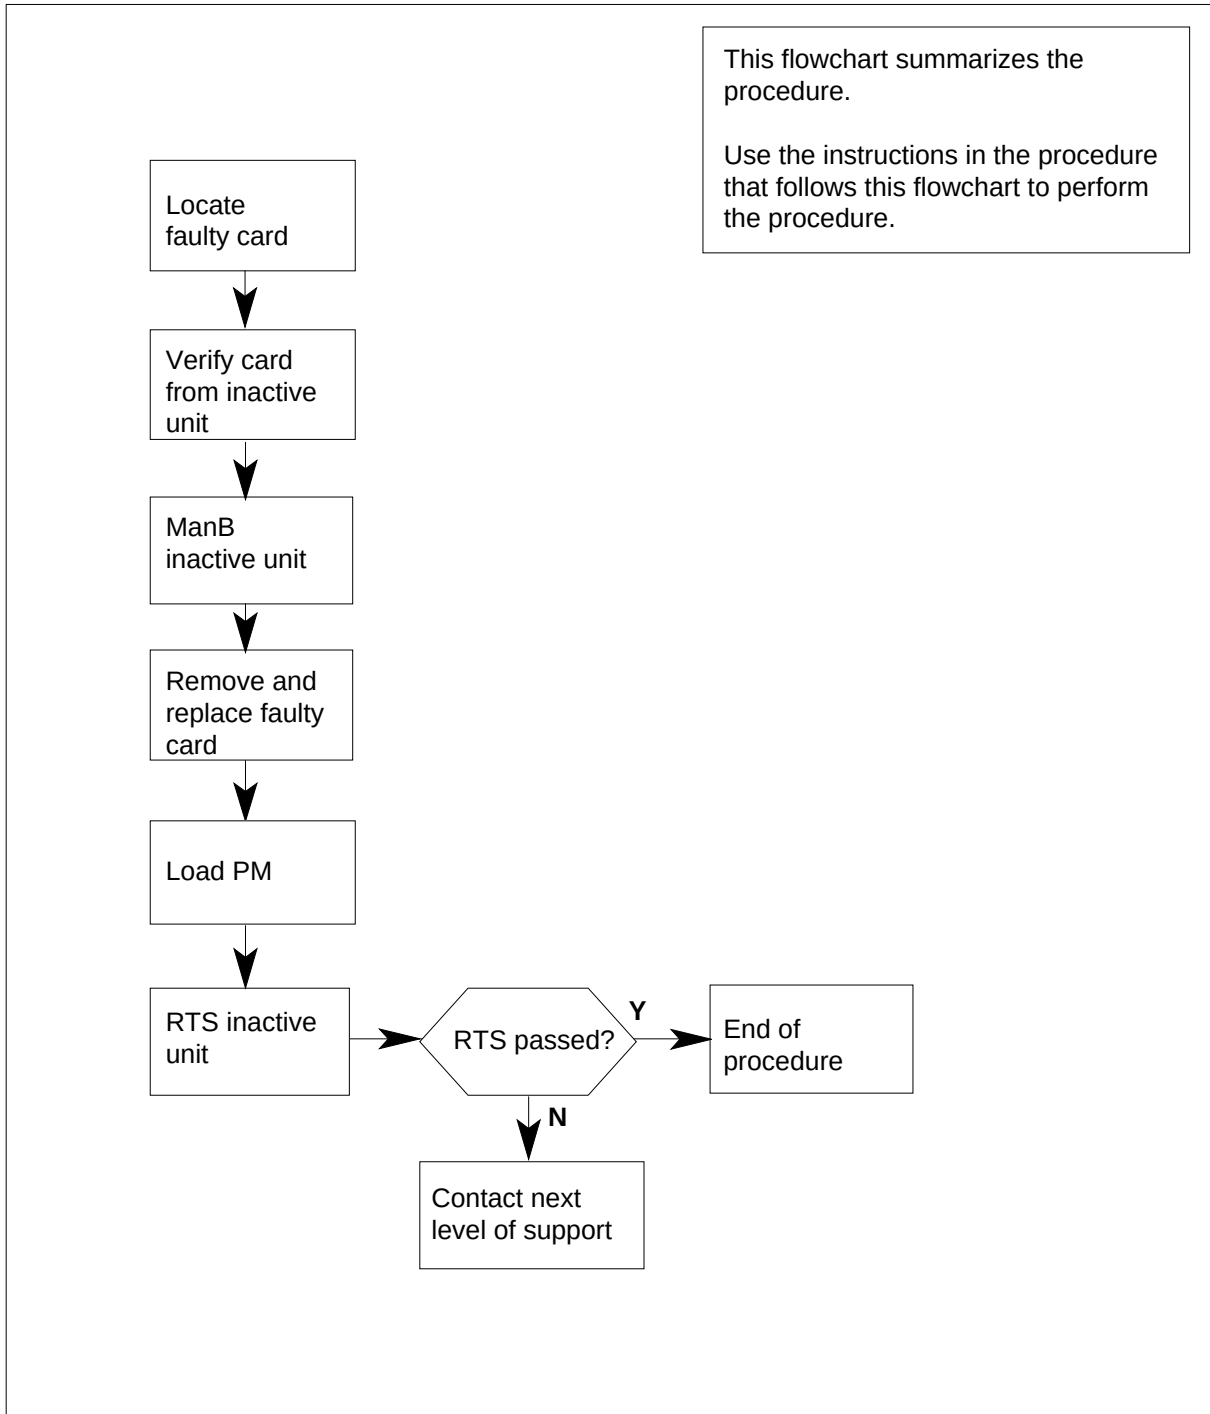NTMX73
in an SMA2 (continued)**Summary of card replacement procedure for an NTMX73 card in an SMA2**

NTMX73 in an SMA2 (continued)

Replacing an NTMX73 card in an SMA2

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Ensure you know the physical location of the faulty card.

If card location is	Do
known	step 4
unknown	step 3

- 3 Perform the procedure "Locating a faulty card in an SMA2."
- 4



CAUTION

Loss of service

When replacing a card in the SMA2, ensure the unit in which you are replacing the card is *inactive* and the mate unit is *active*.

Obtain an NTMX73 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card to be removed.

At the MAP display

- 5 Ensure the current MAP display is at the PM level and post the SMA2 by typing

>MAPCI;MTC;PM;POST SMA2 sma2_no

and pressing the Enter key.

where

sma2_no

is the number of the SMA2 with the faulty card

Example of a MAP display:

NTMX73 in an SMA2 (continued)

SMA2	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2 0 ISTb Links_00S: CSide 0, PSide 0
 Unit0: Act InSv
 Unit1: InAct IsTb

- 6** Observe the MAP display and determine if the faulty card is in the active or the inactive unit.

If the faulty card is on the	Do
active unit	step 7
inactive unit	step 11

- 7** Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
 and pressing the Enter key.
 A confirmation prompt for the SWACT command is displayed at the MAP terminal.

If prompt indicates	Do
cannot continue at this time	step 8
can continue at this time	step 9

- 8** Reject the prompt to SWACT of the units by typing
>NO
 and pressing the Enter key.

The system discontinues the SWACT.

- 9** Confirm the system prompt by typing
>YES
 and pressing the Enter key.

The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.

If the message is	Do
SWACT passed	step 11

NTMX73 in an SMA2 (continued)

	If the message is	Do
	SWACT failed Reason: XPM SWACTback	step 10
	SWACT refused by SWACT Controller	step 10
10	The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on the inactive unit before attempting to clear the alarm condition on the active unit. Go to step 18.	

At the frame or cabinet

- 11 Place a sign on the active unit bearing the words *Active unit-Do not touch*. This sign should not be attached by magnets or tape.

At the MAP display

- 12 Busy the inactive PM unit by typing
>bsy unit unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)

At the frame or cabinet

13



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

Perform the common replacing a card procedure in this document.

At the MAP display

- 14 Load the inactive SMA2 unit by typing
>loadpm unit unit_no CC
and pressing the Enter key.
where

NTMX73 in an SMA2 (end)

unit_no
is the number of the faulty SMA2 unit

		If load	Do
		passed	step 15
		failed	step 18
15	Use the following information to determine where to proceed.		
		If you entered this procedure from	Do
		alarm clearing procedures	step 17
		other	step 16
16	Return the inactive SMA2 unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty SMA2 unit		
		If RTS	Do
		passed	step 19
		failed	step 18
17	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.		
18	Obtain further assistance in replacing this card by contacting operating company maintenance personnel.		
19	Remove the sign from the active SMA2 unit.		
20	Go to the common returning a card procedure in this document.		
21	You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.		

NTMX74 in an RSC-M

Application

Use this procedure to replace an NTMX74 card in the Remote Switching Center Multi-Access (RSC-M) shelf.

Note: In this section RSC-M is referred to as RCO2 in the examples. When software outputs messages to the MAP terminal the system does not differentiate between the two types of RCO2.

PEC	Suffixes	Name
NTMX74	AB	DS30A Interface

Common procedures


None

Action

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX74 in an RSC-M (continued)

Summary of Replacing an NTMX74 in an RSC-M

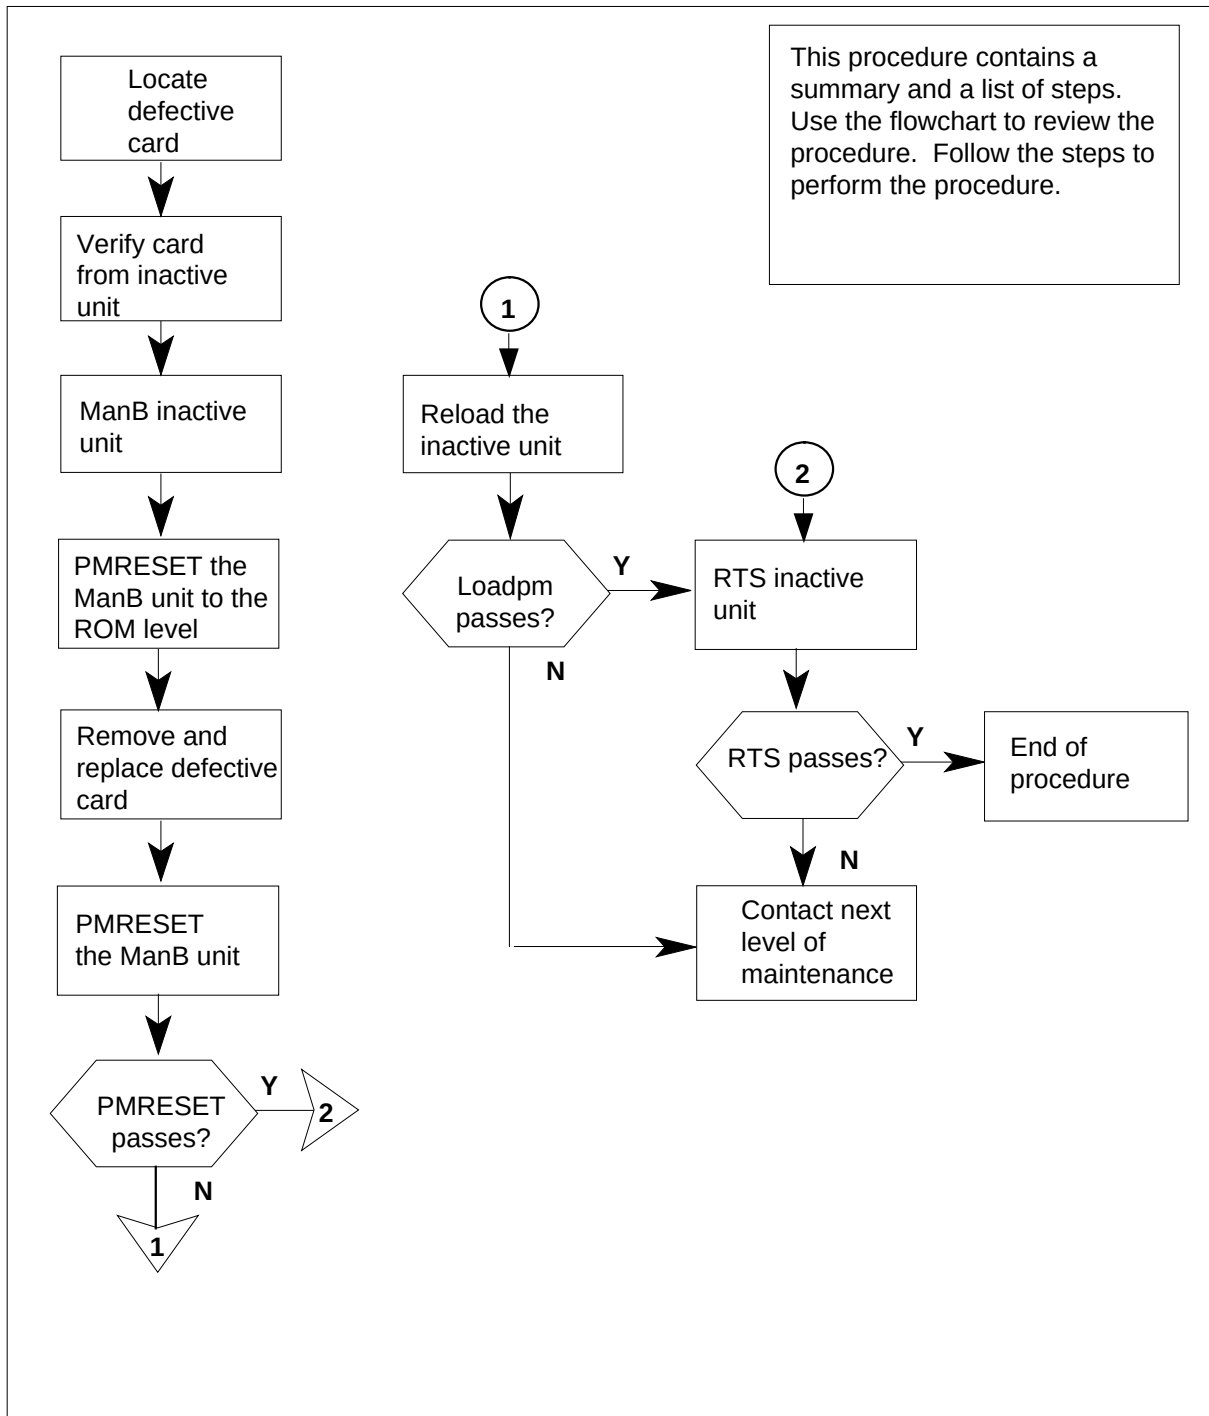

NTMX74 in an RSC-M (continued)

Replacing an NTMX74 in an RSC-M



WARNING

Loss of service

When you replace a card in the RSC-M, make sure that the unit in which you replace the card is *inactive*. Make sure that the mate unit is *active*.

At your current location

- 1 Proceed if you have been directed to this card replacement procedure:
 - from a step in a maintenance procedure
 - to use the procedure to verify or accept cards
 - by your maintenance support group.

Obtain an NTMX74 replacement card. Verify that the replacement card has the same product engineering code (PEC), and PEC suffix, as the card to remove.

At the MAP terminal

- 2 Set the MAP display to the peripheral module (PM) level. To post the RSC-M/RCO2, type:

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 with the defective card

Example of a MAP display:

NTMX74 in an RSC-M (continued)

```

CM      MS      IOD      Net      PM      CCS      LNS      Trks      Ext      Appl
.       .       .       .       1RC02    .       .       .       .       .

RC02
0 Quit      PM      0      0      2      0      2      25
2 Post_     RC02    0      0      0      0      1      1
3 ListSet
4           RC02    0 ISTb  Links_00S: CSide 1, PSide 1
5 TRNSL     Unit0:  Inact InSv
6 TST       Unit1:  Act  InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_
13 SWACT
14 QueryPM
15
16
17 Perform
18

```

- 3** Observe the MAP display. Make sure that the card you remove is on the inactive unit.

If defective card is on	Do
active unit	step 4
inactive unit	step 6

- 4** To perform a Switch of Activity (SWACT) of the processing activity, to the inactive unit, type:

>SWACT

and press the Enter key.

- 5** To confirm the system prompt, type:

>YES

and press the Enter key.

After the two units are in-service, proceed to the next step.

At the RSC-M cabinet

- 6** Place a sign on the *active* unit that bears the words *Active unit-Do not touch*. Do not use magnets or tape to attach this sign.

NTMX74 in an RSC-M (continued)

At the MAP terminal

- 7 To busy the inactive PM unit, type:
>bsy INACTIVE
and press the Enter key.
- 8 To set the Manual Busy (ManB) RCO2 unit to the ROM level to prevent trapping, type:
>PMRESET UNIT unit_no NORUN
and press the Enter key.
where
unit_no
is the number of the inactive RCO2 unit busied in step 7

At the RSC-M cabinet

9



WARNING

Static electricity damage

Wear a wrist-strap that connects to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. The wrist strap protects the cards against static electricity damage.

Put on a wrist strap.

10



DANGER

Equipment damage


Take the following precautions when you remove or insert a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX74 card as the following figures describe:

- a** Locate the card you must remove on the correct shelf.

NTMX74
in an RSC-M (continued)

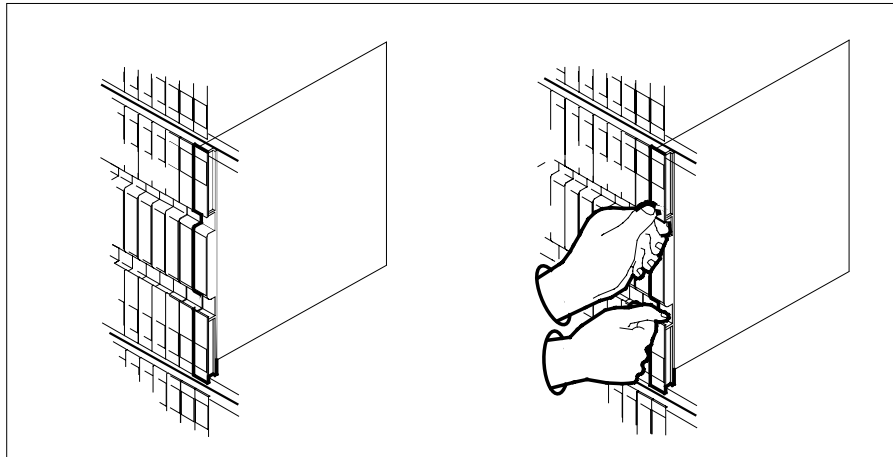

- b** Open the locking levers on the card you must replace. Carefully pull the card toward you until the card clears the shelf.

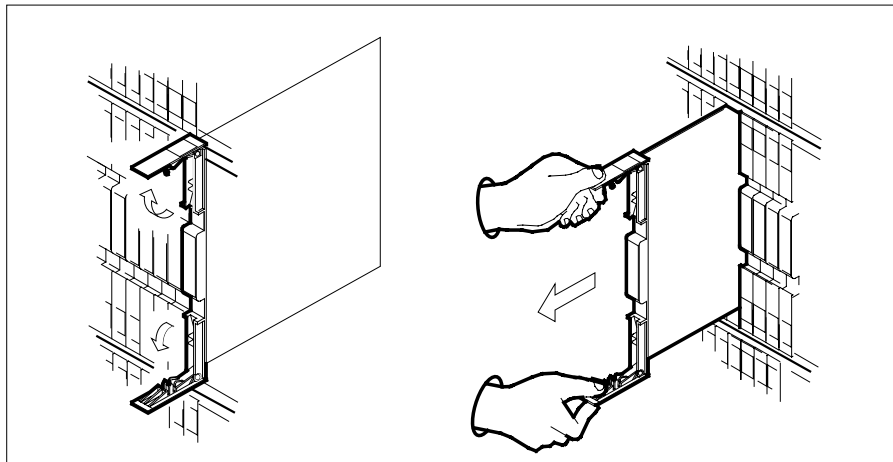


- c** Make sure the replacement card has the same PEC, and PEC suffix, as the card you remove.


11 Open the locking levers on the replacement card.

- a** Align the card with the slots in the shelf.
b Carefully slide the card into the shelf.

NTMX74 in an RSC-M (continued)

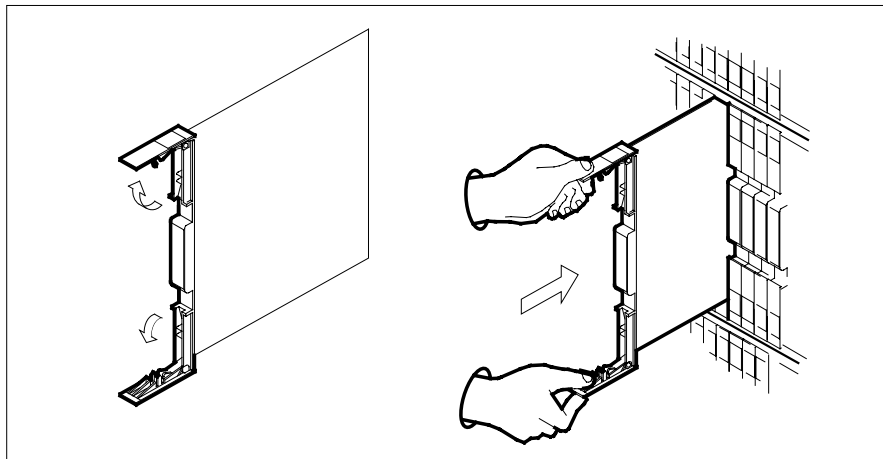

- 12** Seat and lock the card.
- a** Use your fingers or thumbs to push on the upper and lower edges of the faceplate. Perform this action to make sure the card is fully seated in the shelf.
 - b** Close the locking levers.

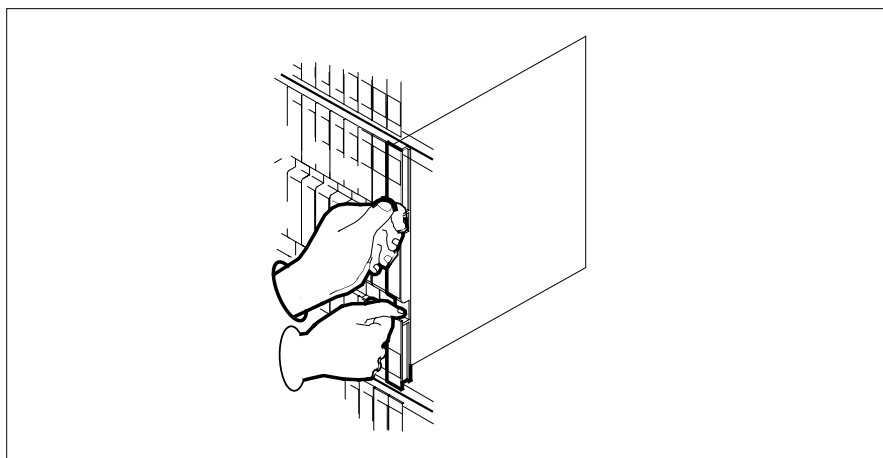

- 13** Refer to the following table to determine the next step:

If you enter this procedure from	Do
alarm clearing procedure	step 19
other	step 14

- 14** To reset the inactive RCO2 unit, type:
>PMRESET UNIT unit_no

NTMX74 in an RSC-M (continued)

and press the Enter key.

where

unit_no

is the number of the inactive RCO2 unit zero or one

If the PMRESET command	Do
passes	step 16
fails	step 15

- 15** To reload the inactive RCO2 unit, type:

>LOADPM UNIT unit_no

and press the Enter key.

where

unit_no

is the number of the inactive RCO2 unit zero or one

If the LOADPM command	Do
passes	step 16
fails	step 20

- 16** To return the inactive RCO2 unit to service, type:

>RTS UNIT unit_no

and press the Enter key.

where

unit_no

is the number of the RCO2 unit busied in step 7

If RTS	Do
passes	step 17
fails	step 20

- 17** Send defective cards for repair according to local procedure.
- 18** Record the date the card is replaced. Record the serial number of the card, and the problems that prompt replacement of the card. Go to step 21.
- 19** Return to the procedure that directed you to this procedure. At the point where a defective card list was produced, identify the next defective card on the list. Go to the correct card replacement procedure for that card in this manual.
- 20** For additional help to replace this card, contact the next level of maintenance.

NTMX74
in an RSC-M (end)

- 21 The procedure is complete. Return to the maintenance procedure that directed you to this card replacement procedure. Continue as directed.

NTMX74 in an RSC RCC2

Application

Use this procedure to replace an NTMX74 card in an RSCE RCC2.

PEC	Suffixes	Name
NTMX74	AA	DS30A Interface card

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX74 in an RSC RCC2 (continued)

Summary of card replacement procedure for an NTMX74 card in RSC RCC2

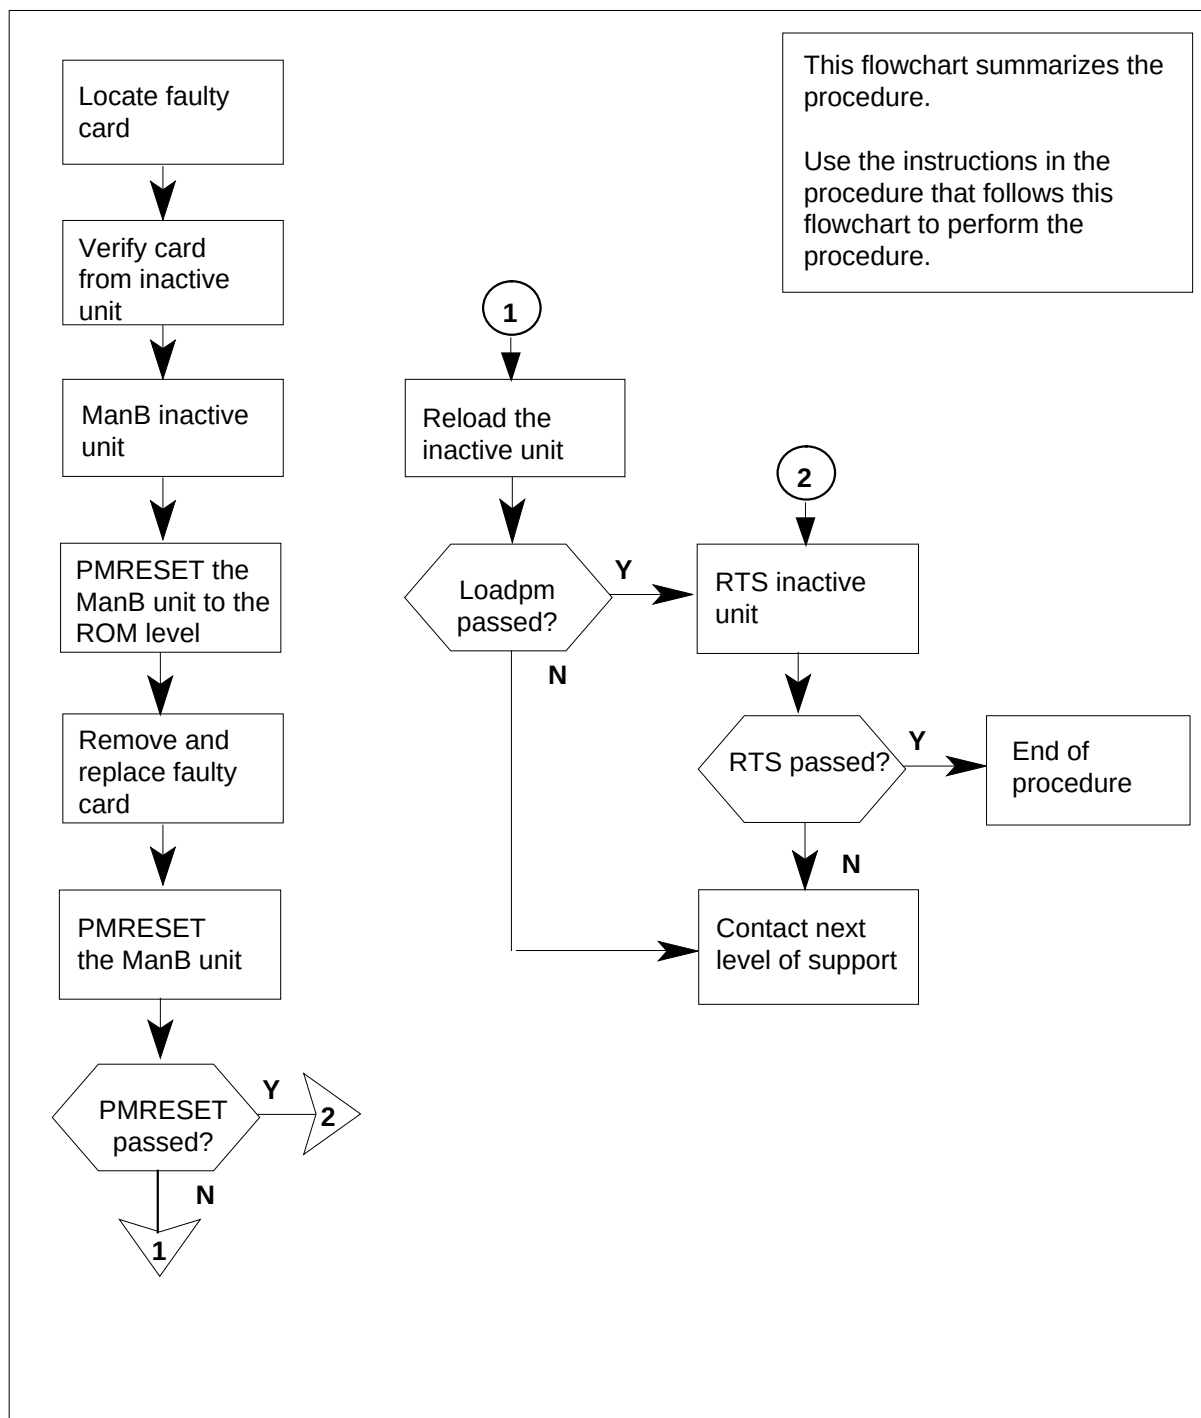

NTMX74 in an RSC RCC2 (continued)

Replacing an NTMX74 card in RSC RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX74 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where
rcc2_no
is the number of the RCC2 with the faulty card
Example of a MAP display:

NTMX74 in an RSC RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	0	2	0	2	25	
2 Post_	RCC2	0	0	0	0	0	1	1	
3 ListSet									
4	RCC2	0	ISTb	Links_OOS:	Cside	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, ensure that the card to be removed is on the inactive unit.

At the RSCE frame

- 5 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 6 Busy the inactive PM unit by typing
>bsy INACTIVE
 and pressing the Enter key.
- 7 Set the ManB RCC2 unit to the ROM level to prevent trapping by typing
>PMRESET UNIT unit_no NORUN
 and pressing the Enter key.
where
unit_no
 is the number of the inactive RCC2 unit busied in step 6

NTMX74
in an RSC RCC2 (continued)**At the RCE frame****8****WARNING****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.


9**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX74 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

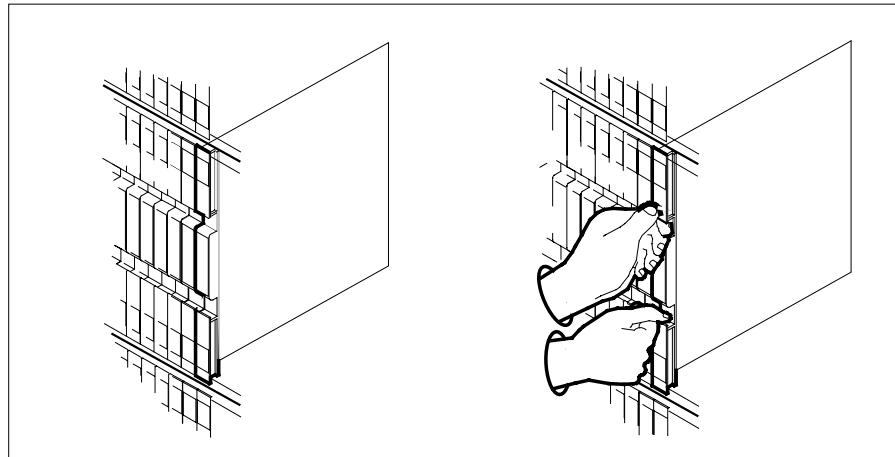

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.


NTMX74 in an RSC RCC2 (continued)

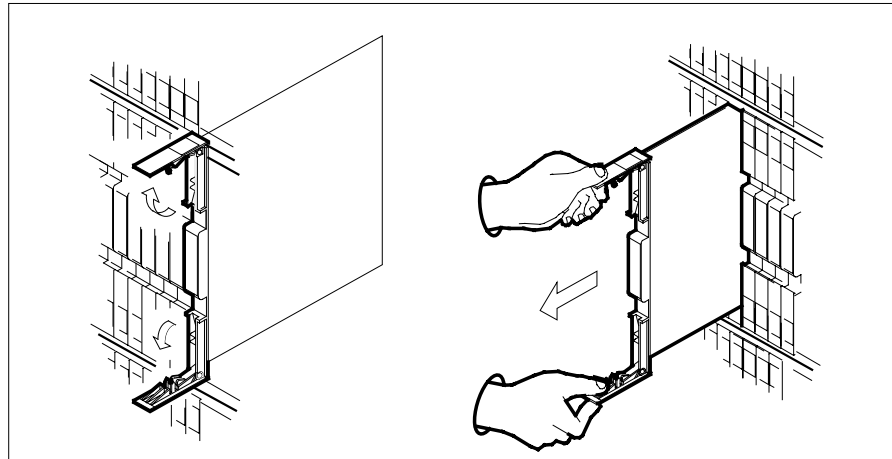

- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

10 Open the locking levers on the replacement card.


- a Align the card with the slots in the shelf.
- b Gently slide the card into the shelf.

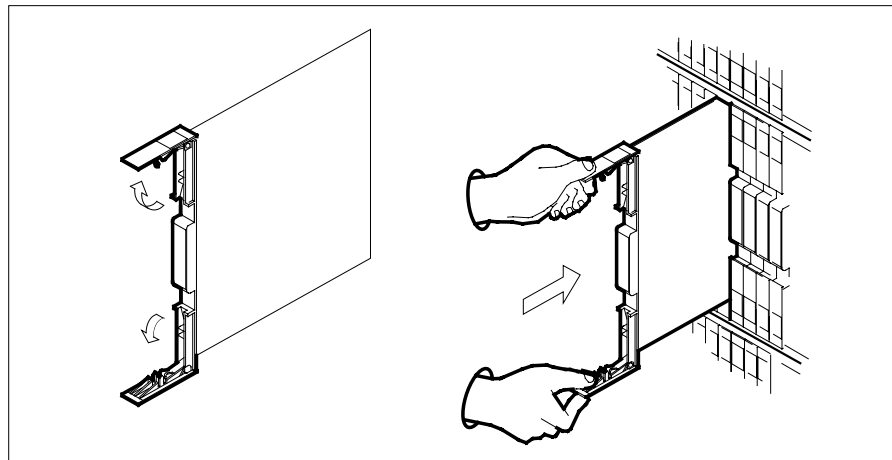

11 Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

NTMX74
in an RSC RCC2 (continued)

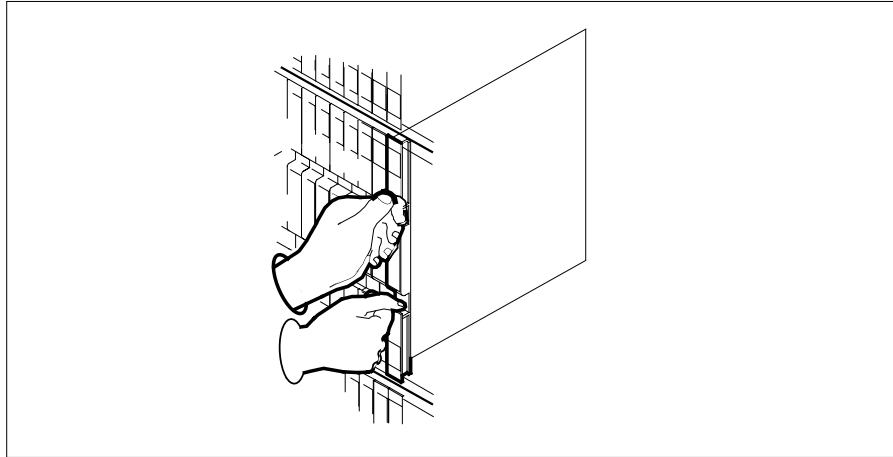

- 12** Refer to the following table to determine the next step

If you entered this procedure from	Do
alarm clearing procedure	step 18
other	step 13

At the MAP terminal

- 13** Reset the inactive RCC2 unit by typing
>PMRESET UNIT unit_no
and pressing the Enter key.
where
unit_no
is the number of the inactive RCC2 unit (0 or 1)

If the PMRESET command	Do
passed	step 15
failed	step 14

- 14** Reload the inactive RCC2 unit by typing
>LOADPM UNIT unit_no
and pressing the Enter key.
where

NTMX74

in an RSC RCC2 (end)

unit_no
is the number of the inactive RCC2 unit (0 or 1)

If the LOADPM command	Do
passed	step 15
failed	step 19

- 15** Return the inactive RCC2 unit to service by typing

>RTS UNIT unit_no

and pressing the Enter key.

where

unit_no
is the number of the inactive RCC2 unit (0 or 1)

If the RTS command	Do
passed	step 16
failed	step 19

- 16** Send any faulty cards for repair according to local procedure.
- 17** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 20.
- 18** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 19** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 20** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX74 in an RSC-S (DS-1) Model A RCC2

Application

Use this procedure to replace an NTMX74 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX74	AA	DS30A Interface card

Common procedures

None


Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX74

in an RSC-S (DS-1) Model A RCC2 (continued)

Summary of card replacement procedure for an NTMX74 card in RSC-S RCC2

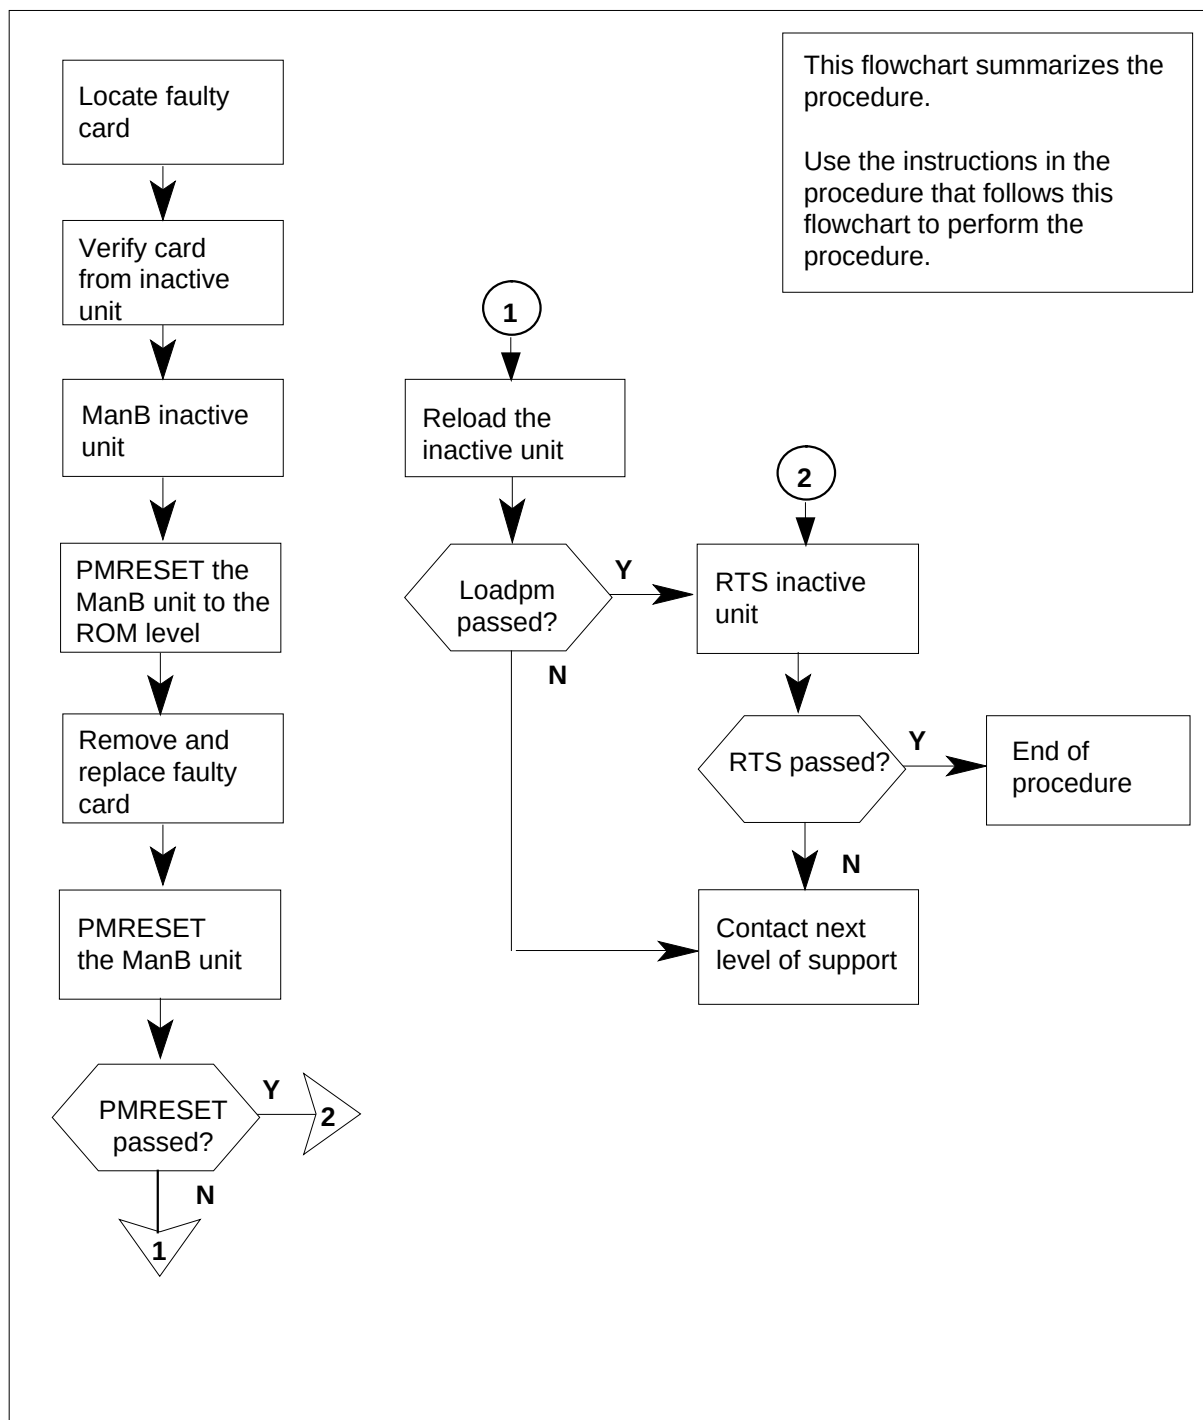

NTMX74 in an RSC-S (DS-1) Model A RCC2 (continued)

Replacing an NTMX74 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX74 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 with the faulty card

Example of a MAP display:

NTMX74**in an RSC-S (DS-1) Model A RCC2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	0	2	0	2	25	
2 Post_	RCC2	0	0	0	0	0	1	1	
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, ensure that the card to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

- 6 Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

NTMX74 in an RSC-S (DS-1) Model A RCC2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.
- 9 Set the ManB RCC2 unit to the ROM level to prevent trapping by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the inactive RCC2 unit busied in step 8

At the RCE frame

10



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

11



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX74 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

NTMX74
in an RSC-S (DS-1) Model A RCC2 (continued)

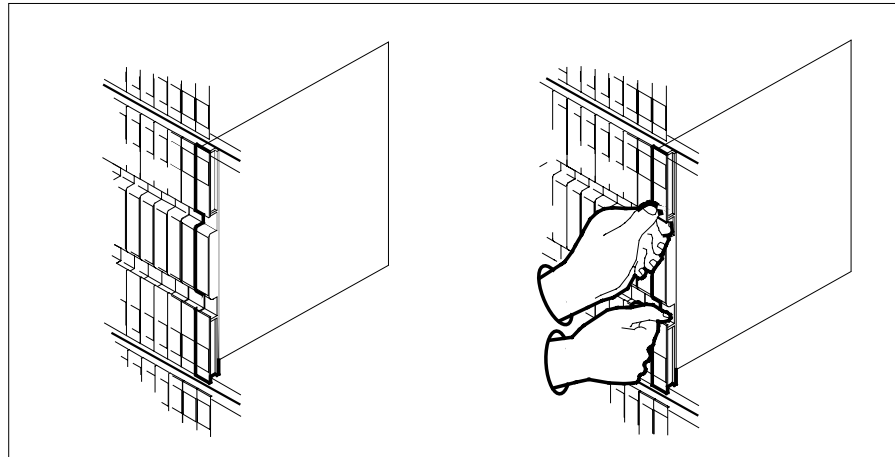

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

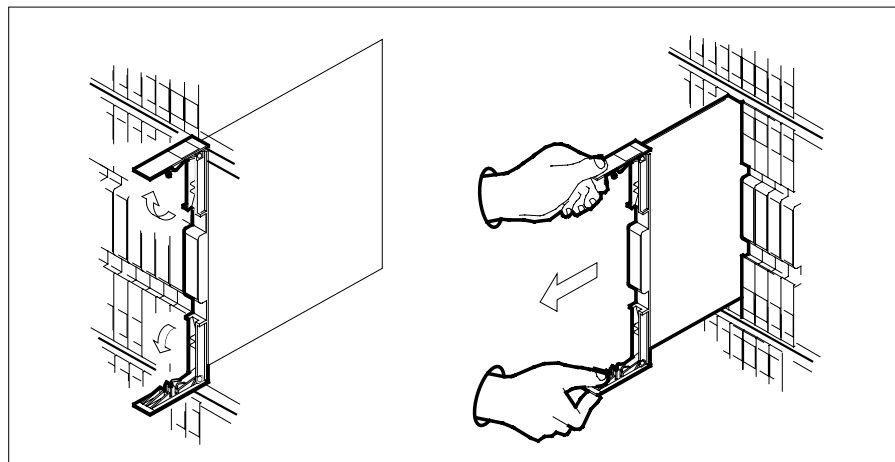


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

12 Open the locking levers on the replacement card.


- a** Align the card with the slots in the shelf.
b Gently slide the card into the shelf.

NTMX74

in an RSC-S (DS-1) Model A RCC2 (continued)

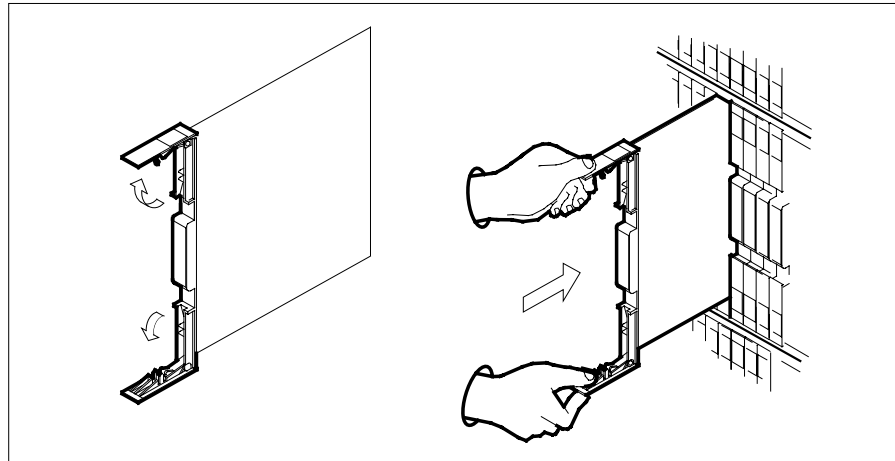

- 13** Seat and lock the card.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

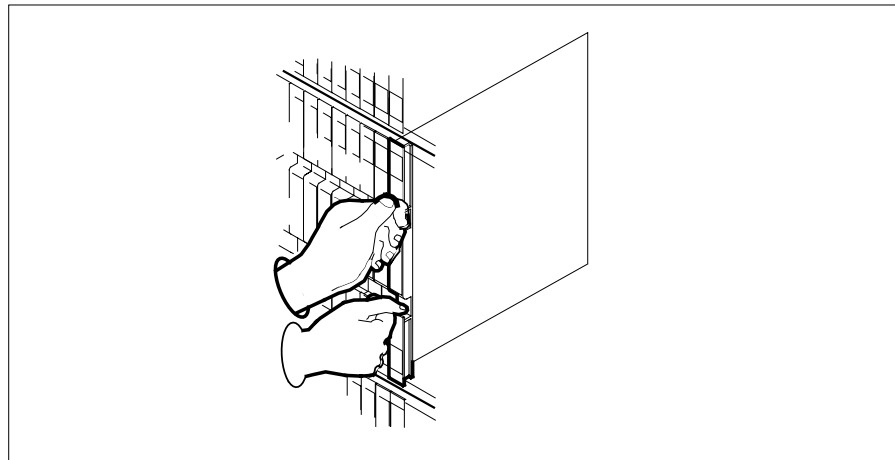

- 14** Refer to the following table to determine the next step

If you entered this procedure from	Do
alarm clearing procedure	step 20
other	step 15

- 15** Reset the inactive RCC2 unit by typing
>PMRESET UNIT unit_no

NTMX74**in an RSC-S (DS-1) Model A RCC2** (continued)

and pressing the Enter key.

where

unit_no

is the number of the inactive RCC2 unit (0 or 1)

If the PMRESET command	Do
passed	step 17
failed	step 16

16 Reload the inactive RCC2 unit by typing

>LOADPM UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the inactive RCC2 unit (0 or 1)

If the LOADPM command	Do
passed	step 17
failed	step 21

17 Return the inactive RCC2 unit to service by typing

>RTS UNIT rcc2_unit_no

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit (0 or 1)

If the RTS command	Do
passed	step 18
failed	step 21

18 Send any faulty cards for repair according to local procedure.

19 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 22.

20 Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

21 Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

NTMX74

in an RSC-S (DS-1) Model A RCC2 (end)

- 22** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX74 in an RSC-S (DS-1) Model B RCC2

Application

Use this procedure to replace an NTMX74 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX74	AA	DS30A Interface card

Common procedures

None


Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX74

in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for an NTMX74 card in RSC-S RCC2

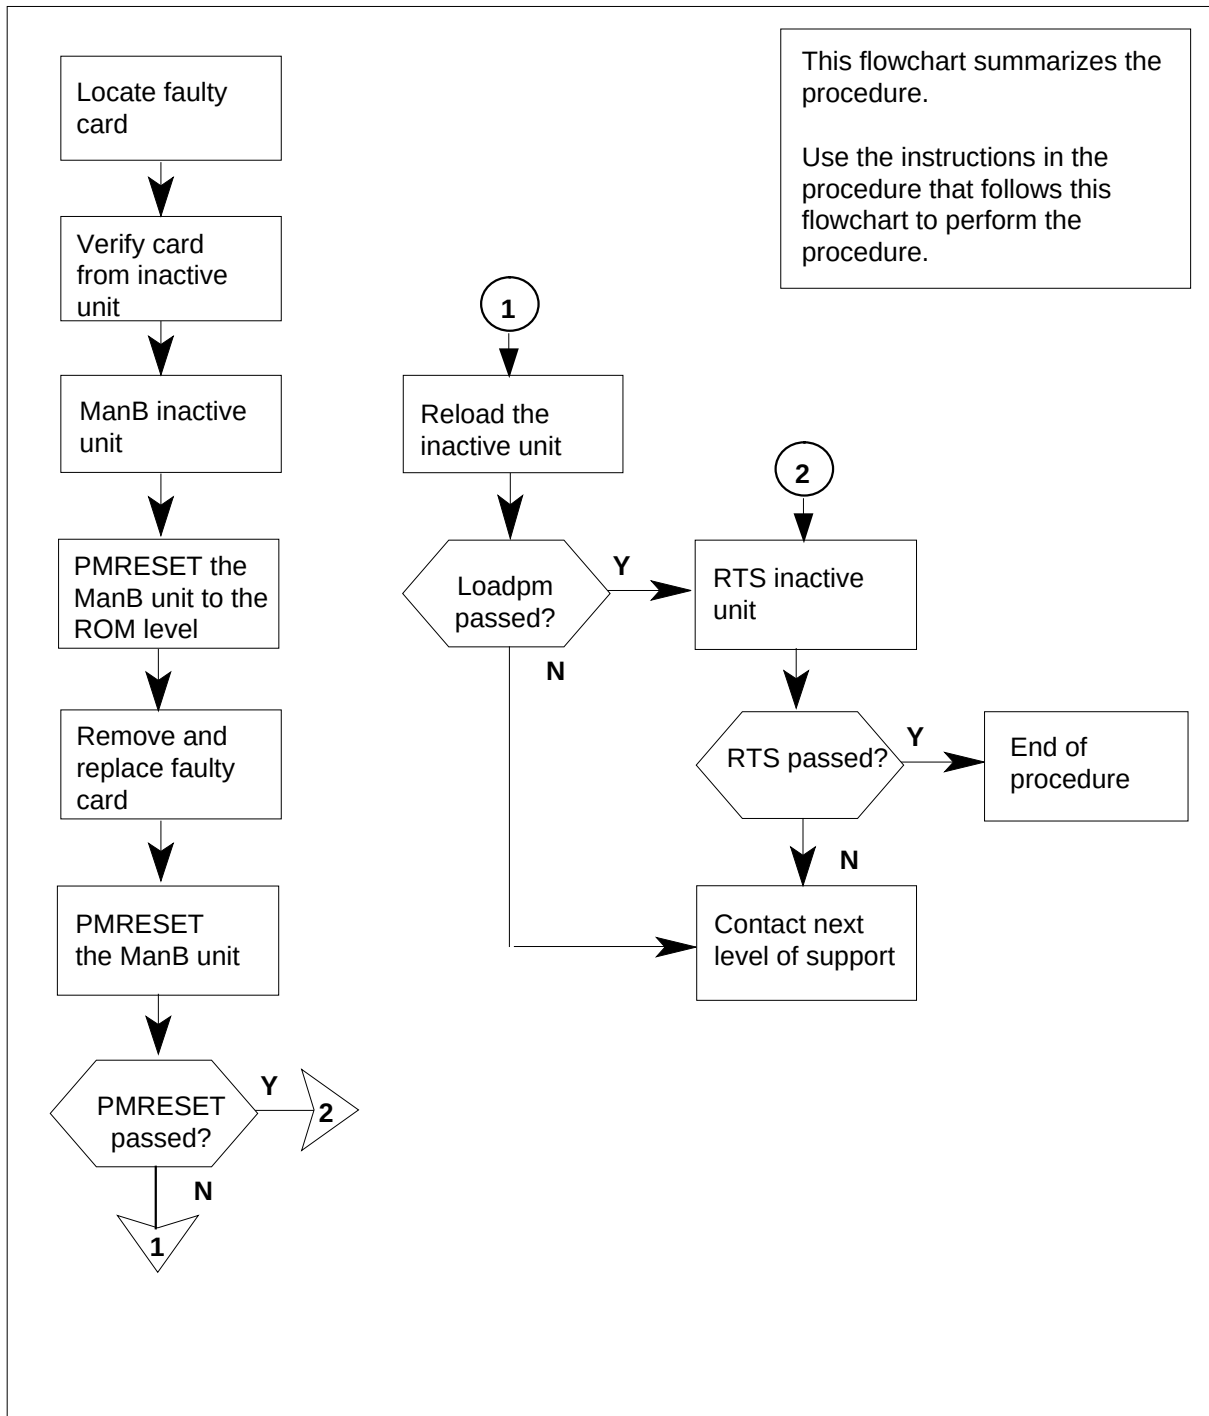

NTMX74 in an RSC-S (DS-1) Model B RCC2 (continued)

Replacing an NTMX74 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX74 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where
rcc2_no
is the number of the RCC2 with the faulty card
Example of a MAP display:

NTMX74

in an RSC-S (DS-1) Model B RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb		InSv
0 Quit	PM		0	0	2	0	2		25
2 Post_	RCC2		0	0	0	0	1		1
3 ListSet									
4	RCC2	0	ISTb	Links_OOS:	CSide	1,	PSide	1	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, ensure that the card to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

- 6 Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

NTMX74 in an RSC-S (DS-1) Model B RCC2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.
- 9 Set the ManB RCC2 unit to the ROM level to prevent trapping by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the inactive RCC2 unit busied in step 8

At the RCE frame

10



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

11



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX74 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

NTMX74
in an RSC-S (DS-1) Model B RCC2 (continued)

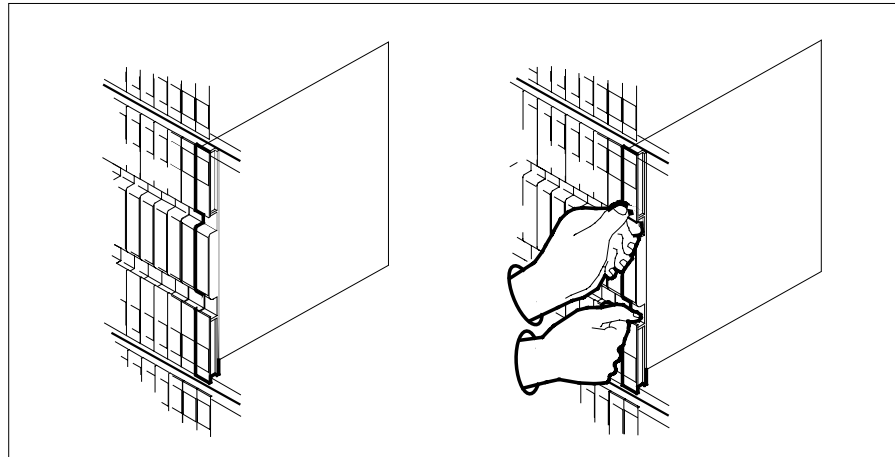

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

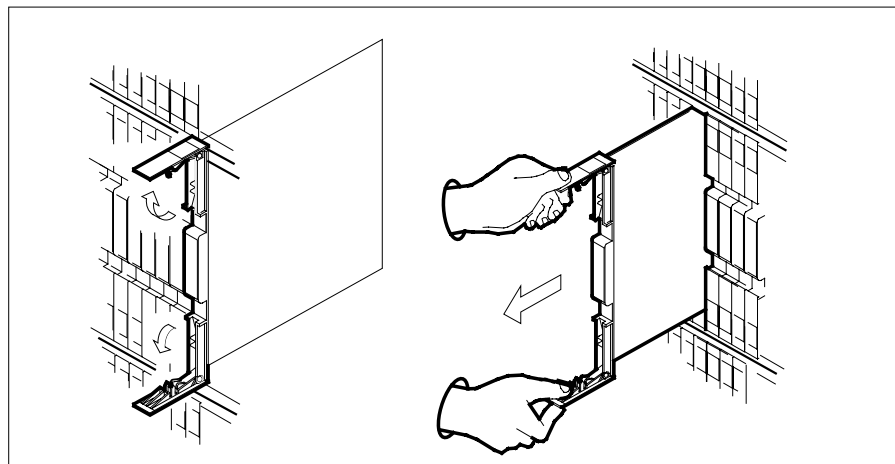


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


12 Open the locking levers on the replacement card.

- a** Align the card with the slots in the shelf.
b Gently slide the card into the shelf.

NTMX74 in an RSC-S (DS-1) Model B RCC2 (continued)

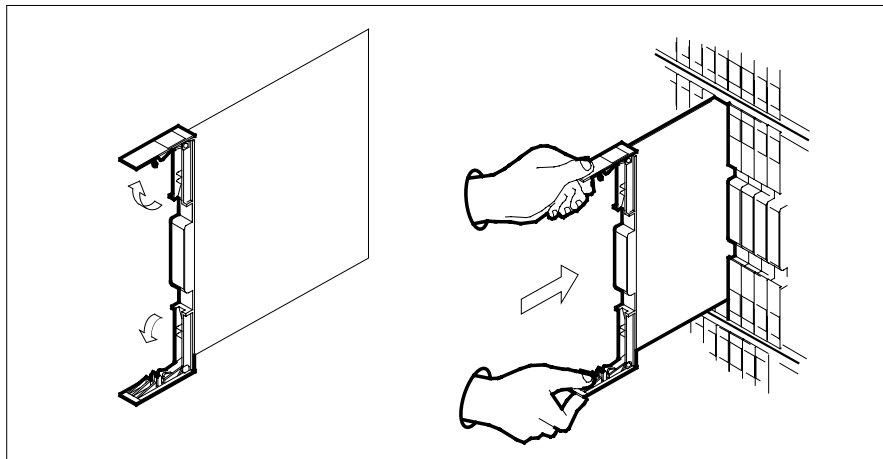

- 13** Seat and lock the card.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

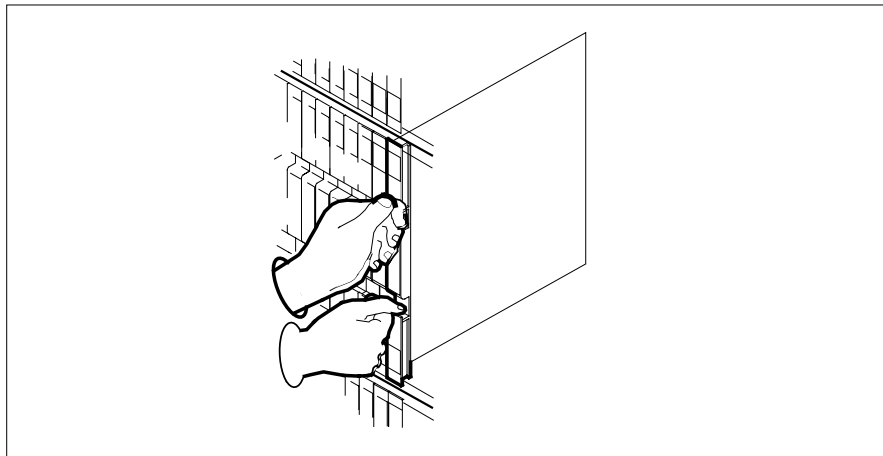

- 14** Refer to the following table to determine the next step

If you entered this procedure from	Do
alarm clearing procedure	step 20
other	step 15

- 15** Reset the inactive RCC2 unit by typing
>PMRESET UNIT unit_no

NTMX74

in an RSC-S (DS-1) Model B RCC2 (continued)

and pressing the Enter key.

where

unit_no
is the number of the inactive RCC2 unit (0 or 1)

If the PMRESET command	Do
passed	step 17
failed	step 16

- 16** Reload the inactive RCC2 unit by typing

>LOADPM UNIT unit_no

and pressing the Enter key.

where

unit_no
is the number of the inactive RCC2 unit (0 or 1)

If the LOADPM command	Do
passed	step 17
failed	step 21

- 17** Return the inactive RCC2 unit to service by typing

>RTS UNIT rcc2_unit_no

and pressing the Enter key.

where

rcc2_unit_no
is the number of the RCC2 unit (0 or 1)

If RTS	Do
passed	step 18
failed	step 21

- 18** Send any faulty cards for repair according to local procedure.

- 19** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 22.

- 20** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 21** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

NTMX74
in an RSC-S (DS-1) Model B RCC2 (end)

- 22 You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX74
in an RSC-S (PCM-30) Model A RCO2

Application

Use this procedure to replace an NTMX74 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX74	AA	DS30A Interface card

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX74 in an RSC-S (PCM-30) Model A RCO2 (continued)

Summary of card replacement procedure for an NTMX74 card in RSC-S RCO2

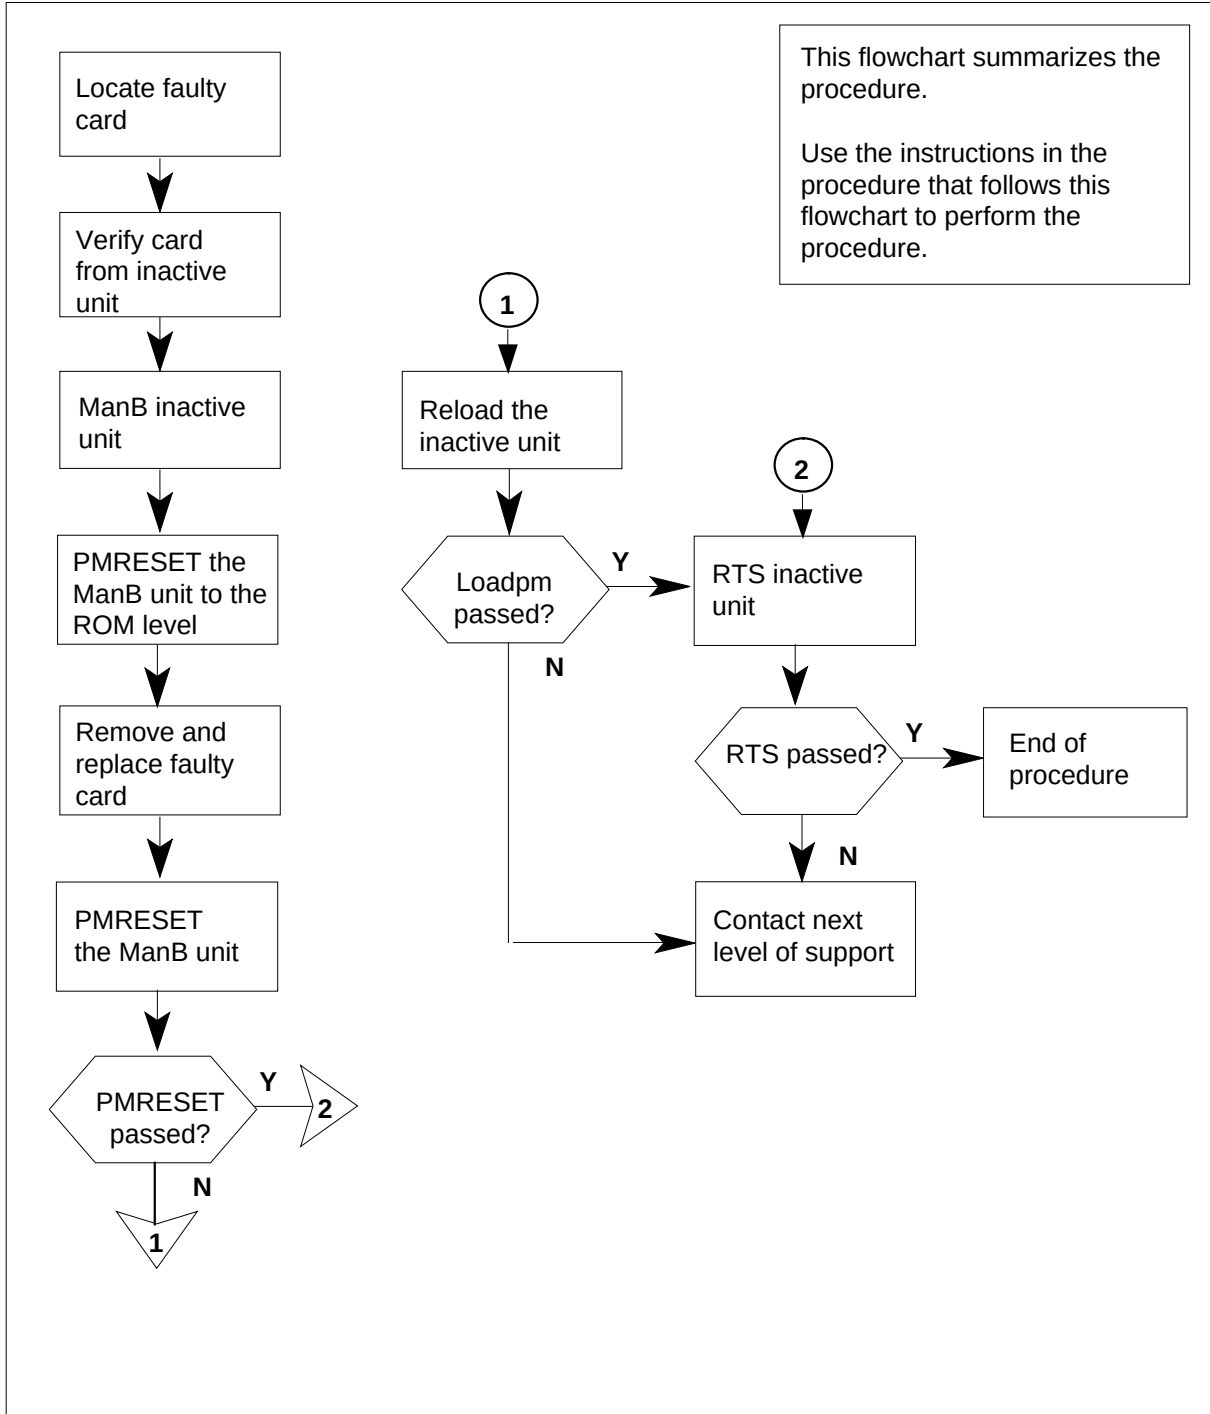

NTMX74 in an RSC-S (PCM-30) Model A RCO2 (continued)

Replacing an NTMX74 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX74 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing

>MAPCI;MTC;PM;POST RCO2 rco2_no

and pressing the Enter key.

where

rco2_no

is the number of the RCO2 with the faulty card

Example of a MAP display:

NTMX74

in an RSC-S (PCM-30) Model A RCO2 (continued)

```

CM      MS      IOD      Net      PM      CCS      LNS      Trks      Ext      Appl
.       .       .       .       1RCO2    .       .       .       .       .

RCO2
0 Quit      PM      0      0      2      0      2      25
2 Post_     RCO2    0      0      0      0      1      1
3 ListSet
4           RCO2    0 ISTb  Links_OOS: CSide 1, PSide 1
5 TRNSL     Unit0:  Inact InSv
6 TST       Unit1:  Act  InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_
13
14 QueryPM
15
16
17
18

```

- 4 By observing the MAP display, be sure that the card to be removed is on the inactive unit.

If faulty card is on

Do

active unit

step 5

inactive unit

step 6

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.

Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 6 Place a sign on the *active* unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

NTMX74 in an RSC-S (PCM-30) Model A RCO2 (continued)

At the MAP terminal

- 7 Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.
- 8 Set the ManB RCO2 unit to the ROM level to prevent trapping by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the inactive RCO2 unit busied in step 7

At the RCE frame

9



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

10



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX74 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

NTMX74
in an RSC-S (PCM-30) Model A RCO2 (continued)

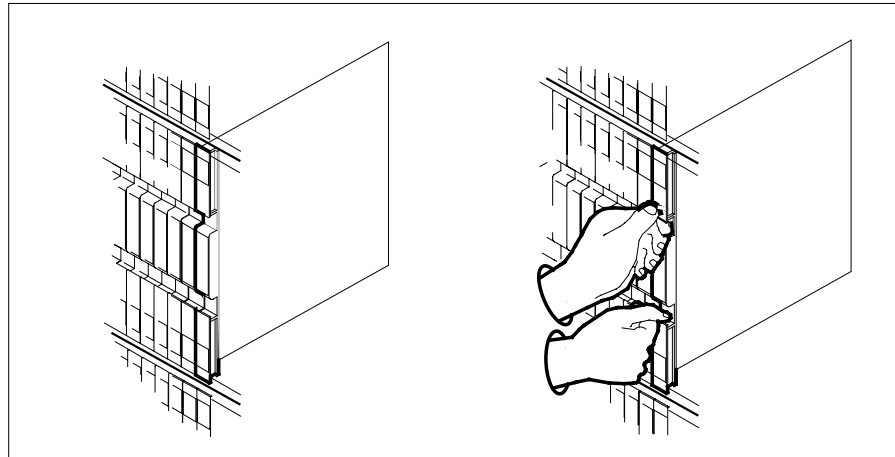


- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

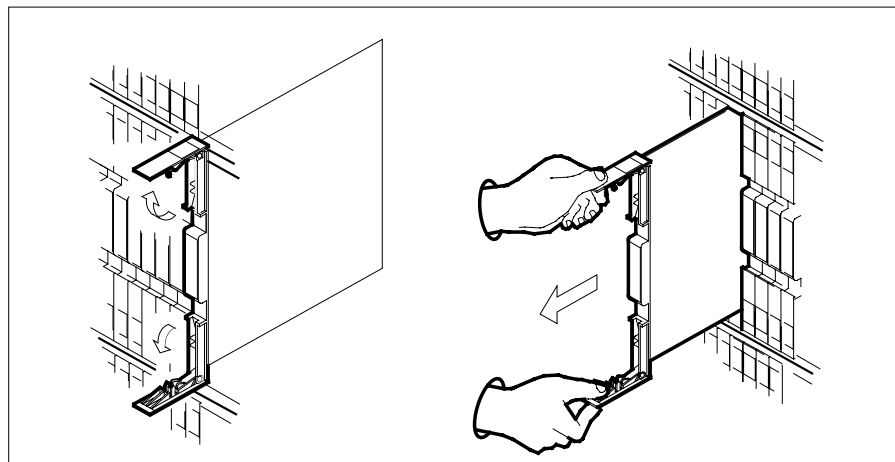


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.
- 11** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX74
in an RSC-S (PCM-30) Model A RCO2 (continued)

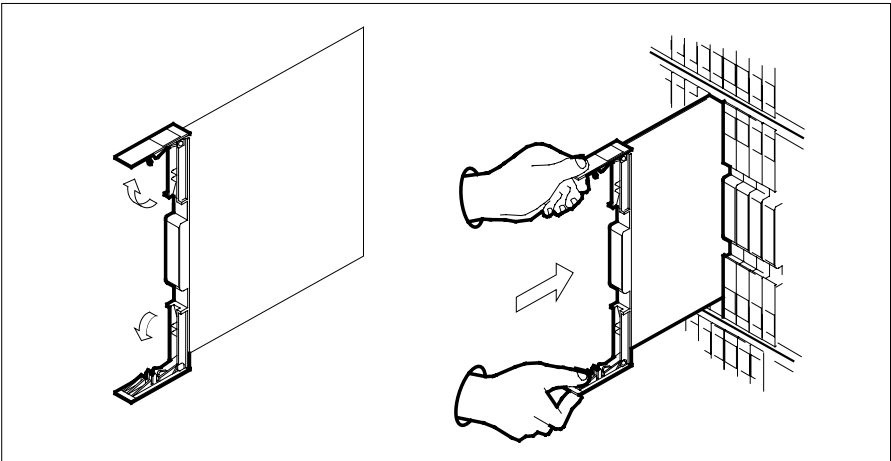

- 12** Seat and lock the card.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

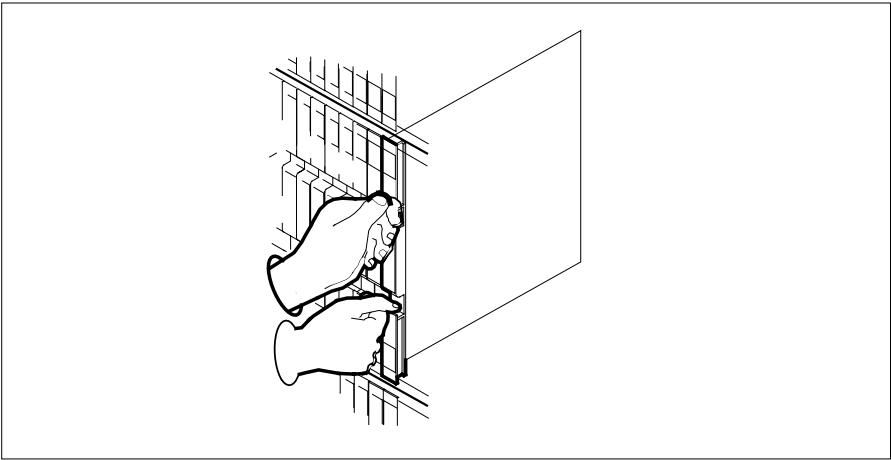

- 13** Refer to the following table to determine the next step

If you entered this procedure from	Do
alarm clearing procedure	step 19
other	step 14

NTMX74

in an RSC-S (PCM-30) Model A RCO2 (continued)

At the MAP terminal

- 14** Reset the inactive RCO2 unit by typing

>PMRESET UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the inactive RCO2 unit (0 or 1)

If the PMRESET command	Do
passed	step 16
failed	step 15

- 15** Reload the inactive RCO2 unit by typing

>LOADPM UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the inactive RCO2 unit (0 or 1)

If the LOADPM command	Do
passed	step 16
failed	step 20

- 16** Return the inactive RCO2 unit to service by typing

>RTS UNIT rco2_unit_no

and pressing the Enter key.

where

rco2_unit_no

is the number of the RCO2 unit (0 or 1)

If RTS	Do
passed	step 17
failed	step 20

- 17** Send any faulty cards for repair according to local procedure.

- 18** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 21.

- 19** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list

NTMX74

in an RSC-S (PCM-30) Model A RCO2 (end)

and go to the appropriate card replacement procedure for that card in this manual.

- 20** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 21** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX74 in an RSC-S (PCM-30) Model B RCO2

Application

Use this procedure to replace an NTMX74 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX74	AA	DS30A Interface card

Common procedures

None


Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX74

in an RSC-S (PCM-30) Model B RCO2 (continued)

Summary of card replacement procedure for an NTMX74 card in RSC-S RCO2

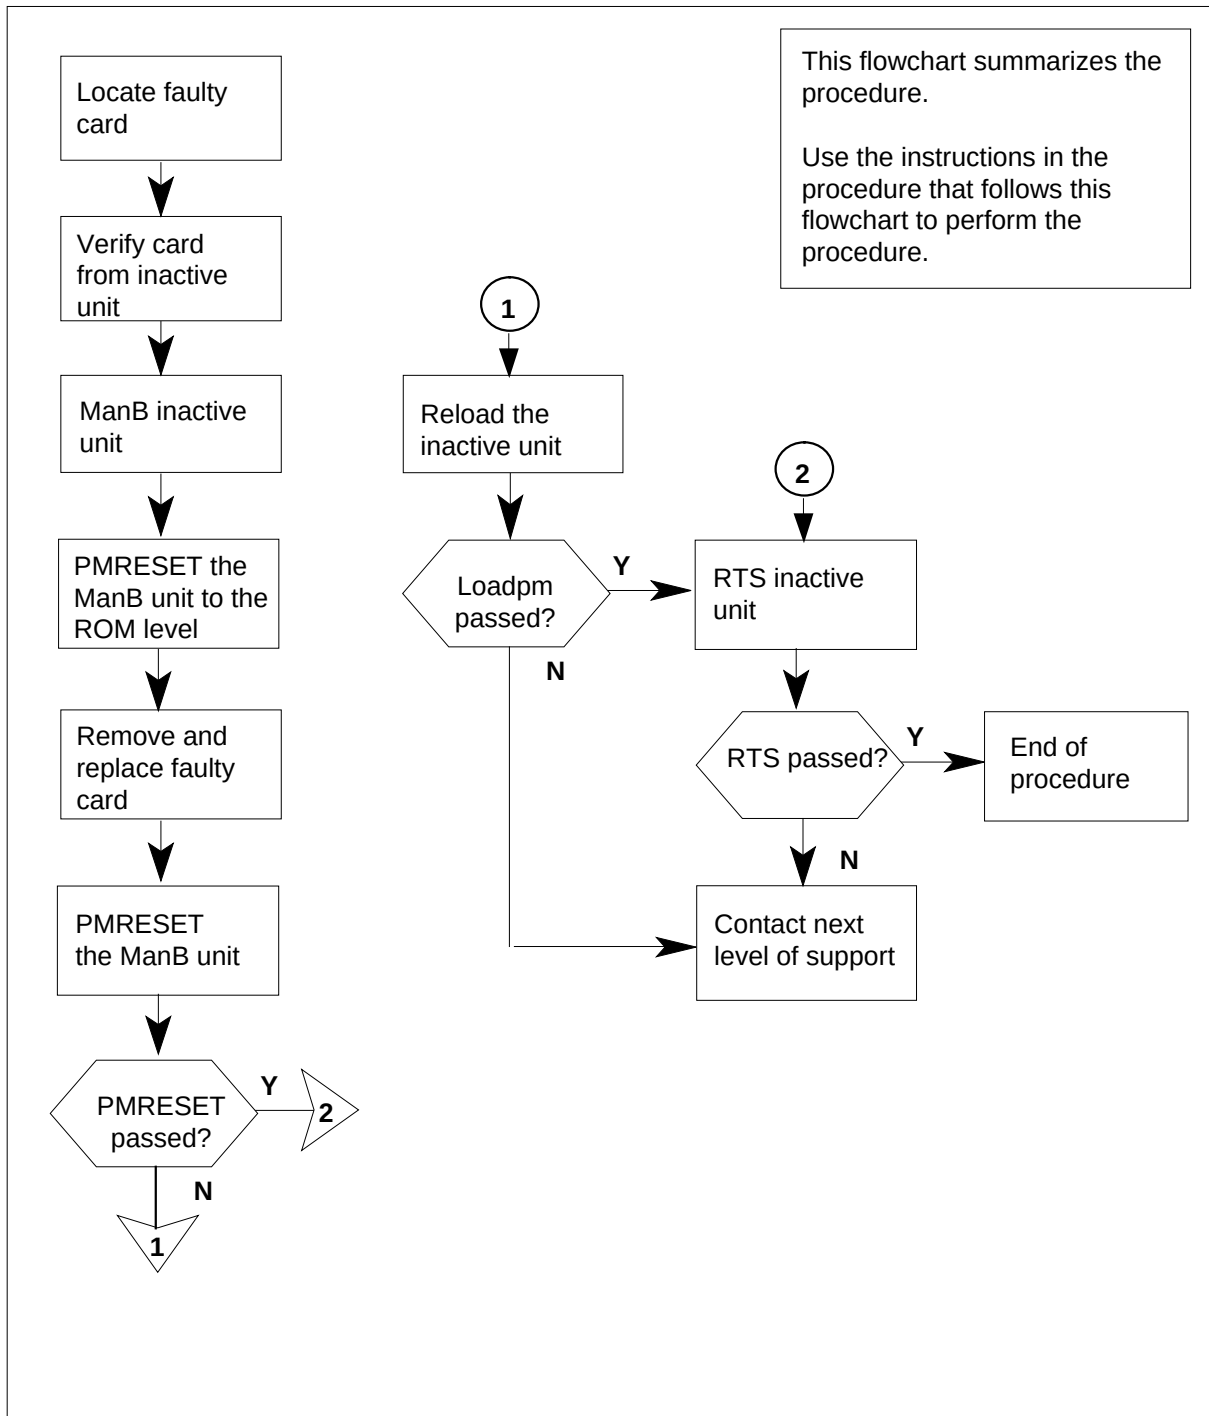

NTMX74 in an RSC-S (PCM-30) Model B RCO2 (continued)

Replacing an NTMX74 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX74 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.
where
rco2_no
is the number of the RCO2 with the faulty card
Example of a MAP display:

NTMX74

in an RSC-S (PCM-30) Model B RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCO2	.	.	.	.	.
RCO2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	2	0	2	25		
2 Post_	RCO2	0	0	0	0	1	1		
3 ListSet									
4	RCO2	0	ISTb	Links_00S:	Cside	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, be sure that the card to be removed is on the inactive unit.

If faulty card is on

Do

active unit

step 5

inactive unit

step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.

- 6 Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the *active* unit bearing the words "Active unit—Do not touch." This sign should not be attached by magnets or tape.

NTMX74 in an RSC-S (PCM-30) Model B RCO2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.
- 9 Set the ManB RCO2 unit to the ROM level to prevent trapping by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the inactive RCO2 unit busied in step 8

At the RCE frame

10



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

11



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Remove the NTMX74 card as shown in the following figures.


- a** Locate the card to be removed on the appropriate shelf.

NTMX74

in an RSC-S (PCM-30) Model B RCO2 (continued)

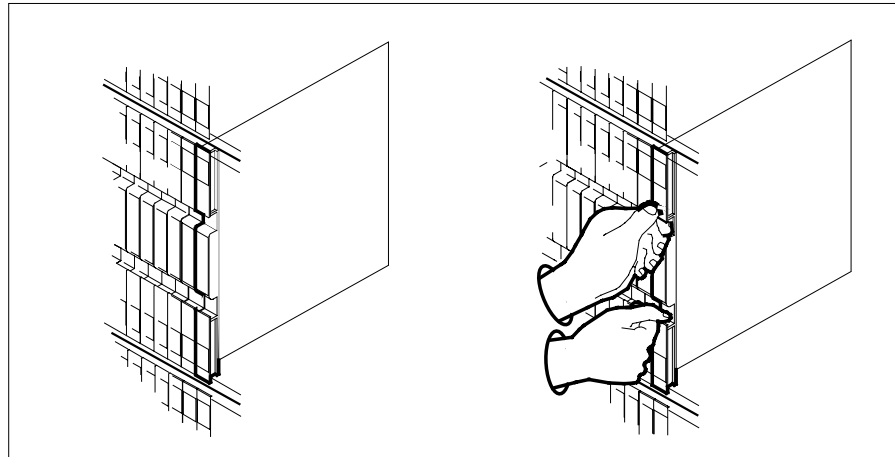

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

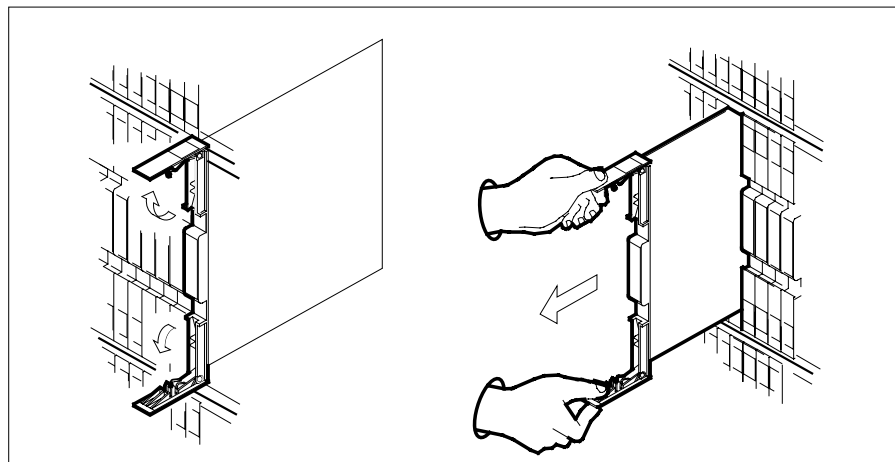


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


12 Open the locking levers on the replacement card.

- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX74 in an RSC-S (PCM-30) Model B RCO2 (continued)

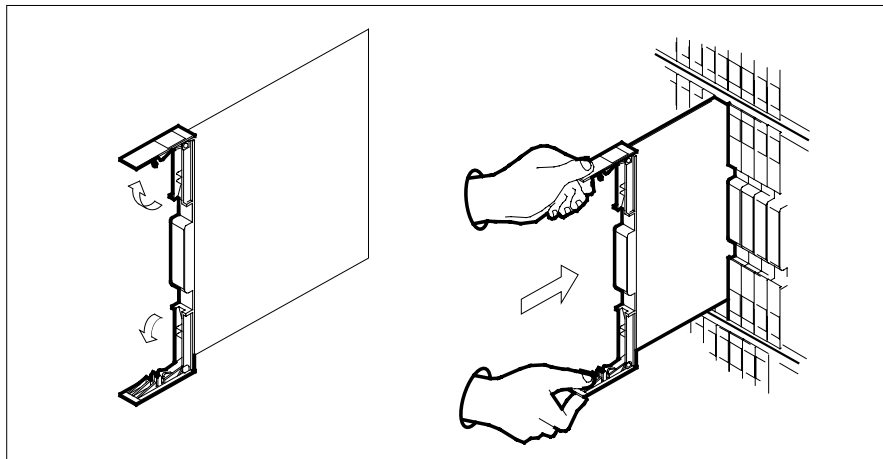

- 13** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

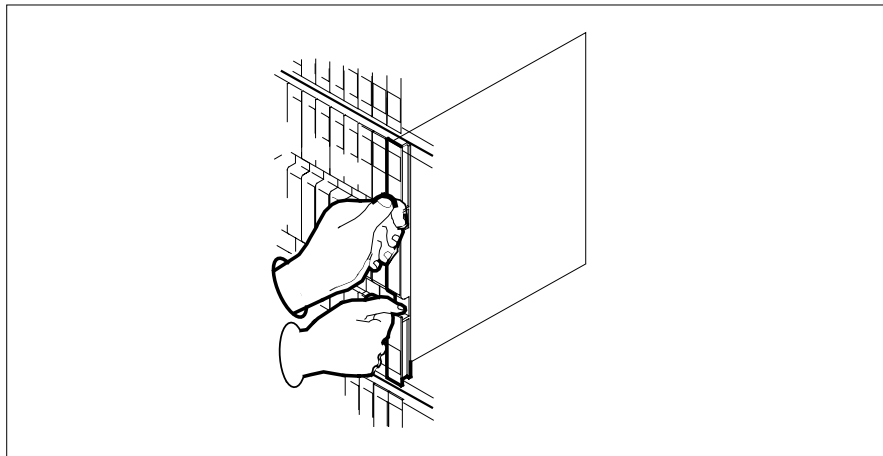

- 14** Refer to the following table to determine the next step

If you entered this procedure from	Do
alarm clearing procedure	step 20
other	step 15

- 15** Reset the inactive RCO2 unit by typing
>PMRESET UNIT unit_no

NTMX74

in an RSC-S (PCM-30) Model B RCO2 (continued)

and pressing the Enter key.

where

unit_no

is the number of the inactive RCO2 unit (0 or 1)

If the PMRESET command	Do
passed	step 17
failed	step 16

- 16** Reload the inactive RCO2 unit by typing

>LOADPM UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the inactive RCO2 unit (0 or 1)

If the LOADPM command	Do
passed	step 17
failed	step 21

- 17** Return the inactive RCO2 unit to service by typing

>RTS UNIT rco2_unit_no

and pressing the Enter key.

where

rco2_unit_no

is the number of the RCO2 unit (0 or 1)

If RTS	Do
passed	step 18
failed	step 21

- 18** Send any faulty cards for repair according to local procedure.

- 19** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 22.

- 20** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 21** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

NTMX74
in an RSC-S (PCM-30) Model B RCO2 (end)

- 22 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX75 in an RSC-M

Application

Use this procedure to replace an NTMX75 circuit card in a Remote Switching Center Multi-access (RSC-M) main shelf.

Note: In this section RSC-M is referred to as RCO2 in the examples. When software outputs messages to the MAP terminal, the software does not differentiate between the two types of RCO2.

PEC	Suffixes	Name
NTMX75	AA	Time switch matrix card

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX75 in an RSC-M (continued)

Summary of replacing an NTMX75 in an RSC-M

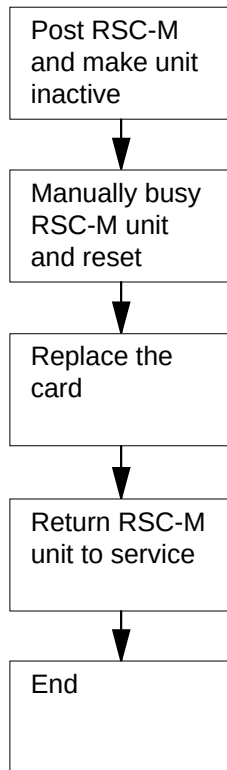

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX75 in an RSC-M (continued)

Replacing an NTMX75 in an RSC-M

At the MAP display

- 1 Proceed if:
 - a step in a maintenance procedure directs you to this card replacement procedure
 - you use the procedure to verify or accept cards
 - your maintenance support group directed you to this procedure.
- 2

**WARNING****Loss of service**

When you replace a card in the RSC-M, make sure the unit in which you replace the card is *inactive*. Make sure the mate unit is *active*.

Obtain an NTMX75 replacement circuit card. Make sure the replacement circuit card has the same product engineering code (PEC), and PEC suffix, as the circuit card you remove.

At the MAP terminal

- 3 Make sure the peripheral module (PM) appears on the MAP display. To post the RSC-M/RCO2, type:

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 with the defective card

Example of a MAP response:

NTMX75

in an RSC-M (continued)

```

RCO2          SysB      ManB      OffL      CBsy      ISTb      InSv
0 Quit      PM          0          0          2          0          2          25
2 Post_     RCO2        0          0          0          0          1          1
3 ListSet
4           RCO2        0 ISTb  Links_00S:  CSide  1, PSide  1
5 TRNSL     Unit0:      Inact ISTb
6 TST       Unit1:      Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_

```

- 4 To determine the location of the RCO2 that contains the circuit card you want to replace, type:

>QUERYPM

and press the Enter key.

Example of a MAP response:

```

PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname:KRI07BI1 EEPROM Load:MX77NG03
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RCO2: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA

```

- 5 Determine the state of the RCO2 unit that associates with the circuit card to replace.

If the state of the RCO2 unit is	Do
active	step 6
inactive	step 8

- 6 To perform a Switch of Activity (SWACT) of the units, type:

>SWACT

and press the Enter key.

Example of a MAP response:

NTMX75 in an RSC-M (continued)

RCO2 0 A Warm SwAct will be performed after
data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):

If	Do
the system prompts you to confirm a warm SWACT	step 7
the system rejects the SWACT	step 21

7 To confirm the command, type:

>YES

and press the Enter key.

Example of a MAP response:

```
Unit0:   Inact SysB Mtce
Unit1:   Act   ISTb
```

RCO2 0 SwAct Passed

If the MAP response is	Do
SWACT passed	step 8
other	step 20

8 A maintenance flag (Mtce) can appear, that indicates system-initiated maintenance tasks are in progress. When the flag disappears from the status lines for both RCO2 units you can proceed to the next step.

At the cabinet

9 Place a sign on the active unit that bears the words *Active unit-Do not touch*. Do not use magnets or tape to attach this sign.

10 To manually busy (ManB) the inactive unit, type:

>BSY INACTIVE

and press the Enter key.

Example of a MAP response:

NTMX75 in an RSC-M (continued)

```
RCO2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
Bsy INACTIVE
RCO2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passes	step 11
fails	step 20

- 11** To reset the inactive RCO2 unit, type:

```
>PMRESET UNIT unit_no NORUN
```

and press the Enter key.

where

unit_no

is the RCO2 unit number zero or one

- 12**



WARNING

Static electricity damage

Wear a wrist strap that connects to the wrist-strap grounding point of the modular supervisory panel (MSP) to handle circuit cards. This protects the cards against static electricity damage.

Locate the circuit card you must replace.

Note: The NTMX75 circuit cards, are in slot 10 of unit zero, and slot 18 of unit one.

- 13** To replace the card, use the common replacing a card procedure in this document. When the procedure is complete, return to this point.

Note: If the circuit card you replace has switches, make sure the switches on the replacement circuit card have the same settings.

- 14** The next action depends on the reason you perform this procedure.

If	Do
a maintenance procedure directs you to this procedure	step 15

NTMX75 in an RSC-M (end)

	If	Do
	a maintenance procedure does not direct you to this procedure	step 16
15	Remove the sign from the active unit. Return to the maintenance procedure that sends you to this procedure. Continue as directed.	

At the MAP terminal

- 16** To return the inactive unit to service, type:
>RTS INACTIVE
 and press the Enter key.

	If the RTS command	Do
	passes	step 17
	fails	step 20

- 17** Remove the sign from the active unit.
- 18** Go to the common returning a card procedure in this document.
- 19** The procedure is complete.
- 20** For additional help, contact the next level of maintenance.
- 21** For additional help with SWACT, contact the next level of maintenance.
- Note:** The system can recommend that you use the SWACT command with the FORCE option. Consult office personnel to determine if you must use the FORCE option.

NTMX75 in an RSC RCC2

Application

Use this procedure to replace an NTMX75 card in an RSCE RCC2.


PEC	Suffixes	Name
NTMX75	AA, DA	Enhanced Matrix

Common procedures

None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

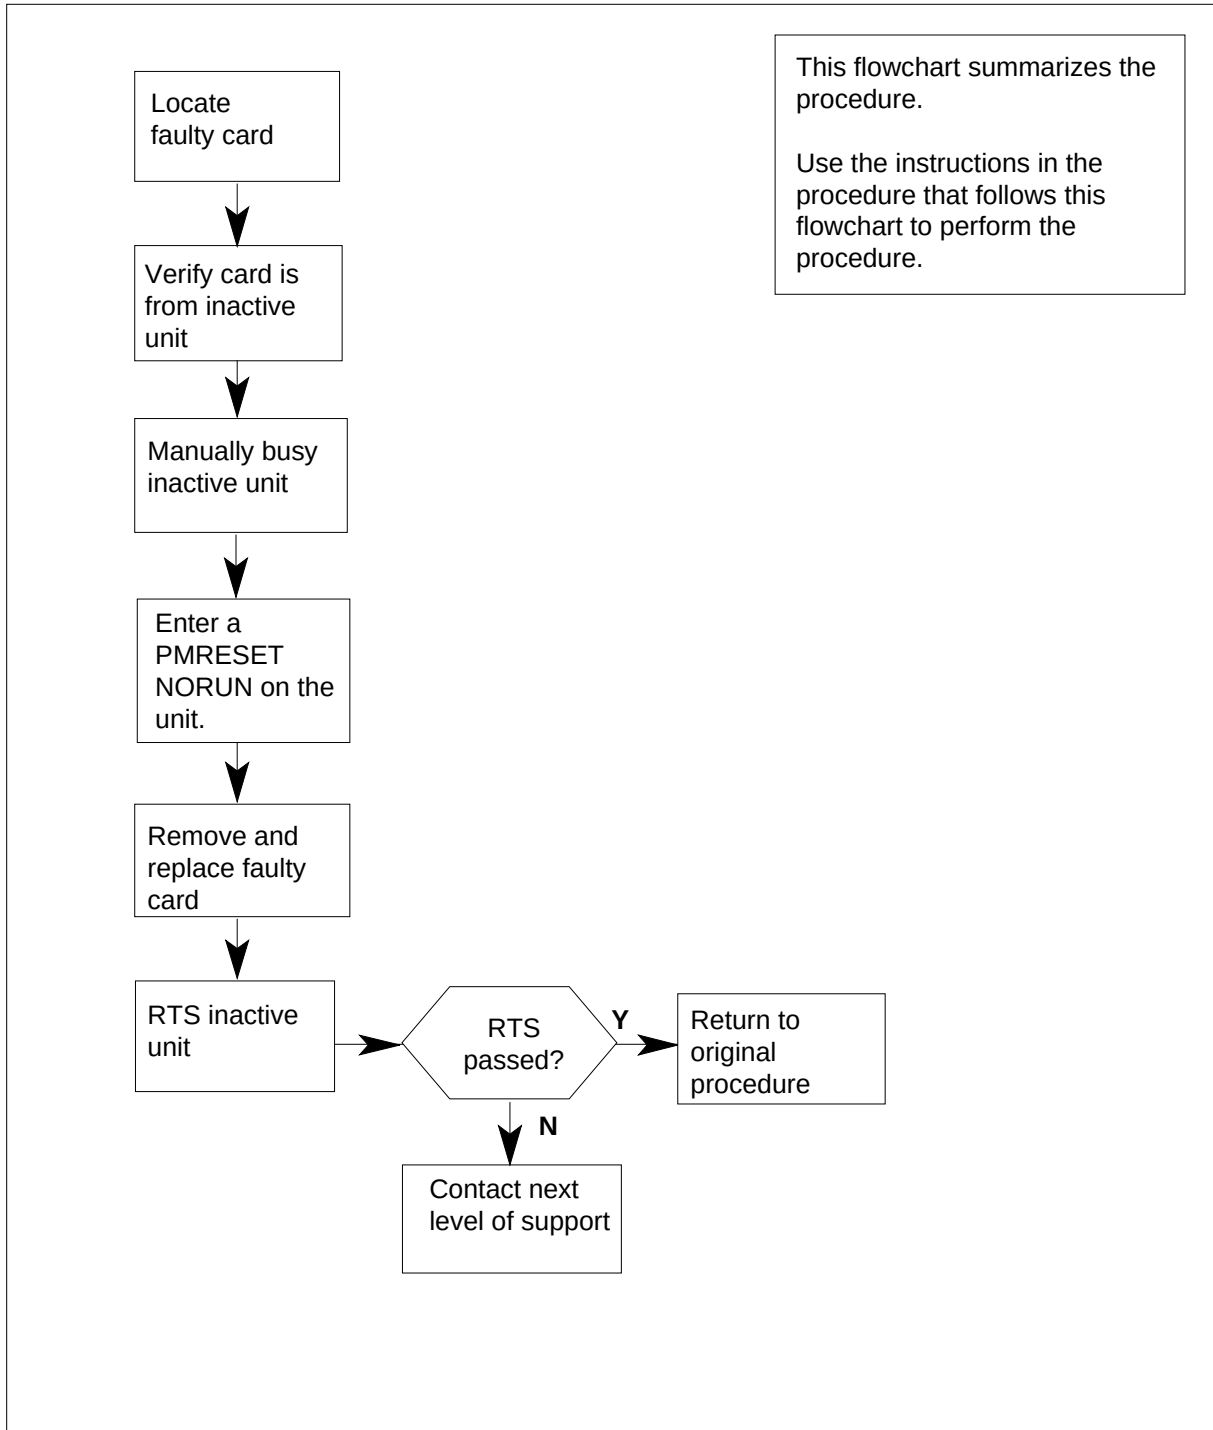NTMX75
in an RSC RCC2 (continued)**Summary of card replacement procedure for NTMX75 ard in RSC**

NTMX75 in an RSC RCC2 (continued)

Replacing an NTMX75 card in RSC RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX75 replacement card. Verify the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where

rcc2_no

is the number of the RCC2 to be busied

Example of a MAP display:

NTMX75
in an RSC RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb		InSv
0	Quit	PM	0	0	2	0	2		25
2	Post_	RCC2	0	0	0	0	1		1
3	ListSet								
4		RCC2	0 InSv	Links_00S:	CSide	1,	PSide	1	
5	TRNSL	Unit0:	Inact	InSv					
6	TST	Unit1:	Act	InSv					
7	BSY								
8	RTS								
9	OffL								
10	LoadPM_								
11	Disp_								
12	Next_								
13									
14	QueryPM								
15									
16									
17									
18									

- 4

Determine from the MAP display if the card that is to be removed is on the inactive unit.
If faulty card is on	Do
active unit	step 5
inactive unit	step 7
- 5

Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
and pressing the Enter key.
- 6

Confirm the system prompt by typing
>YES
and pressing the Enter key.
After both units are in-service, proceed to the next step.

At the RSCE frame

- 7

Place a sign on the active unit bearing the words *Active unit—Do not touch*. Place this sign in an electrostatic discharge (ESD) bag. Do not attach the sign with magnets or tape.

NTMX75 in an RSC RCC2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.
- 9 Reset the inactive unit by typing
>PMRESET unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the unit to be reset (0 or 1)

At the RSCE frame

10



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

- 11 Remove the NTMX75 card as shown in the following figures.
- a Locate the card to be removed on the appropriate shelf.

NTMX75
in an RSC RCC2 (continued)

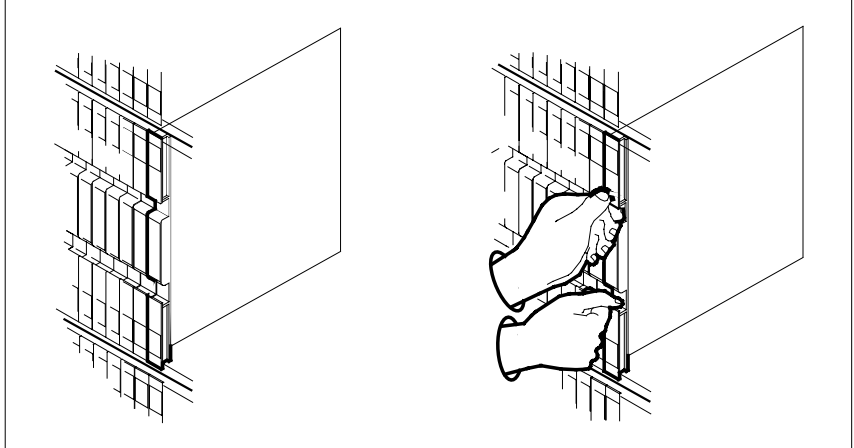

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

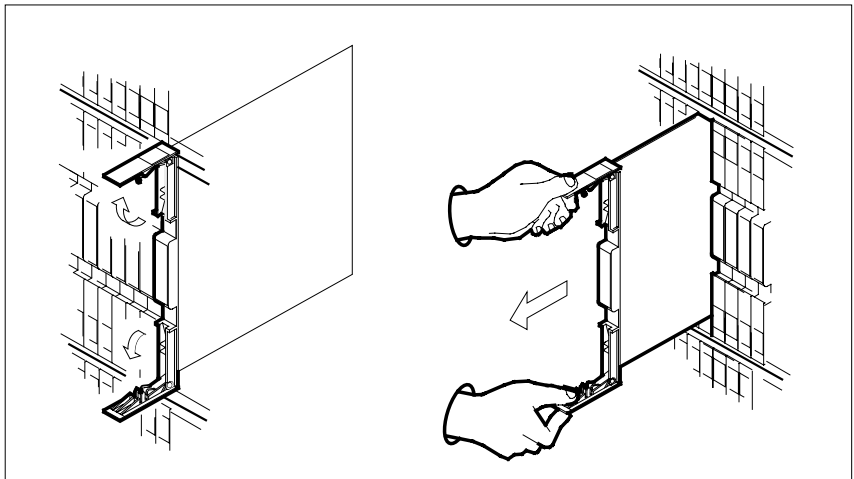


- c** Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.


- 12** Open the locking levers on the replacement card.

- a** Align the card with the slots in the shelf.
b Gently slide the card into the shelf.

NTMX75 in an RSC RCC2 (continued)

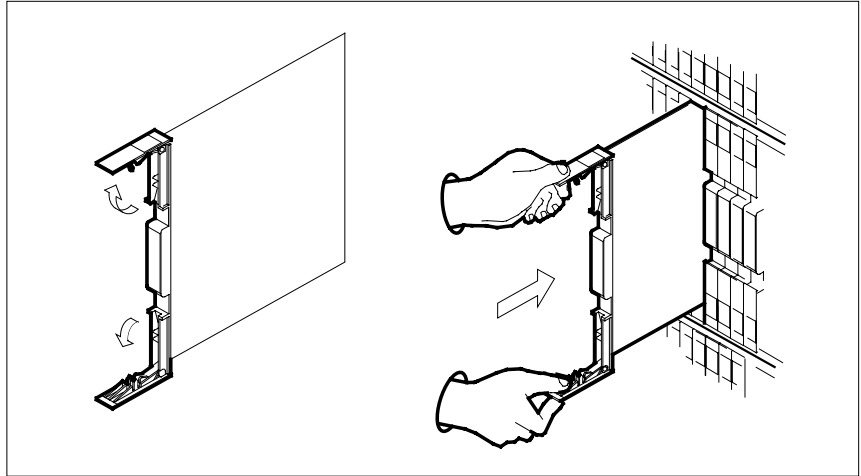

- 13** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

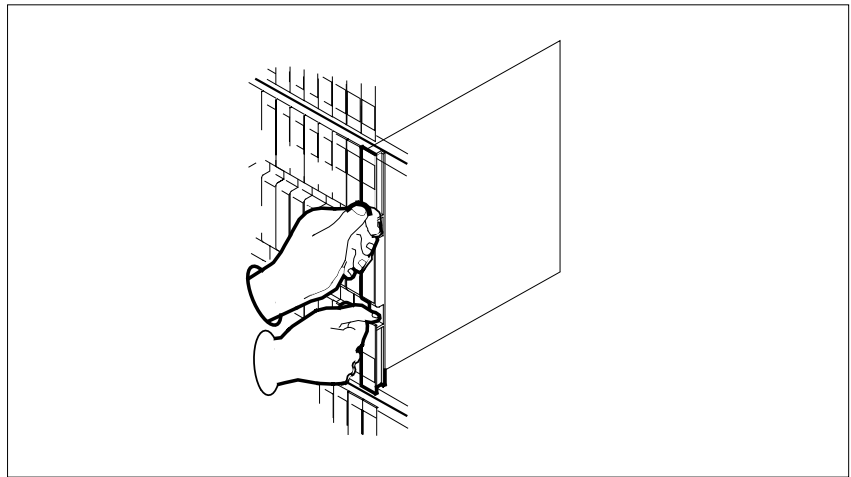

At the MAP terminal

- 14** Reset the inactive unit by typing
>PMRESET unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be reset (0 or 1)

NTMX75 in an RSC RCC2 (end)

- 15** Use the following information to determine what step to go to next in this procedure.
- | If you entered this procedure from | Do |
|---|-----------|
| alarm clearing procedures | step 19 |
| other | step 16 |
- 16** Return the inactive RCC2 unit to service by typing
>RTS UNIT rcc2_unit_no
 and pressing the Enter key.
where
 rcc2_unit_no
 is the number of the RCC2 unit being returned to service
- | If RTS | Do |
|---------------|-----------|
| passed | step 17 |
| failed | step 20 |
- 17** Send any faulty cards for repair according to local procedure.
- 18** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 21.
- 19** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 20** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level of support.
- 21** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX75 in an RSC-S (DS-1) Model A RCC2

Application

Use this procedure to replace an NTMX75 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX75	AA, DA	Enhanced Matrix

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX75 in an RSC-S (DS-1) Model A RCC2 (continued)

Summary of card replacement procedure for NTMX75 card in RSC-S RCC2

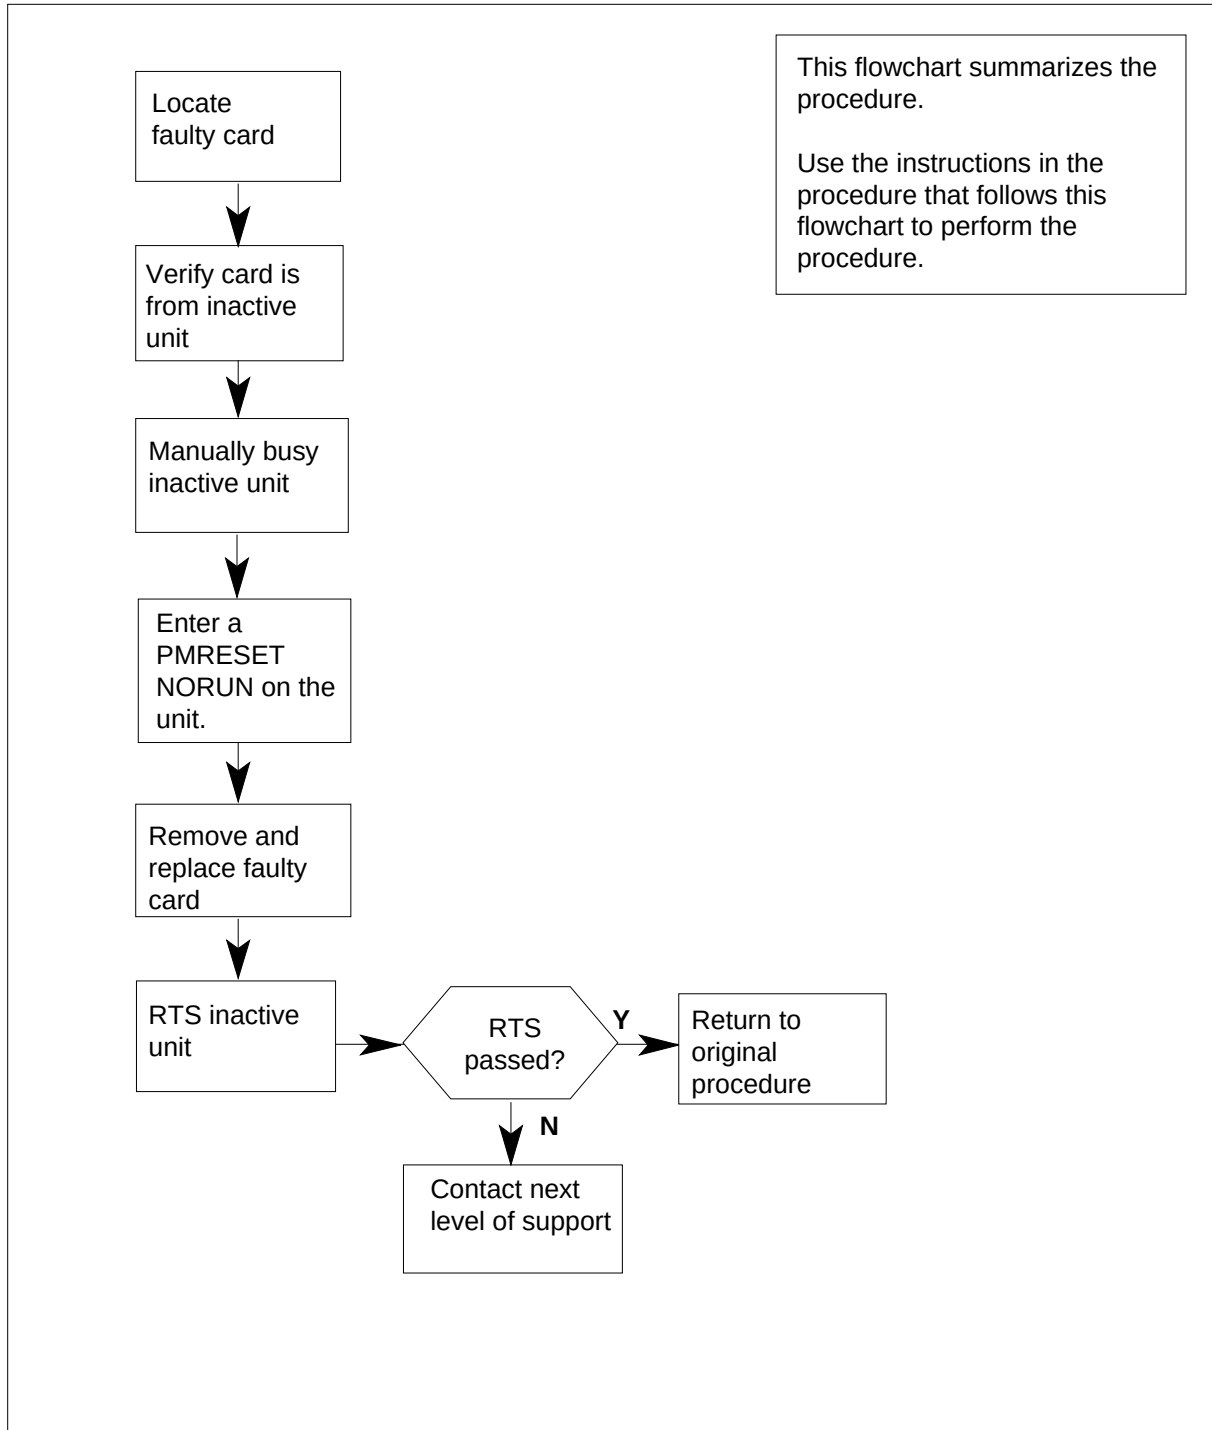

NTMX75 in an RSC-S (DS-1) Model A RCC2 (continued)

Replacing an NTMX75 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX75 replacement card. Verify the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 to be busied

Example of a MAP display:

NTMX75

in an RSC-S (DS-1) Model A RCC2 (continued)

CM	MS	IOD	Net	PM 1RCC2	CCS	LNS	Trks	Ext	Appl
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	2	0	2	25	
2 Post_	RCC2		0	0	0	0	1	1	
3 ListSet									
4	RCC2	0	InSv	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Determine from the MAP display if the card that is to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

- 6 Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. Place this sign in an electrostatic discharge (ESD) bag. Do not attach the sign with magnets or tape.

NTMX75 in an RSC-S (DS-1) Model A RCC2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.
- 9 Reset the inactive unit by typing
>PMRESET unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the unit to be reset (0 or 1)

At the RCE frame

10



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

- 11 Remove the NTMX75 card as shown in the following figures.
- a Locate the card to be removed on the appropriate shelf.

NTMX75
in an RSC-S (DS-1) Model A RCC2 (continued)

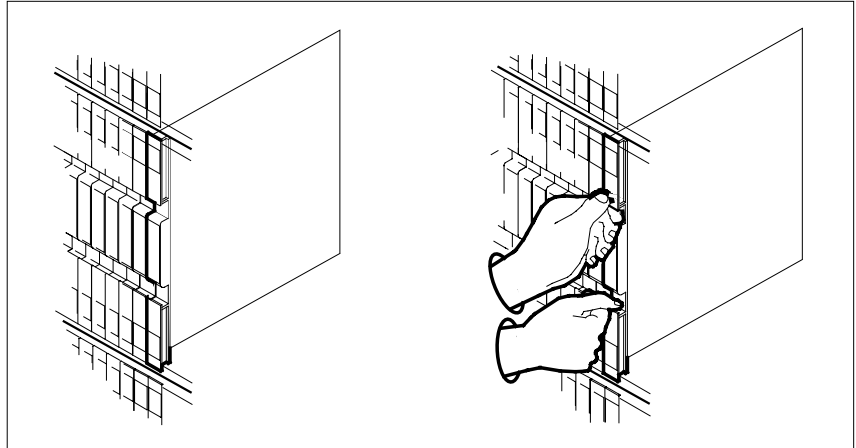


- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

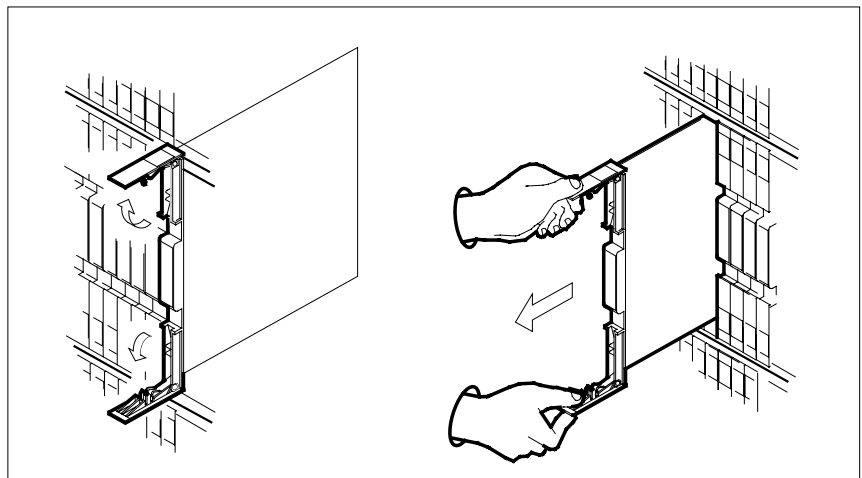


- c** Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 12** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
 - b** Gently slide the card into the shelf.

NTMX75 in an RSC-S (DS-1) Model A RCC2 (continued)

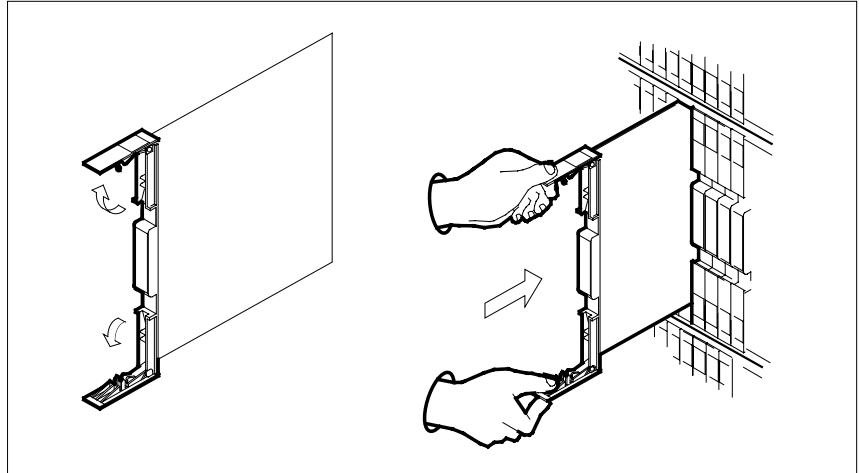

- 13** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

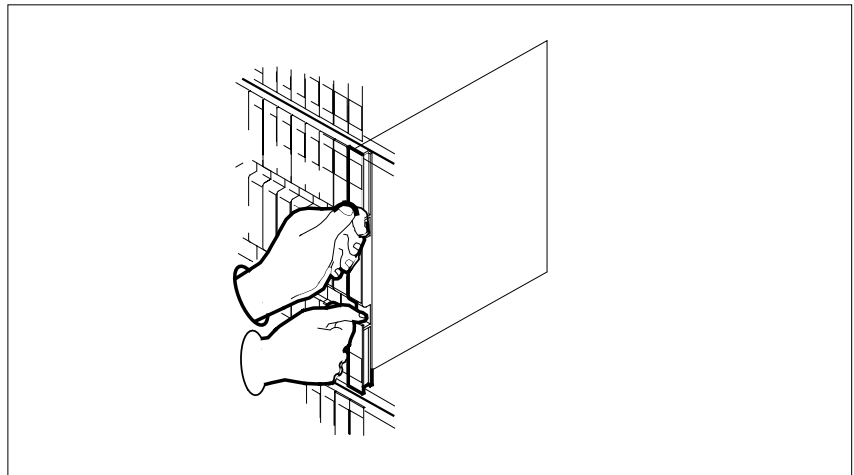

At the MAP terminal

- 14** Reset the inactive unit by typing
>PMRESET unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be reset (0 or 1)

NTMX75

in an RSC-S (DS-1) Model A RCC2 (end)

- 15** Use the following information to determine what step to go to next in this procedure.
- | If you entered this procedure from | Do |
|------------------------------------|---------|
| alarm clearing procedures | step 19 |
| other | step 16 |
- 16** Return the inactive RCC2 unit to service by typing
>RTS UNIT rcc2_unit_no
 and pressing the Enter key.
where
 rcc2_unit_no
 is the number of the RCC2 unit being returned to service
- | If RTS | Do |
|--------|---------|
| passed | step 17 |
| failed | step 19 |
- 17** Send any faulty cards for repair according to local procedure.
- 18** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 21.
- 19** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 20** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level of support.
- 21** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX75 in an RSC-S (DS-1) Model B RCC2

Application

Use this procedure to replace an NTMX75 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX75	AA, DA	Enhanced Matrix

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX75 in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for NTMX75 card in RSC-S RCC2

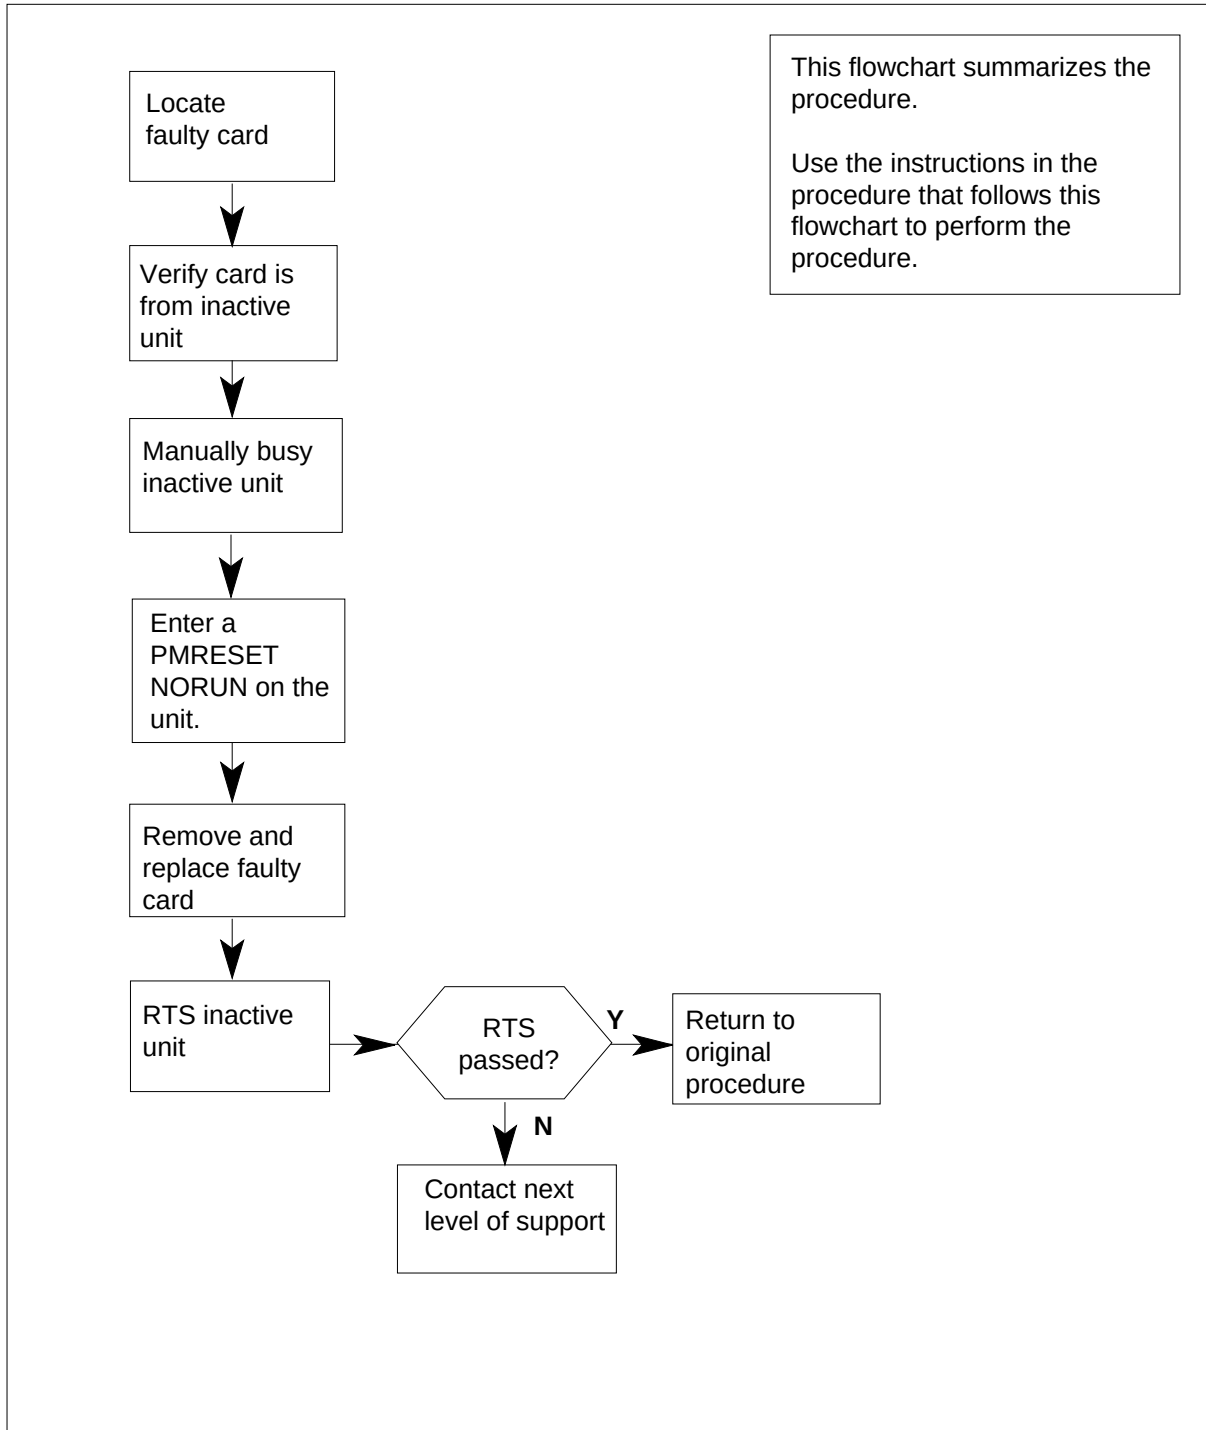

NTMX75 in an RSC-S (DS-1) Model B RCC2 (continued)

Replacing an NTMX75 card in an RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX75 replacement card. Verify the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where

rcc2_no

is the number of the RCC2 to be busied

Example of a MAP display:

NTMX75
in an RSC-S (DS-1) Model B RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	0	2	0	2	25	
2 Post_	RCC2	0	0	0	0	0	1	1	
3 ListSet									
4	RCC2	0	InSv	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Determine from the MAP display if the card that is to be removed is on the inactive unit.
- | If faulty card is on | Do |
|----------------------|--------|
| active unit | step 5 |
| inactive unit | step 7 |
- 5 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
and pressing the Enter key.
- 6 Confirm the system prompt by typing
>YES
and pressing the Enter key.
After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. Place this sign in an electrostatic discharge (ESD) bag. Do not attach the sign with magnets or tape.

NTMX75 in an RSC-S (DS-1) Model B RCC2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.
- 9 Reset the inactive unit by typing
>PMRESET unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the unit to be reset (0 or 1)

At the RCE frame

10



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

- 11 Remove the NTMX75 card as shown in the following figures.
- a Locate the card to be removed on the appropriate shelf.

NTMX75
in an RSC-S (DS-1) Model B RCC2 (continued)

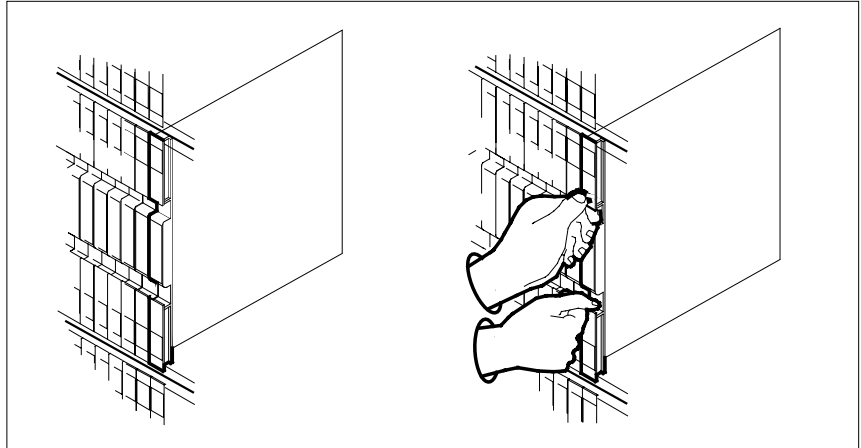


- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

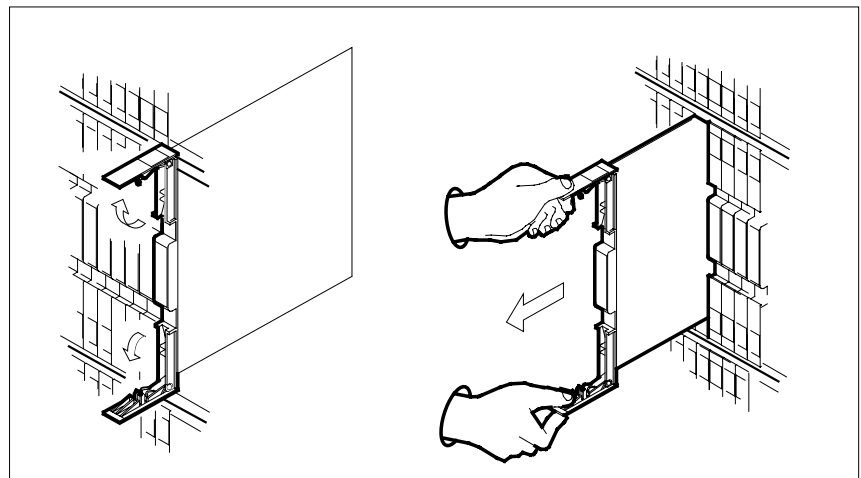


- c** Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 12** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
 - b** Gently slide the card into the shelf.

NTMX75 in an RSC-S (DS-1) Model B RCC2 (continued)

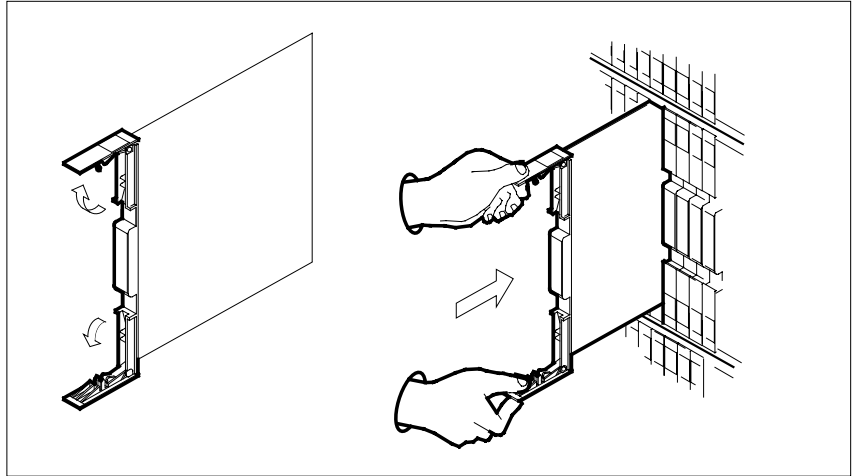

- 13** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

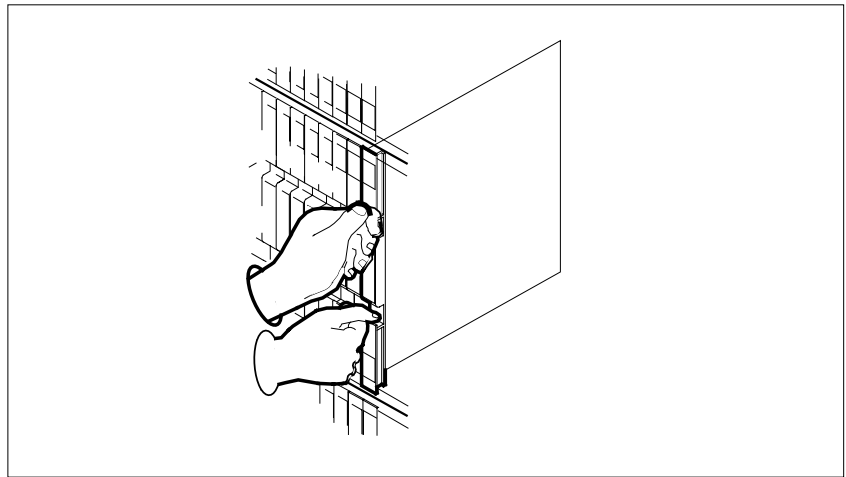

At the MAP terminal

- 14** Reset the inactive unit by typing
>PMRESET unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be reset (0 or 1)

NTMX75

in an RSC-S (DS-1) Model B RCC2 (end)

- 15** Use the following information to determine what step to go to next in this procedure.
- | If you entered this procedure from | Do |
|------------------------------------|---------|
| alarm clearing procedures | step 19 |
| other | step 16 |
- 16** Return the inactive RCC2 unit to service by typing
>RTS UNIT rcc2_unit_no
 and pressing the Enter key.
where
 rcc2_unit_no
 is the number of the RCC2 unit being returned to service
- | If RTS | Do |
|--------|---------|
| passed | step 17 |
| failed | step 19 |
- 17** Send any faulty cards for repair according to local procedure.
- 18** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 21.
- 19** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 20** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level of support.
- 21** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX75 in an RSC-S (PCM-30) Model A RCO2

Application

Use this procedure to replace an NTMX75 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX75	AA	Enhanced Matrix

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX75 in an RSC-S (PCM-30) Model A RCO2 (continued)

Summary of card replacement procedure for an NTMX75 card in RSC-S RCO2

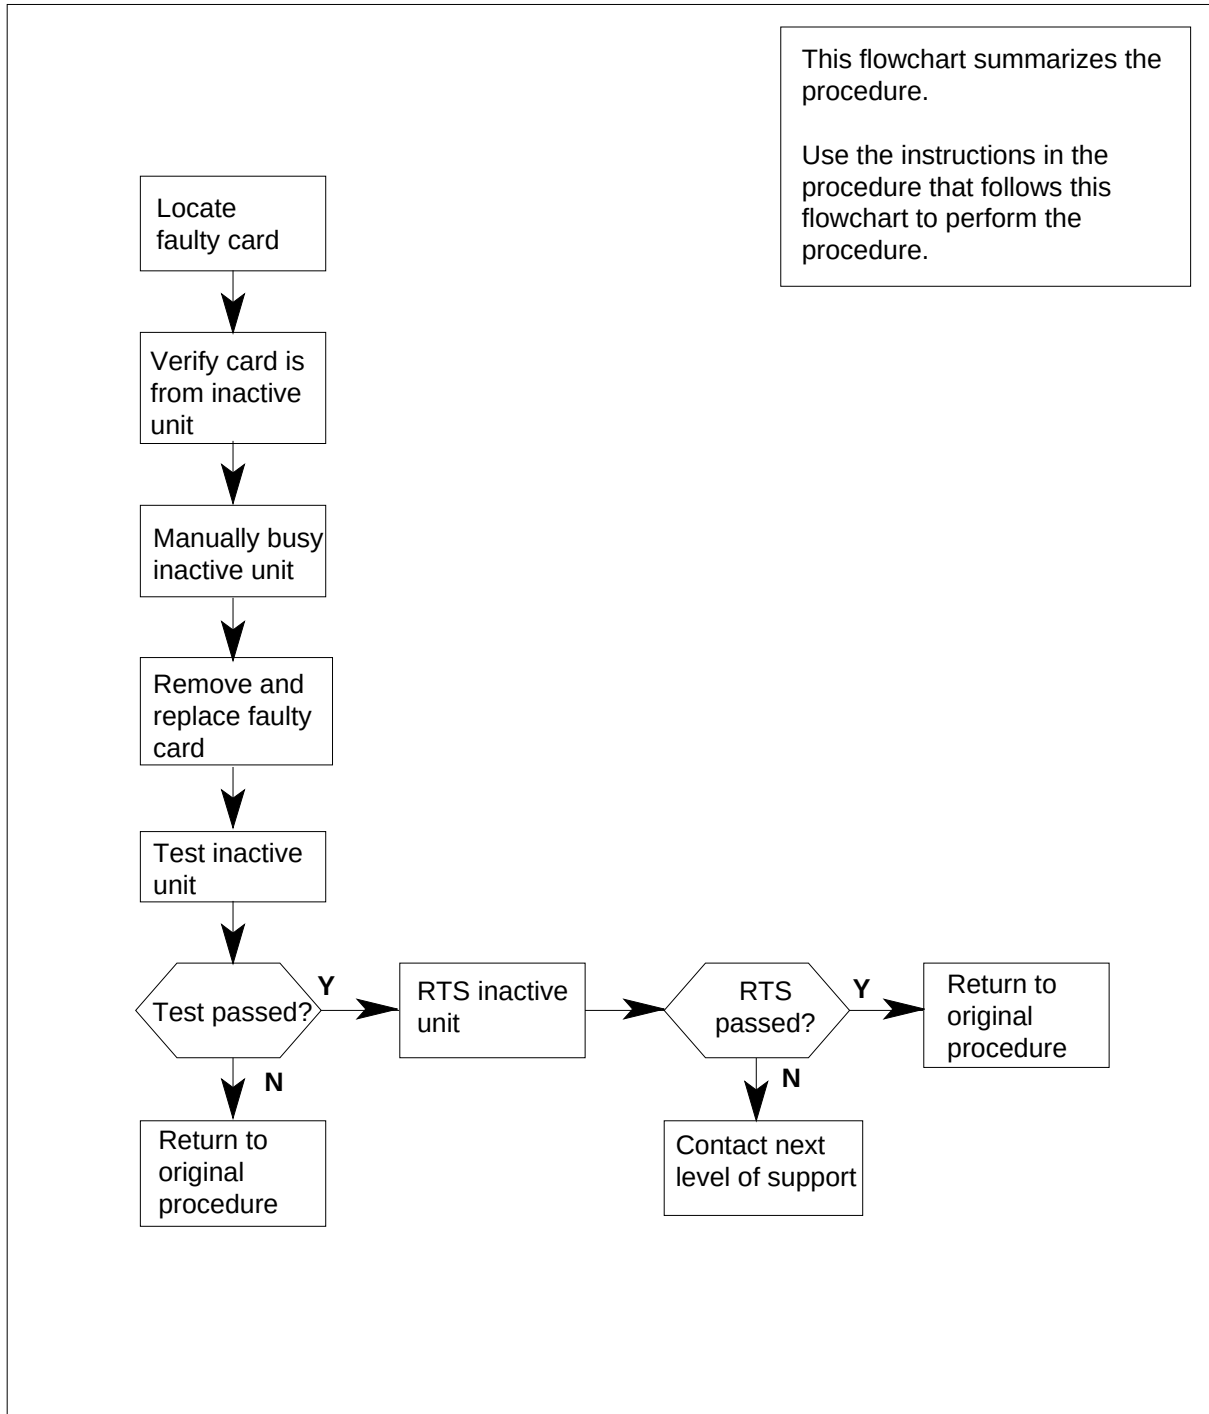

NTMX75 in an RSC-S (PCM-30) Model A RCO2 (continued)

Replacing an NTMX75 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX75 replacement card. Verify the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.
where
rco2_no
is the number of the RCO2 to be busied
Example of a MAP display:

NTMX75
in an RSC-S (PCM-30) Model A RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RC02	.	.	.	.	.
RC02			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0		2	0	2	25	
2 Post_	RC02	0	0		0	0	1	1	
3 ListSet									
4	RC02	0 InSv	Links_00S:	CSide	1,	PSide	1		
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Determine from the MAP display if the card to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing **>SWACT** and pressing the Enter key.
- Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 6 Confirm the system prompt by typing **>YES** and pressing the Enter key.
- After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

NTMX75 in an RSC-S (PCM-30) Model A RCO2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.

At the RCE frame

9



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.


- 10 Unseat the NTMX73 card.
- 11 Remove the NTMX75 card as shown in the following figures.
- a Locate the card to be removed on the appropriate shelf.

NTMX75

in an RSC-S (PCM-30) Model A RCO2 (continued)

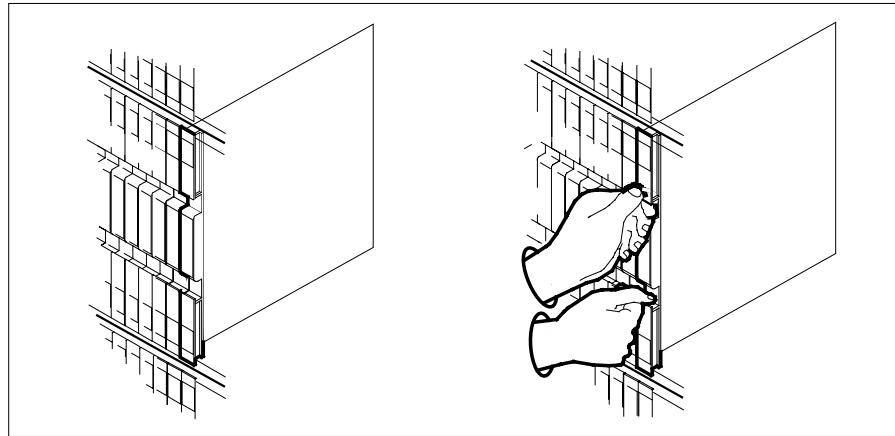


- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

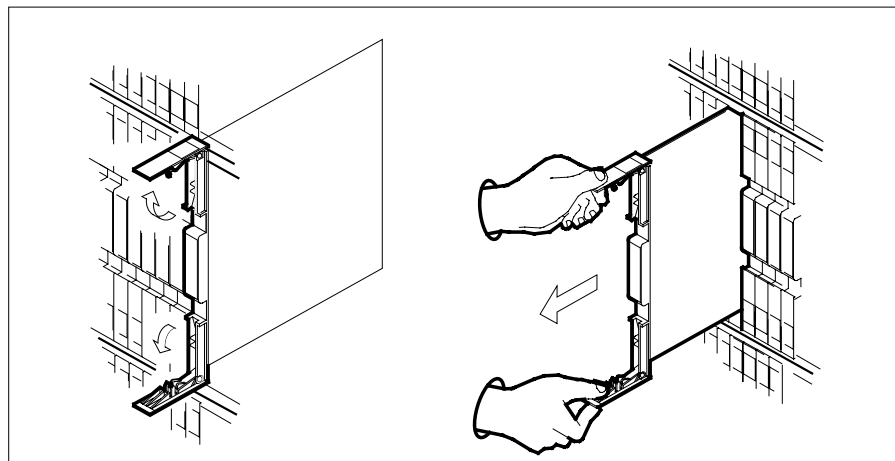


- c** Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 12** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX75 in an RSC-S (PCM-30) Model A RCO2 (continued)

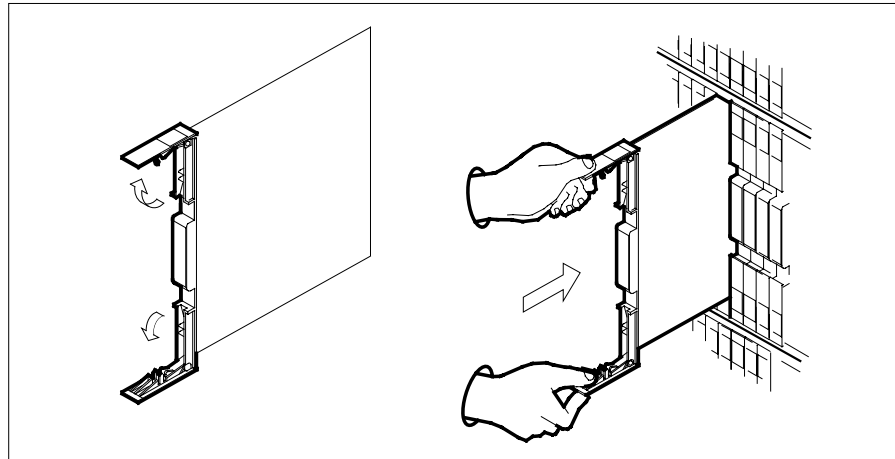

- 13** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

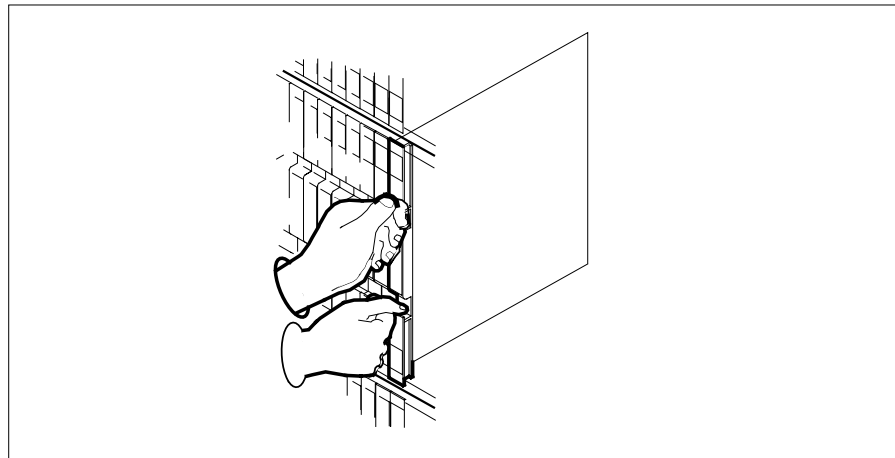

- 14** Reseat the NTMX73 card.

At the MAP terminal

- 15** Load the inactive RCO2 by typing
>LOADPM UNIT unit_no CC
and pressing the Enter key.
where

NTMX75

in an RSC-S (PCM-30) Model A RCO2 (continued)

- unit_no**
is the number of the RCO2 busied in step 8
- | If LOADPM | Do |
|-----------|---------|
| passed | step 16 |
| failed | step 22 |
- 16** Test the inactive RCO2 unit by typing
>TST UNIT unit_no
 and pressing the Enter key.
where
unit_no
 is the number of the RCO2 unit loaded in step 15
- | If TST | Do |
|--------|---------|
| passed | step 17 |
| failed | step 21 |
- 17** Use the following information to determine what step to go to next in this procedure.
- | If you entered this procedure from | Do |
|------------------------------------|---------|
| alarm clearing procedures | step 21 |
| other | step 18 |
- 18** Return the inactive RCO2 unit to service by typing
>RTS UNIT rco2_unit_no
 and pressing the Enter key.
where
rco2_unit_no
 is the number of the RCO2 unit being returned to service
- | If RTS | Do |
|--------|---------|
| passed | step 19 |
| failed | step 21 |
- 19** Send any faulty cards for repair according to local procedure.
- 20** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 23.

NTMX75

in an RSC-S (PCM-30) Model A RCO2 (end)

- 21 Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 22 Obtain further assistance in replacing this card by contacting the personnel responsible for higher level of support.
- 23 You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX75 in an RSC-S (PCM-30) Model B RCO2

Application

Use this procedure to replace an NTMX75 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX75	AA	Enhanced Matrix

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX75 in an RSC-S (PCM-30) Model B RCO2 (continued)

Summary of card replacement procedure for an NTMX75 card in RSC-S RCO2

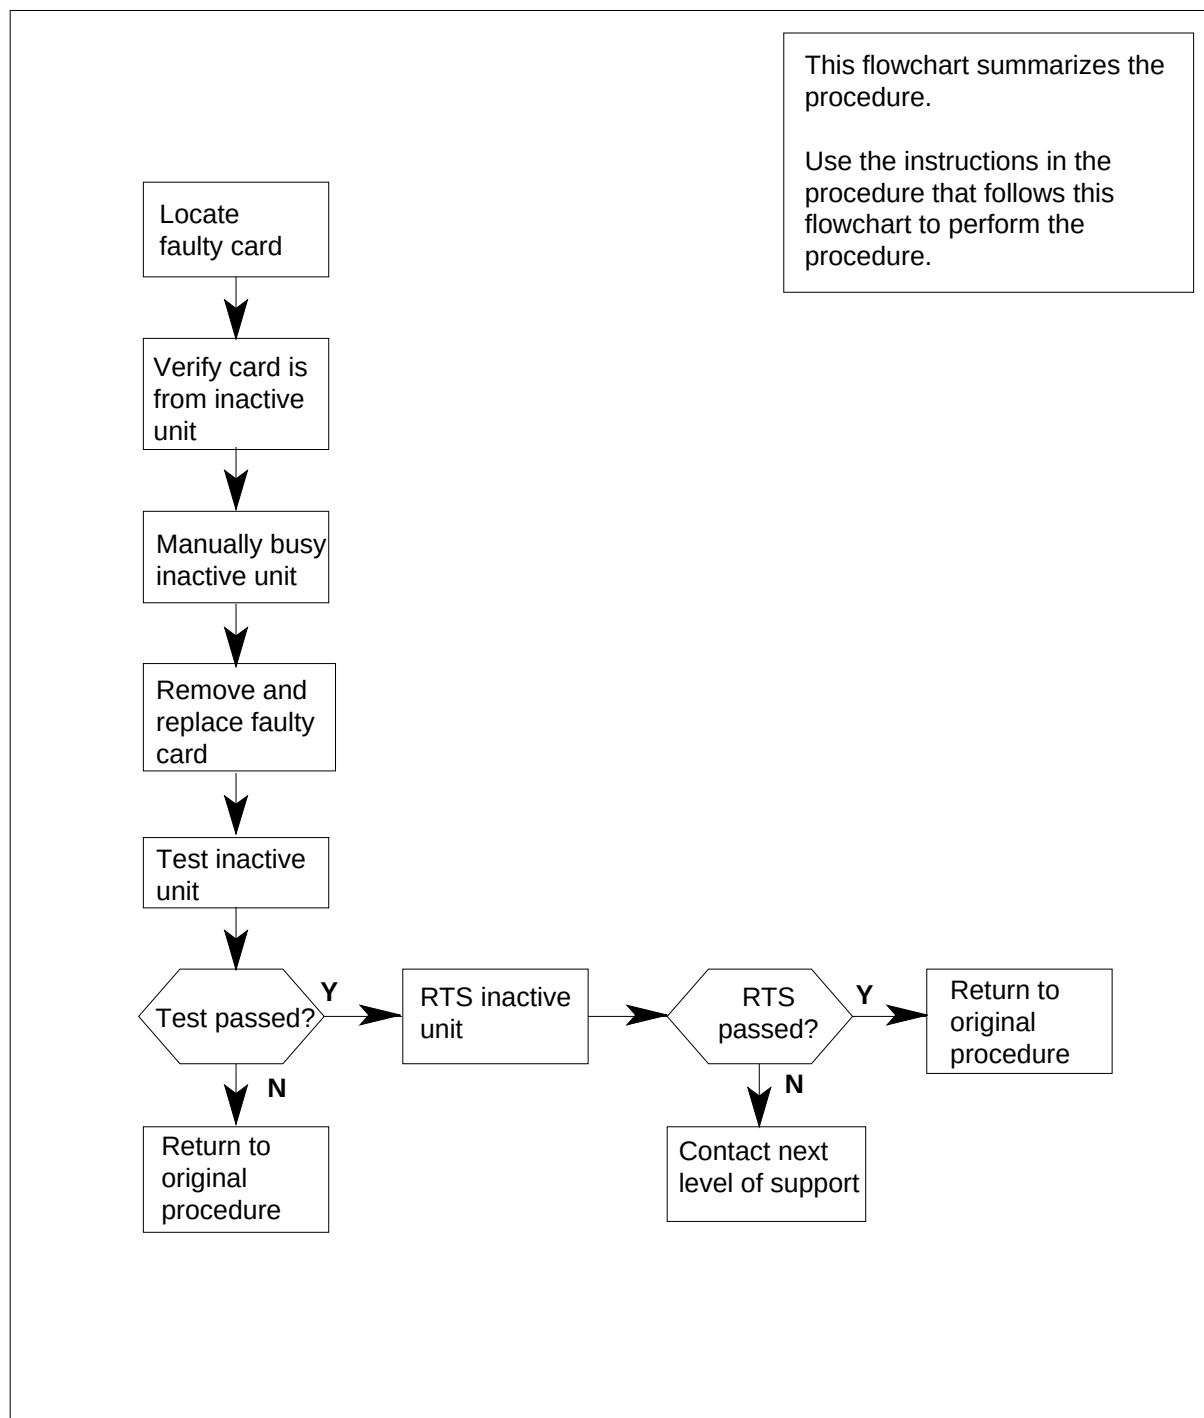

NTMX75 in an RSC-S (PCM-30) Model B RCO2 (continued)

Replacing an NTMX75 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX75 replacement card. Verify the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.
where
rco2_no
is the number of the RCO2 to be busied
Example of a MAP display:

NTMX75**in an RSC-S (PCM-30) Model B RCO2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RC02	.	.	.	.	.
RC02			SysB	ManB	OffL	CBsy	ISTb		InSv
0 Quit	PM	0	0		2	0	2		25
2 Post_	RC02	0	0		0	0	1		1
3 ListSet									
4	RC02	0 InSv	Links_00S:		CSide	1, PSide	1		
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Determine from the MAP display if the card to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
 and pressing the Enter key.
Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 6 Confirm the system prompt by typing
>YES
 and pressing the Enter key.
 After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words "Active unit—Do not touch." This sign should not be attached by magnets or tape.

NTMX75 in an RSC-S (PCM-30) Model B RCO2 (continued)

At the MAP terminal

- 8 Busy the inactive PM unit by typing
>bsy unit_no
and pressing the Enter key.
where
unit_no
is the number of the unit to be busied (0 or 1)
When both units are in-service, proceed to the next step.

At the RCE frame

9



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

- 10 Unseat the NTMX73 card.
- 11 Remove the NTMX75 card as shown in the following figures.
- a Locate the card to be removed on the appropriate shelf.

NTMX75
in an RSC-S (PCM-30) Model B RCO2 (continued)

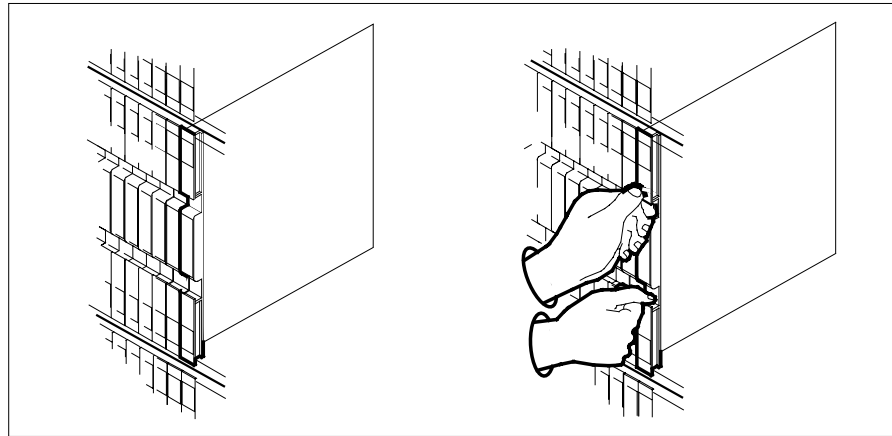


- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

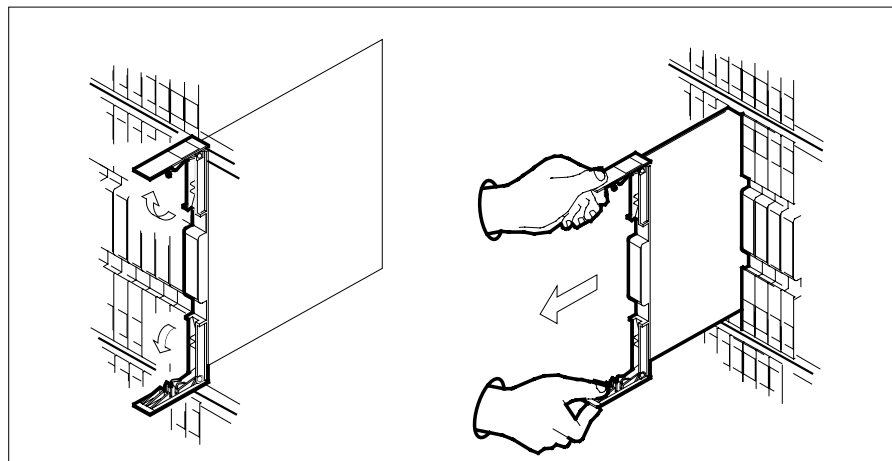


- c** Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 12** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX75 in an RSC-S (PCM-30) Model B RCO2 (continued)

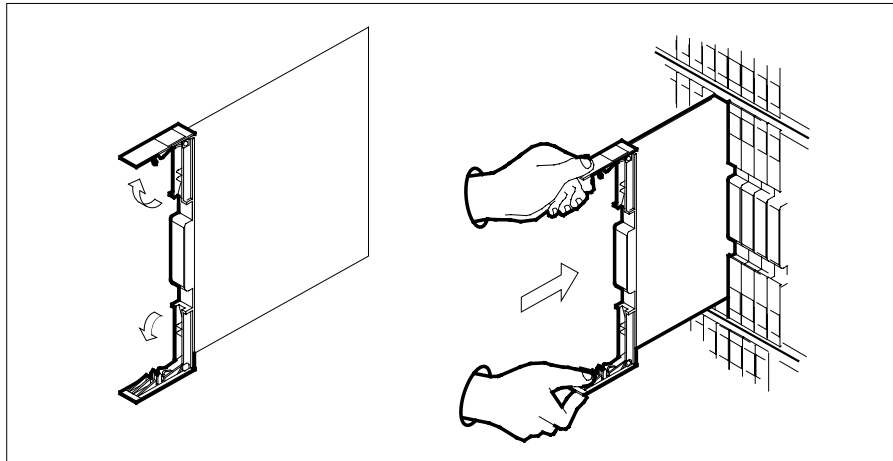

- 13** Seat and lock the card.
- Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - Close the locking levers.

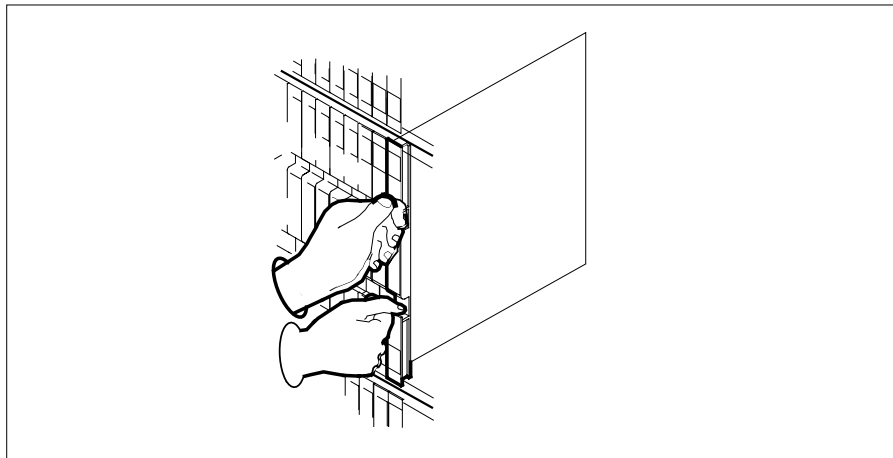

- 14** Reseat the NTMX73 card.

At the MAP terminal

- 15** Load the inactive RCO2 by typing
>LOADPM UNIT unit_no CC
and pressing the Enter key.
where

NTMX75**in an RSC-S (PCM-30) Model B RCO2** (continued)

	unit_no is the number of the RCO2 busied in step 8						
	<table> <tr> <th>If LOADPM</th><th>Do</th></tr> <tr> <td>passed</td><td>step 16</td></tr> <tr> <td>failed</td><td>step 22</td></tr> </table>	If LOADPM	Do	passed	step 16	failed	step 22
If LOADPM	Do						
passed	step 16						
failed	step 22						
16	Test the inactive RCO2 unit by typing >TST UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the RCO2 unit loaded in step 15						
	<table> <tr> <th>If TST</th><th>Do</th></tr> <tr> <td>passed</td><td>step 17</td></tr> <tr> <td>failed</td><td>step 21</td></tr> </table>	If TST	Do	passed	step 17	failed	step 21
If TST	Do						
passed	step 17						
failed	step 21						
17	Use the following information to determine what step to go to next in this procedure.						
	<table> <tr> <th>If you entered this procedure from</th><th>Do</th></tr> <tr> <td>alarm clearing procedures</td><td>step 21</td></tr> <tr> <td>other</td><td>step 18</td></tr> </table>	If you entered this procedure from	Do	alarm clearing procedures	step 21	other	step 18
If you entered this procedure from	Do						
alarm clearing procedures	step 21						
other	step 18						
18	Return the inactive RCO2 unit to service by typing >RTS UNIT rco2_unit_no and pressing the Enter key. <i>where</i> rco2_unit_no is the number of the RCO2 unit being returned to service						
	<table> <tr> <th>If RTS</th><th>Do</th></tr> <tr> <td>passed</td><td>step 19</td></tr> <tr> <td>failed</td><td>step 21</td></tr> </table>	If RTS	Do	passed	step 19	failed	step 21
If RTS	Do						
passed	step 19						
failed	step 21						
19	Send any faulty cards for repair according to local procedure.						
20	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 23.						

NTMX75

in an RSC-S (PCM-30) Model B RCO2 (end)

- 21** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 22** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level of support.
- 23** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX75 in an SMA2

Application

Use this procedure to replace an NTMX75 card in an SMA2.

PEC	Suffixes	Name
NTMX75	BA	Enhanced Matrix

Common procedures

The following procedures are referenced in this procedure:

- “Locating a faulty card in an SMA2”
- replacing a card
- returning a card


Do not go to a common procedure unless directed to do so in the step-action procedure.

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

NTMX75 in an SMA2 (continued)

Summary of card replacement procedure for an NTMX75 card in an SMA2

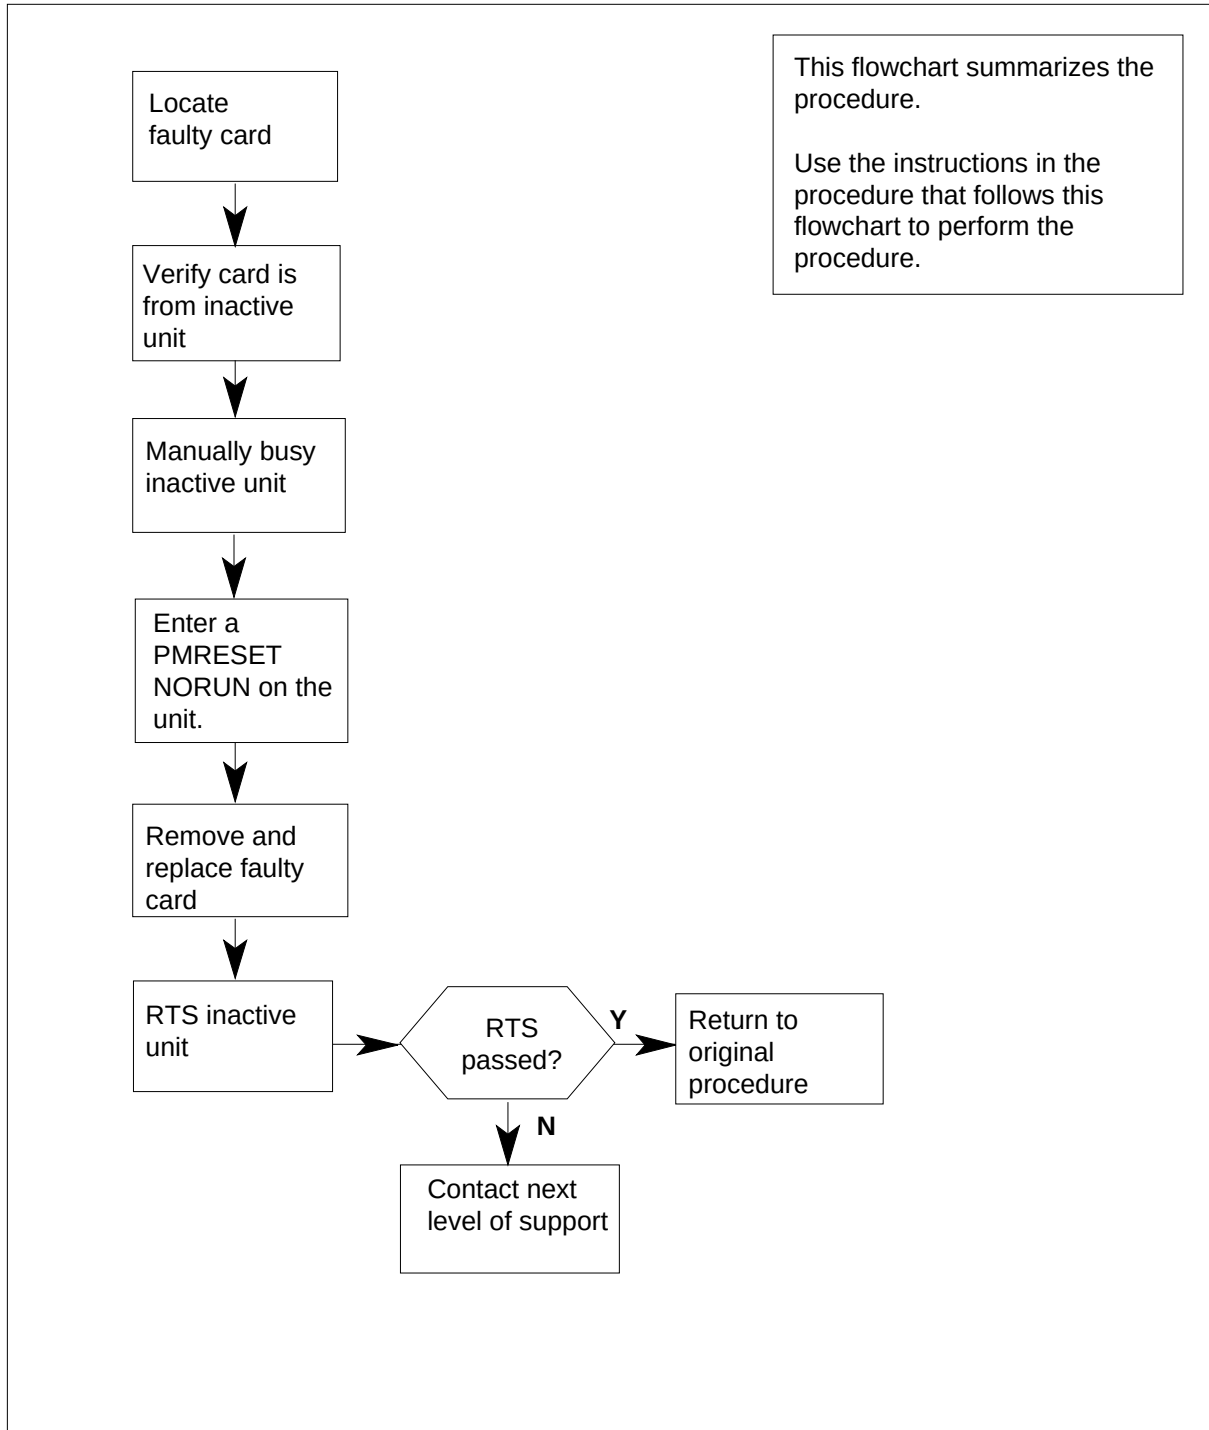

NTMX75 in an SMA2 (continued)

Replacing an NTMX75 card in an SMA2

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Ensure you know the physical location of the faulty card.

If card location is	Do
known	step 4
unknown	step 3

- 3 Perform the procedure "Locating a faulty card in an SMA2."
- 4



CAUTION

Loss of service

When replacing a card in the SMA2, ensure the unit in which you are replacing the card is *inactive* and the mate unit is *active*.

Obtain an NTMX75 replacement card. Ensure the replacement card has the same product engineering code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 5 Set the MAP display to the PM level and post the SMA2 by typing
>MAPCI;MTC;PM;POST SMA2 sma2_no
 and pressing the Enter key.

where

sma2_no

is the number of the SMA2 to be busied

Example of a MAP display:

SMA2	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2	0	ISTb	Links_00S:	CSide	0,	PSide	0
Unit0:	Act	InSv					
Unit1:	InAct	IsTb					

NTMX75 in an SMA2 (continued)

6	Observe the MAP display and determine if the faulty card is in the active or the inactive unit.		
	If faulty card is on	Do	
	active unit	step 7	
	inactive unit	step 11	
7	Switch the processing activity (SWACT) to the inactive unit by typing >SWACT and pressing the Enter key. A confirmation prompt for the SWACT command is displayed at the MAP terminal.		
	If prompt indicates	Do	
	cannot continue at this time	step 8	
	can continue at this time	step 9	
8	Reject the prompt to SWACT of the units by typing >NO and pressing the Enter key. The system discontinues the SWACT.		
9	Confirm the system prompt by typing >YES and pressing the Enter key. The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably. Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.		
	If the message is	Do	
	SWACT passed	step 11	
	SWACT failed Reason: XPM SWACTback	step 10	
	SWACT refused by SWACT Controller	step 10	
10	The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on		

NTMX75 in an SMA2 (continued)

the inactive unit before attempting to clear the alarm condition on the active unit.

Go to step 20.

At the frame or cabinet

- 11 Place a sign on the active unit bearing the words *Active unit—Do not touch*. Place this sign in an electrostatic discharge (ESD) bag. Do not attach the sign with magnets or tape.

At the MAP terminal

- 12 Busy the inactive PM unit by typing

>bsy INACTIVE

and pressing the Enter key.

- 13 Reset the inactive unit by typing

>PMRESET unit_no NORUN

and pressing the Enter key.

where

unit_no

is the number of the unit to be reset (0 or 1)

At the frame or cabinet

- 14



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

Perform the common replacing a card procedure in this document.

At the MAP terminal

- 15 Reset the inactive unit by typing

>PMRESET unit_no

and pressing the Enter key.

where

unit_no

is the number of the unit to be reset (0 or 1)

NTMX75
in an SMA2 (end)

- 16** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 19
other	step 17

- 17** Return the inactive SMA2 unit to service by typing
>RTS INACTIVE
and pressing the Enter key.

If RTS	Do
passed	step 18
failed	step 19

- 18** Go to the common returning a card procedure in this document.
Go to step 21.
- 19** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 20** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level of support.
- 21** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX76 in an RSC-M

Application

Use this procedure to replace an NTMX76 circuit card in a Remote Switching Center Multi-access (RSC-M) main shelf.

Note: In this section, RSC-M is referred to as RCO2 in the examples. When software outputs messages to the MAP terminal, the software does not differentiate between the two types of RCO2.

PEC	Suffixes	Name
NTMX76	AA, AB	Message and tones card

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX76 in an RSC-M (continued)

Summary of Replacing an NTMX76 in an RSC-M

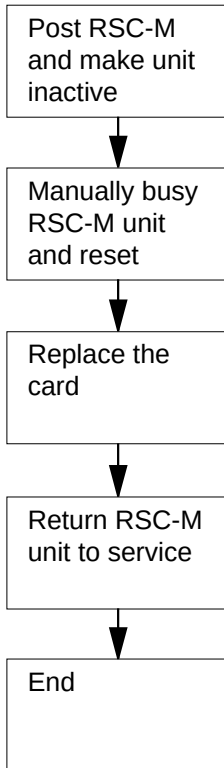

This procedure contains a flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX76 in an RSC-M (continued)

Replacing an NTMX76 in an RSC-M

At the MAP display

- 1 Proceed if:
 - a step in a maintenance procedure directs you to this card replacement procedure
 - you use the procedure to verify or accept cards
 - your maintenance support group directs you to this procedure.
- 2



WARNING

Loss of service

When you replace a card in the RSC-M, make sure the unit in which you replace the card is *inactive*. Make sure that the mate unit is *active*.

Obtain an NTMX76 replacement circuit card. Make sure the replacement circuit card has the same product engineering code (PEC), and PEC suffix, as the circuit card you remove.

At the MAP terminal

- 3 Make sure the peripheral module (PM) level appears on the MAP display. To post the RSC-M/RCO2, type:

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 with the defective card(s)

Example of a MAP response:

NTMX76 in an RSC-M (continued)

```

RCO2          SysB      ManB      OffL      CBsy      ISTb      InSv
0 Quit        PM        0          0          2          0          2          25
2 Post_       RCO2      0          0          0          0          1          1
3 ListSet
4             RCO2      0 ISTb  Links_00S: CSide 1, PSide 1
5 TRNSL       Unit0:    Inact ISTb
6 TST         Unit1:    Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_

```

- 4 To determine the location of the RCO2, that contains the circuit card to replace, type:

>QUERYPM

and press the Enter key.

Example of a MAP response:

```

PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMS Equipped: 53 Loadname: UK00ADU6 EEPROM Load:
BNK0N205
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RCO2: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA

```

- 5 Determine the state of the RCO2 unit that associates with the circuit card to replace:

If the state of the RCO2 unit is	Do
active	step 6
inactive	step 8

- 6 To perform a Switch of Activity (SWACT) of the units, type:

>SWACT

and press the Enter key.

Example of a MAP response:

NTMX76

in an RSC-M (continued)

RC02 0 A Warm SwAct will be performed after
data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):

If	Do
the system prompts you to confirm a warm SWACT	step 7
the system rejects the SWACT	step 21

- 7 To confirm the command, type:

>YES

and press the Enter key.

Example of a MAP response:

```
Unit0:  Inact SysB Mtce
Unit1:  Act   ISTb
```

```
RC02 0      SwAct Passed
```

If the MAP response is	Do
SWACT passed	step 8
other	step 20

- 8 A maintenance flag (Mtce) can appear, that indicates system-initiated maintenance tasks are in progress. Wait until the flag disappears from the status lines for both RCO2 units before you proceed to the next step.

At the cabinet

- 9 Place a sign on the active unit that bears the words *Active unit-Do not touch*. Do not use magnets or tape to attach this sign.

- 10 To manually busy (ManB) the inactive unit, type:

>BSY INACTIVE

and press the Enter key.

Example of a MAP response:

NTMX76 in an RSC-M (continued)

```
RCO2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
Bsy INACTIVE
RCO2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passes	step 11
fails	step 20

- 11** To reset the inactive RCO2 unit, type:
>PMRESET UNIT unit_no NORUN
 and press the Enter key.
where
 unit_no
 is the inactive RCO2 unit number zero or one.

At the shelf

12



WARNING

Static electricity damage

Wear a wrist strap that connects to the wrist-strap grounding point of the modular supervisory panel (MSP) to handle circuit cards. The wrist strap protects the cards against static electricity damage

Locate the circuit card you want to replace.

Note: The NTMX76 circuit cards are in slot 8 of unit zero, and slot 20 of unit one.

- 13** To replace the card use the common replacing a card procedure in this document. When the procedure is complete, return to this point.
Note: If the circuit card you replace has switches, make sure the switches on the replacement circuit card have the same settings.

At the MAP terminal

- 14** To reset the inactive unit, type:
>PMRESET UNIT unit_no
 and press the Enter key.
where

NTMX76

in an RSC-M (end)

unit_no

is the number of the RCO2 unit busied in step 10

	If PMRESET	Do
	passes	step 15
	fails	step 20
15	Use the following information to determine the next step in this procedure.	
	If you enter this procedure from	Do
	alarm clearing procedures	step 19
	other	step 16
16	To return the inactive unit to service, type: >RTS INACTIVE and press the Enter key.	
	If the RTS command	Do
	passes	step 17
	fails	step 20
17	Remove the sign from the active unit.	
18	Go to the common returning a card procedure in this document. Go to step 22.	
19	Return to <i>Alarm Clearing Procedures</i> or other procedure that direct you to this procedure. Continue as directed.	
20	For additional help, contact the next level of maintenance.	
21	For additional help with SWACT, contact the next level of maintenance. Note: The system can recommend that you use the SWACT command with the FORCE option. Consult office personnel to determine if you must use the FORCE option.	
22	The procedure is complete.	

**NTMX76
in an RSC RCC2**

Application

Use this procedure to replace the following card in an RSC RCC2.

PEC	Suffixes	Name
NTMX76	AA, AB	Message and Tone card

If you cannot identify the PEC, suffix, and shelf or frame for the card you want to replace, refer to the Index for a list of cards, shelves, and frames documented in this card replacement NTP.

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX76 in an RSC RCC2 (continued)

Summary of card replacement procedure for an NTMX76 card in RSC RCC2

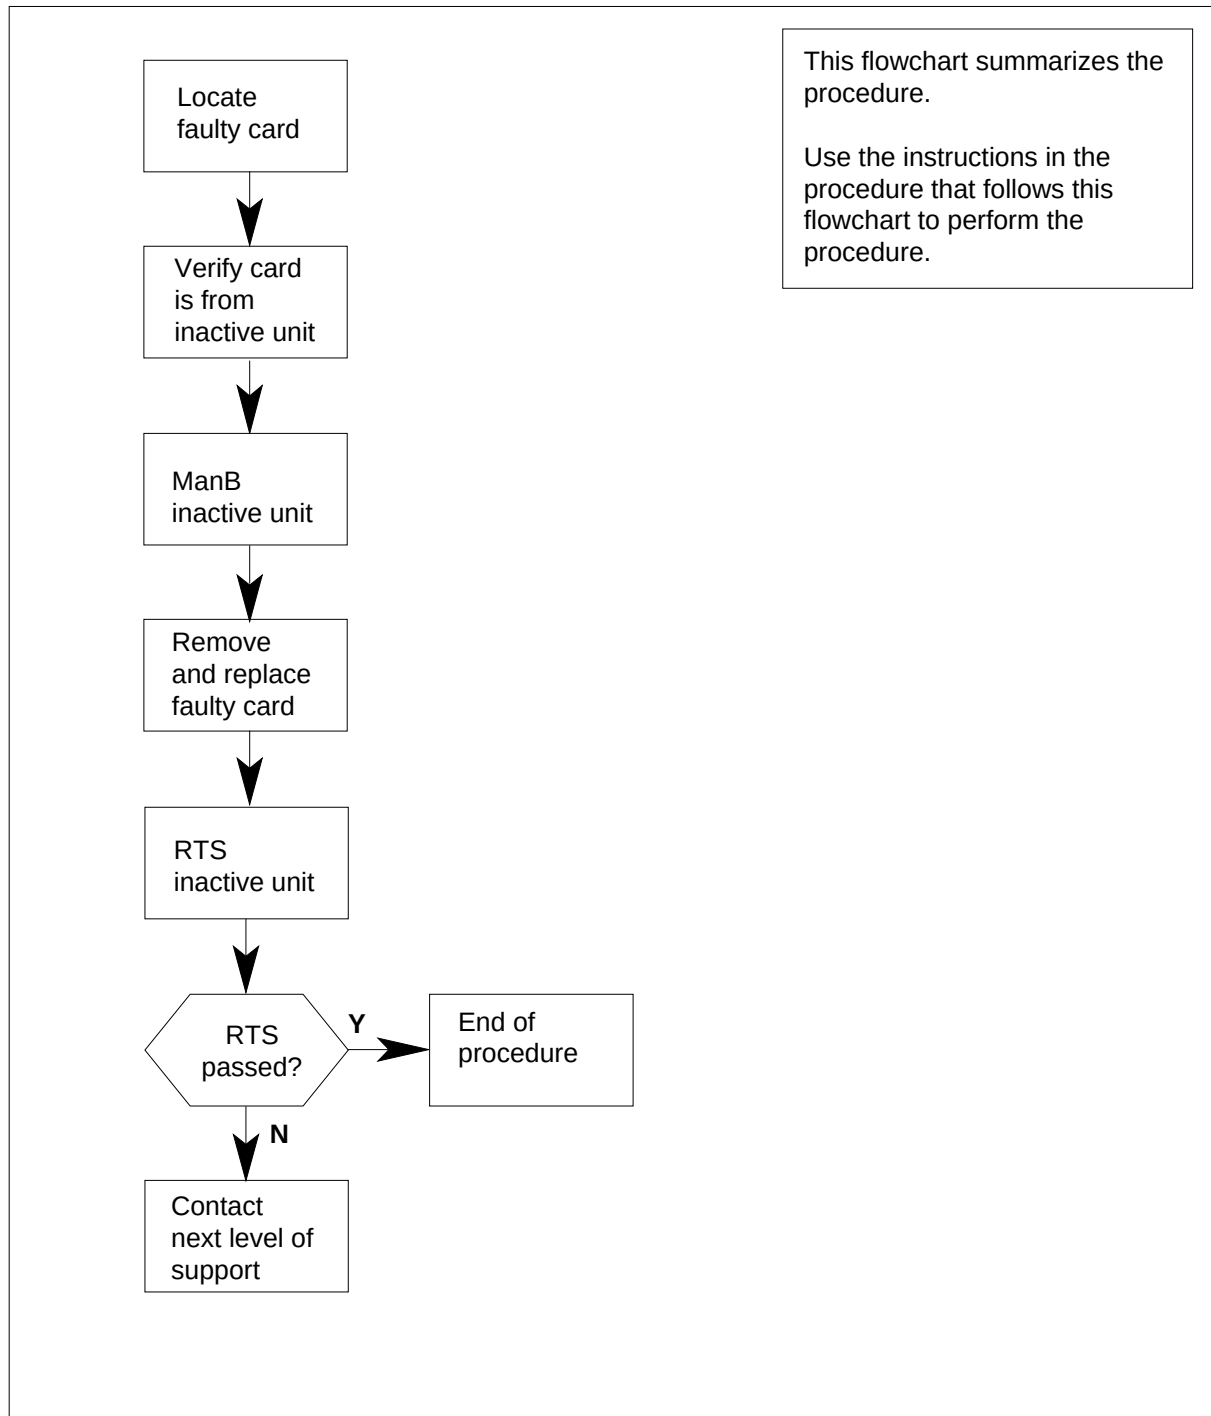

NTMX76 in an RSC RCC2 (continued)

Replacing an NTMX76 card in RSC RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX76 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 to be busied (0 or 1)

Example of a MAP response:

```
RCC2  0 ISTb Links_OOS: CSide 1, PSide
Unit0:  Inact      ISTb
Unit1:  Act       InSv
```

- 4 Determine the location of the RCC2 containing the faulty NTMX76 card by typing

>QUERYPM

and pressing the Enter key.

Example of a MAP response:

NTMX76 in an RSC RCC2 (continued)

```
PM Type: RCC2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname: CRI07BRI1 EEPROM Load:
MX77NB03
WARM SWACT is supported and available
RCC2 0 is included in the REX schedule.
REX on RCC2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC 00 C02 RSC 00 05 RCC2: 000 MX85AA
RSC 00 C02 RSC 00 47 EXT:LEFT 01:13 MX86AA
```

- 5 Determine the state of the RCC2 unit associated with the faulty NTMX76 card.

If the state of the RCC2 unit is	Do
active	step 6
inactive	step 8

- 6 Switch activity of the units by typing

>SWACT

and pressing the Enter key.

Example of a MAP response:

```
RCC2 0      A Warm SwAct will be performed after
             data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):
```

If	Do
you are prompted to confirm a warm SWACT	step 7
the system rejects the SWACT	step 21

- 7 Confirm the command by typing

>YES

and pressing the Enter key.

Example of a MAP response:

NTMX76 in an RSC RCC2 (continued)

```
Unit0:  Inact SysB  Mtce
Unit1:  Act   ISTb
```

```
RCC2 0      SwAct Passed
```

If the MAP response is	Do
SWACT passed	step 8
anything else	step 20

- 8** A maintenance flag (Mtce) may appear, indicating system-initiated maintenance tasks are in progress. Wait until the flag disappears from the status lines for both RCC2 units before proceeding to the next step.

At the RSCE frame

- 9** Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 10** Busy the inactive PM unit by typing
>bsy INACTIVE
 and pressing the Enter key.

Example of a MAP response:

```
RCC2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
Bsy INACTIVE
RCC2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passed	step 11
failed	step 20

- 11** Reset the inactive RCC2 unit to the ROM level by typing
>PMRESET UNIT rcc2_unit_no NORUN
 and pressing the Enter key.
where
rcc2_unit_no
 is the number of the inactive RCC2 unit (0 or 1)

NTMX76 in an RSC RCC2 (continued)

At the RSCE frame

12



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the CRSC cabinet. This protects the equipment against damage caused by static electricity.

Locate the circuit card to be replaced.

- 13 Replace the card using the common replacing a card procedure in this document. When you have completed the procedure, return to this point.

Note: If the circuit card you are replacing has switches, ensure the switches on the replacement circuit card have the same settings as the card replaced.

At the MAP terminal

- 14 Reset the inactive unit by typing

>PMRESET UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the RCC2 unit busied in step 10

If PMRESET	Do
passed	step 15
failed	step 20

- 15 Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 19
other	step 16

- 16 Return the inactive RCC2 unit to service by typing

>RTS INACTIVE

NTMX76
in an RSC RCC2 (end)

and pressing the Enter key.

If the RTS command	Do
passed	step 17
failed	step 20

- 17** Remove the sign from the active unit.
- 18** Go to the common returning a card procedure in this document.
Go to step 22.
- 19** Return to *Alarm Clearing Procedures* or other procedure that directed you to this procedure and continue as directed.
- 20** For further assistance, contact the personnel responsible for the next level of support.
- 21** For further assistance with switch of activity, contact the personnel responsible for the next level of support.
Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 22** You have successfully completed this procedure.

NTMX76 in an RSC-S (DS-1) Model A RCC2

Application

Use this procedure to replace the following card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX76	AA	Message and Tone card

If you cannot identify the PEC, suffix, and shelf or frame for the card you want to replace, refer to the Index for a list of cards, shelves, and frames documented in this card replacement NTP.

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX76 in an RSC-S (DS-1) Model A RCC2 (continued)

Summary of card replacement procedure for an NTMX76 card in RSC-S RCC2

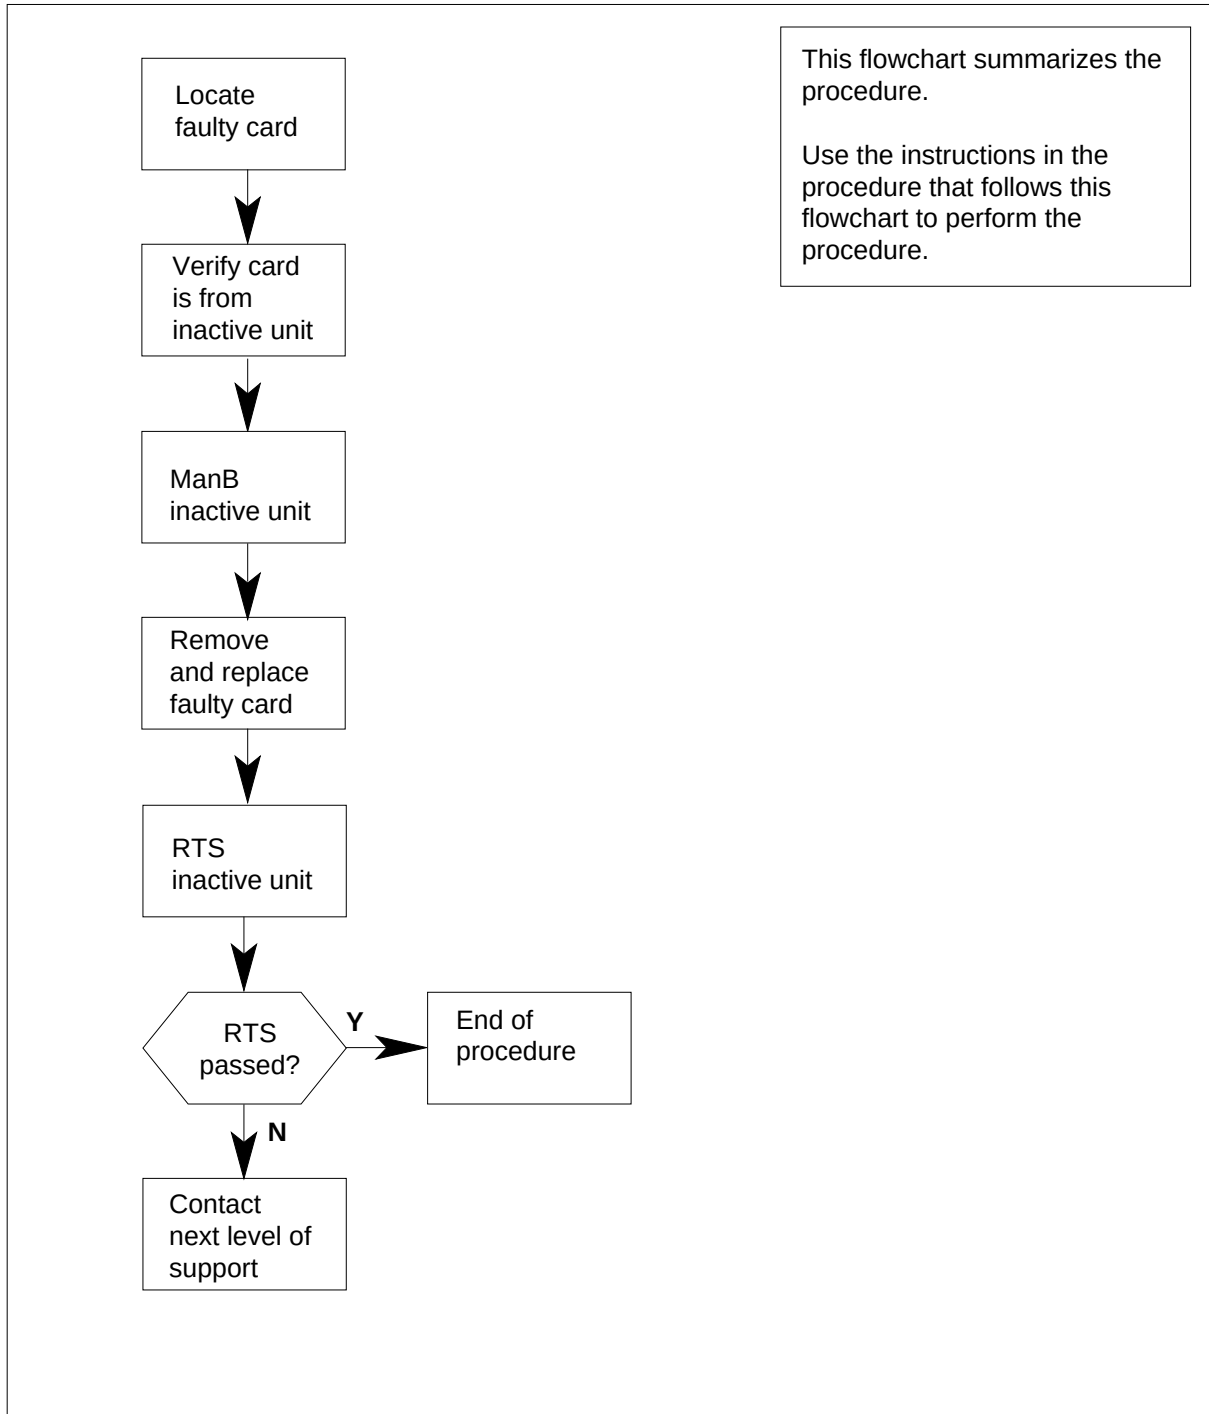

NTMX76 in an RSC-S (DS-1) Model A RCC2 (continued)

Replacing an NTMX76 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX76 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 to be busied (0 or 1)

Example of a MAP response:

```
RCC2  0 ISTb Links_00S: CSide 1, PSide
Unit0: Inact  ISTb
Unit1: Act   InSv
```

- 4 Determine the location of the RCC2 containing the faulty NTMX76 card by typing

>QUERYPM

and pressing the Enter key.

Example of a MAP response:

NTMX76

in an RSC-S (DS-1) Model A RCC2 (continued)

PM Type: RCC2 PM No.: 0 PM Int. No.: 9 Node_No: 24
 PMs Equipped: 53 Loadname: CRI07BRI1 EEPROM Load:
 MX77NB03
 WARM SWACT is supported and available
 RCC2 0 is included in the REX schedule.
 REX on RCC2 0 has not been performed.
 Node Status: {OK, FALSE}
 Unit 0 Act, Status: {OK, FALSE}
 Unit 1 Inact, Status: {OK, FALSE}
 Site Flr RPos Bay_id Shf Description Slot EqPEC
 RSC0 00 C02 RSC 00 05 RCC2: 000 MX85AA
 RSC0 00 C02 RSC 00 47 EXT:LEFT 01:13 MX86AA

- 5 Determine the state of the RCC2 unit associated with the faulty NTMX76 card..

If the RCC2 unit is	Do
active	step 6
inactive	step 8

- 6 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT

and pressing the Enter key.

and pressing the Enter key.

Example of a MAP response:

RCC2 0 A Warm SwAct will be performed after
 data sync of active terminals.
 Please confirm ("YES", "Y", "NO", or "N"):

If	Do
you are prompted to confirm a warm SWACT	step 7
the system rejects the SWACT	step 20

- 7 Confirm the system prompt by typing
>YES

and pressing the Enter key.

Example of a MAP response:

NTMX76

in an RSC-S (DS-1) Model A RCC2 (continued)

```
Unit0:  Inact SysB Mtce
Unit1:  Act   ISTb
```

```
RCC2 0      SwAct Passed
```

If the MAP response is	Do
SWACT passed	step 8
anything else	step 19

At the RCE frame

- 8 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 9 Busy the inactive PM unit by typing
>bsy INACTIVE
 and pressing the Enter key.
- 10 Reset the inactive RCC2 unit to the ROM level by typing
>PMRESET UNIT rcc2_unit_no NORUN
 and pressing the Enter key.
where
rcc2_unit_no
 is the number of the inactive RCC2 unit (0 or 1)

At the RCE frame

11



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Locate the circuit card to be replaced.

- 12 Replace the card using the common replacing a card procedure in this document. When you have completed the procedure, return to this point.

Note: If the circuit card you are replacing has switches, ensure the switches on the replacement circuit card have the same settings as the card replaced.

NTMX76

in an RSC-S (DS-1) Model A RCC2 (end)

At the MAP terminal

- 13** Reset the inactive RCC2 unit by typing

>PMRESET UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the RCC2 busied in step 9

If PMRESET	Do
passed	step 14
failed	step 19

- 14** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 18
other	step 15

- 15** Return the inactive RCC2 unit to service by typing

>RTS INACTIVE

and pressing the Enter key.

If RTS	Do
passed	step 16
failed	step 19

- 16** Remove the sign from the active unit.

- 17** Go to the common returning a card procedure in this document.

Go to step 21.

- 18** Return to *Alarm Clearing Procedures* or other procedure that directed you to this procedure and continue as directed.

- 19** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

- 20** For further assistance with switch of activity, contact the personnel responsible for the next level of support.

- 21** You have successfully completed this procedure.

NTMX76 in an RSC-S (DS-1) Model B RCC2

Application

Use this procedure to replace the following card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX76	AA	Message and Tone card

If you cannot identify the PEC, suffix, and shelf or frame for the card you want to replace, refer to the Index for a list of cards, shelves, and frames documented in this card replacement NTP.

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX76 in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for an NTMX76 card in RSC-S RCC2

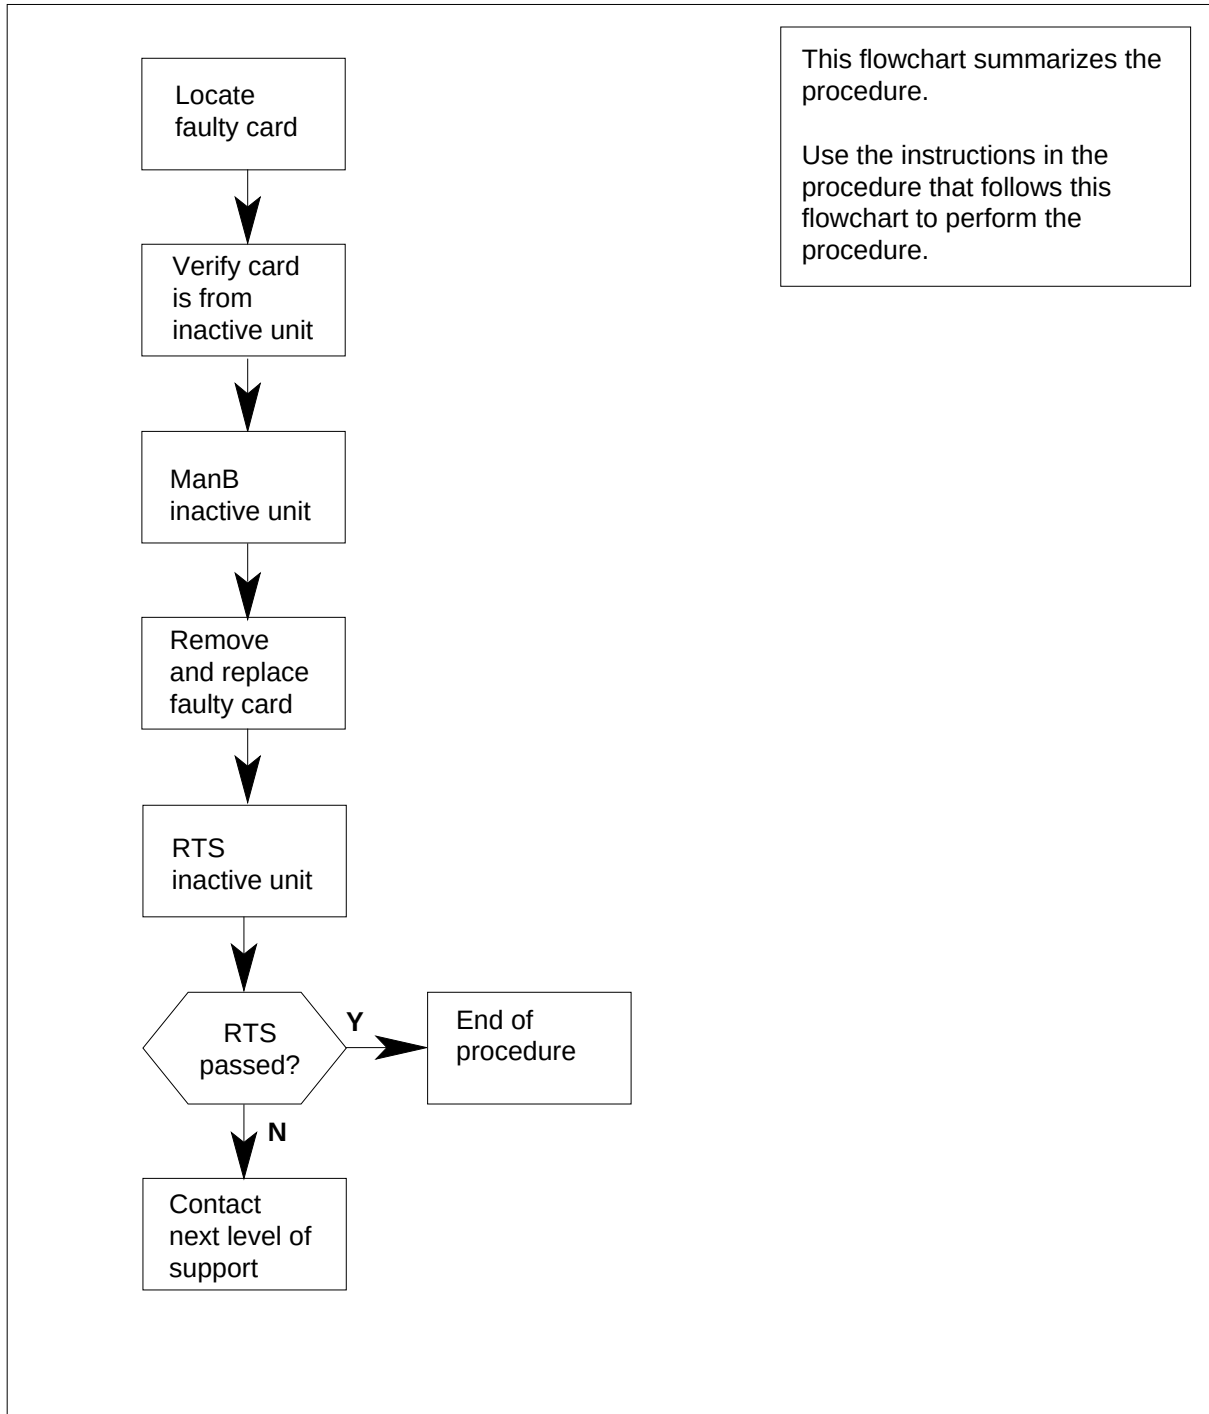

NTMX76 in an RSC-S (DS-1) Model B RCC2 (continued)

Replacing an NTMX76 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX76 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 to be busied (0 or 1)

Example of a MAP response:

```
RCC2  0 ISTb Links_00S: CSide 1, PSide
Unit0: Inact  ISTb
Unit1: Act   InSv
```

- 4 Determine the location of the RCC2 containing the faulty NTMX76 card by typing

>QUERYPM

and pressing the Enter key.

Example of a MAP response:

NTMX76

in an RSC-S (DS-1) Model B RCC2 (continued)

```

PM Type: RCC2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname: CRI07BRI1 EEPROM Load:
MX77NB03
WARM SWACT is supported and available
RCC2 0 is included in the REX schedule.
REX on RCC2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC0 00 C02 RSC 00 05 RCC2: 000 MX85AA
RSC0 00 C02 RSC 00 47 EXT:LEFT 01:13 MX86AA

```

- 5 Determine the state of the RCC2 unit associated with the faulty NTMX76 card..

If the RCC2 unit is	Do
active	step 6
inactive	step 8

- 6 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT

and pressing the Enter key.

and pressing the Enter key.

Example of a MAP response:

```

RCC2 0      A Warm SwAct will be performed after
            data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):

```

If	Do
you are prompted to confirm a warm SWACT	step 7
the system rejects the SWACT	step 20

- 7 Confirm the system prompt by typing
>YES

and pressing the Enter key.

Example of a MAP response:

NTMX76

in an RSC-S (DS-1) Model B RCC2 (continued)

```
Unit0:   Inact SysB  Mtce
Unit1:   Act   ISTb
```

```
RCC2 0      SwAct Passed
```

If the MAP response is	Do
SWACT passed	step 8
anything else	step 19

At the RCE frame

- 8 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 9 Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.
- 10 Reset the inactive RCC2 unit to the ROM level by typing
>PMRESET UNIT rcc2_unit_no NORUN
and pressing the Enter key.
where
rcc2_unit_no
is the number of the inactive RCC2 unit (0 or 1)

At the RCE frame

11



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Locate the circuit card to be replaced.

NTMX76

in an RSC-S (DS-1) Model B RCC2 (continued)

- 12** Replace the card using the common replacing a card procedure in this document. When you have completed the procedure, return to this point.

Note: If the circuit card you are replacing has switches, ensure the switches on the replacement circuit card have the same settings as the card replaced.

At the MAP terminal

- 13** Reset the inactive RCC2 unit by typing

>PMRESET UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the RCC2 busied in step 9

If PMRESET	Do
passed	step 14
failed	step 19

- 14** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 18
other	step 15

- 15** Return the inactive RCC2 unit to service by typing

>RTS INACTIVE

and pressing the Enter key.

If RTS	Do
passed	step 16
failed	step 19

- 16** Remove the sign from the active unit.

- 17** Go to the common returning a card procedure in this document.

Go to step 21.

- 18** Return to *Alarm Clearing Procedures* or other procedure that directed you to this procedure and continue as directed.

- 19** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

NTMX76

in an RSC-S (DS-1) Model B RCC2 (end)

- 20 For further assistance with switch of activity, contact the personnel responsible for the next level of support.
- 21 You have successfully completed this procedure.

NTMX76
in an RSC-S (PCM-30) Model A RCO2

Application

Use this procedure to replace an NTMX76 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX76	AA, AB	Message and Tone card

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX76 in an RSC-S (PCM-30) Model A RCO2 (continued)

Summary of card replacement procedure for an NTMX76 card in RSC-S RCO2

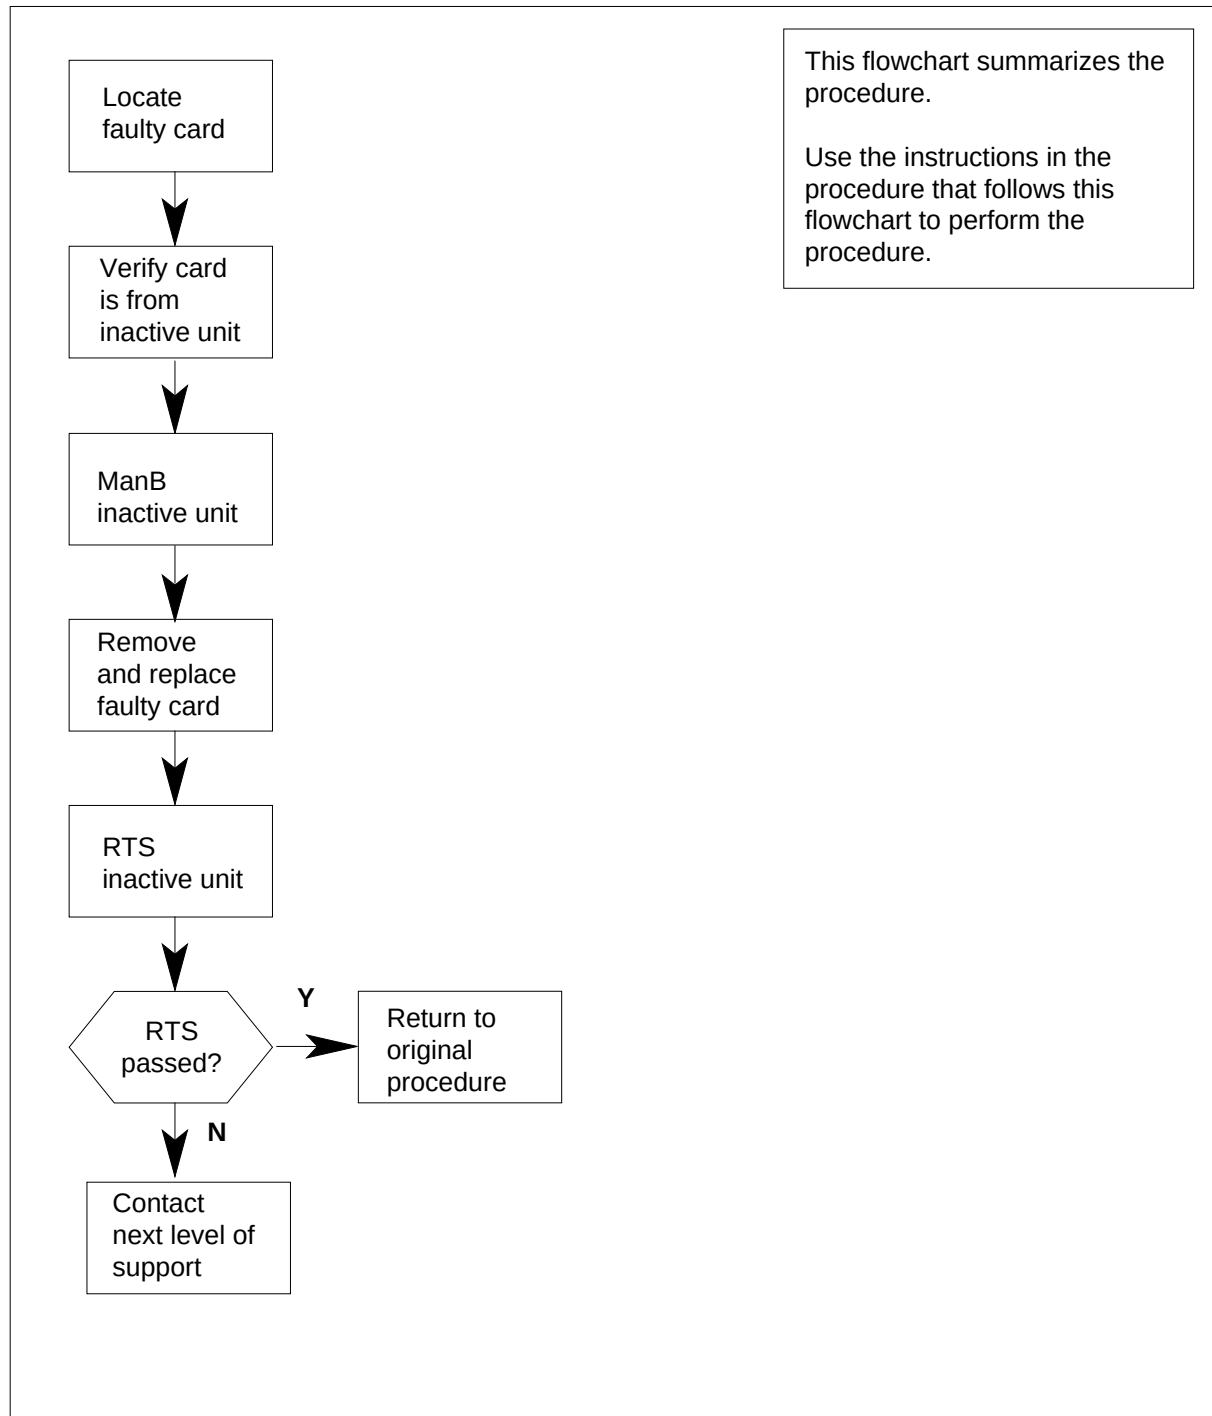

NTMX76 in an RSC-S (PCM-30) Model A RCO2 (continued)

Replacing an NTMX76 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX76 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing

>MAPCI;MTC;PM;POST RCO2 rco2_no

and pressing the Enter key.

where

rco2_no

is the number of the RCO2 with the faulty card(s)

Example of a MAP display:

NTMX76

in an RSC-S (PCM-30) Model A RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCO2	.	.	.	.	.
RCO2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	2	0	2	25		
2 Post_	RCO2	0	0	0	0	1	1		
3 ListSet									
4	RCO2	0	ISTb	Links_00S:	CSide	1, PSide	1		
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Determine the location of the RCO2 containing the circuit card you are replacing by typing

>QUERYPM

and pressing the Enter key.

Example of a MAP response:

```
PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname: UK00ADU6 EEPROM Load:
BNK0N205
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RCO2: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA
```

- 5 By observing the MAP display, be sure that the card to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 6

NTMX76

in an RSC-S (PCM-30) Model A RCO2 (continued)

	If faulty card is on	Do
	inactive unit	step 9
6	Switch the processing activity (SWACT) to the inactive unit by typing >SWACT and pressing the Enter key. <i>Example of a MAP response:</i> RCO2 0 A Warm SwAct will be performed after data sync of active terminals. Please confirm ("YES", "Y", "NO", or "N"): Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.	
7	Confirm the system prompt by typing >YES and pressing the Enter key. and pressing the Enter key. <i>Example of a MAP response:</i> Unit0: Inact SysB Mtce Unit1: Act ISTb RCO2 0 SwAct Passed	
	If the MAP response is	Do
	SWACT passed	step 8
	anything else	step 24
8	A maintenance flag (Mtce) may appear, indicating system-initiated maintenance tasks are in progress. Wait until the flag disappears from the status lines for both RCO2 units before proceeding to the next step.	
At the RCE frame		
9	Put a sign on the active unit bearing the words <i>Active unit—Do not touch</i> . This sign should not be attached by magnets or tape.	

NTMX76

in an RSC-S (PCM-30) Model A RCO2 (continued)

At the MAP terminal

- 10 Busy the inactive PM unit by typing

>bsy INACTIVE

and pressing the Enter key.

Example of a MAP response:

```
RCO2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
Bsy INACTIVE
RCO2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passed	step 11
failed	step 24

- 11 Reset the inactive RCO2 unit by typing

>PMRESET UNIT unit_no NORUN

and pressing the Enter key.

where

unit_no

is the number of the inactive RCO2 unit (0 or 1)

At the RCE frame

- 12



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

NTMX76 in an RSC-S (PCM-30) Model A RCO2 (continued)

13


**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Remove the NTMX76 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

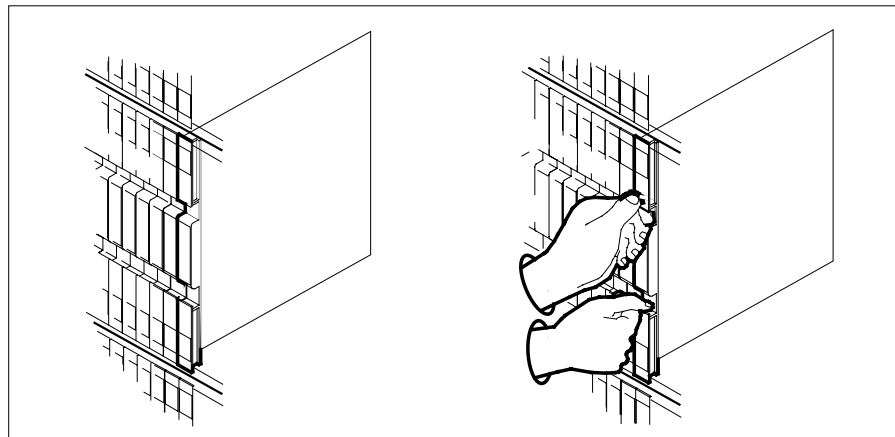

- b** Open the locking levers on the card to be replaced and gently pull the card towards you until it clears the shelf.

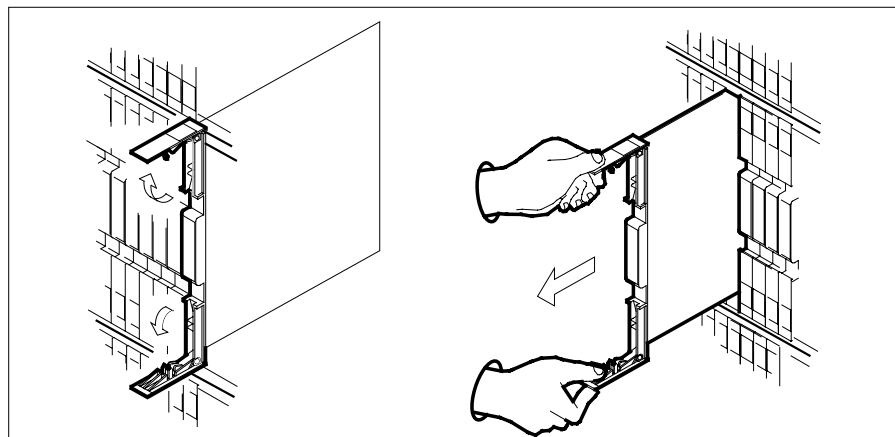

NTMX76 in an RSC-S (PCM-30) Model A RCO2 (continued)

- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

14



DANGER


Equipment damage

Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Open the locking levers on the replacement card.

- a Align the card with the slots in the shelf.
- b Gently slide the card into the shelf.

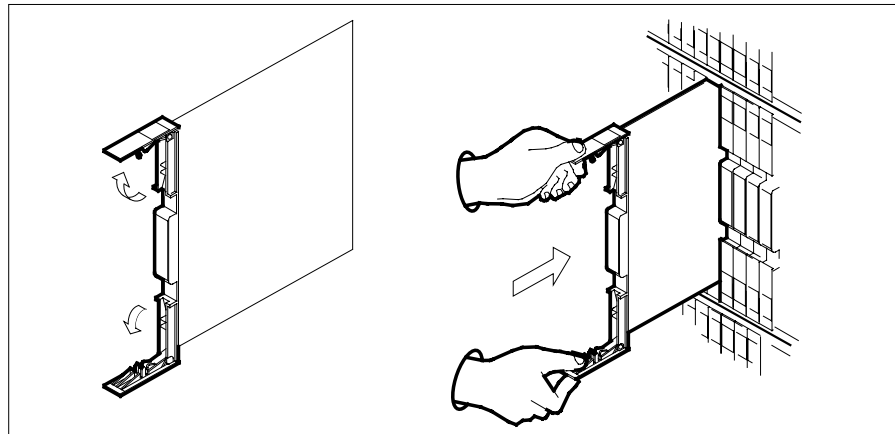


15

Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

NTMX76
in an RSC-S (PCM-30) Model A RCO2 (continued)

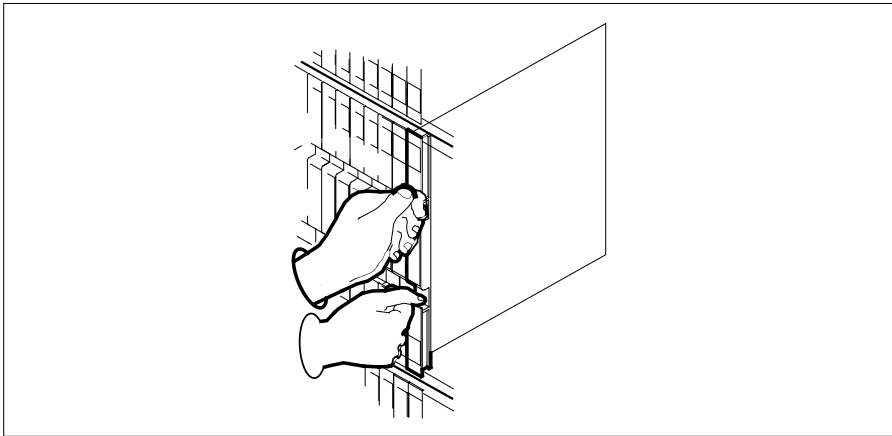

- 16 Reseat the MX76 card.

At the MAP terminal

- 17 Reset the inactive unit by typing
 >PMRESET UNIT unit_no
 and pressing the Enter key.

where

unit_no
 is the number of the RCO2 unit busied in step 10

If PMRESET	Do
passed	step 18
failed	step 24

- 18 Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 23
other	step 19

- 19 Return the inactive RCO2 unit to service by typing
 >RTS INACTIVE

NTMX76

in an RSC-S (PCM-30) Model A RCO2 (end)

and pressing the Enter key.

If RTS	Do
passed	step 20
failed	step 24

- 20 Remove the sign from the active unit.
- 21 Send any faulty cards for repair according to local procedure.
- 22 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 25.
- 23 Return to *Alarm Clearing Procedures* or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 24 Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 25 You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX76
in an RSC-S (PCM-30) Model B RCO2

Application

Use this procedure to replace an NTMX76 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX76	AA, AB	Message and Tone card

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX76 in an RSC-S (PCM-30) Model B RCO2 (continued)

Summary of card replacement procedure for an NTMX76 card in RSC-S RCO2

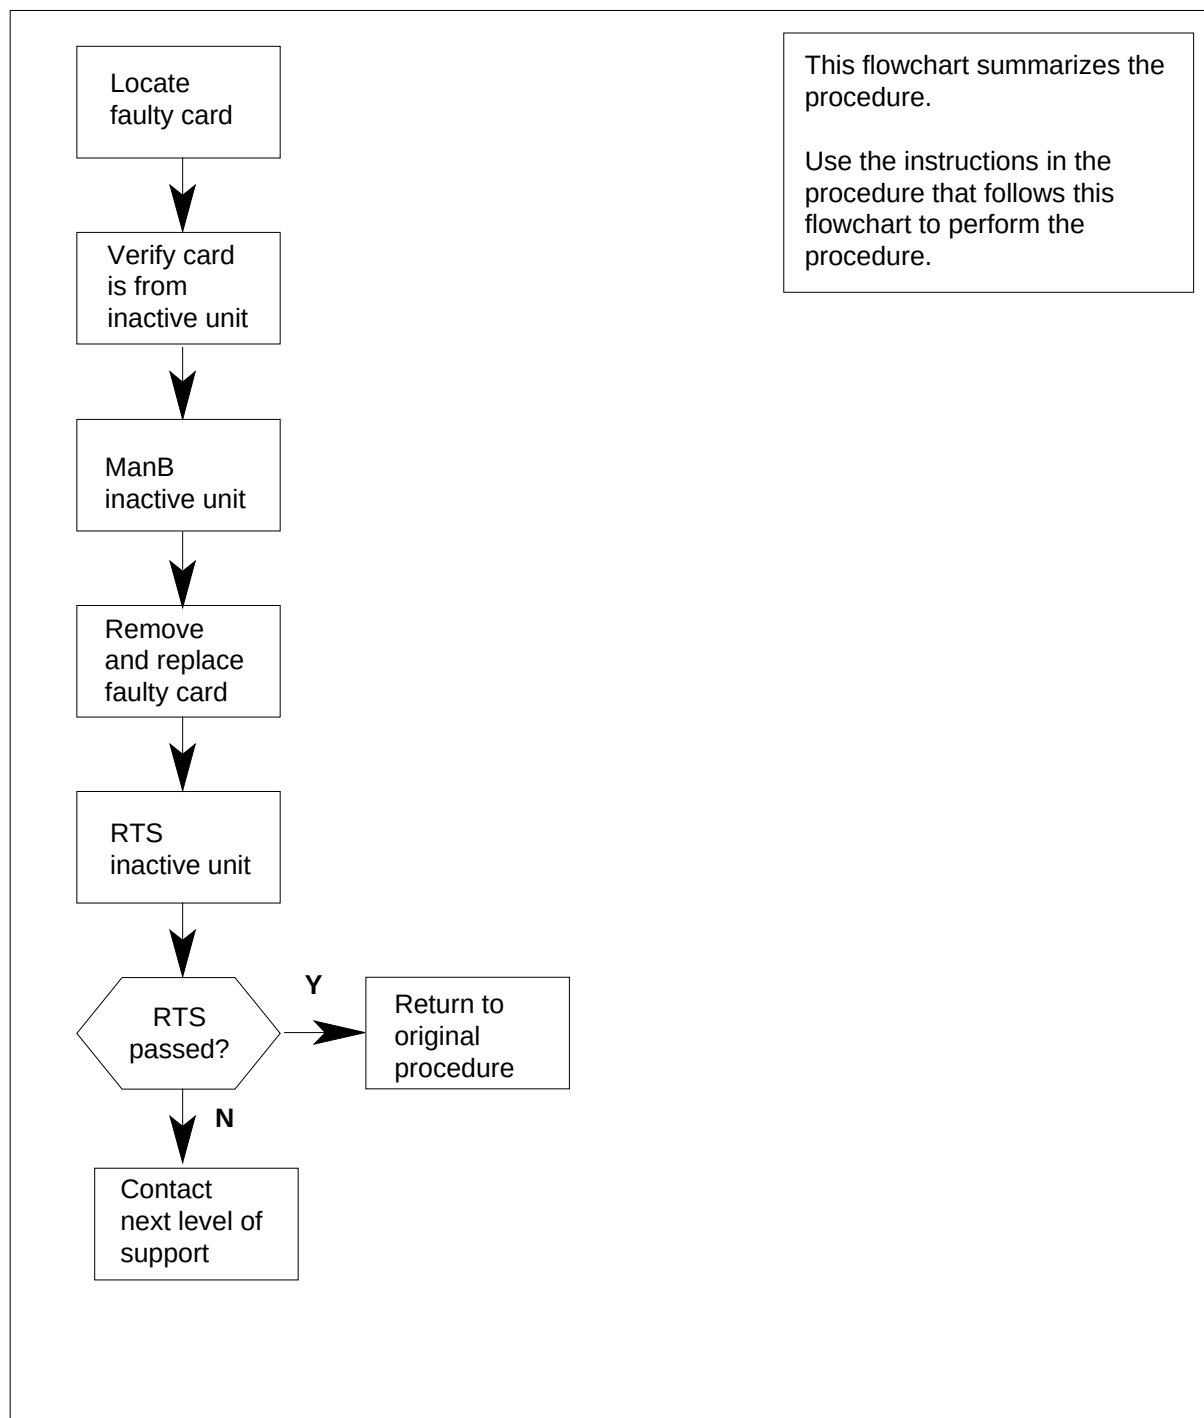

NTMX76 in an RSC-S (PCM-30) Model B RCO2 (continued)

Replacing an NTMX76 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX76 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing

>MAPCI;MTC;PM;POST RCO2 rco2_no

and pressing the Enter key.

where

rco2_no

is the number of the RCO2 with the faulty card(s)

Example of a MAP display:

NTMX76**in an RSC-S (PCM-30) Model B RCO2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCO2	.	.	.	.	.
RCO2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	2	0	2	25		
2 Post_	RCO2	0	0	0	0	1	1		
3 ListSet									
4	RCO2	0	ISTb	Links_00S:	CSide	1, PSide	1		
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Determine the location of the RCO2 containing the circuit card you are replacing by typing

>QUERYPM

and pressing the Enter key.

Example of a MAP response:

PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname: UK00ADU6 EEPROM Load:
BNK0N205

WARM SWACT is supported and available

RCO2 0 is included in the REX schedule.

REX on RCO2 0 has not been performed.

Node Status: {OK, FALSE}

Unit 0 Act, Status: {OK, FALSE}

Unit 1 Inact, Status: {OK, FALSE}

Site Flr RPos Bay_id Shf Description Slot EqPEC

RSC-M 00 C02 RSC-M 00 05 RCO2: 000 MX85AA

RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA

- 5 By observing the MAP display, be sure that the card to be removed is on the inactive unit.

If faulty card is on

Do

active unit

step 6

NTMX76

in an RSC-S (PCM-30) Model B RCO2 (continued)

	If faulty card is on	Do
	inactive unit	step 9
6	Switch the processing activity (SWACT) to the inactive unit by typing >SWACT and pressing the Enter key. Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.	
7	Confirm the system prompt by typing >YES and pressing the Enter key. <i>Example of a MAP response:</i> Unit0: Inact SysB Mtce Unit1: Act ISTb RCO2 0 SwAct Passed	
	If the MAP response is	Do
	SWACT passed	step 8
	anything else	step 22
8	A maintenance flag (Mtce) may appear, indicating system-initiated maintenance tasks are in progress. Wait until the flag disappears from the status lines for both RCO2 units before proceeding to the next step.	

At the RCE frame

- 9 Put a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 10 Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.
Example of a MAP response:

NTMX76

in an RSC-S (PCM-30) Model B RCO2 (continued)

```
RCO2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
Bsy INACTIVE
RCO2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passed	step 11
failed	step 22

- 11** Reset the inactive RCO2 unit by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the inactive RCO2 unit (0 or 1)

At the RCE frame

12



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

13



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Remove the NTMX76 card as shown in the following figures.

NTMX76
in an RSC-S (PCM-30) Model B RCO2 (continued)

- a** Locate the card to be removed on the appropriate shelf.

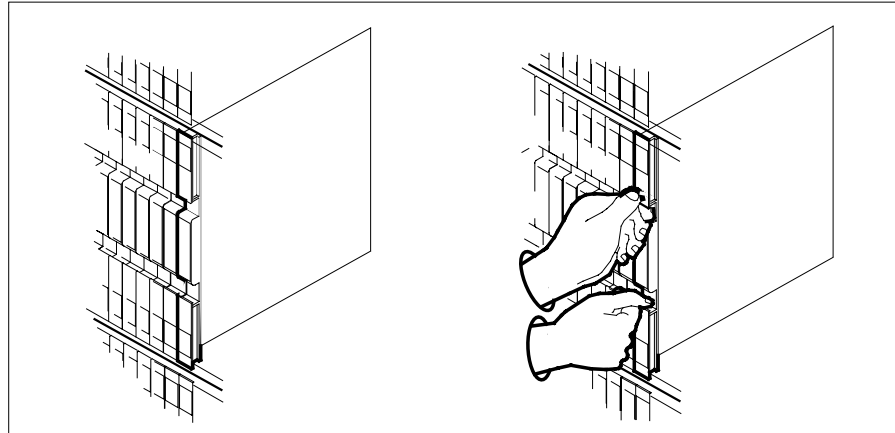

- b** Open the locking levers on the card to be replaced and gently pull the card towards you until it clears the shelf.

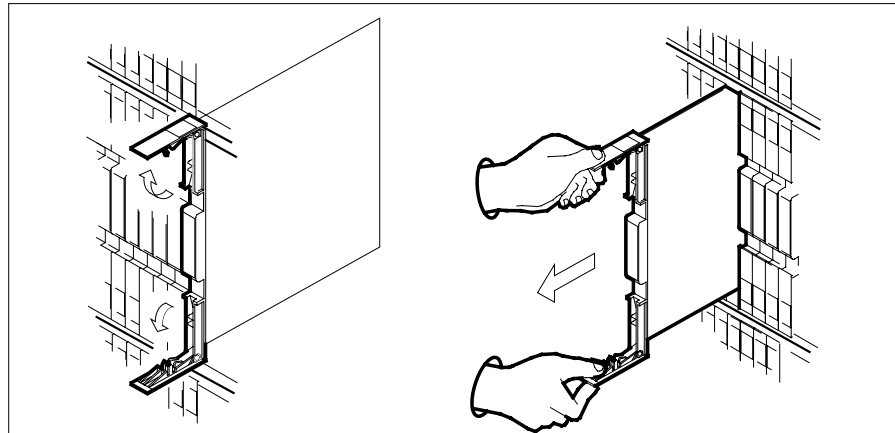

- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

14

**DANGER****Equipment damage**


Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Open the locking levers on the replacement card.

NTMX76 in an RSC-S (PCM-30) Model B RCO2 (continued)

- a Align the card with the slots in the shelf.
- b Gently slide the card into the shelf.

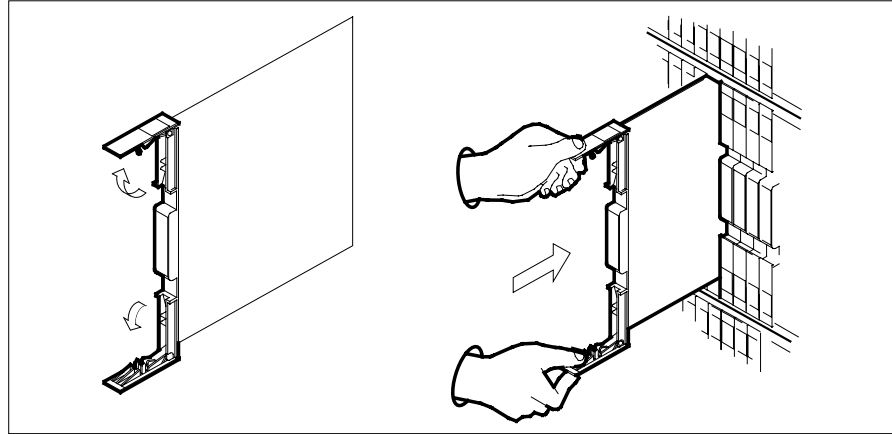

15




CAUTION

Loss of subscriber service

Subscriber service may be lost in the active unit when reseating the MX76 card. It is recommended that this procedure be performed during low traffic periods.

Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

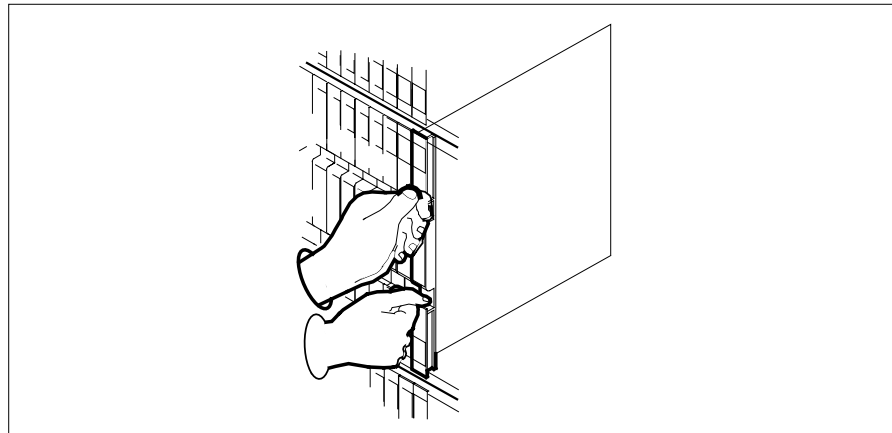

NTMX76

in an RSC-S (PCM-30) Model B RCO2 (end)

At the MAP terminal

- 16** Reset the inactive unit by typing

>PMRESET UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the RCO2 unit busied in step 10

If PMRESET	Do
passed	step 17
failed	step 22

- 17** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 21
other	step 18

- 18** Return the inactive RCO2 unit to service by typing

>RTS INACTIVE

and pressing the Enter key.

If RTS	Do
passed	step 19
failed	step 22

- 19** Send any faulty cards for repair according to local procedure.

- 20** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 23.

- 21** Return to *Alarm and Performance Monitoring Procedures* or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 22** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

- 23** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX76 in an SMA2

Application

Use this procedure to replace an NTMX76 card in an SMA2.

PEC	Suffixes	Name
NTMX76	BA, CA	HDLC/DMSX Messaging Interface Card

Common procedures


The following procedures are referenced in this procedure:

- “Locating a faulty card in an SMA2”
- replacing a card
- returning a card

Do not go to a common procedure unless directed to do so in the step-action procedure.

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

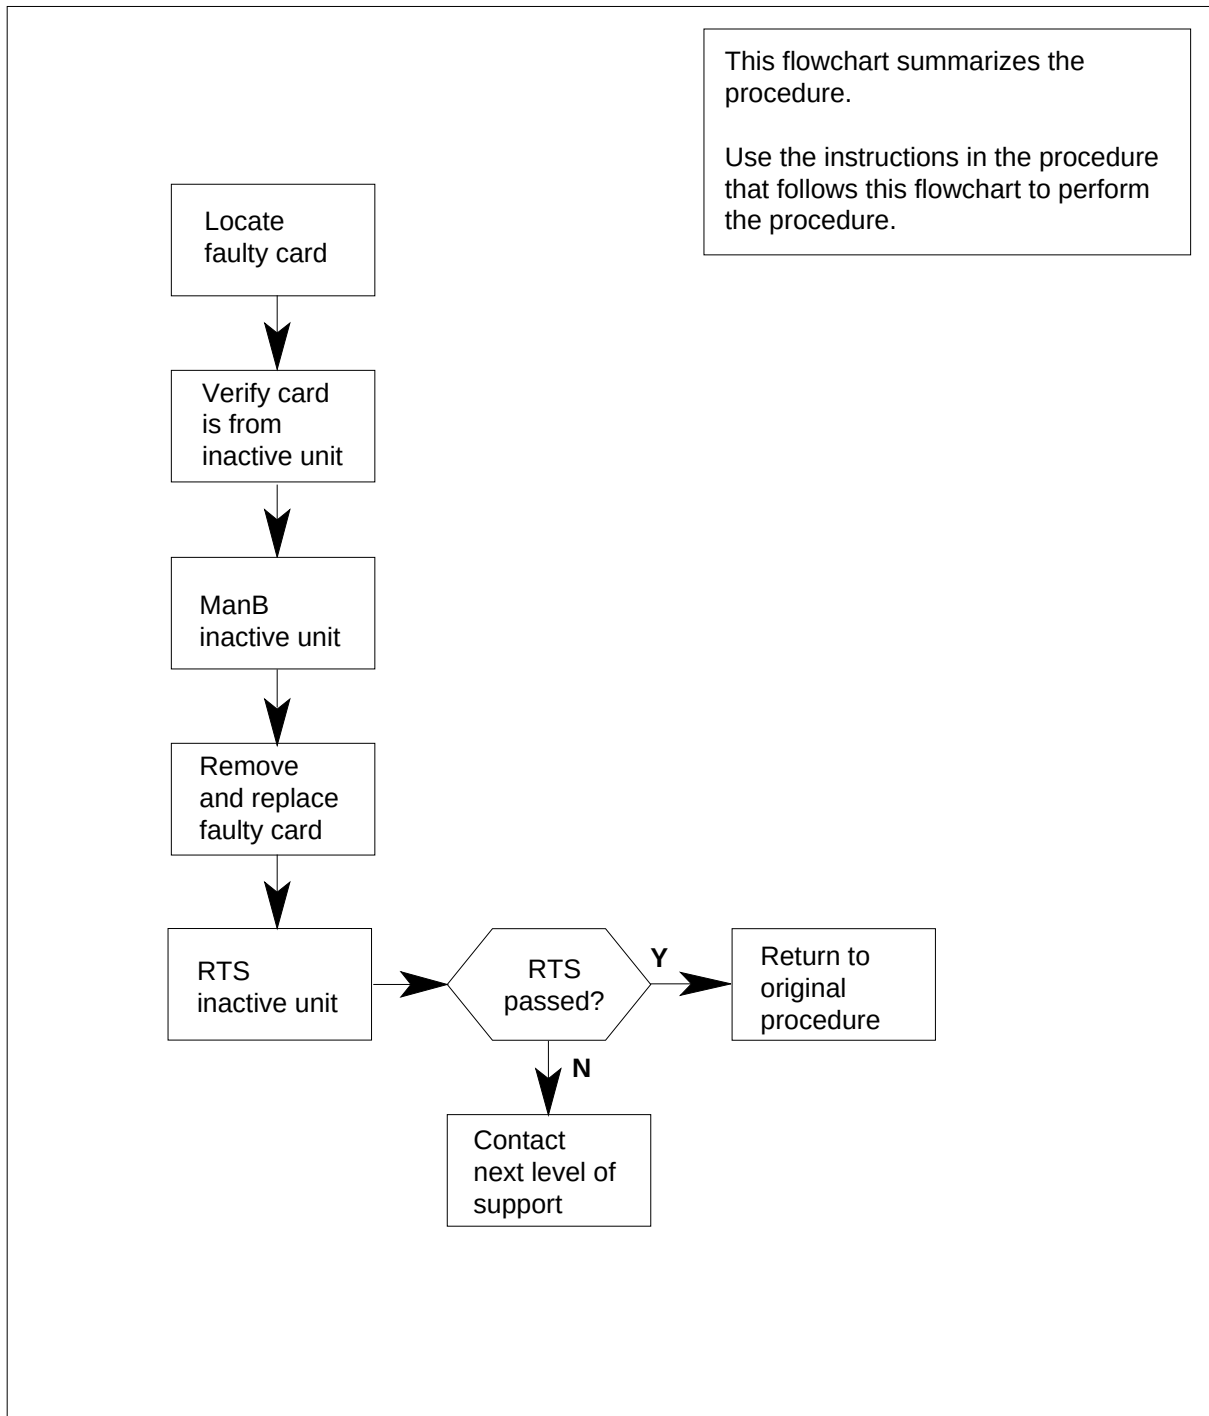NTMX76
in an SMA2 (continued)**Summary of card replacement procedure for an NTMX76 card in an SMA2**

NTMX76 in an SMA2 (continued)

Replacing an NTMX76 card in an SMA2

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Ensure you know the physical location of the faulty card.

If card location is	Do
known	step 4
unknown	step 3

- 3 Perform the procedure "Locating a faulty card in an SMA2."

4



CAUTION

Loss of service

When replacing a card in the SMA2, ensure the unit in which you are replacing the card is *inactive* and the mate unit is *active*.

Obtain an NTMX76 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 5 Ensure the current MAP display is at the PM level and post the SMA2 by typing

>MAPCI;MTC;PM;POST SMA2 sma2_no

and pressing the Enter key.

where

sma2_no

is the number of the SMA2 to be busied (0 or 1)

Example of a MAP display:

NTMX76 in an SMA2 (continued)

SMA2	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2 0 ISTb Links_00S: CSide 0, PSide 0
Unit0: Act InSv
Unit1: InAct IsTb

- 6** By observing the MAP display, be sure the card to be removed is on the inactive unit.

If faulty card is on	Do
active unit	step 7
inactive unit	step 11

- 7** Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
and pressing the Enter key.
A confirmation prompt for the SWACT command is displayed at the MAP terminal.

If prompt indicates	Do
cannot continue at this time	step 8
can continue at this time	step 9

- 8** Reject the prompt to SWACT of the units by typing
>NO
and pressing the Enter key.

The system discontinues the SWACT.

- 9** Confirm the system prompt by typing
>YES
and pressing the Enter key.

The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.

If the message is	Do
SWACT passed	step 11

NTMX76 in an SMA2 (continued)

	If the message is	Do
	SWACT failed Reason: XPM SWACTback	Rea- step 10
	SWACT refused SWACT Controller	by step 10
10	The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on the inactive unit before attempting to clear the alarm condition on the active unit. Go to step 19.	
At the frame or cabinet		
11	Put a sign on the <i>active</i> unit bearing the words <i>Active unit-Do not touch</i> . This sign should not be attached by magnets or tape.	
At the MAP terminal		
12	Busy the inactive SMA2 unit by typing >bsy unit unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the SMA2 unit to be busied (0 or 1)	
13	Prevent the SMA2 from trapping by typing >PMRESET UNIT unit_no NORUN and pressing the Enter key. <i>where</i> unit_no is the number of the inactive SMA2 unit (0 or 1)	

NTMX76 in an SMA2 (continued)

At the frame or cabinet

14

**WARNING****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

**CAUTION****Loss of subscriber service**

Subscriber service may be lost in the *active* unit when reseating the MX76 card. It is recommended this procedure be performed during low traffic periods.

Perform the common replacing a card procedure in this document.

15

Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 18
other	step 16

16

Return the inactive SMA2 unit to service by typing

>RTS UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the SMA2 unit being returned to service (0 or 1)

If RTS	Do
passed	step 17
failed	step 19

17

Go to the common returning a card procedure in this document.

Go to step 20.

NTMX76

in an SMA2 (end)

- 18** Return to *Alarm Clearing Procedures* or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 19** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 20** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

**NTMX77
in an RSC**

Application

Use this procedure to replace the following card in an RSC RCC or RSCE RCC2.

Note: This procedure is used to replace a card in an RCC or RCC2. In this procedure the term RCC refers to both the RCC and RCC2 in an RSC frame, NT6X10.

PEC	Suffixes	Name
NTMX77	AA	Unified processor (UP)

Common procedures


None


Action

The following flowchart is a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX77 in an RSC (continued)

Summary of card replacement procedure for an NTMX77 card in an RCC

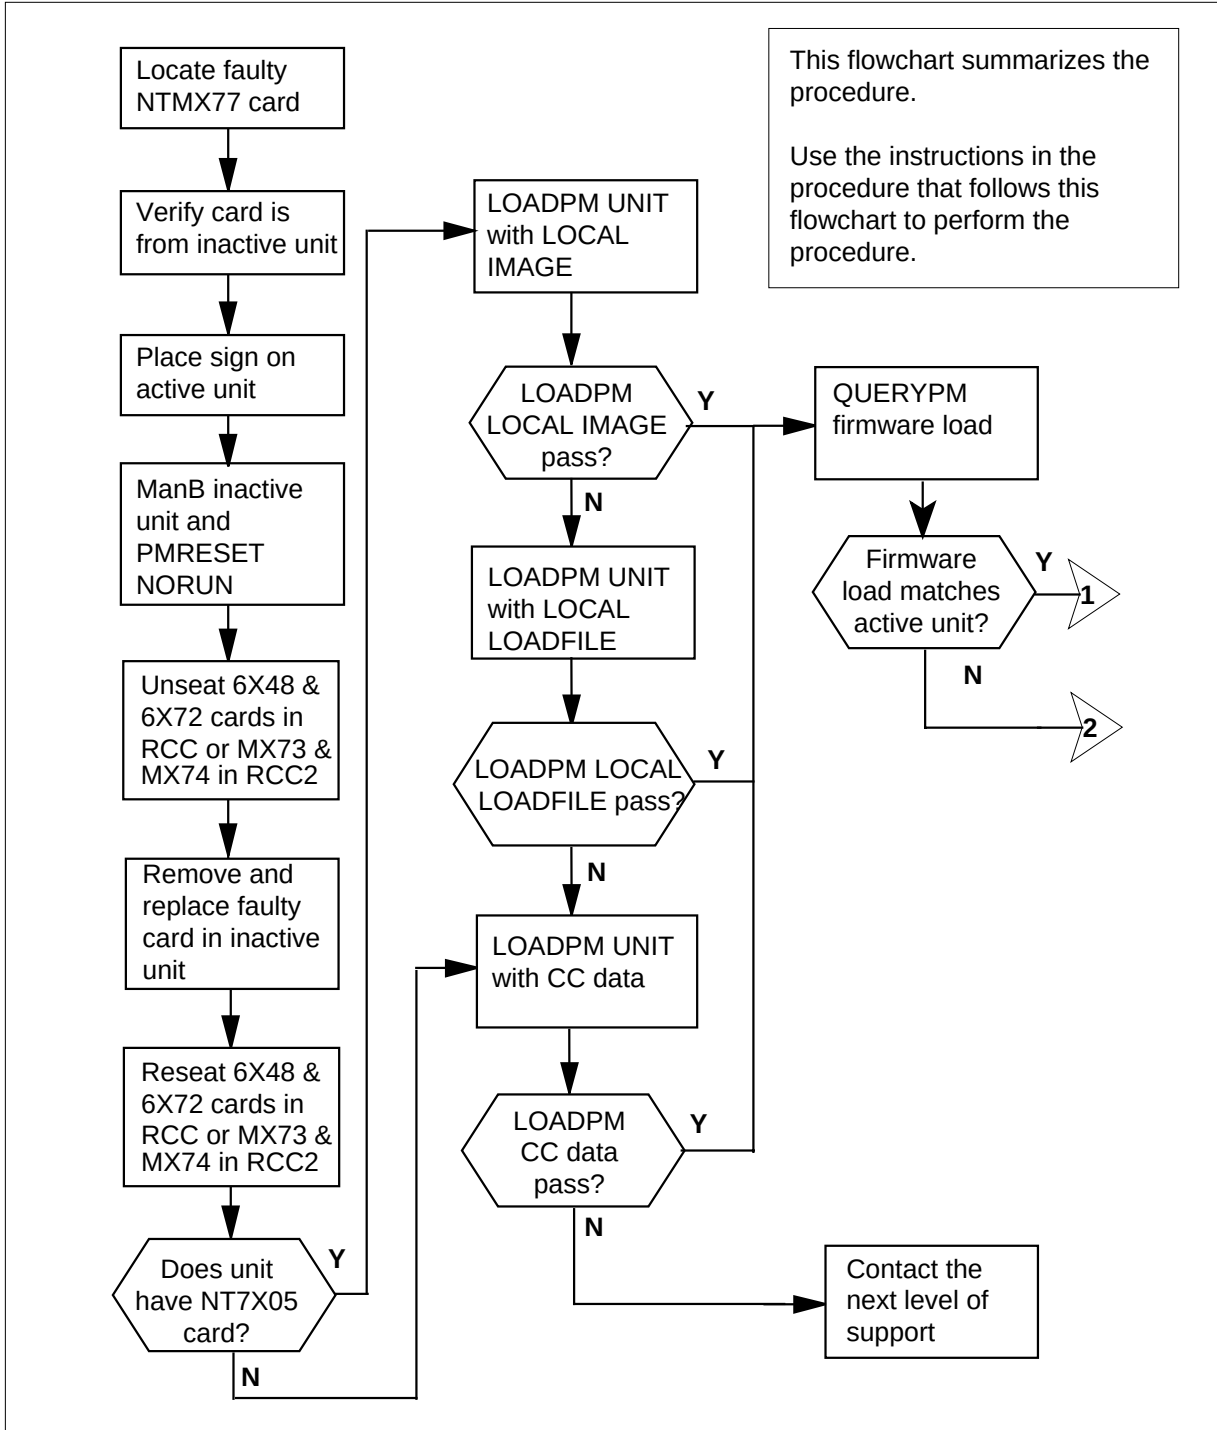

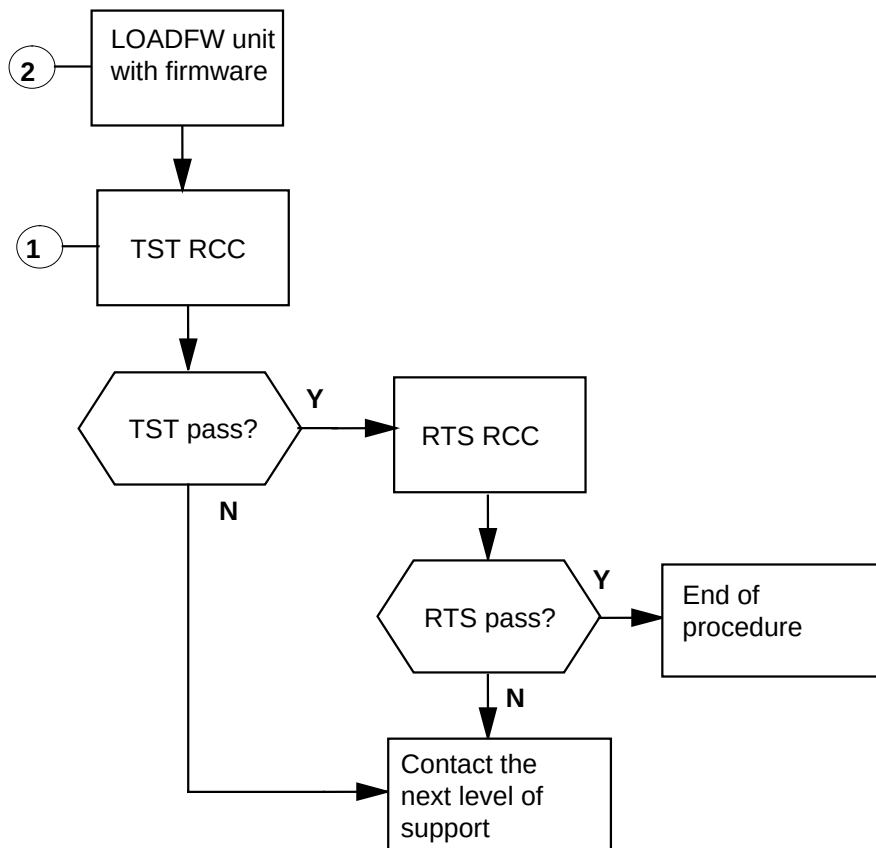NTMX77
in an RSC (continued)**Summary of card replacement procedure for an NTMX77 card in an RCC (continued)**

NTMX77 in an RSC (continued)

Replacing an NTMX77 card in an RSC RCC

At your Current Location

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to verify or accept cards, or were directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC, make sure the unit where you are replacing the card is *inactive* and the mate unit is *active*.

Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal and post the RCC. To post the RCC, type

>MAPCI;MTC;PM;POST RCC rcc_unit_no

and press the Enter key.

where

rcc_unit_no

is the number of the RCC unit to be busied (0 or 1)

Example of a MAP display:

NTMX77 in an RSC (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	APPL
.	.	.	.	1RCC	.	.	.	.	.
RCC			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	2	0	2	25		
2 Post_	RCC	0	0	0	0	1	1		
3 ListSet									
4		RCC	0	ISTb	Links_00S:	CSide	0,	PSide	0
5 TRNSL_		Unit 0:	Inact	SysB					
6 TST_		Unit 1:	Act	InSv					
7 BSY_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13 SwAct									
14 QueryPM									
15									
16 IRLINK									
17 Perform									
18									

- 4 Check that the NTMX77AA card with faults is in the inactive unit. Make sure the LED labeled ACTIVE is OFF or observe the MAP display.

If the NTMX77AA card with faults is in	Do
active unit	step 5
inactive unit	step 9

- 5 Switch the processing activity (SWACT) to the inactive unit. To SWACT the unit, type

>SWACT

and press the Enter key.

If SWACT	Do
cannot continue at this time	step 6
can continue at this time	step 7

- 6 Do not switch activity of the units. To reject the SWACT, type

>NO

and press the Enter key.

The system discontinues the SWACT.

Return to step 5 during a period of low traffic.

NTMX77

in an RSC (continued)

- 7 To confirm the system prompt, type
>YES
and press the Enter key.
The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding to the next maintenance action.

If the message is	Do
SWACT passed	step 9
SWACT failed	step 8
SWACT refused by SWACT controller	step 8

- 8 Return to the Alarm Clearing Procedures in this manual to clear the alarm condition on the inactive unit. When the alarm is cleared, return to step 1 of this procedure.

At the RCE or RSCE frame

- 9 Put a sign on the active unit bearing the words *Active unit—Do not touch*.

At the MAP terminal

- 10 Busy the inactive RCC unit. To busy the unit, type
>BSY INACTIVE
and press the Enter key.
- 11 Set the inactive unit to the ROM level. To set the unit to the ROM level, type
>PMRESET UNIT rcc_unit_no NORUN
and press the Enter key.
where
rcc_unit_no
is the number of the inactive RCC unit (0 or 1)

NTMX77
in an RSC (continued)

At the RCE or RSCE frame

12



DANGER
Static electricity damage
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC. This protects the equipment against damage caused by static electricity.



DANGER
Equipment damage
Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.

2. Do not force the cards into the slots.

Put on a wrist strap.

13 Your next step is based on whether the NTMX77 is in an RSC or RCC2.

If the NTMX77 is in an	Do
RCC	step 14
RCC2	step 16

14 Unseat the NT6X48 card in slots 06 and 07.

15 Unseat the NT6X72 card in slot 19.


Go to step 17.

16 Unseat the NTMX73 and NTMX74 circuit cards.


17 Remove the NTMX77 card as shown in the following figures.

a Locate the card to be removed on the appropriate shelf.

NTMX77 in an RSC (continued)

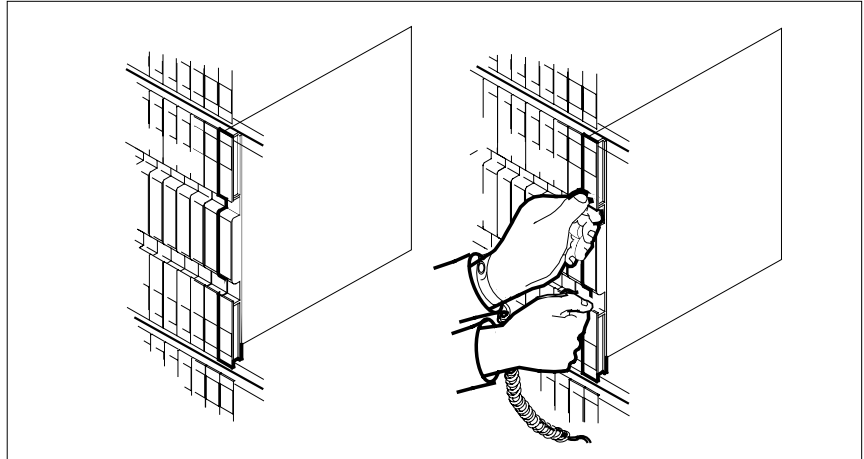


- b** Open the locking levers on the card to be replaced and gently pull the card towards you until it clears the shelf.

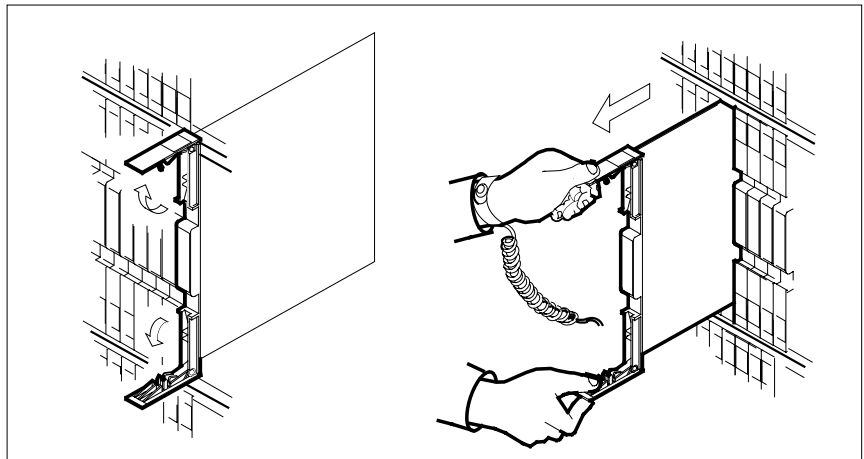

- c** Make sure the replacement card has the same PEC, including suffix, as the card you just removed. Also make sure the DIP switch settings on the replacement card match the settings of the card just removed.

Note: If the NTMX77 has DIP switch S1, set DIP switch S1 to XPM.

- 18** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
 - b** Carefully slide the card into the shelf.

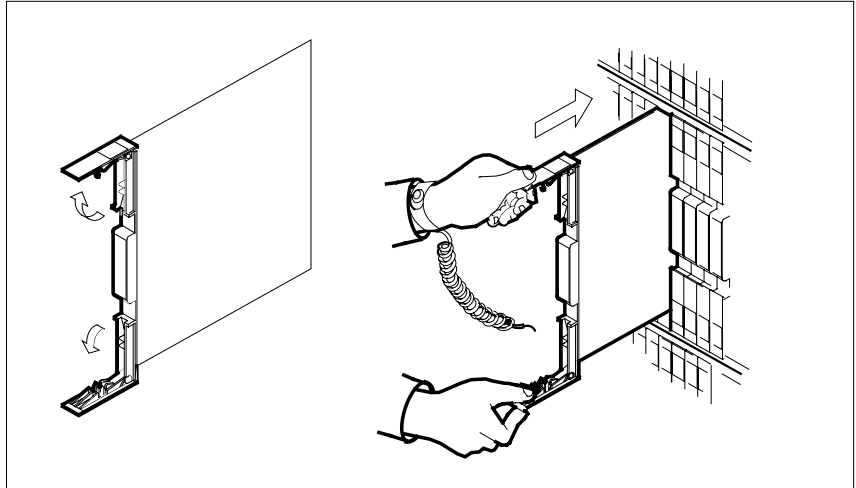NTMX77
in an RSC (continued)

19

**DANGER****Possible loss of P-side nodes**


Monitor the LEDs on the faceplate of the replacement NTMX77 circuit card.

1. The INSV and ESA LEDs may come ON and must go OFF in less than four seconds.
2. The ACT LED may come ON and light for less than one second. If the ACT LED remains ON for more than one second, immediately remove the NTMX77 circuit card, obtain a new NTMX77 circuit card, and return to this step. If the NTMX77 circuit card is allowed to remain with both units having an active processor, a condition of dual activity exists, which results in the loss of P-side nodes.

Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

NTMX77 in an RSC (continued)

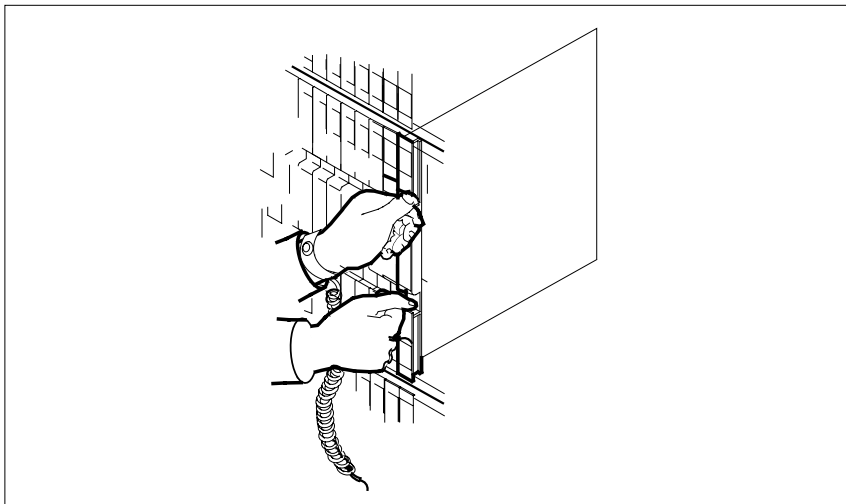

- 20** Your next step is based on whether the NTMX77 is in an RCC or RCC2.

If the NTMX77 is in an	Do
RCC	step 21
RCC2	step 23

- 21** Reseat the NT6X72 card in slot 19.
- 22** Reseat the NT6X48 card in slots 06 and 07.
Go to step 24.
- 23** Reseat the NTMX73 and NTMX74 circuit cards.
- 24** Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
an alarm clearing procedure	step 34
other	step 25

At the MAP terminal

- 25** The peripheral/remote loader 16 card (NT7X05) allows local loading of RCC data which reduces recovery time. To check if the NT7X05 card is provisioned, type

>QUERYPM FILES

and press the Enter key.

Example of a MAP display:

Note: If the NT7X05 card is not provisioned, the MAP response is:
NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 26
not provisioned	step 27


Possible service interruption

The LOCAL LOADFILE option of the LOADPM command has a parameter of [`<file> string`]], if this file_name parameter is used, the loadfile named in the parameter will be used which is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

where

NTMX77 in an RSC (continued)

rcc_unit_no
is the number of the inactive RCC unit

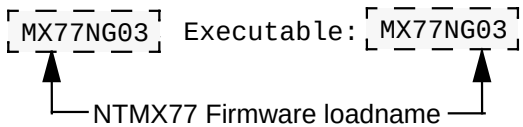	If the load	Do
	passed	step 28
	failed	step 27
27	To load the inactive RCC unit, type >LOADPM INACTIVE and press the Enter key.	
	If	Do
	load passes	step 28
	load fails	step 35
28	Query the XPM counters for the firmware load on the NTMX77. To query XPM counters, type >QUERYPM CNTRS and press the Enter key. <i>Example of a MAP display:</i> Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0 Unit 0: Ram Load: ESR05AY EPRom Version: AB02 EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03 CMR LOAD: CMR03A UP:MX77AA Unit 1: Ram Load: ESR05AY EPRom Version: AB02 EEPROM Load: Loadable: [MX77NG03] Executable: [MX77NG03] CMR LOAD: CMR03A UP:MX77AA 	
	If firmware is	Do
	valid	step 31
	invalid	step 29
29	To load the NTMX77 firmware into the inactive unit, type >LOADFW INACTIVE	

NTMX77 in an RSC (end)

and press the Enter key.

Note: If the firmware load is not specified with the LOADFW command, the command applies the firmware file datafilled in the appropriate inventory table.

	If load	Do
	passed	step 30
	failed	step 35
30	To upgrade the firmware in the inactive unit, type >LOADFW INACTIVE UPGRADE and press the Enter key.	
	If the LOADFW UPGRADE	Do
	passes	step 31
	fails	step 35
31	Return the inactive RCC unit to service. To RTS the RCC unit, type >RTS INACTIVE and press the Enter key.	
	If the RTS	Do
	passed	step 32
	failed	step 35
32	Send any faulty cards for repair according to local procedure.	
33	Record the following items in office records: • date the card was replaced • serial number of the card • indications that prompted replacement of the card Go to step 36.	
34	Return to the alarm clearing procedure that directed you to this procedure. At the point where a card list was produced, identify the next card on the list and go to the appropriate card replacement procedure for that card in this manual.	
35	Get additional help in replacing this card by contacting operating company maintenance personnel.	
36	You have correctly completed this procedure. Remove the sign from the active unit. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.	

NTMX77 in an RSC-M

Application

Use this procedure to replace an NTMX77 circuit card in a Remote Switching Center Multi-access (RSC-M) main shelf.

Note: In this section, RSC-M is known as RCO2 in the examples. When software outputs messages to the MAP terminal, software does not differ between the two RCO2 types.

PEC	Suffixes	Name
NTMX77	AA	Unified Processor card

Common procedures

Two common procedures are referenced in this section:


- “Replacing a card”
- “Returning a card”

Action

This procedure is the procedure to replace the card. This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX77 in an RSC-M (continued)

Summary of replacing an NTMX77 in an RSC-M

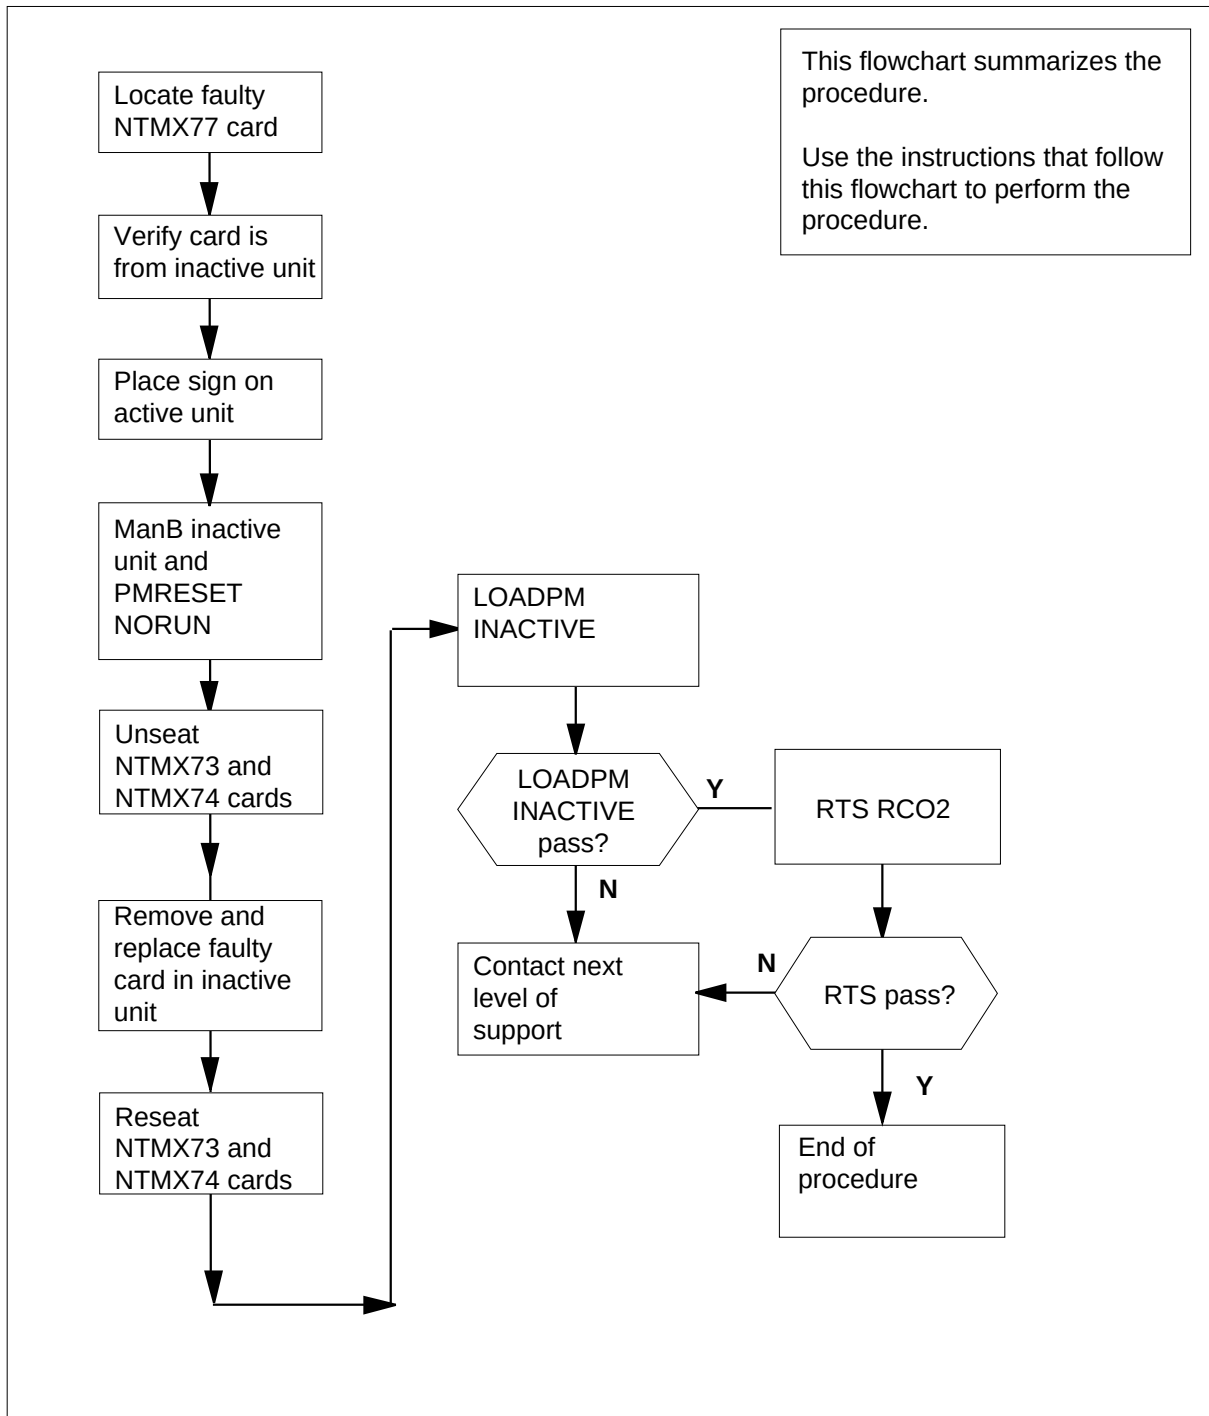

NTMX77 in an RSC-M (continued)

To replace an NTMX77 in an RSC-M

At the MAP display

- 1 Proceed only if one of the following conditions apply. The maintenance support group or a step in a maintenance procedure directs you to this card replacement procedure. Use the procedure to verify or accept cards.
- 2



WARNING

Loss of service

To replace a card in the RSC-M, make sure the unit in which you replace the card is *inactive* and the mate unit is *active*.

Obtain an NTMX77 replacement circuit card. Make sure the replacement circuit card contains the same product engineering code (PEC) and suffix as the circuit card that you remove.

At the MAP terminal

- 3 Make sure the current MAP display is at the peripheral module (PM) level. To post the RSC-M/RCO2, type

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 that you post.

Example of a MAP response:

```

RCO2          SysB      ManB      OffL      Cbsy      ISTb      InSv
0 Quit      PM          0          0          2          2          25
2 Post_     RCO2        0          0          0          1          1
3 ListSet
4           RCO2        0 ISTb  Links_00S: CSide 1, PSide 1
5 TRNSL     Unit0:      Inact ISTb
6 TST       Unit1:      Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_
13 SwAct
14 QueryPM
15
16 IRLINK
17 Perform
18

```

NTMX77 in an RSC-M (continued)

- 4 To determine the location of the RCO2 that contains the circuit card that you replace, type

>QUERYPM

and press the Enter key.

Example of a MAP response:

```
PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped:53 Loadname: KRI07BI1 EEPROM Load:MX77NG03
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RCO2: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA
```

- 5 Determine the state of the RCO2 unit associated with the circuit card to replace.

If the state of the RCO2 unit	Do
is active	step 6
is inactive	step 8

- 6 To switch activity of the units, type

>SWACT

and press the Enter key.

Example of a MAP response:

```
RCO2 0 A Warm SwAct will be performed after
data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):
```

If the system	Do
prompts you to confirm a warm SWACT	step 7
rejects the SWACT	step 24

- 7 To confirm the command, type

>YES

and press the Enter key.

NTMX77 in an RSC-M (continued)

Example of a MAP response:

```
Unit0:  Inact SysB Mtce
Unit1:  Act   ISTb
```

```
RCO2 0      SwAct Passed
```

If the MAP response	Do
is SWACT passed	step 8
is other than listed here	step 23

- 8 A maintenance flag (Mtce) can appear. This flag indicates that maintenance tasks that the system initiates are in progress. Wait until the flag disappears from the status lines for both RCO2 units before you proceed to the next step.

At the cabinet

- 9 Place a sign on the active unit with the words *Active unit-Do not touch*. Do not attach this sign with magnets or tape.

- 10 To manually busy (ManB) the inactive unit, type

>BSY INACTIVE

and press the Enter key.

Example of a MAP response:

```
RCO2      0 ISTb  Links_00S: CSide  0 , PSide  1
Unit0:    Inact ManB
Unit1:    Act   ISTb
bsy INACTIVE
RCO2 0 Unit 0      Bsy Passed
```

If the BSY command	Do
passed	step 11
failed	step 23

- 11 To reset the inactive RCO2 unit, type

>PMRESET UNIT unit_no NORUN

and press the Enter key.

where

unit_no

is the rco2 unit number (0 or 1)

NTMX77 in an RSC-M (continued)

At the shelf**12****WARNING****Static electricity damage**

Wear a wrist strap that connects to the wrist-strap grounding point of the modular supervisory panel (MSP) to handle circuit cards. The wrist-strap protects the cards against static electricity damage.

Locate the circuit card to replace.

Note: NTMX77 circuit cards reside in slot 3 of unit 0, and slot 25 of unit 1.

13 Unseat the NTMX73 and NTMX74 circuit cards.

14 To replace the card, use the common "Replacing a card" procedure in this document. Complete the procedure and return to this point. Make sure the replacement card has the same PEC, including suffix, as the card you just removed.

Note: If the NTMX77 card has a DIP switch, set DIP switch S1 to CPM.

15 Reseat the NTMX73 and NTMX74 circuit cards.

16 The next action depends on the reason you perform this procedure.

If a maintenance procedure	Do
directed you to this procedure	step 17
did not direct you to this procedure	step 18

17 Remove the sign from the active unit. Return to the maintenance procedure that sent you to this procedure. Continue as directed.

At the MAP terminal

18 To load the inactive unit, type
>LOADPM INACTIVE
and press the Enter key.

If the LOADPM command	Do
failed	step 23
passed	step 19

19 To return the inactive unit to service, type
>RTS INACTIVE

NTMX77

in an RSC-M (end)

and press the Enter key.

If the RTS command	Do
passed	step 20
failed	step 23

- 20 Remove the sign from the active unit.
- 21 Go to the common "Returning a card" procedure in this document.
- 22 This procedure is complete.
- 23 For additional help, contact the next level of support.
- 24 For additional help with switch of activity, contact the next level of support.
 - Note:** If the system recommends the use of the SWACT command with the FORCE option, consult office personnel. Office personnel can advise you to not use the FORCE option.

NTMX77 in an RSC-S (DS-1) Model A RCC2

Application

Use this procedure to replace an NTMX77 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX77	AA	Unified Processor

Common procedures

None


Action


The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX77

in an RSC-S (DS-1) Model A RCC2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCO2 (1 of 2)

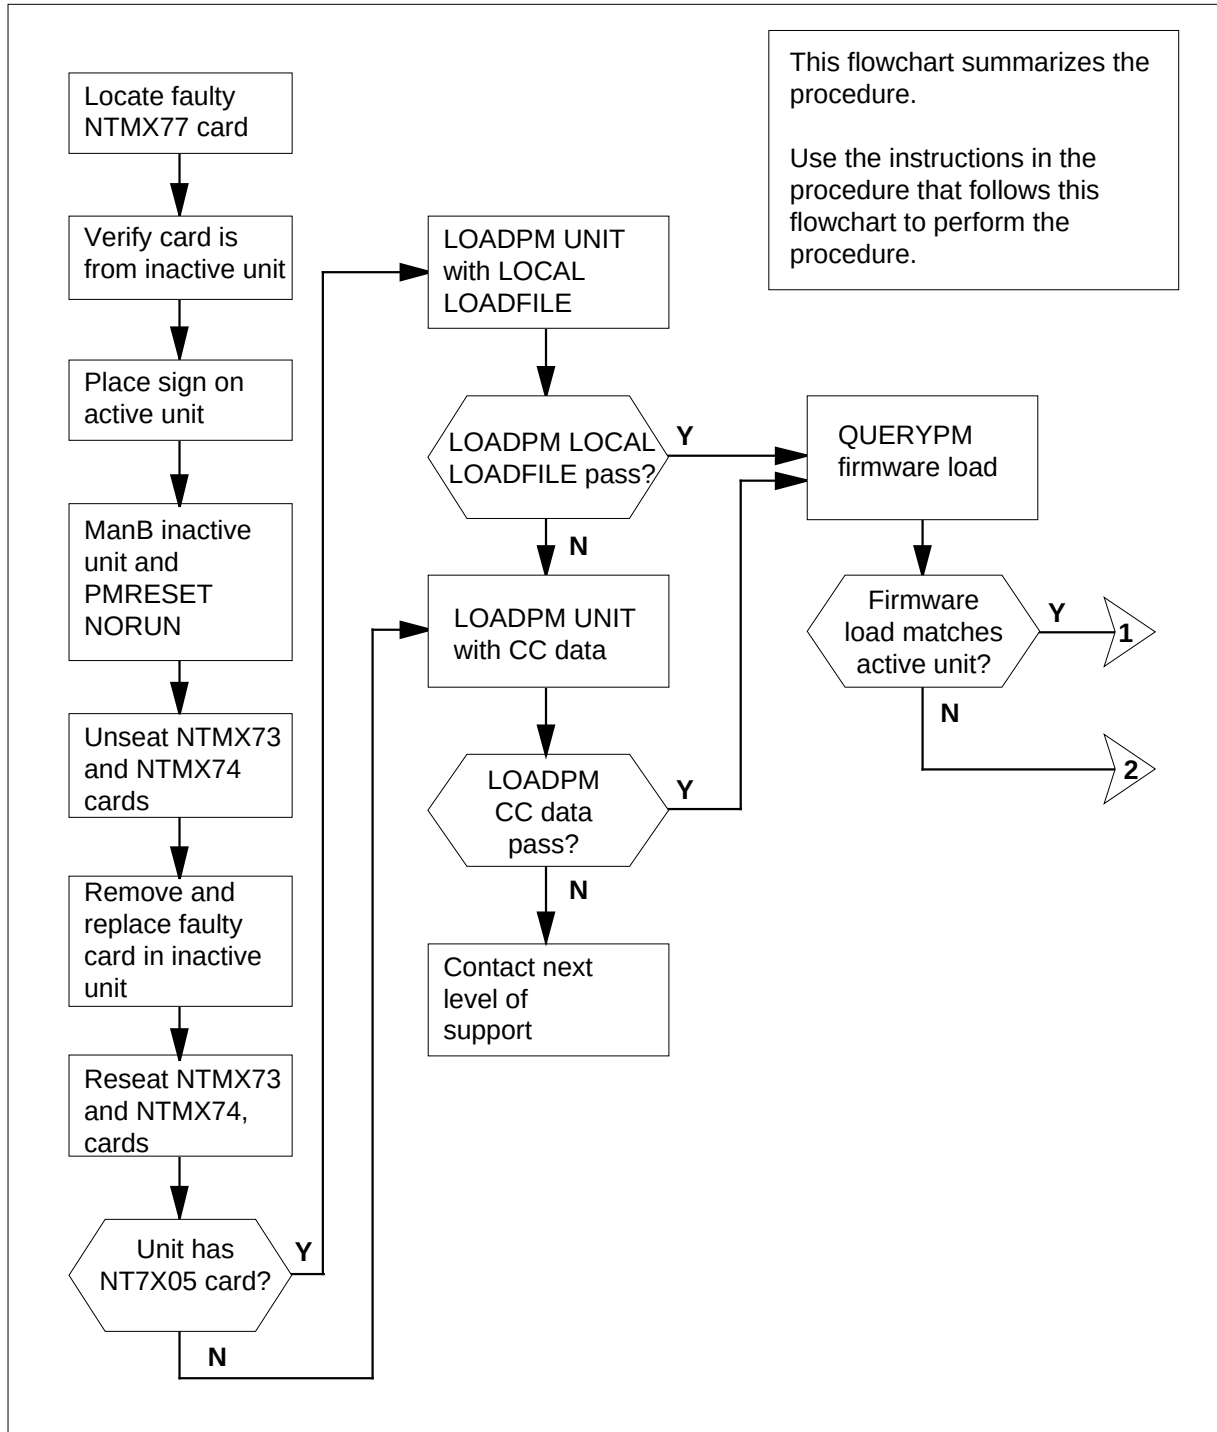

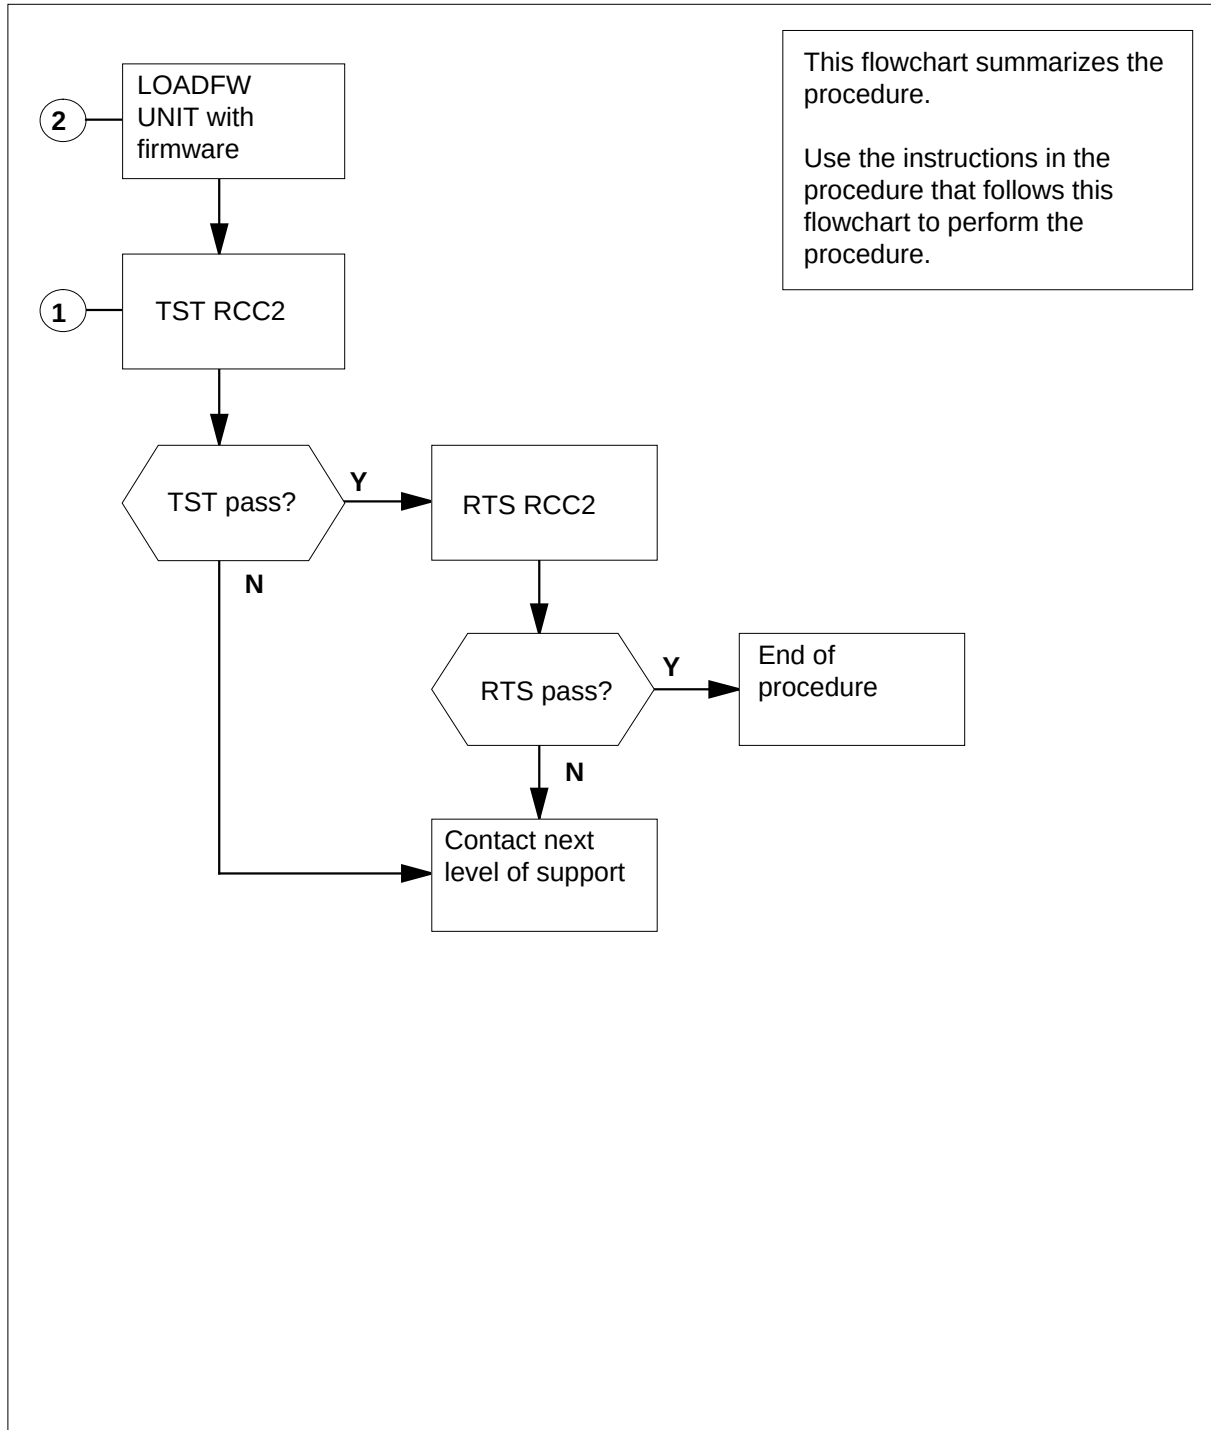NTMX77
in an RSC-S (DS-1) Model A RCC2 (continued)**Summary of card replacement procedure for an NTMX77 card in RSC-S RCC2 (2 of 2)**

NTMX77 in an RSC-S (DS-1) Model A RCC2 (continued)

Replacing an NTMX77 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, make sure the unit in which the card is being replaced is *inactive* and the mate unit is *active*.

Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal and post the RCC2. To post the RCC2, type

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and press the Enter key.

where

rcc2_no

is the number of the RCC2 to be busied (0 or 1)

Example of a MAP display:

NTMX77

in an RSC-S (DS-1) Model A RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	APPL
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL		CBsy	ISTb	InSv
0 Quit	PM		0	0	2		0	2	25
2 Post_	RCC2		0	0	0		0	1	1
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	0,	PSide	0	
5 TRNSL_	Unit0:		Inact	SysB					
6 TST_	Unit1:		Act	InSv					
7 BSY_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13 SwAct									
14 QueryPM									
15									
16 IRLINK									
17 Perform									
18									

- 4 Check that the NTMX77AA card with faults is in the inactive unit. Make sure the LED labeled ACTIVE is OFF or observe the MAP display.

If the NTMX77AA card with faults is in	Do

active unit	step 5

inactive unit	step 9

- 5 Switch the processing activity (SWACT) to the inactive unit. To SWACT the unit, type

>SWACT

and press the Enter key.

If SWACT	Do

cannot continue now	step 6

can continue now	step 7

- 6 Do not switch activity of the units. To reject the SWACT, type

>NO

and press the Enter key.

The system discontinues the SWACT.

Return to step 5 during a period of low traffic.

NTMX77**in an RSC-S (DS-1) Model A RCC2** (continued)

- 7 To confirm the system prompt, type
>YES
and press the Enter key.
The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before continuing to the next maintenance action.

If the message is	Do
SWACT passed	step 9
SWACT failed	step 8
SWACT not accepted by SWACT controller	step 8

- 8 Return to the Alarm Clearing Procedures in this manual to clear the alarm condition on the inactive unit. When the alarm clears, return to step 1 of this procedure.

At the RCE frame

- 9 Place a sign on the active unit with the words *Active unit—Do not touch*. This sign must not be attached by magnets or tape.

At the MAP terminal

- 10 Busy the inactive PM unit. To busy the unit, type
>BSY INACTIVE
and press the Enter key.
- 11 Set the inactive unit to the ROM level. To set the unit to the ROM level, type
>PMRESET UNIT rcc2_unit_no NORUN
and press the Enter key.
where
rcc2_unit_no
is the number of the inactive RCC2 unit (0 or 1)

NTMX77
in an RSC-S (DS-1) Model A RCC2 (continued)

At the RCE frame

12

**DANGER****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

13 Unseat the NTMX73 and NTMX74 circuit cards.

14 Remove the NTMX77 card as shown in the following figures.


a Locate the card to be removed on the appropriate shelf.

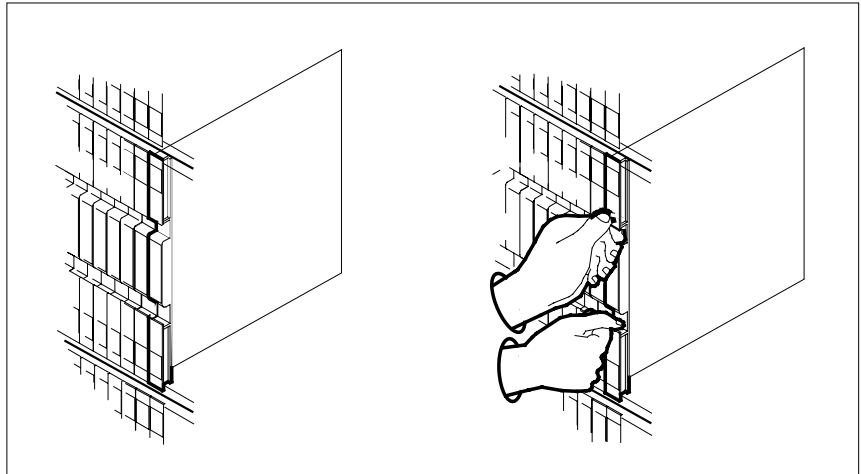

b Open the locking levers on the card to be replaced. Carefully pull the card toward you until it clears the shelf.

NTMX77


in an RSC-S (DS-1) Model A RCC2 (continued)

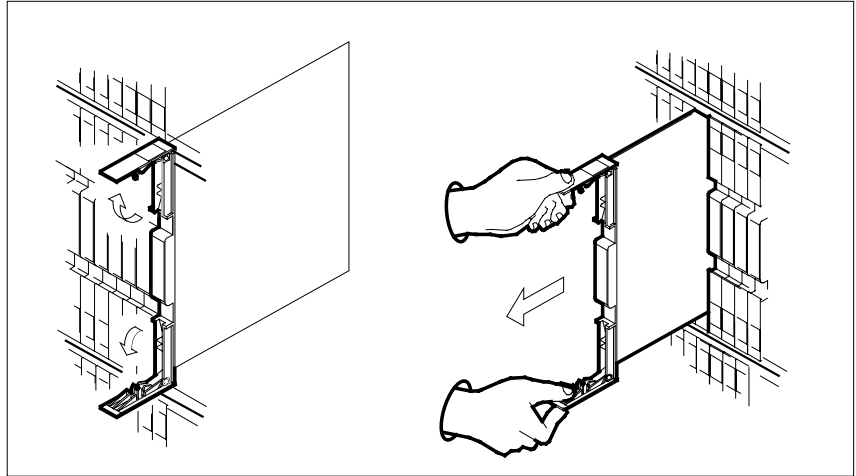

- c Make sure the replacement card has the same PEC, including suffix, as the card you just removed. Also make sure the DIP switch settings on the replacement card match the settings of the card just removed.

Note: If the NTMX77 card has a DIP switch, set DIP switch S1 to CPM.

- 15 Open the locking levers on the replacement card.
- a Align the card with the slots in the shelf.
 - b Carefully slide the card into the shelf.

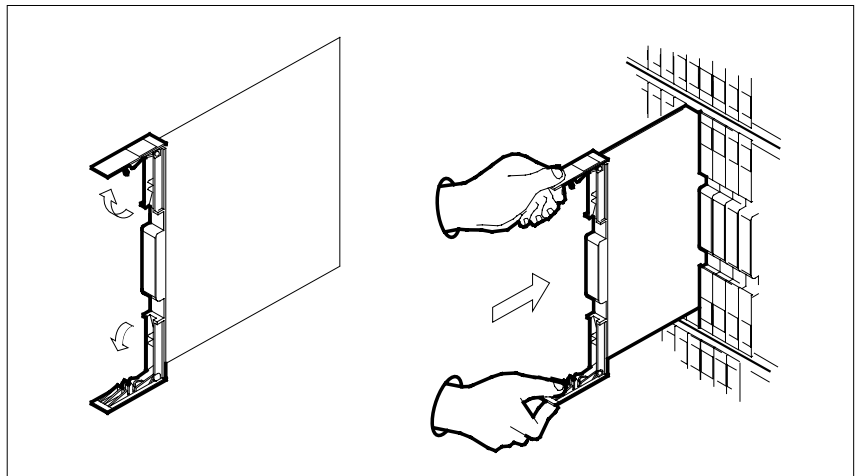

NTMX77

in an RSC-S (DS-1) Model A RCC2 (continued)

16


**DANGER****Possible loss of P-side nodes**

Monitor LEDs on the faceplate of the replacement NTMX77 when installing.

1. INSV and ESA LEDs may come ON and must go OFF in less than 4 seconds.
2. The ACT LCD may come ON and light for less than 1 second. If the ACT LED remains ON for more than 1 second, immediately remove the NTMX77 card and return to step 14c. with a new NTMX77 card. If the NTMX77 card is allowed to remain with both units having an active processor, this is a condition of dual activity, which results in the loss of P-side nodes.

Seat and lock the card.

- a Use your fingers or thumbs to push on the upper and lower edges of the faceplate to make sure the card is fully seated in the shelf.
- b Close the locking levers.

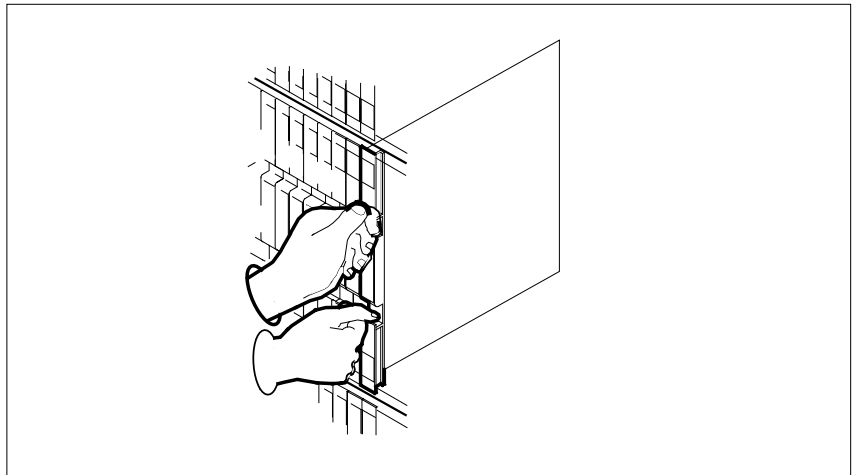

17 Reseat the NTMX73 and NTMX74 circuit cards..

18 Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
an alarm clearing procedure	step 28

NTMX77**in an RSC-S (DS-1) Model A RCC2** (continued)

If you entered this procedure from	Do
other	step 19

At the MAP terminal

- 19** The peripheral/remote loader-16 card (NT7X05) allows local loading of RCC2 data, which reduces recovery time. To check if the NT7X05 card is provisioned, type

>QUERYPM FILES

and press the Enter key.

Example of a MAP display:

```

      CM   MS   IOD   Net   PM   CCS   LNS   Trks   Ext   APPL
      .    .    .    .    1RCC2 .    .    .    .    .
                *C*

RCC2          SysB   ManB   OffL   Cbsy   ISTb   InSv
0 Quit      PM      2       0       2       0       25
2 Post     RCC2    1       0       0       0       1
3 ListSet
4          RCC2    0 ISTb  Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0: Inact ManB
6 TST_      Unit 1: Act InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_  NT7X05 load File: CRI05AW
11 Disp_    NT7X05 Image File:
12 Next_    CMR Load: CMR03A
13 SwAct    Unit 1:
14 QueryPM  NT7X05 load File: [CRI05AW]
15          NT7X05 Image File:
16 IRLINK   CMR Load: CMR03A
17 Perform
18

```

(NT7X05 load file name)

Note: If the NT7X05 card is not provisioned, the MAP response is:
NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 20
not provisioned	step 21

NTMX77
in an RSC-S (DS-1) Model A RCC2 (continued)

20



DANGER
Possible service interruption
The LOCAL LOADFILE option of the LOADPM command has a parameter of [<file> string]]. When this parameter is used, the loadfile named in the parameter is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the inactive RCC2 unit from the local loadfile. To load the inactive RCC2 unit from the local loadfile, type

>LOADPM UNIT rcc2_unit_no LOCAL LOADFILE

and press the Enter key.

where

rcc2_unit_no
is the number of the inactive RCC2 unit

If the load	Do
passed	step 22
failed	step 21

21 To load the inactive RCC2 unit, type

>LOADPM INACTIVE

and press the Enter key.

If load	Do
passed	step 22
failed	step 29

22 Query the XPM counters for the firmware load on the NTMX77. To query XPM counters, type

>QUERYPM CNTRS

and press the Enter key.

Example of a MAP display:

NTMX77
in an RSC-S (DS-1) Model A RCC2 (continued)

Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0
Unit 0:
Ram Load: CRI05AW
EPRom Version: AB02
EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03
CMR Load: CMR03A
UP:MX77AA
Unit 1:
Ram Load: CRI05AW
EPRom Version: AB02
EEPROM Load: Loadable: [MX77NG03], Executable: [MX77NG03]
CMR Load: CMR03A
UP:MX77AA

(NTMX77 firmware load name)

If firmware is	Do
valid	step 25
invalid	step 23

- 23 To load the firmware on the inactive unit type
>LOADFW INACTIVE
and press the Enter key.

If LOADFW	Do
passed	step 24
failed	step 29

- 24 To upgrade the firmware on the inactive unit, type
>LOADFW INACTIVE UPGRADE
and press the Enter key.

If LOADFW UPGRADE	Do
passed	step 25
failed	step 29

- 25 Return the inactive RCC2 unit to service. To RTS the RCC2 unit, type
>RTS INACTIVE

NTMX77
in an RSC-S (DS-1) Model A RCC2 (end)

and press the Enter key.

If RTS	Do
passed	step 26
failed	step 29

26 Send any cards with faults for repair according to local procedure.

27 Record the following information in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Go to step 30.

28 Return to the alarm clearing procedure that directed you to this procedure. At the point where a card list was produced, identify the next card on the list and go to the appropriate card replacement procedure for that card in this manual.

29 Get additional help in replacing this card by contacting operating company maintenance personnel.

30 You have correctly completed this procedure. Remove the sign from the active unit. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX77 in an RSC-S (DS-1) Model B RCC2

Application

Use this procedure to replace an NTMX77 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX77	AA	Unified Processor

Common procedures

None


Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX77


in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCC2 (1 of 2)

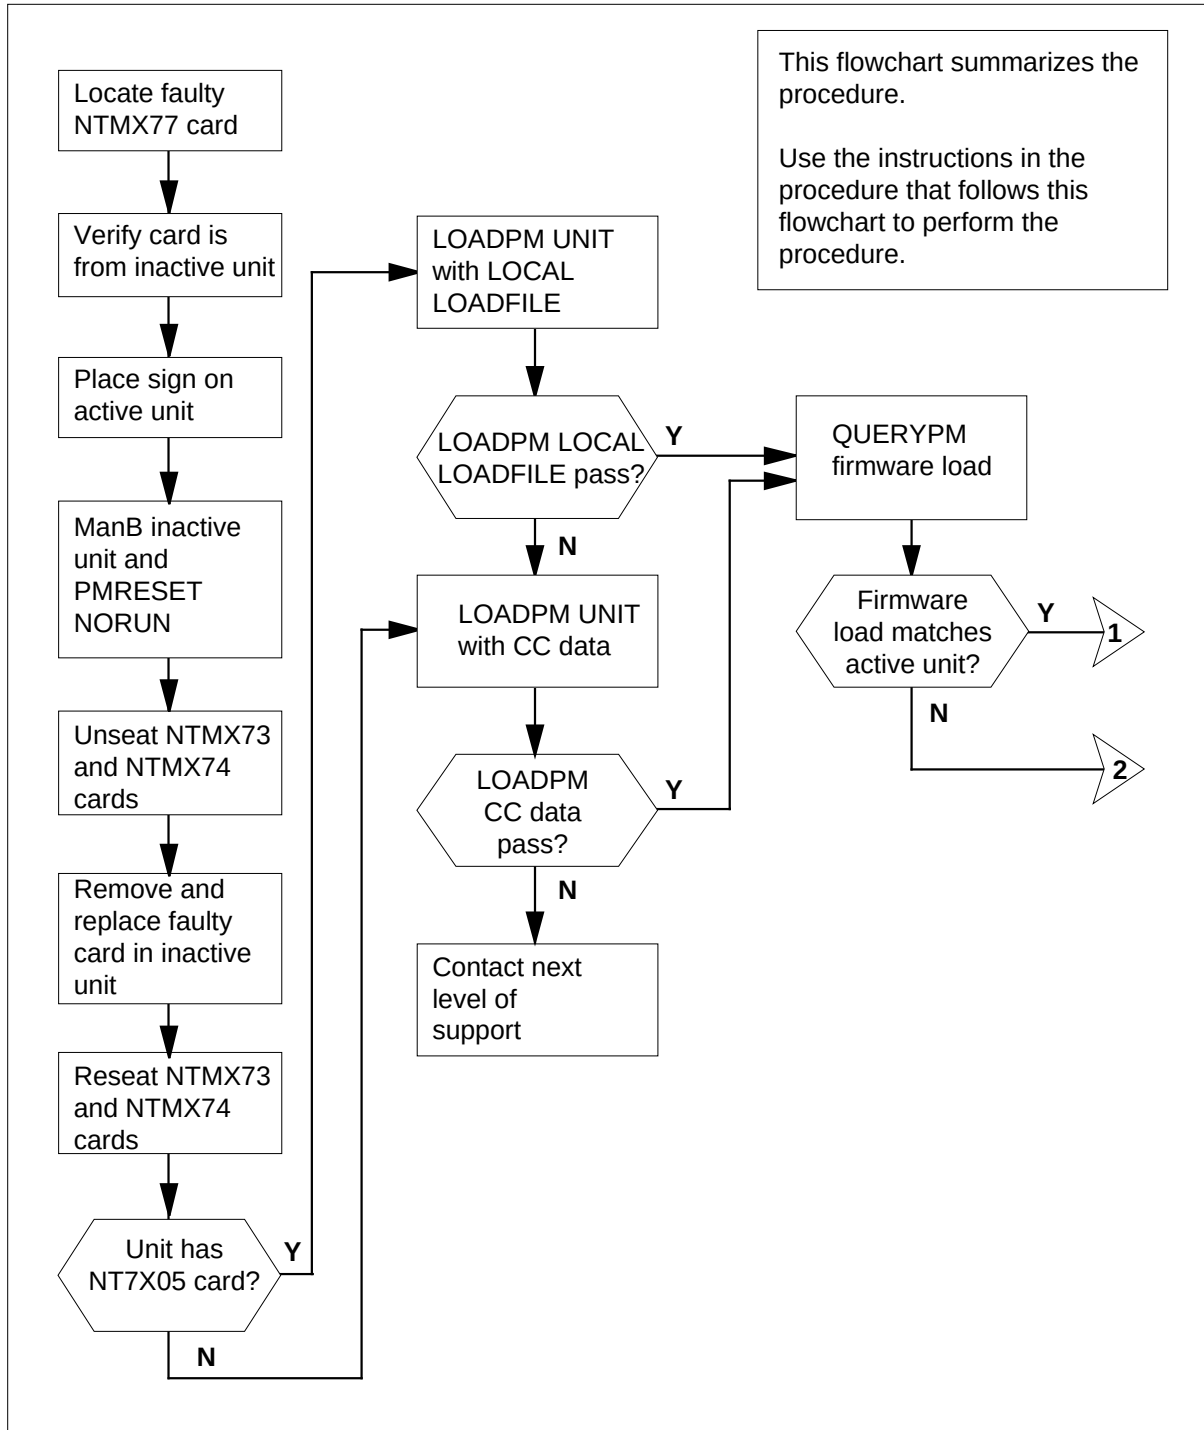

NTMX77 in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCC2 (2 of 2)

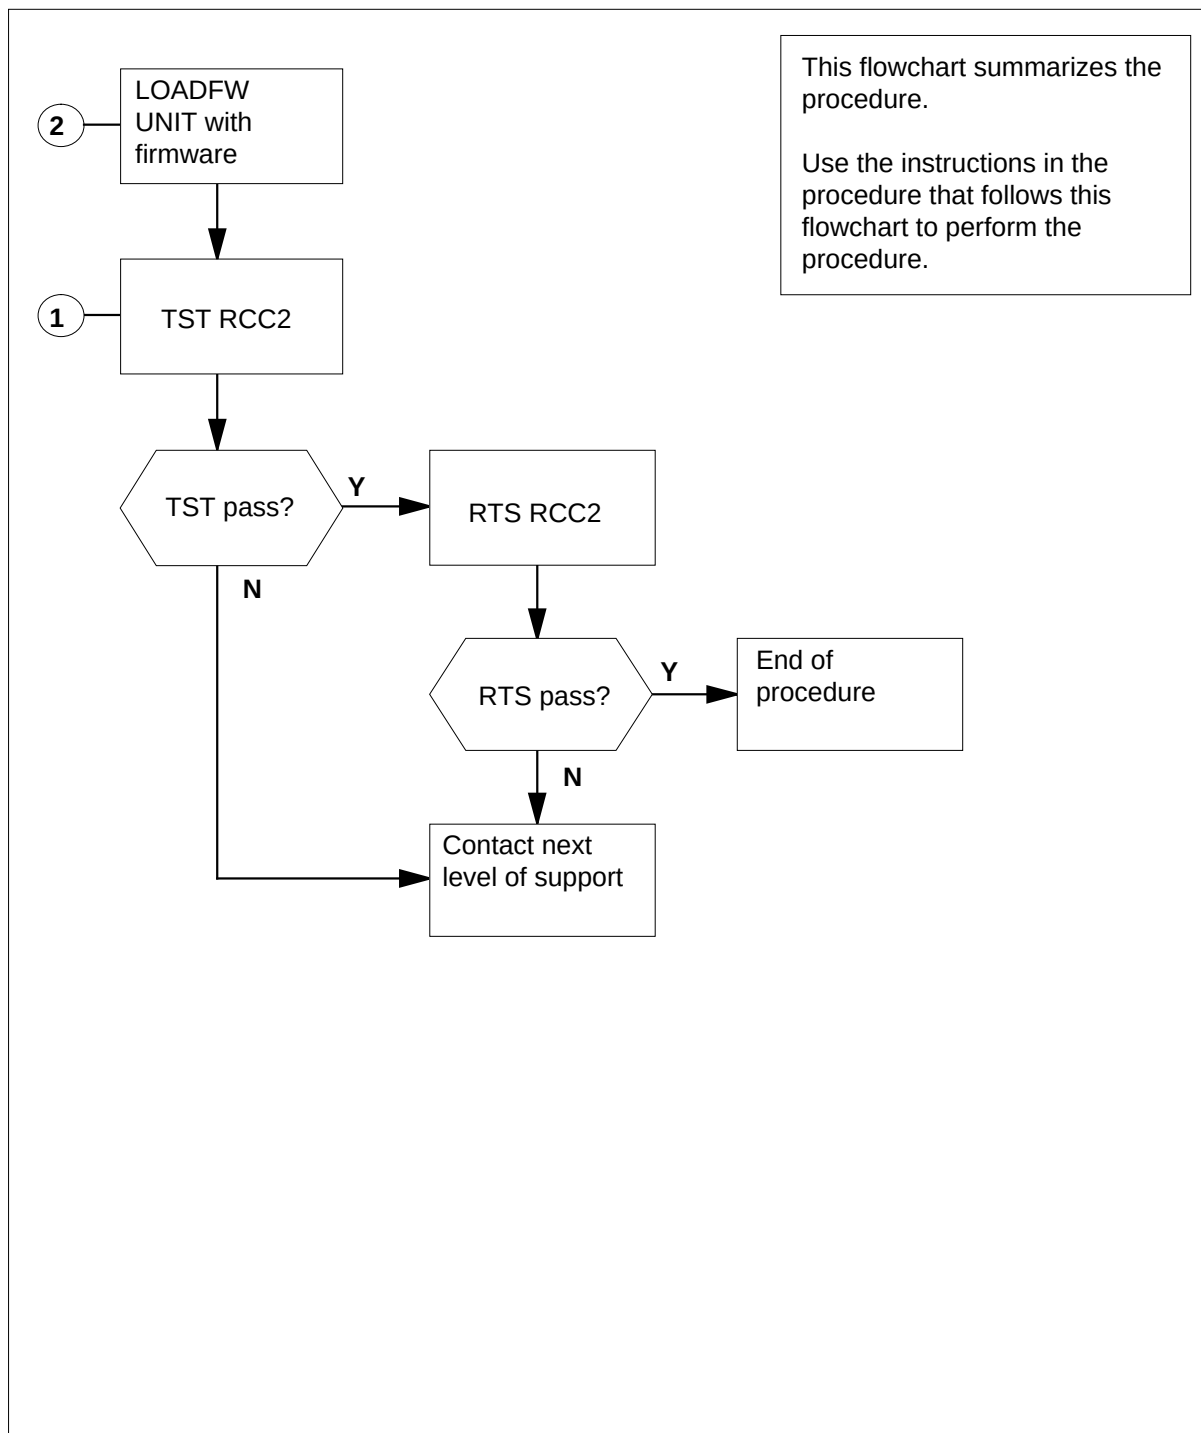

NTMX77 in an RSC-S (DS-1) Model B RCC2 (continued)

Replacing an NTMX77 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, make sure the unit in which the card is being replaced is *inactive* and the mate unit is *active*.

Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal and post the RCC2. To post the RCC2, type

>MAPCI;MTC;PM;POST RCC2 rcc2_no

and press the Enter key.

where

rcc2_no

is the number of the RCC2 to be busied (0 or 1)

Example of a MAP display:

NTMX77**in an RSC-S (DS-1) Model B RCC2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	APPL
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL		CBsy	ISTb	InSv
0 Quit	PM		0	0	2		0	2	25
2 Post_	RCC2		0	0	0		0	1	1
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	0,	PSide	0	
5 TRNSL_	Unit0:		Inact	SysB					
6 TST_	Unit1:		Act	InSv					
7 BSY_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13 SwAct									
14 QueryPM									
15									
16 IRLINK									
17 Perform									
18									

- 4 Check that the NTMX77AA card with faults is in the inactive unit. Make sure the LED labeled ACTIVE is OFF or observe the MAP display.

If the NTMX77AA card with faults is in	Do
active unit	step 5
inactive unit	step 9

- 5 Switch the processing activity (SWACT) to the inactive unit. To SWACT the unit, type

>SWACT

and press the Enter key.

If SWACT	Do
cannot continue at this time	step 6
can continue at this time	step 7

- 6 Do not switch activity of the units. To reject the SWACT, type

>NO

and press the Enter key.

The system discontinues the SWACT.

Return to step 5 during a period of low traffic.

NTMX77

in an RSC-S (DS-1) Model B RCC2 (continued)

- 7 To confirm the system prompt, type
>YES
 and press the Enter key.
 The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding to the next maintenance action.

If the message is	Do
SWACT passed	step 9
SWACT failed	step 8
SWACT refused by SWACT controller	step 8

- 8 Return to the Alarm Clearing Procedures in this manual to clear the alarm condition on the inactive unit. When the alarm is cleared, return to step 1 of this procedure.

At the RCE frame

- 9 Place a sign on the active unit with the words *Active unit—Do not touch*. This sign must not be attached by magnets or tape.

At the MAP terminal

- 10 Busy the inactive PM unit. To busy the unit, type
>BSY INACTIVE
 and press the Enter key.
- 11 Set the inactive unit to the ROM level. To set the unit to the ROM level, type
>PMRESET UNIT rcc2_unit_no NORUN
 and press the Enter key.
where
rcc2_unit_no
 is the number of the inactive RCC2 unit (0 or 1)

NTMX77 in an RSC-S (DS-1) Model B RCC2 (continued)

At the RCE frame

12



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

13 Unseat the NTMX73 and NTMX74 circuit cards.

14 Remove the NTMX77 card as shown in the following figures.


a Locate the card to be removed on the appropriate shelf.

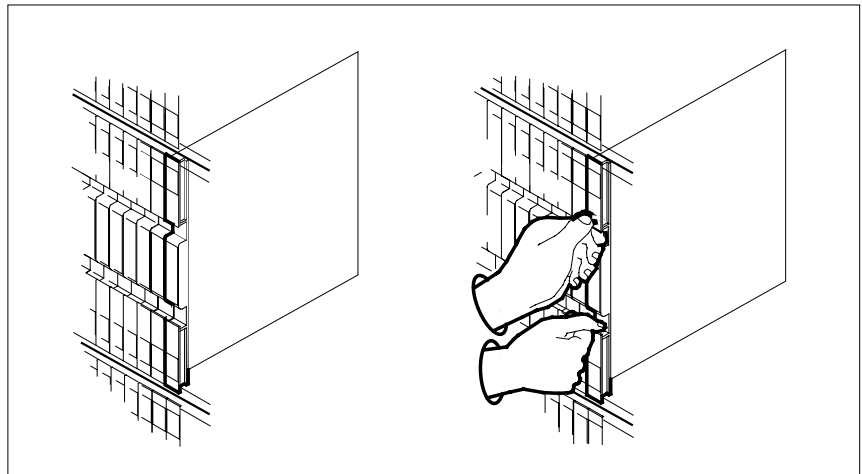

b Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

NTMX77


in an RSC-S (DS-1) Model B RCC2 (continued)

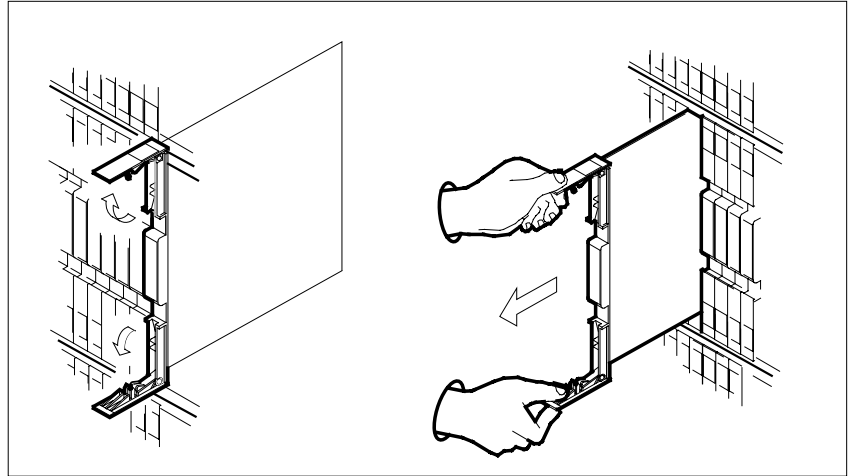

- c Make sure the replacement card has the same PEC, including suffix, as the card you just removed. Also make sure the DIP switch settings on the replacement card match the settings of the card just removed.

Note: If the NTMX77 card has a DIP switch, set DIP switch S1 to CPM.

- 15 Open the locking levers on the replacement card.
- a Align the card with the slots in the shelf.
 - b Gently slide the card into the shelf.

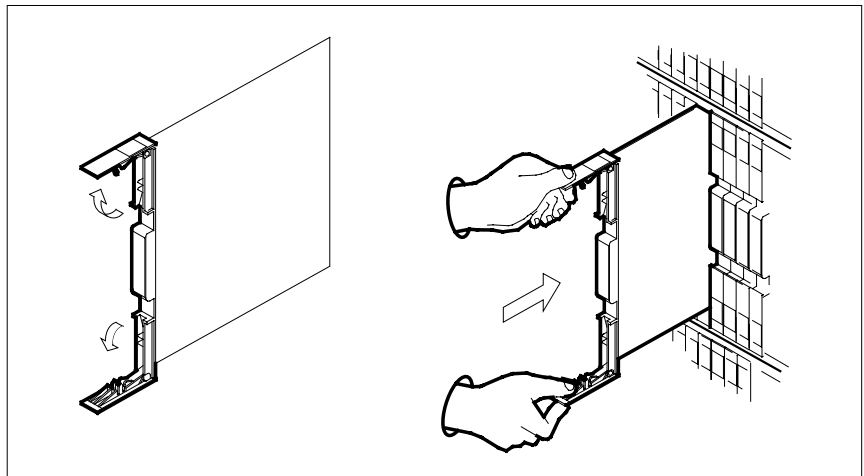

NTMX77 in an RSC-S (DS-1) Model B RCC2 (continued)

16



DANGER


Possible loss of P-side nodes

Monitor LEDs on the faceplate of the replacement NTMX77 when installing.

1. INSV and ESA LEDs may come ON and must go OFF in less than 4 seconds.
2. The ACT LCD may come ON and light for less than 1 second. If the ACT LED remains ON for more than 1 second, immediately remove the NTMX77 card and return to step 14c with a new NTMX77 card. If the NTMX77 card is allowed to remain with both units having an active processor, this is a condition of dual activity, which results in the loss of P-side nodes.

Seat and lock the card.

- a Use your fingers or thumbs to push on the upper and lower edges of the faceplate to make sure the card is fully seated in the shelf.
- b Close the locking levers.

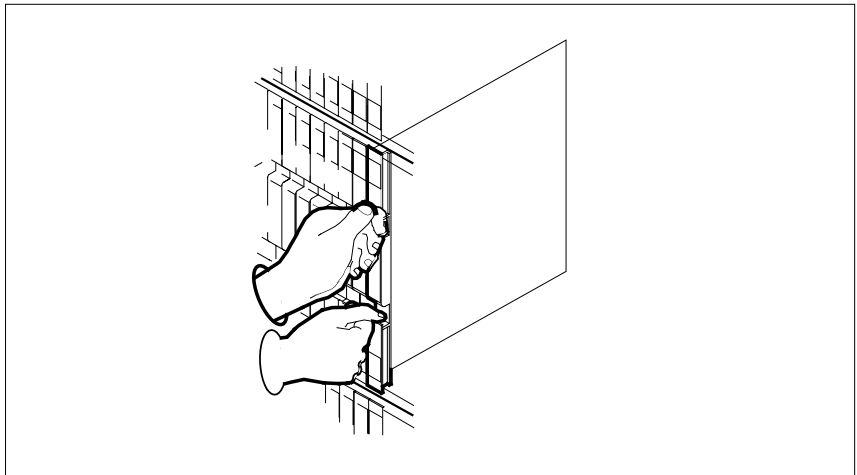

17 Reseat the NTMX73 and NTMX74 circuit cards.

18 Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
an alarm clearing procedure	step 28

NTMX77

in an RSC-S (DS-1) Model B RCC2 (continued)

If you entered this procedure from	Do
other	step 19

At the MAP terminal

- 19** The peripheralremote loader-16 card (NT7X05) allows local loading of RCC2 data, which reduces recovery time. To check if the NT7X05 card is provisioned, type

>QUERYPM FILES

and press the Enter key.

Example of a MAP display:

```

CM      MS      IOD      Net      PM      CCS      LNS      Trks      Ext      APPL
.        .        .        .        1RCC2      .        .        .        .        .
          *C*

RCC2      SysB      ManB      OffL      CBsy      ISTb      InSv
0 Quit      PM      2        0        2        0        25
2 Post      RCC2    1        0        0        0        1
3 ListSet
4           RCC2      0 ISTb  Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0:  Inact ManB
6 TST_      Unit 1:   Act InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_   NT7X05 load File: CRI05AW
11 Disp_     NT7X05 Image File:
12 Next_     CMR Load: CMR03A
13 SwAct     Unit 1:
14 QueryPM   NT7X05 load File: [CRI05AW]
15           NT7X05 Image File:
16 IRLINK    CMR Load: CMR03A
17 Perform
18

```

(NT7X05 load file name)

Note: If the NT7X05 card is not provisioned, the MAP response is:
NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 20
not provisioned	step 21

NTMX77**in an RSC-S (DS-1) Model B RCC2** (continued)

20

**DANGER****Possible service interruption**

The LOCAL LOADFILE option of the LOADPDM command has a parameter of [<file> string]]. When this parameter is used, the loadfile named in the parameter is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the inactive RCC2 unit from the local loadfile. To load the inactive RCC2 unit from the local loadfile, type

>LOADPDM UNIT rcc2_unit_no LOCAL LOADFILE

and press the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

If the load	Do
passed	step 22
failed	step 21

21 To load the inactive RCC2 unit, type

>LOADPDM INACTIVE

and press the Enter key.

If load	Do
passed	step 22
failed	step 29

22 Query the XPM counters for the firmware load on the NTMX77. To query the XPM counters, type

>QUERYPM CNTRS

and press the Enter key.

Example of a MAP response

NTMX77

in an RSC-S (DS-1) Model B RCC2 (continued)

Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0

Unit 0:

Ram Load: CRI05AW

EPRom Version: AB02

EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03

CMR Load: CMR03A

UP:MX77AA

Unit 1:

Ram Load: CRI05AW

EPRom Version: AB02

EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03

CMR Load: CMR03A

UP:MX77AA

↑
NTMX77 firmware load name

	If firmware is	Do
	valid	step 25
	invalid	step 23
23	To load the firmware on the inactive unit, type >LOADFW INACTIVE and press the Enter key.	
	If LOADFW	Do
	passed	step 24
	failed	step 29
24	To upgrade the firmware on the inactive unit, type >LOADFW INACTIVE UPGRADE and press the Enter key.	
	If LOADFW UPGRADE	Do
	passed	step 25
	failed	step 29
25	Return the inactive RCC2 unit to service. To RTS the RCC2 unit, type >RTS INACTIVE	

NTMX77
in an RSC-S (DS-1) Model B RCC2 (end)

and press the Enter key.

If RTS	Do
passed	step 26
failed	step 29

26 Send any cards with faults for repair according to local procedure.

27 Record the following information in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Go to step 30.

28 Return to the alarm clearing procedure that directed you to this procedure. At the point where a card list was produced, identify the next card on the list and go to the appropriate card replacement procedure for that card in this manual.

29 Get additional help in replacing this card by contacting operating company maintenance personnel.

30 You have correctly completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX77
in an RSC-S (PCM-30) Model A RCO2

Application

Use this procedure to replace an NTMX77 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX77	AA	Unified Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.


NTMX77 in an RSC-S (PCM-30) Model A RCO2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCO2 (1 of 2)

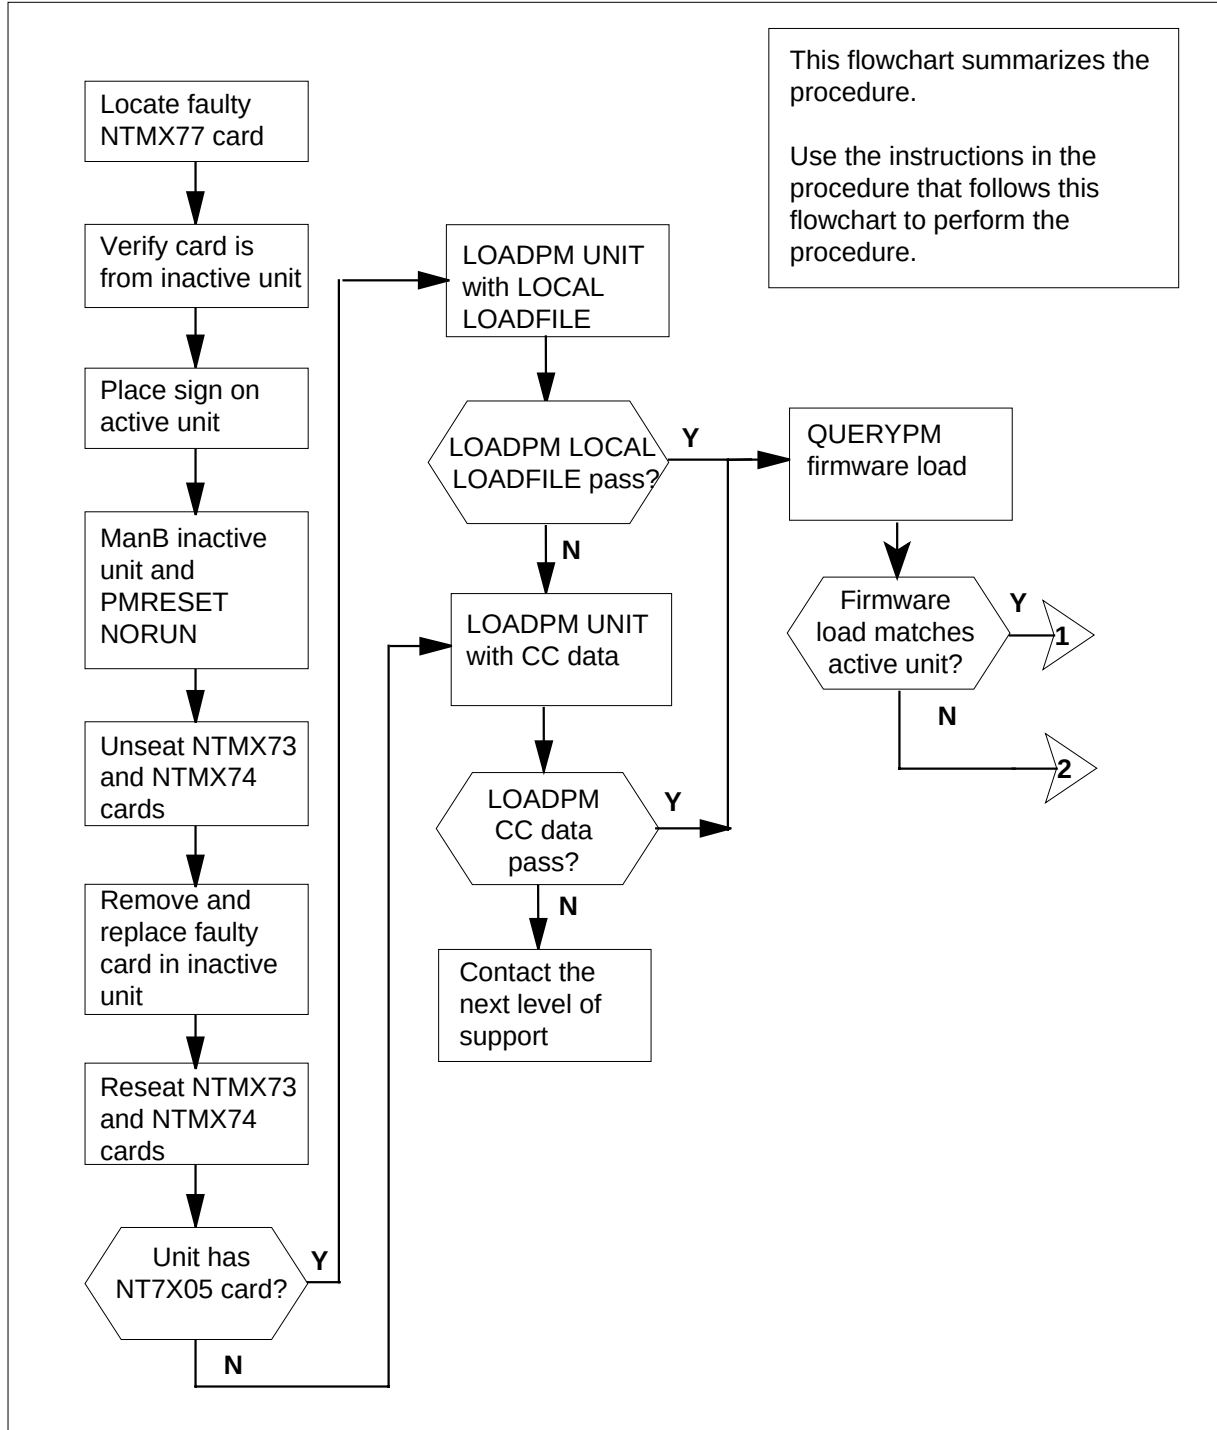

NTMX77 in an RSC-S (PCM-30) Model A RCO2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCO2 (2 of 2)

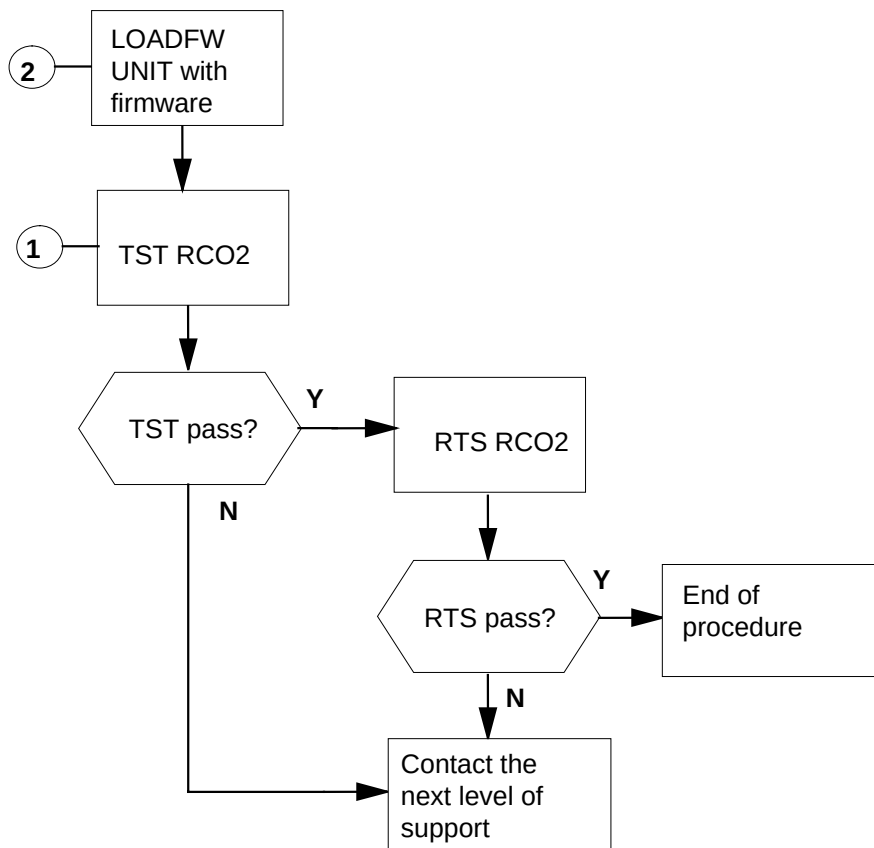

NTMX77 in an RSC-S (PCM-30) Model A RCO2 (continued)

Replacing an NTMX77 card in RSC-S RCO2

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCO2, make sure the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal and post the RCO2. To post the RCO2, type

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 to be busied (0 or 1)

Example of a MAP display:

NTMX77

in an RSC-S (PCM-30) Model A RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCO2	.	.	.	.	.
RCO2			SysB	ManB	OffL	CBsy	ISTb		InSv
0 Quit	PM	0	0	0	2	0	2		25
2 Post_	RCO2	0	0	0	0	0	1		1
3 ListSet									
4	RCO2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Check that the NTMX77AA card with faults is in the inactive unit. Make sure the LED labeled ACTIVE is OFF or observe the MAP display.

If the NTMX77AA card with faults is in	Do
active unit	step 5
inactive unit	step 9

- 5 Switch the processing activity (SWACT) to the inactive unit. To SWACT the unit, type

>SWACT

and press the Enter key.

If SWACT	Do
cannot continue now	step 6
can continue now	step 7

- 6 Do not switch activity of the units. To reject the SWACT, type

>NO

and press the Enter key.

The system discontinues the SWACT.

NTMX77

in an RSC-S (PCM-30) Model A RCO2 (continued)

- 7 Return to step 5 during a period of low traffic.
- To confirm the system prompt, type
- >YES**
- and press the Enter key.
- The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before continuing to the next maintenance action.

If the message is	Do
SWACT passed	step 9
SWACT failed	step 8
SWACT not accepted by SWACT controller	step 8

- 8 Return to the Alarm Clearing Procedures in this manual to clear the alarm condition on the inactive unit. When the alarm clears, return to step 1 of this procedure.

At the RCE frame

- 9 Place a sign on the active unit with the words *Active unit—Do not touch*. This sign must not be attached by magnets or tape.

At the MAP terminal

- 10 Busy the inactive PM unit. To busy the unit, type
- >BSY INACTIVE**
- and press the Enter key.
- 11 Set the inactive unit to the ROM level. To set the unit to the ROM level, type
- >PMRESET UNIT rco2_unit_no NORUN**
- and press the Enter key.
- where
- rco2_unit_no**
- is the number of the inactive RCO2 unit (0 or 1)

NTMX77 in an RSC-S (PCM-30) Model A RCO2 (continued)

At the RCE frame

12



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

13 Unseat the NTMX73 and NTMX74 circuit cards..


14 Remove the NTMX77 card as shown in the following figures.

a Locate the card to be removed on the appropriate shelf.

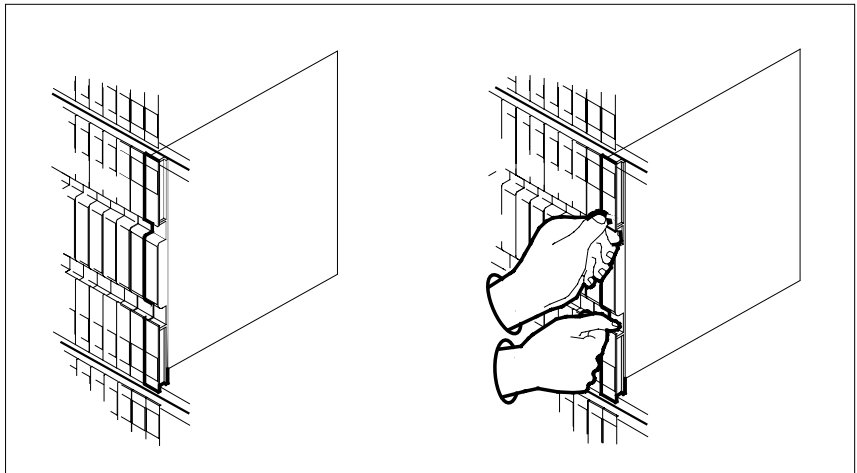

b Open the locking levers on the card to be replaced. Carefully pull the card toward you until it clears the shelf.


NTMX77 in an RSC-S (PCM-30) Model A RCO2 (continued)

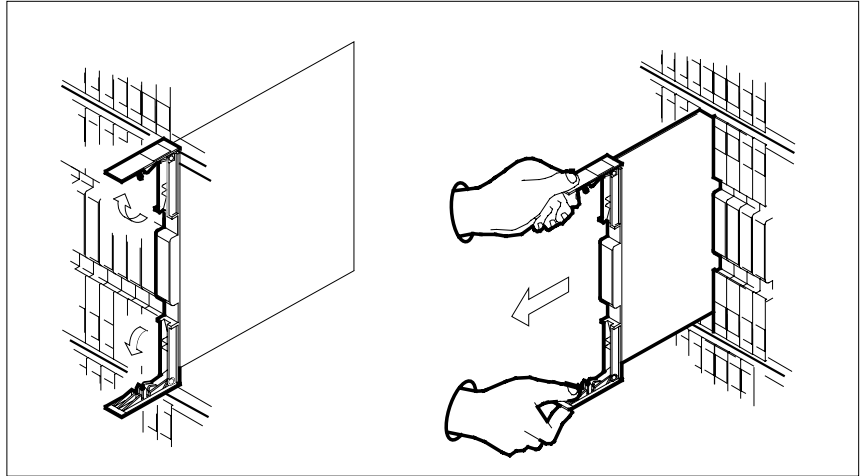

- c Make sure the replacement card has the same PEC, including suffix, as the card you just removed. Also make sure the DIP switch settings on the replacement card match the settings of the card just removed.

Note: If the NTMX77 circuit card has a DIP switch, set DIP switch S1 to CPM.

- 15 Open the locking levers on the replacement card.
- a Align the card with the slots in the shelf.
 - b Carefully slide the card into the shelf.

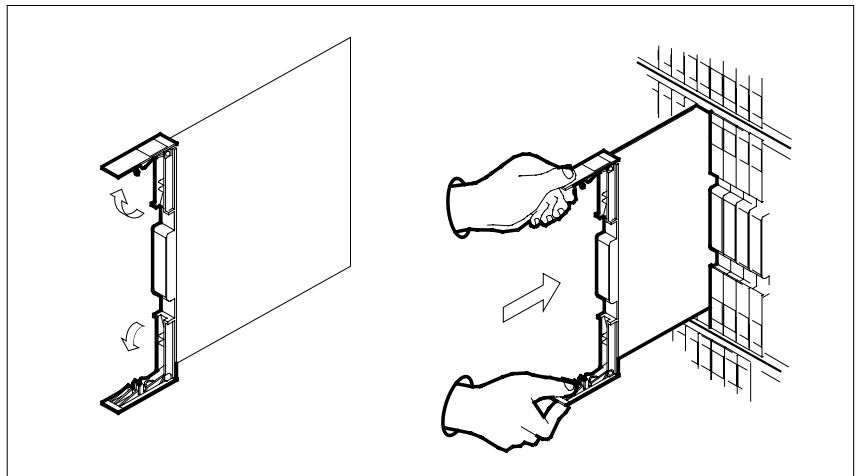

NTMX77

in an RSC-S (PCM-30) Model A RCO2 (continued)

16


**DANGER****Possible loss of P-side nodes**

Monitor the LEDs on the faceplate of the replacement NTMX77 when installing.

1. The INSV and ESA LEDs may come ON and must go OFF in less than 4 seconds.
2. The ACT LCD may come ON and light for less than 1 second. If the ACT LED remains ON for more than 1 second, immediately remove the NTMX77 card and return to step 14 c with a new NTMX77 card. If the NTMX77 card is allowed to remain with both units having an active processor, this is a condition of dual activity, which results in the loss of P-side nodes.

Seat and lock the card.

- a Use your fingers or thumbs to push on the upper and lower edges of the faceplate to make sure the card is fully seated in the shelf.
- b Close the locking levers.

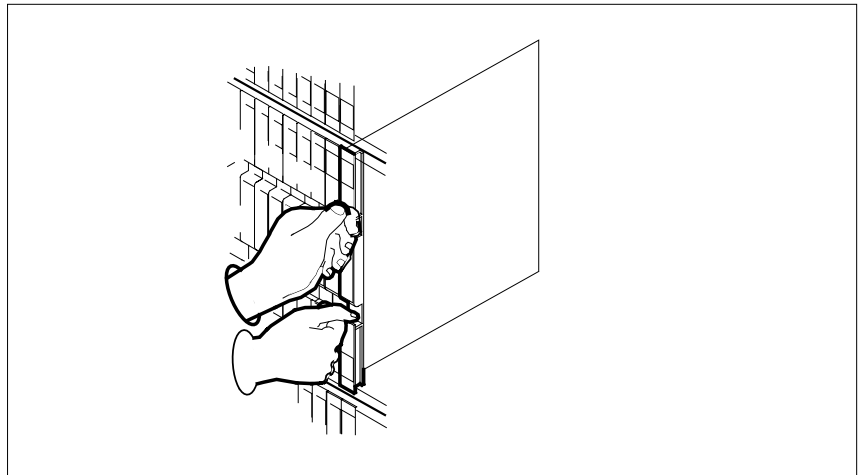

17 Reseat the NTMX73 and NTMX74 circuit cards..

18 Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
an alarm clearing procedure	step 28

NTMX77**in an RSC-S (PCM-30) Model A RCO2** (continued)

If you entered this procedure from	Do
other	step 19

At the MAP terminal

- 19** The peripheral/remote loader 16 card (NT7X05) allows local loading of RCO2 data, which reduces recovery time. To check if the NT7X05 card is provisioned, type

>QUERYPM FILES

and press the Enter key.

Example of a MAP display:

```

CM   MS   IOD   Net   PM   CCS   LNS   Trks   Ext   APPL
.    .    .    .    1RCO2 .    .    .    .    .
      *C*
RCO2          SysB   ManB   OffL   CBsy   ISTb   InSv
0 Quit      PM      2       0       2       0       2       25
2 Post      RCO2    1       0       0       0       1       1
3 ListSet
4           RCO2      0 ISTb Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0: Inact ManB
6 TST_      Unit 1: Inact InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_  NT7X05 load File: KRI05AU
11 Disp_    NT7X05 Image File:
12 Next_    Unit 1:
13 SwAct    NT7X05 load File: [KRI05AU]
14 QueryPM  NT7X05 Image File: [ ]
15
16 IRLINK
17 Perform
18

```

(NT7X05 load file name)

Note: If the NT7X05 card is not provisioned, the MAP response is:
NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 20
not provisioned	step 21

NTMX77
in an RSC-S (PCM-30) Model A RCO2 (continued)

20



DANGER
Possible service interruption
The LOCAL LOADFILE option of the LOADPDM command has a parameter of [<file> string]]. When this parameter is used, the loadfile named in the parameter is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the inactive RCO2 unit from the local loadfile. To load the inactive RCO2 unit from the local loadfile, type

>LOADPDM UNIT rco2_unit_no LOCAL LOADFILE

and press the Enter key.

where

rco2_unit_no
is the number of the inactive RCO2 unit

If the load	Do
passed	step 22
failed	step 21

21 To load the inactive RCO2 unit, type

>LOADPDM INACTIVE

and press the Enter key.

If LOADPDM	Do
passed	step 22
failed	step 29

22 Query the XPM counters for the firmware load on the NTMX77. To query XPM counters, type

>QUERYPM CNTRS

and press the Enter key.


Example of a MAP display:

NTMX77 in an RSC-S (PCM-30) Model A RCO2 (continued)

```

Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0
Unit 0:
Ram Load: KRI05AU
EPRom Version: AB02
EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03
CMR LOAD: CMR33A15
UP:MX77AA
IP:BX01
Unit 1:
Ram Load: KRI05AU
EPRom Version: AB02
EEPROM Load: Loadable: [MX77NG03], Executable: [MX77NG03]
CMR LOAD: CMR33A15
UP:MX77AA
IP:BX01

```

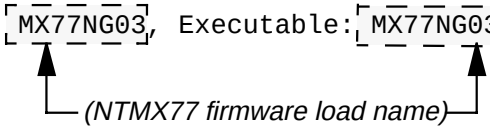

 (NTMX77 firmware load name)

If firmware is	Do
valid	step 25
invalid	step 23

- 23** To load the firmware on the inactive unit, type
>LOADFW INACTIVE
 and press the Enter key.

If the LOADFW	Do
passes	step 24
fails	step 29

- 24** To upgrade the firmware on the inactive unit, type
>LOADFW INACTIVE UPGRADE
 and press the Enter key.

If the LOADFW UPGRADE	Do
passes	step 25
fails	step 29

- 25** Return the inactive RCO2 unit to service. To RTS the unit, type
>RTS INACTIVE

NTMX77
in an RSC-S (PCM-30) Model A RCO2 (end)

and press the Enter key.

If RTS	Do
passed	step 26
failed	step 29

26 Send any faulty cards for repair according to local procedure.

27 Record the following information in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Go to step 30.

28 Return to the alarm clearing procedure that directed you to this procedure. At the point where a card list was produced, identify the next card on the list and go to the appropriate card replacement procedure for that card in this manual.

29 Get additional help in replacing this card by contacting operating company maintenance personnel.

30 You have correctly completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX77 in an RSC-S (PCM-30) Model B RCO2

Application

Use this procedure to replace an NTMX77 card in an RSC-S RCO2.

PEC	Suffixes	Name
NTMX77	AA	Unified Processor

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.


NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCO2 (1 of 2)

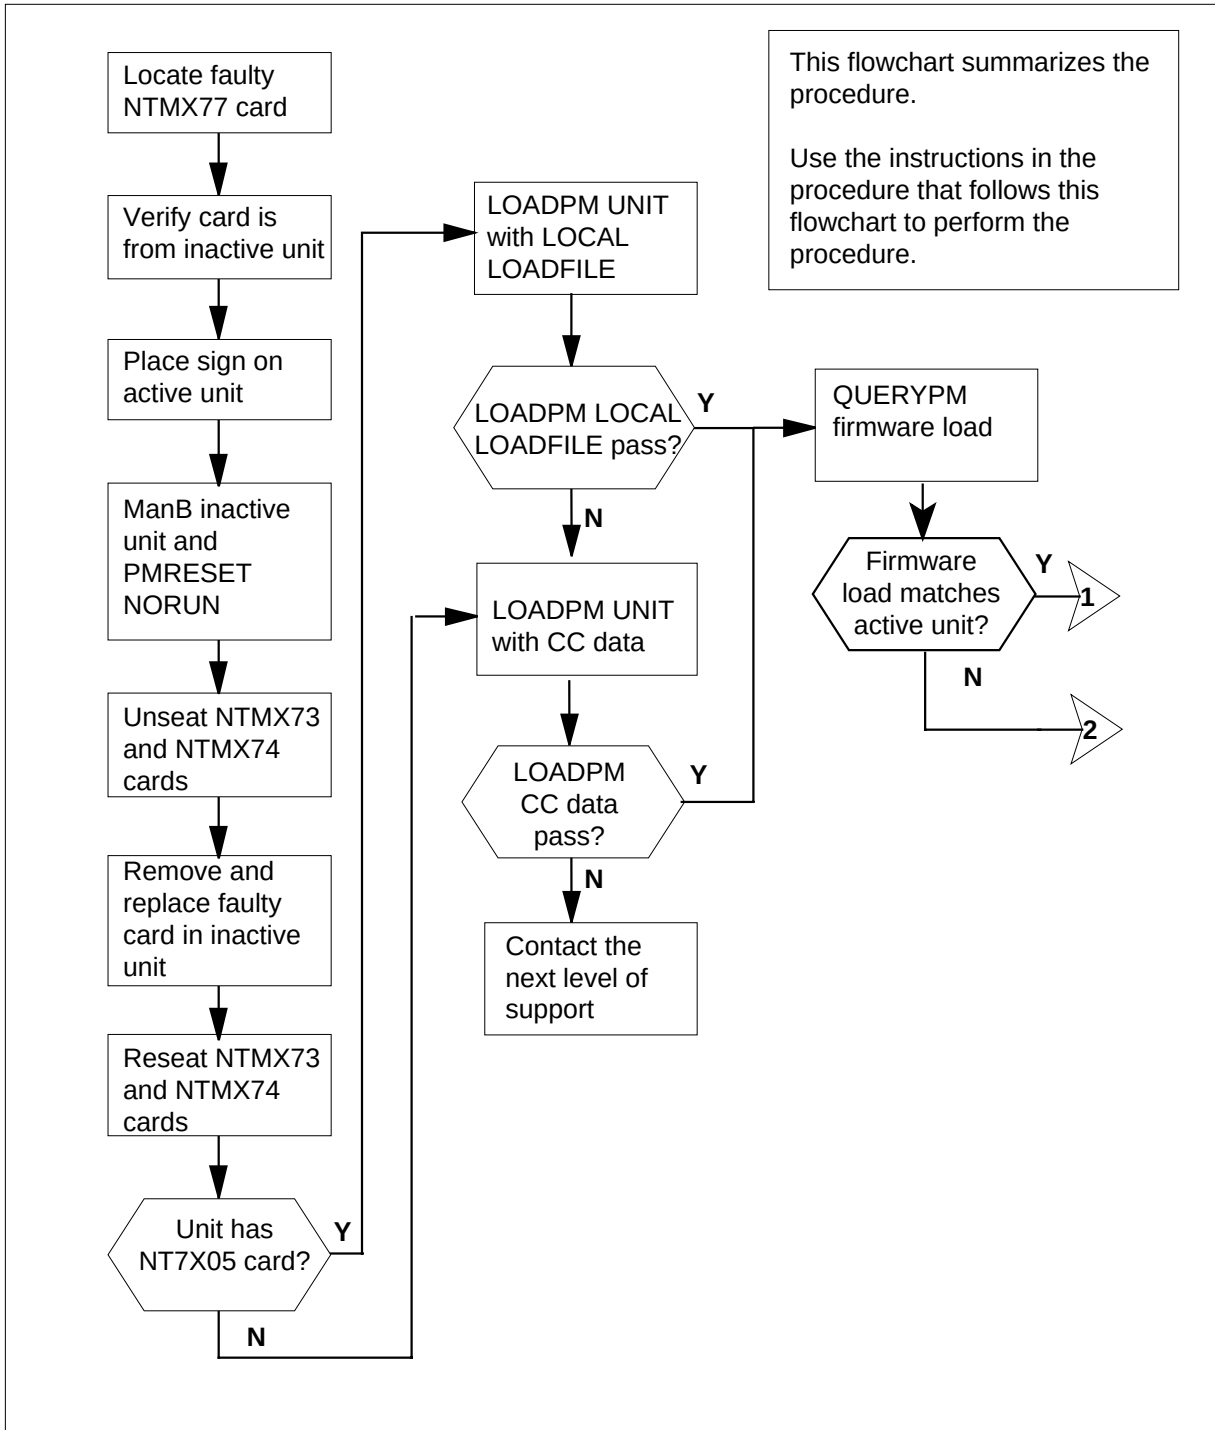

NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

Summary of card replacement procedure for an NTMX77 card in RSC-S RCO2 (2 of 2)

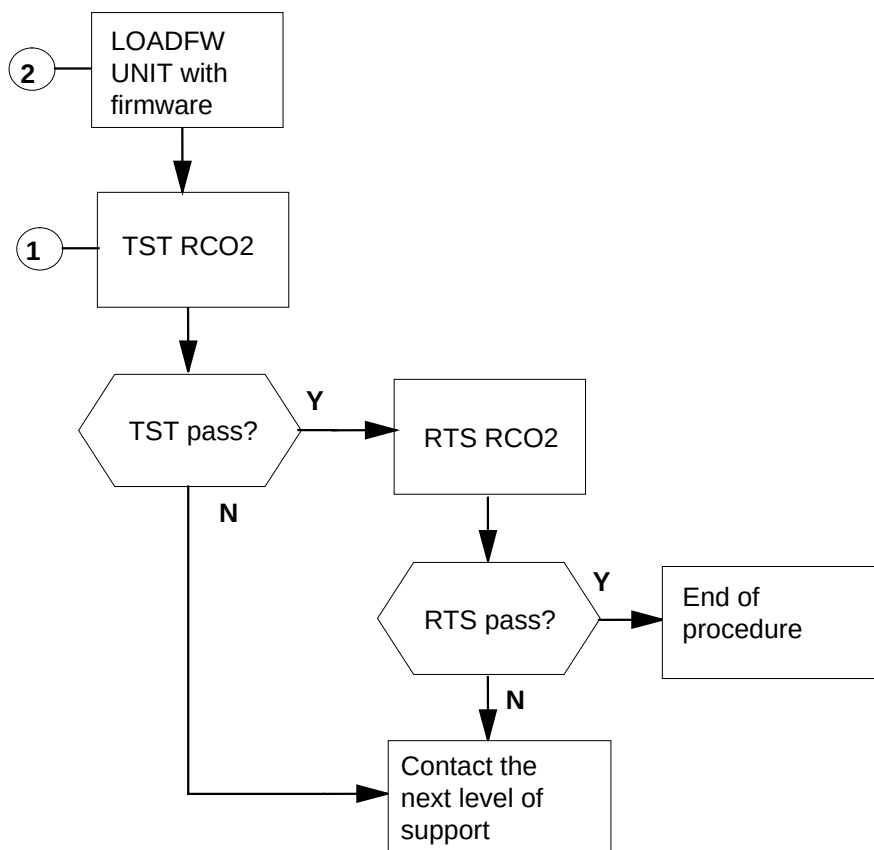

NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

Replacing an NTMX77 card in RSC-S RCO2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCO2, make sure the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal and post the RCO2. To post the RCO2, type

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 to be busied (0 or 1)

Example of a MAP display:

NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCO2	.	.	.	.	.
RCO2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	0	2	0	2	25	
2 Post_	RCO2	0	0	0	0	0	1	1	
3 ListSet									
4	RCO2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 Check that the NTMX77AA card with faults is in the inactive unit. Make sure the LED labeled ACTIVE is OFF or observe the MAP display.

If the NTMX77AA card with faults is in	Do

active unit	step 5

inactive unit	step 9

- 5 Switch the processing activity (SWACT) to the inactive unit. To SWACT the unit, type

>SWACT

and press the Enter key.

If SWACT	Do

cannot continue now	step 6

can continue now	step 7

- 6 Do not switch activity of the units. To reject the SWACT, type

>NO

and press the Enter key.

The system discontinues the SWACT.

NTMX77

in an RSC-S (PCM-30) Model B RCO2 (continued)

- Return to step 5 during a period of low traffic.
- 7** To confirm the system prompt, type
>YES
 and press the Enter key.
- The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.
- Note:** A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before continuing to the next maintenance action.
- | If the message is | Do |
|--|--------|
| SWACT passed | step 9 |
| SWACT failed | step 8 |
| SWACT not accepted by SWACT controller | step 8 |
- 8** Return to the Alarm Clearing Procedures in this manual to clear the alarm condition on the inactive unit. When the alarm clears, return to step 1 of this procedure.
- At the RCE frame**
- 9** Place a sign on the active unit with the words *Active unit—Do not touch*. This sign must not be attached by magnets or tape.
- At the MAP terminal**
- 10** Busy the inactive PM unit. To busy the unit, type
>BSY INACTIVE
 and press the Enter key.
- 11** Set the inactive unit to the ROM level. To set the unit to the ROM level, type
>PMRESET UNIT rco2_unit_no NORUN
 and press the Enter key.
- where
- rco2_unit_no**
 is the number of the inactive RCO2 unit (0 or 1)

NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

At the RCE frame

12



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

13 Unseat the NTMX73 and NTMX74 circuit cards.


14 Remove the NTMX77 card as shown in the following figures.

a Locate the card to be removed on the appropriate shelf.

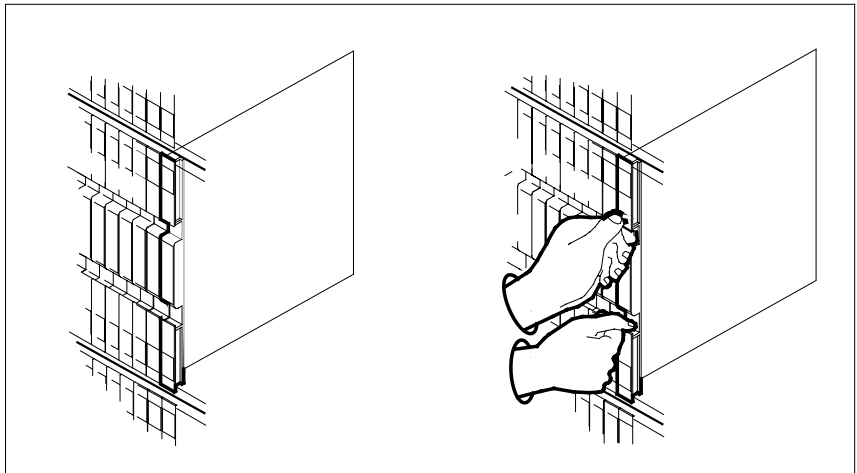

b Open the locking levers on the card to be replaced. Carefully pull the card toward you until it clears the shelf.


NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

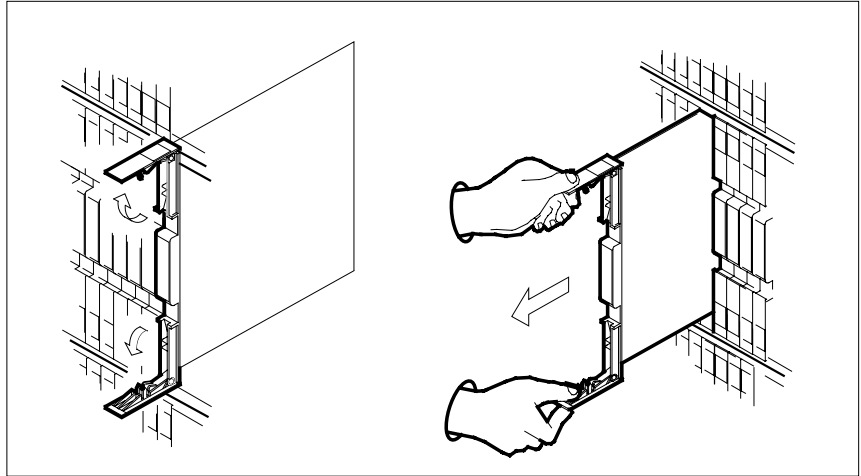

- c Make sure the replacement card has the same PEC, including suffix, as the card you just removed. Also make sure the DIP switch settings on the replacement card match the settings of the card just removed.

Note: If the NTMX77 circuit card has a DIP switch, set DIP switch S1 to CPM.

- 15 Open the locking levers on the replacement card.
- a Align the card with the slots in the shelf.
 - b Carefully slide the card into the shelf.

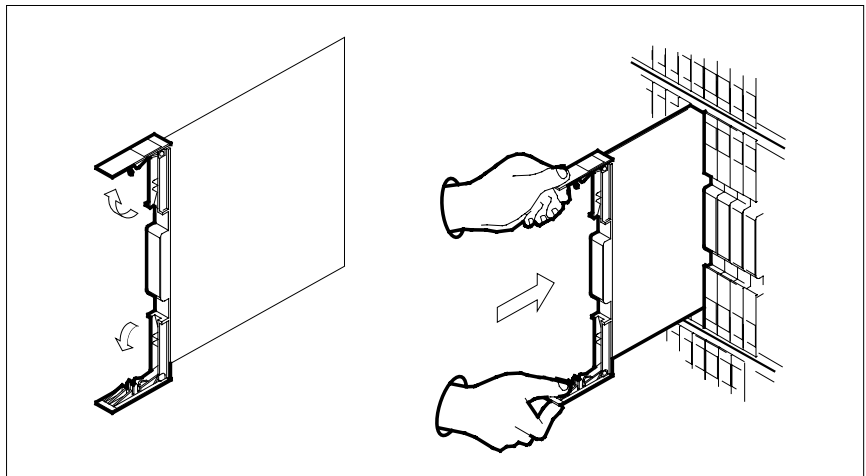

NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

16



DANGER


Possible loss of P-side nodes

Monitor the LEDs on the faceplate of the replacement NTMX77 when installing.

1. The INSV and ESA LEDs may come ON and must go OFF in less than 4 seconds.
2. The ACT LCD may come ON and light for less than 1 second. If the ACT LED remains ON for more than 1 second, immediately remove the NTMX77 card and return to step 14 c with a new NTMX77 card. If the NTMX77 card is allowed to remain with both units having an active processor, this is a condition of dual activity, which will result in the loss of P-side nodes.

Seat and lock the card.

- a Use your fingers or thumbs to push on the upper and lower edges of the faceplate to make sure the card is fully seated in the shelf.
- b Close the locking levers.

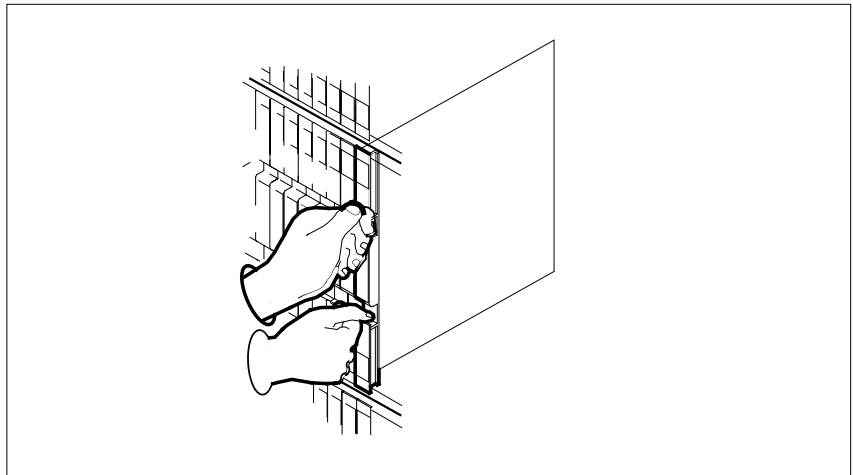

17 Reseat the NTMX73 and NTMX74 circuit cards.

18 Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
an alarm clearing procedure	step 28

NTMX77

in an RSC-S (PCM-30) Model B RCO2 (continued)

If you entered this procedure from	Do
other	step 19

At the MAP terminal

- 19** The peripheral/remote loader 16 card (NT7X05) allows local loading of RCO2 data which reduces recovery time. To check if the NT7X05 card is provisioned, type

>QUERYPM FILES

and press the Enter key.

Example of a MAP display:

```

CM   MS   IOD   Net   PM   CCS   LNS   Trks   Ext   APPL
.    .    .    .    1RCO2 .    .    .    .    .
      *C*
RCO2          SysB   ManB   OffL   CBSy   ISTb   InSv
0 Quit      PM      2       0       2       0       25
2 Post      RCO2    1       0       0       0       1
3 ListSet
4           RCO2      0 ISTb Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0: Inact ManB
6 TST_      Unit 1: Inact InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_   NT7X05 load File: KRI05AU
11 Disp_     NT7X05 Image File:KRI05AU
12 Next_
13 SwAct     Unit 1:
14 QueryPM   NT7X05 load File: [KRI05AU]
15           NT7X05 Image File:KRI05AU
16 IRLINK
17 Perform
18

```

(NT7X05 load file name)

Note: If the NT7X05 card is not provisioned, the MAP response is:
NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 20
not provisioned	step 21

NTMX77 in an RSC-S (PCM-30) Model B RCO2 (continued)

20



DANGER

Possible service interruption

The LOCAL LOADFILE option of the LOADPM command has a parameter of [<file> string]]. When this parameter is used, the loadfile named in the parameter is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the inactive RCO2 unit from the local loadfile. To load the inactive RCO2 unit from the local loadfile, type

>LOADPM UNIT unit_no LOCAL IMAGE

and press the Enter key.

where

rco2_unit_no

is the number of the inactive RCO2 unit

If the load	Do
passed	step 22
failed	step 21

21 To load the inactive RCO2 unit, type

>LOADPM INACTIVE

and press the Enter key.

If the load	Do
passed	step 22
failed	step 29

22 Query the XPM counters for the firmware load on the NTMX77. To query XPM counters, type

>QUERYPM CNTRS

and press the Enter key.

Example of a MAP display:

NTMX77

in an RSC-S (PCM-30) Model B RCO2 (continued)

Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0

Unit 0:

Ram Load: KRI05AU

EProm Version: AB02

EEProm Load: Loadable: MX77NG03, Executable: MX77NG03

CMR LOAD: CMR33A15

UP:MX77AA

IP:BX01

Unit 1:

Ram Load: KRI05AU

EProm Version: AB02

EEProm Load: Loadable: [MX77NG03] Executable: [MX77NG03]

CMR LOAD: CMR33A15

UP:MX77AA

IP:BX01

(NTMX77 firmware load name)

If firmware is	Do
valid	step 25
invalid	step 23

- 23** To load the firmware on the inactive unit, type
>LOADFW INACTIVE
 and press the Enter key.

If LOADFW	Do
passed	step 24
failed	step 29

- 24** To upgrade the firmware on the inactive unit, type
>LOADFW INACTIVE UPGRADE
 and press the Enter key.

If LOADFW UPGRADE	Do
passed	step 25
failed	step 29

- 25** Return the inactive RCO2 unit to service. To RTS the RCO2 unit, type
>RTS INACTIVE

NTMX77
in an RSC-S (PCM-30) Model B RCO2 (end)

and press the Enter key.

If RTS	Do
passed	step 26
failed	step 29

- 26** Send any faulty cards for repair according to local procedure.
- 27** Record the following information in office records:
- date the card was replaced
 - serial number of the card
 - indications that prompted replacement of the card
- Go to step 30.
- 28** Return to the alarm clearing procedure that directed you to this procedure. At the point where a card list was produced, identify the next card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 29** Get additional help in replacing this card by contacting operating company maintenance personnel.
- 30** You have correctly completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

**NTMX77
in an SMS**

Application

Use this procedure to replace an NTMX77 card in an SMS.

PEC	Suffixes	Name
NTMX77	AA	Unified processor (UP)

Common procedures


None


Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

NTMX77 in an SMS (continued)

Summary of card replacement procedure for an NTMX77 card in an SMS

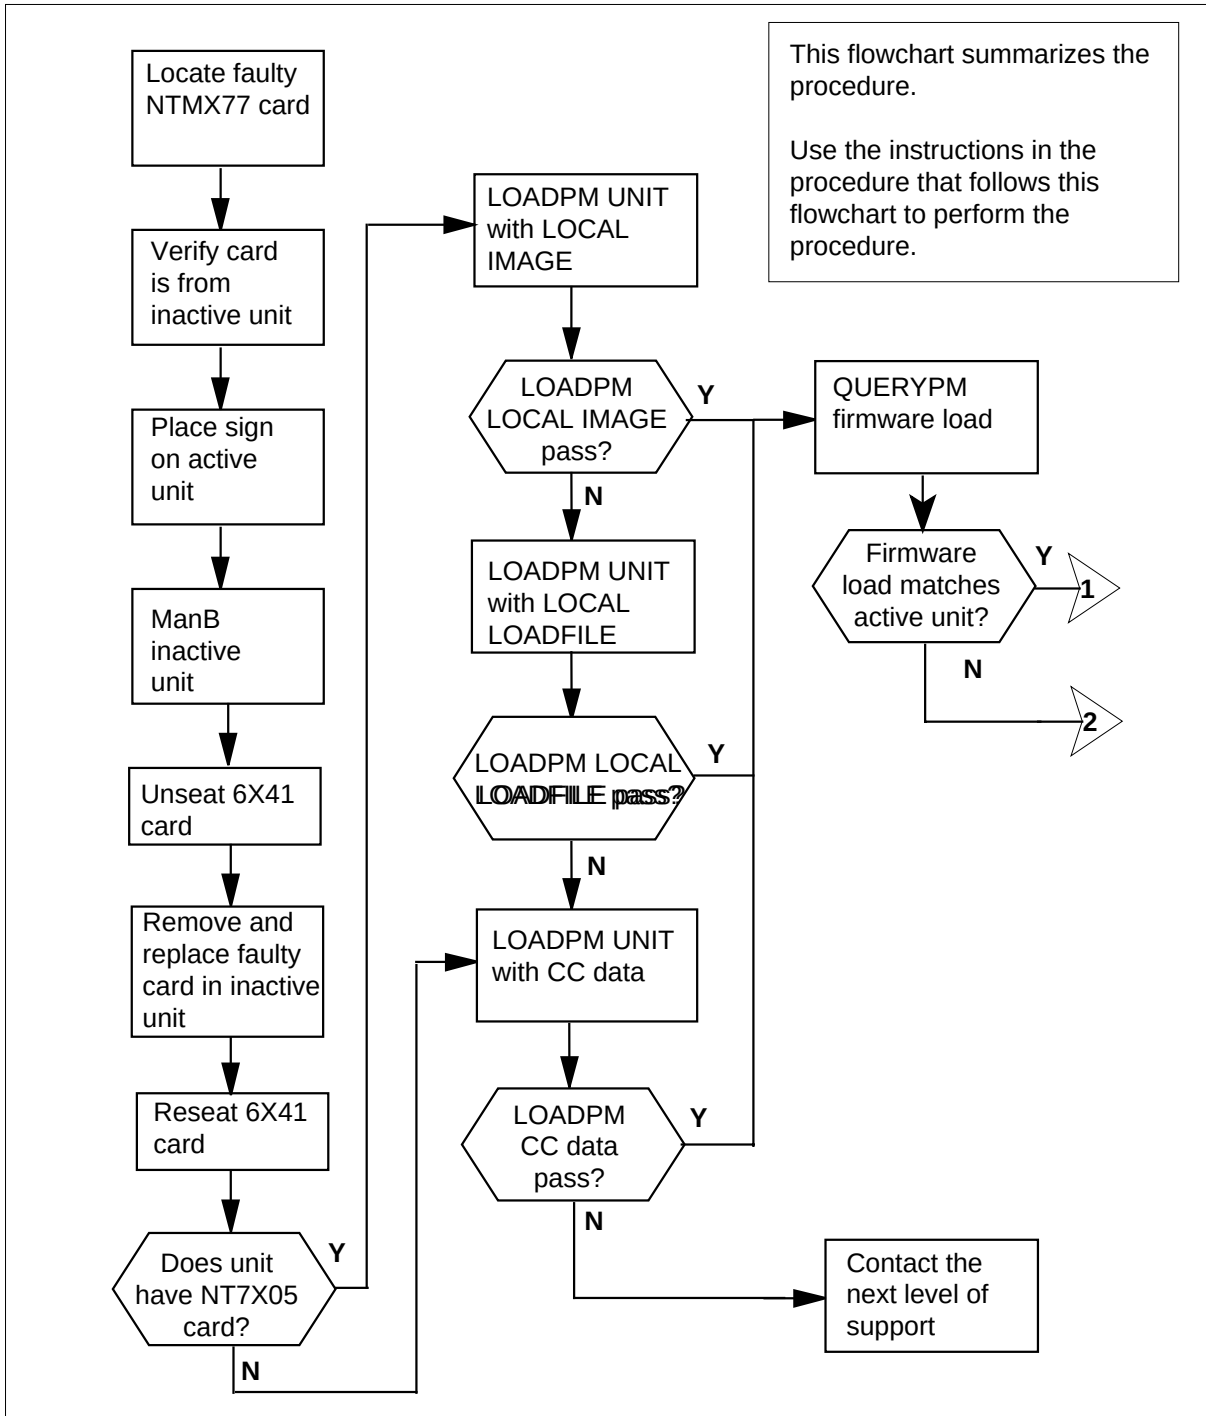

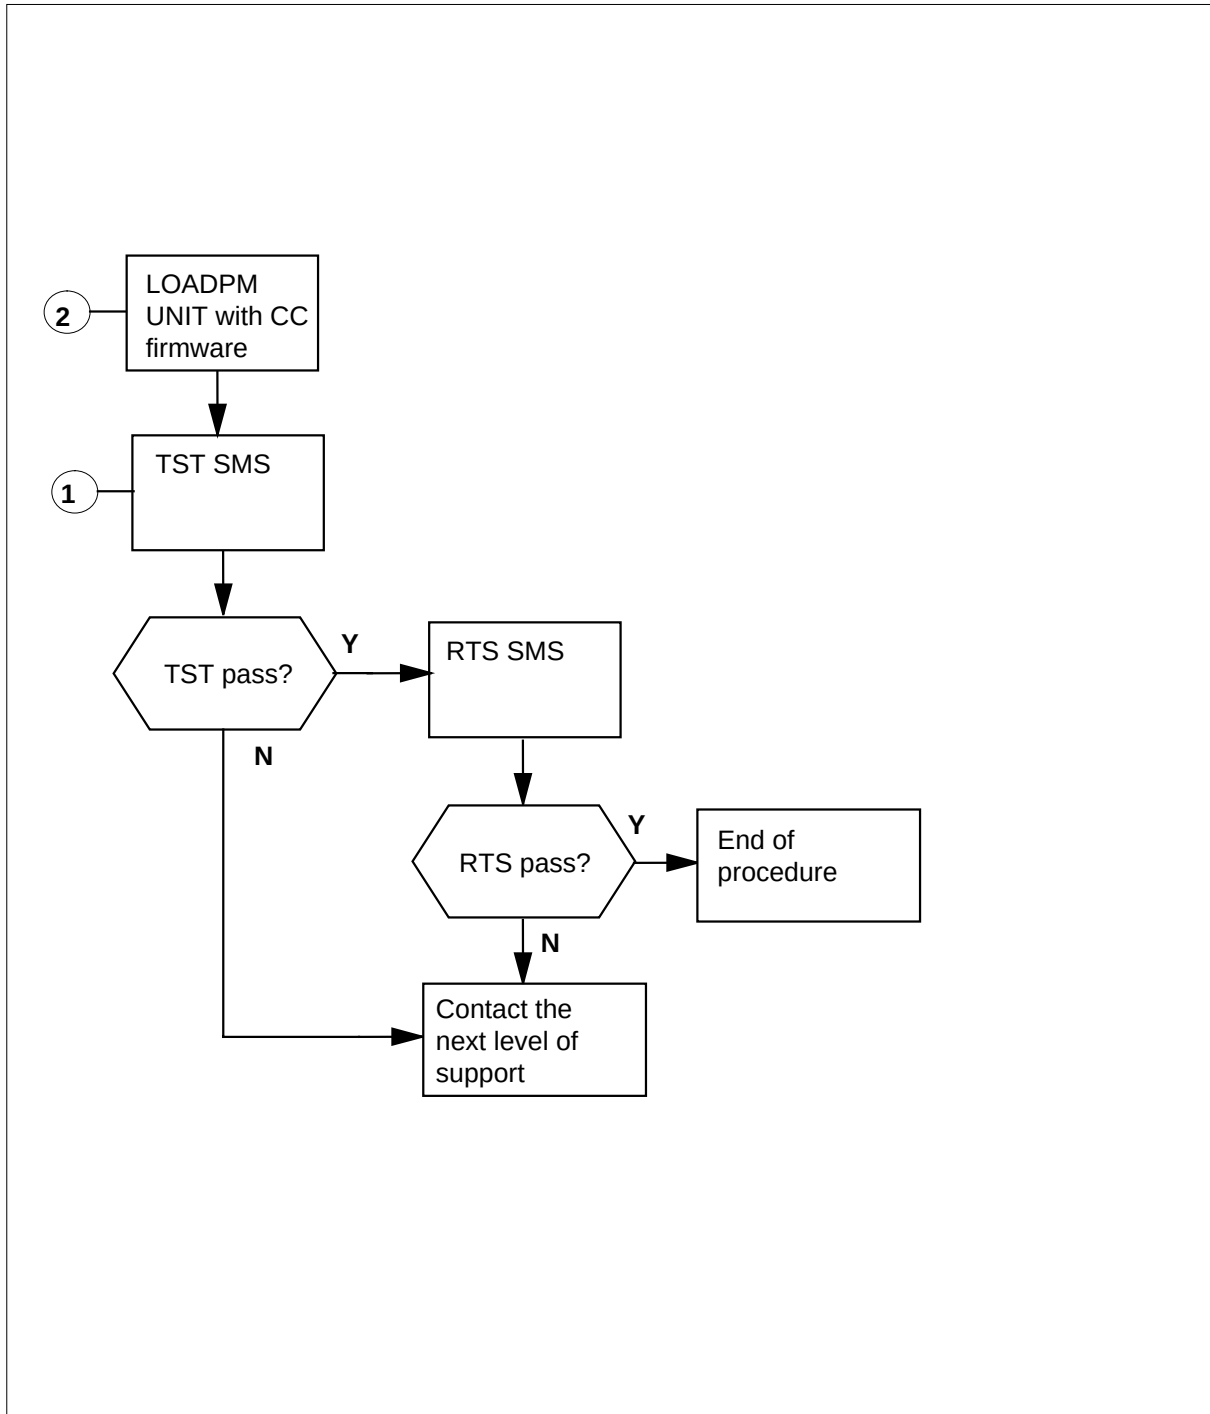NTMX77
in an SMS (continued)**Summary of card replacement procedure for an NTMX77 card in an SMS**

NTMX77 in an SMS (continued)

Replacing an NTMX77 card in an SMS

At your Current Location

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or were directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the SMS, ensure the unit where you are replacing the card is inactive and the mate unit is active.

Obtain a replacement card. Verify the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal by typing

>MAPCI;MTC;PM;POST SMS sms_no

and pressing the Enter key.

where

sms_no

is the number of the SMS to be posted

Example of a MAP response

SMS	SysB	ManB	Offl	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMS	0	0	0	0	1	7

SMS 0 ISTb Links_00S: CSide 0, PSide 0

Unit0: Act ISTb

Unit1: Inact InSv

- 4 To verify the faulty NTMX77 card is in the inactive unit, ensure the LED labeled *Active* is off or observe the MAP display.

If faulty card is on	Do
active unit	step 5

NTMX77 in an SMS (continued)

	If faulty card is on	Do
	inactive unit	step 8
5	Switch the activity of the units by typing >SWACT and pressing the Enter key. The system determines the type of SWACT it can perform and displays a confirmation prompt for the selected SWACT.	
	If SWACT	Do
	can continue at this time	step 6
	cannot continue at this time	step 30
6	Switch the activity of the unit by typing >YES and pressing the Enter key. The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably. Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.	
	If the message is	Do
	SwAct passed	step 8
	SwAct failed	step 7
	SwAct failedReason: XPM SwActback	step 7
	SwAct refused by SwAct controller	step 7
7	Return to <i>Alarm Clearing Procedures</i> to clear the alarm condition on the inactive unit. When the alarm is cleared, return to step 1 of this procedure.	
At the frame		
8	Put a sign on the active unit bearing the following words: <i>Active unit—Do not touch</i> . This sign should not be attached with magnets or tape.	

NTMX77 in an SMS (continued)

At the MAP terminal

- 9 Busy the inactive SMS unit by typing
>BSY UNIT unit_no
and pressing the Enter key.
where
unit_no
is the number of the faulty SMS unit
- 10 Set the unit to the ROM level by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.
where
unit_no
is the number of the faulty SMS unit

At the frame

11



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel of the SMS. This protects the equipment against damage caused by static electricity. When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.

Put on a wrist strap.

- 12 Unseat the NT6X41 card.

13



CAUTION


Service disruption

If the replacement MX77 card you are installing has dip switch S1, ensure dip switch S1 is in the XPM position. If switch S1 is not in the XPM position, the active unit will go out-of-service, thereby interrupting call processing.


Remove the NTMX77 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

NTMX77
in an SMS (continued)

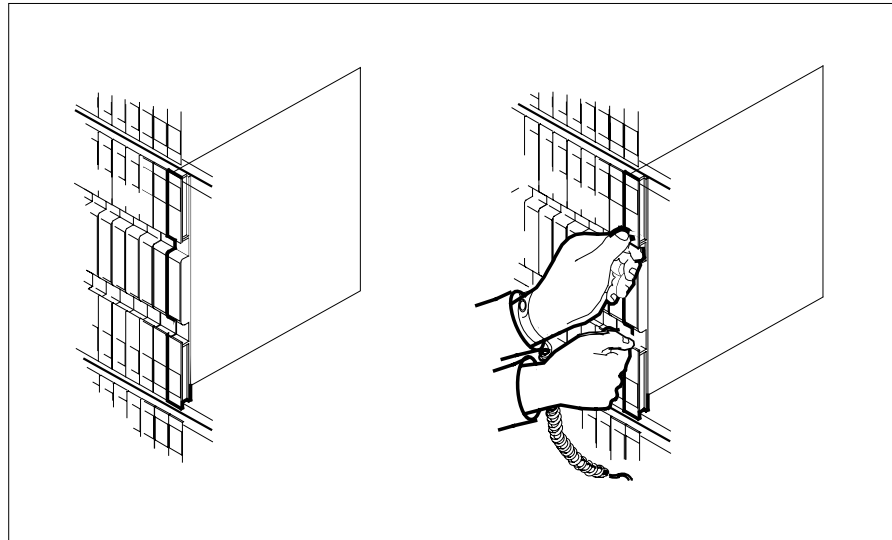

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

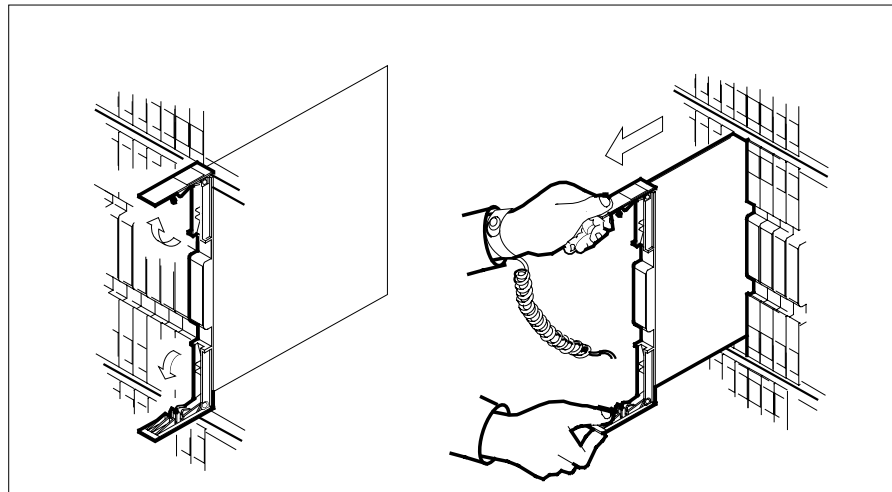

- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed. Also ensure that all replacement card dip switch settings match settings of the card just removed. Ensure that dip switch S1 (if equipped) is in the XPM position.

NTMX77 in an SMS (continued)

14



DANGER


Possible loss of P-side nodes

Monitor the LEDs on the faceplate of the replacement NTMX77 when installing.

1. The INSV and ESA LEDs may come ON and must go OFF in less than 4 seconds.
2. The ACT LCD may come ON and light for less than 1 second. If the ACT LED remains ON for more than 1 second, immediately remove the NTMX77 card and return to step 13, Section c, "Ensure the replacement card has the same PEC, including suffix, as the card you just removed. Also ensure that all replacement card dip switch settings match settings of the card just removed. Ensure that dip switch S1 (if equipped) is in the XPM position." on page -299 with a new NTMX77 card.


If the NTMX77 card is allowed to remain with both units having an active processor, this is a condition of dual activity, which will result in the loss of P-side nodes. If the switches are set correctly reject the faulty card.

Open the locking levers on the replacement card. Align the card with the slots in the shelf and gently slide the card into the shelf.

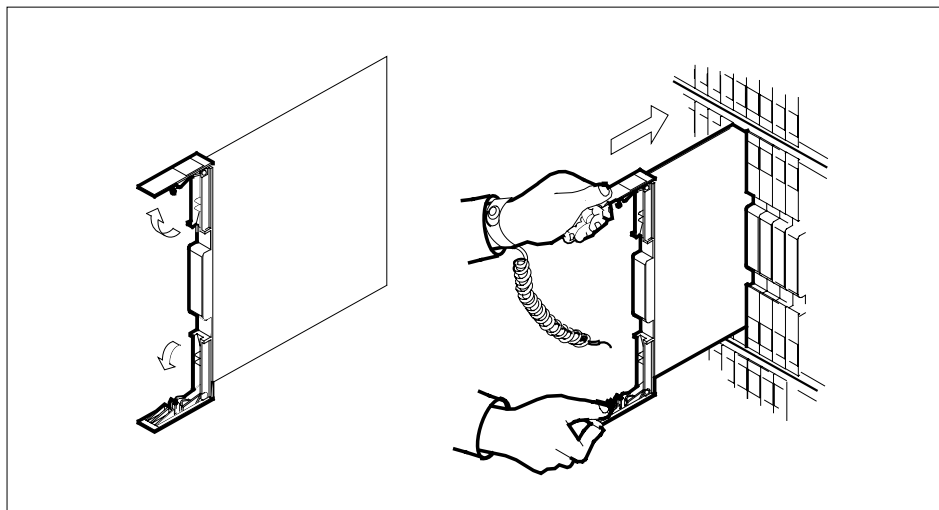

NTMX77
in an SMS (continued)

- 15** Seat and lock the card.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

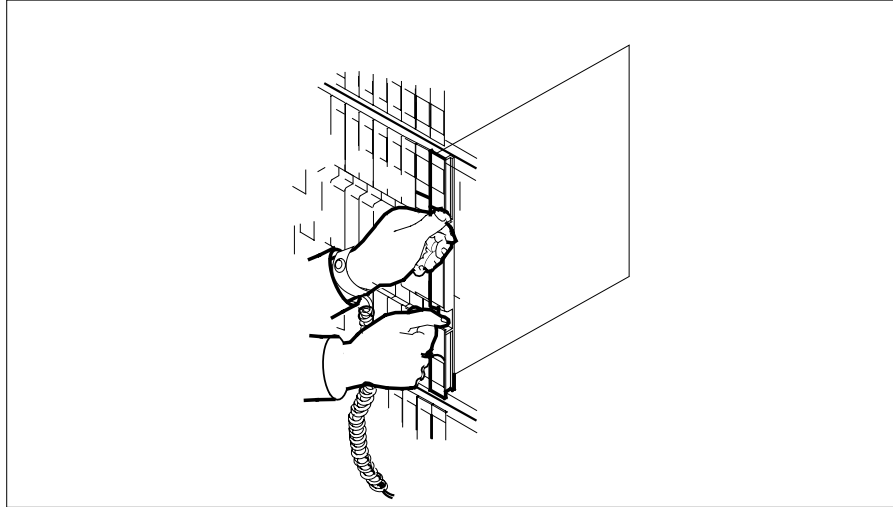

- 16** Reseat the NT6X41 card.

At the MAP terminal

- 17** The peripheral loader card (NT7X05) allows local loading of the NTMX77 data. Local data loading reduces recovery time. Check if the NT7X05 card is provisioned by typing:

>QUERYPM FILES

and pressing the Enter key.

Example of a MAP display:

NTMX77
in an SMS (continued)

```

CM      MS      IOD      Net      PM      CCS      LNS      Trks      Ext      APPL
.       .       .       .       1RCC
          *C*
SMS
0 Quit      PM      2       0       2       0       2       25
2 Post      SMS     1       0       0       0       1       1
3 ListSet
4           SMS     0 ISTb Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0: Inact ManB
6 TST_      Unit 1: Act  InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_ NT7X05 load File: ESS05AW
11 Disp_    NT7X05 Image File:ESS05AW
12 Next_
13 SwAct    Unit 1:
14 QueryPM  NT7X05 load File: ESS05AW
15          NT7X05 Image File:ESS05AW
16 IRLINK
17 Perform
18
```

Note: If the NT7X05 card is not provisioned the MAP response is:Nt 7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 18
not provisioned	step 20

18



CAUTION

ISDN units can not be loaded by LOCAL IMAGE

Do not LOADPM from the LOCAL IMAGE on units with ISDN capability. The NT7X05 card does not support ISDN, use LOCAL LOADFILE or load from the CC on units with ISDN.

Load the SMS from the local image by typing
>LOADPM UNIT unit_no LOCAL IMAGE
and pressing the Enter key.
where

NTMX77 in an SMS (continued)

rcc_unit_no
is the number of the inactive RCC unit

If the load	Do
passed	step 22
failed	step 19

- 19** Load the SMS from the local loadfile by typing
>LOADPM UNIT unit_no LOCAL LOADFILE
 and pressing the Enter key.
where

rcc_unit_no
is the number of the inactive RCC unit

If the load	Do
passed	step 22
failed	step 20

- 20** Load the SMS from the CC by typing
>LOADPM UNIT unit_no CC
 and pressing the Enter key.
where

unit_no
is the number of the faulty SMS unit busied in step 9

If load	Do
passes	step 22
fails	step 29

- 21** Query the XPM countrs for the firmware load on the NTMX77 by typing:
>QUERYPM CNTRS
 and pressing the Enter key.
Example of a MAP display:

NTMX77**in an SMS (continued)**

```

Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0
Unit 0:
Ram Load: ESS05AW
EPROM Version: AB02
EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03
CMR LOAD: CMR33A15
UP:MX77AA

```

```

Unit 1:
Ram Load: ESS05AW
EPROM Version: AB02
EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03
CMR LOAD: CMR33A15
UP:MX77AA

```

	If firmware is	Do
	valid	step 23
	invalid	step 22
22	Load the firmware in the inactive SMS unit by typing >LOADPM UNIT unit_no CC FIRMWARE and pressing the Enter key. <i>where</i> unit_no is the number of the faulty SMS unit busied in step 9	
	If load	Do
	passes	step 23
	fails	step 29
23	Test the inactive SMS unit by typing >TST UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty SMS unit loaded in step 20 <i>Example of a MAP response</i>	

NTMX77 in an SMS (end)

Test Passed
or
Test Failed

	If TST	Do
	passes	step 24
	fails	step 29
24	Return the inactive SMS unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the faulty SMS unit tested in step 23	
	If RTS	Do
	passes	step 25
	fails	step 29
25	Send any faulty cards for repair according to local procedure.	
26	Remove the sign from the active SMS unit.	
27	Record the following items in office records according to local policy: • date the card was replaced • serial number of the card • symptoms that prompted replacement of the card	
28	You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.	
29	Obtain further assistance in replacing this card by contacting personnel responsible for a higher level of support.	
30	For further assistance with switch of activity, contact the personnel responsible for the next level of support. Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.	

NTMX77 in an SMS-R

Application

Use this procedure to replace the following card in an SMS-R.

PEC	Suffixes	Name
NTMX77	AA	Unified Processor (UP)

Common procedures


Not applicable

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.


NTMX77 in an SMS-R (continued)

Summary of card replacement procedure for an NTMX77 card in an SMS-R

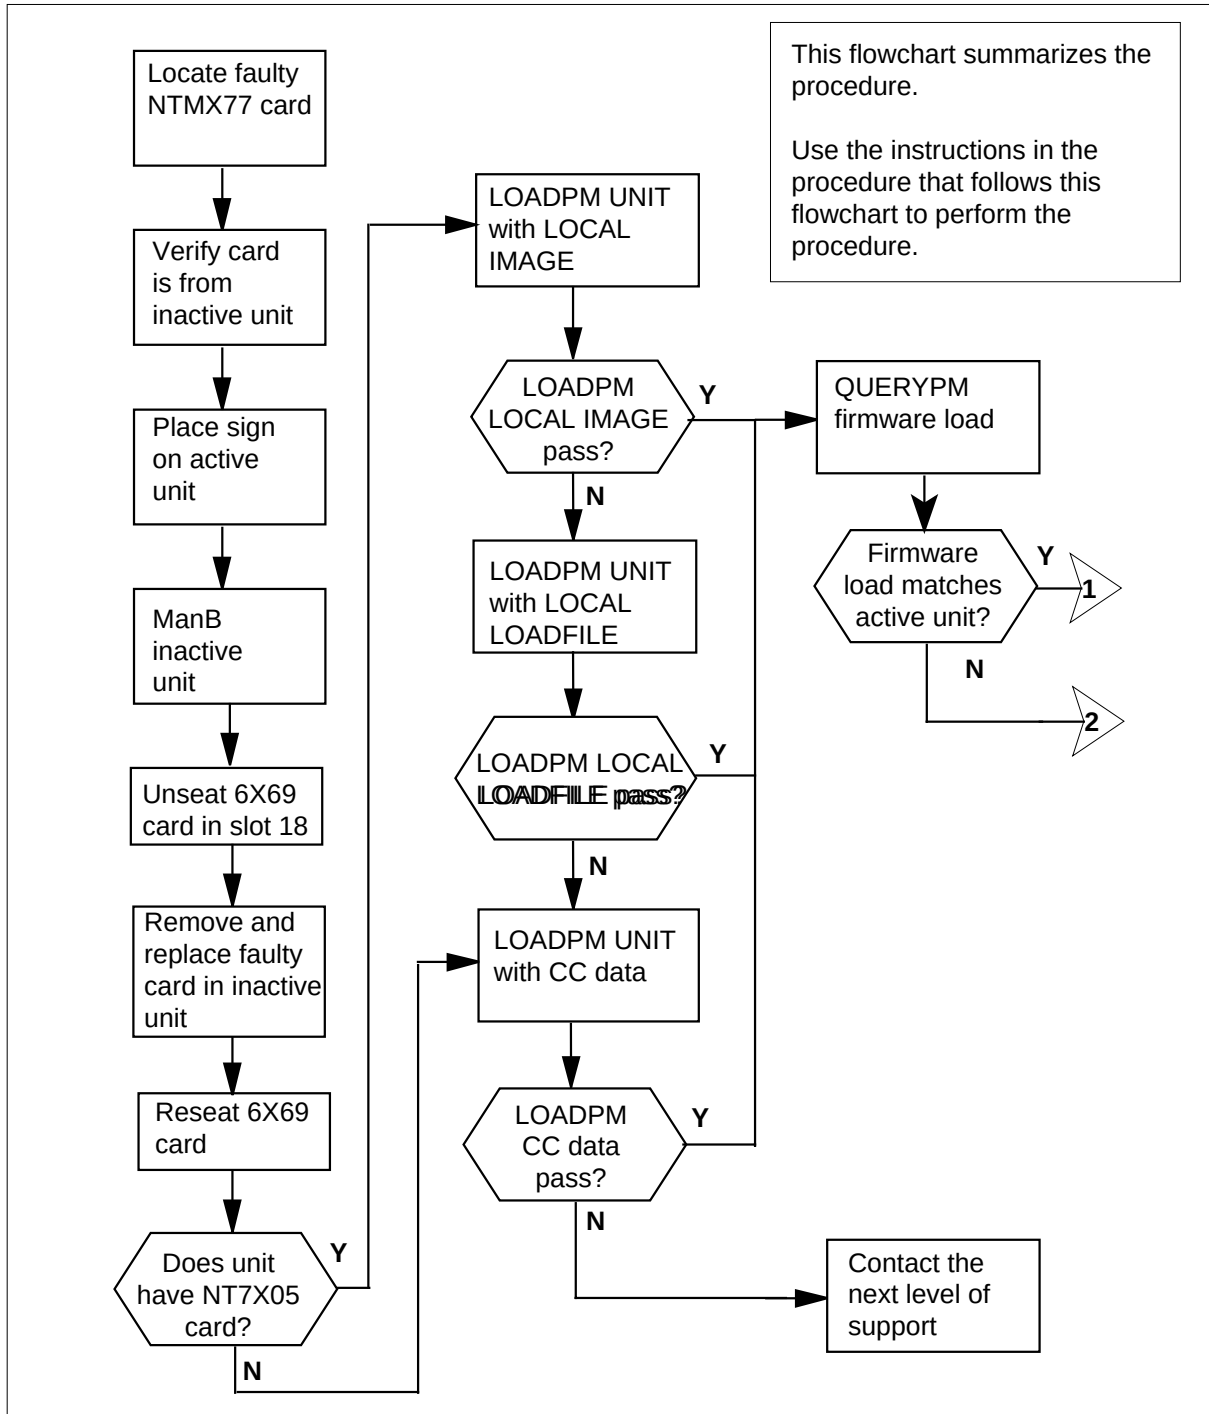

NTMX77 in an SMS-R (continued)

Summary of card replacement procedure for an NTMX77 card in an SMS-R

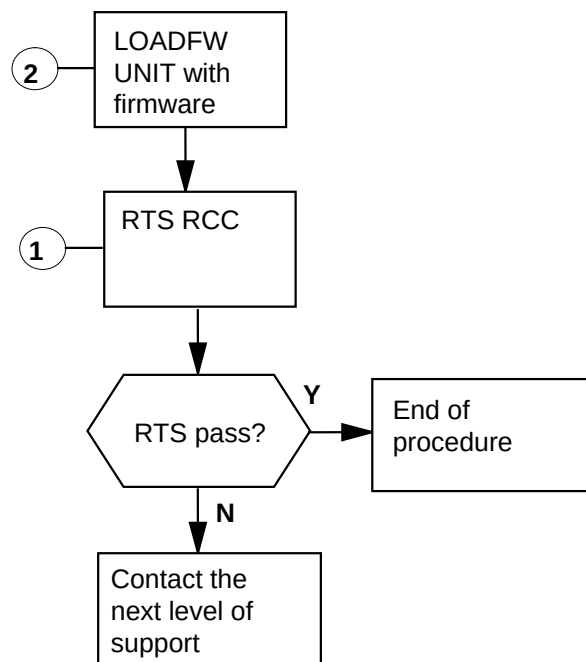

NTMX77 in an SMS-R (continued)

Replacing an NTMX77 card in an SMS-R

At your Current Location

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or were directed to this procedure by your maintenance support group.

2



CAUTION

Loss of service

When replacing a card in the SMS-R, ensure the unit where you are replacing the card is inactive and the mate unit is active.

Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Access the PM level of the MAP terminal by typing
>MAPCI;MTC;PM;POST SMSR smsr_no
and pressing the Enter key.

where

smsr_no

is the number of the SMS-R to be posted

Example of a MAP display response

SMSR	SysB	ManB	Offl	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMSR	0	0	0	0	1	7

SMSR 0 ISTb Links_00S: CSide 0, PSide 0

Unit0: Act ISTb

Unit1: Inact InSv

- 4 To verify that the faulty NTMX77AA card is in the inactive unit, ensure that the LED labeled Active is off or observe the MAP display.

If faulty card is on	Do
active unit	step 5
inactive unit	step 8

NTMX77**in an SMS-R** (continued)

- 5 Switch the activity of the units by typing
>SWACT
and pressing the Enter key.
The system determines the type of SWACT it can perform and displays a confirmation prompt for the selected SWACT.
- | If SWACT | Do |
|------------------------------|---------|
| can continue at this time | step 6 |
| cannot continue at this time | step 32 |
- 6 Switch the activity of the unit by typing
>YES
and pressing the Enter key.
The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.
- Note:** A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.
- | If the message is | Do |
|--|--------|
| SwAct passed | step 8 |
| SwAct failed | step 7 |
| SwAct failed. Reason:
XPM SwActback | step 7 |
| SwAct refused by SwAct
controller | step 7 |
- 7 Return to the *Alarm Clearing Procedures* to clear the alarm condition on the inactive unit. When the alarm is cleared, return to step 1 of this procedure.
- At the SMS-R frame**
- 8 Put a sign on the active unit bearing the following words: **"Active unit-Do not touch."**
- At the MAP terminal**
- 9 Busy the inactive SMS-R unit by typing
>BSY UNIT unit_no
and pressing the Enter key.
where

NTMX77
in an SMS-R (continued)

unit_no

is the number of the faulty SMS-R unit

- 10** Set the PM to the ROM level by typing
>PMRESET UNIT unit_no NORUN
and pressing the Enter key.

where

unit_no

is the number of the faulty SMS-R unit busied in step 9

At the SME frame

11



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel of the SMU. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

12



DANGER

Equipment damage

Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.



CAUTION

Service disruption

If the message interface card NT6X69 is not unseated, the active unit will go out-of-service, which will interrupt call processing.

Unseat the NT6X69 card in slot 18.

NTMX77 in an SMS-R (continued)

13




CAUTION

Service disruption


If the replacement MX77 card you are installing has dip switch S1, ensure dip switch S1 is in the XPM position. If switch S1 is not in the XPM position, the active unit will go out-of-service, which will interrupt call processing.

Remove the NTMX77 card as shown in the following figures.

- a Locate the card to be removed on the appropriate shelf.

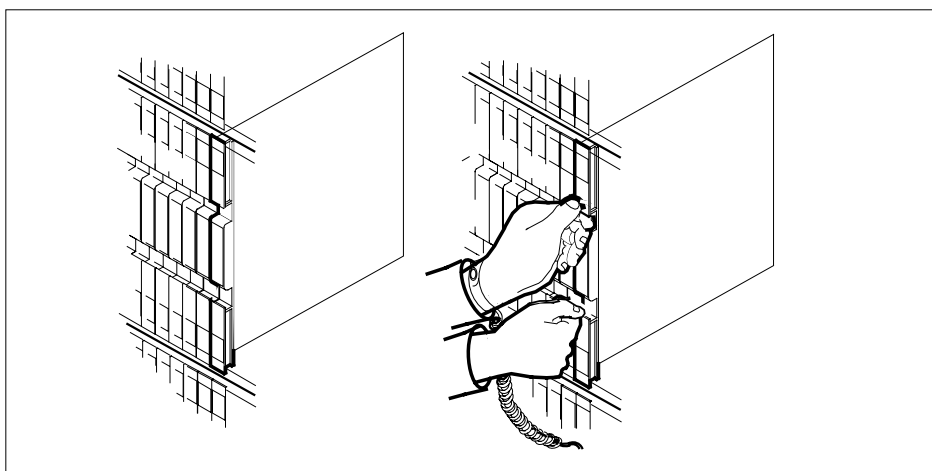


- b Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

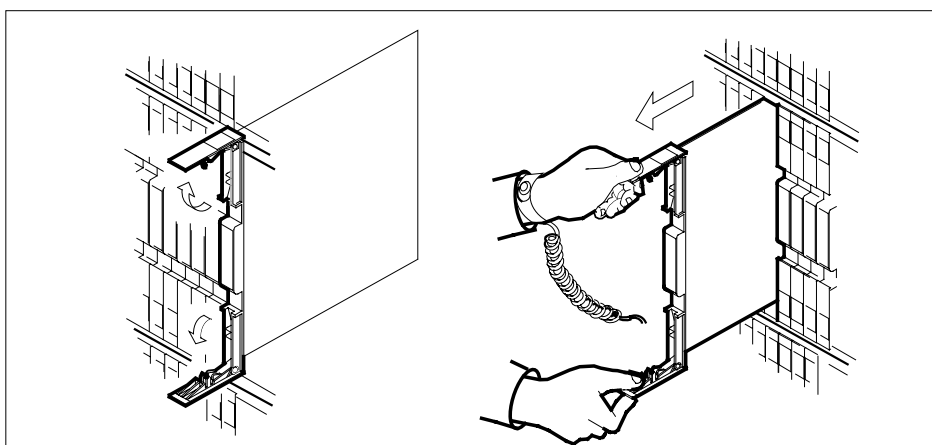


NTMX77
in an SMS-R (continued)

- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed. Also ensure that all replacement card dip switch settings match settings of the card just removed. Ensure that dip switch S1 (if equipped) is in the XPM position.
- 14** Open the locking levers on the replacement card.
- 15** Align the card with the slots in the shelf and gently slide the card into the shelf.

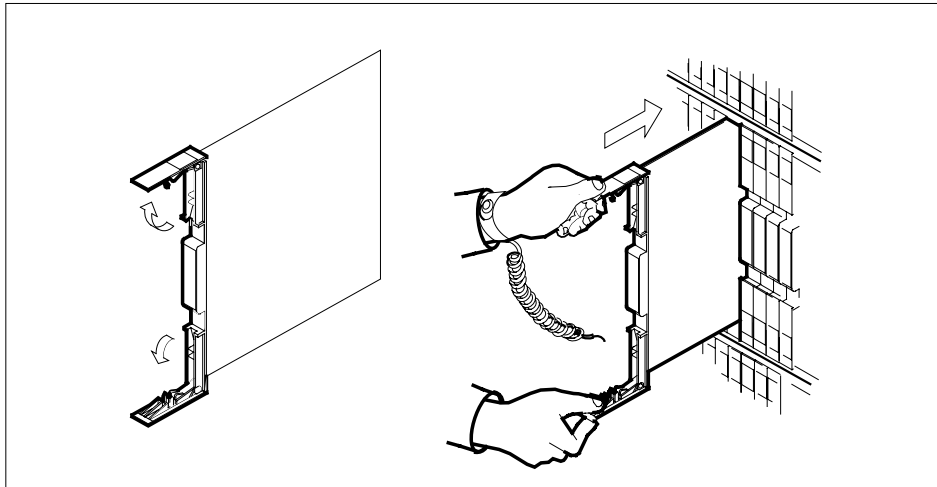

- 16** Seat and lock the new NTMX77 card.
 - a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
 - b** Close the locking levers.

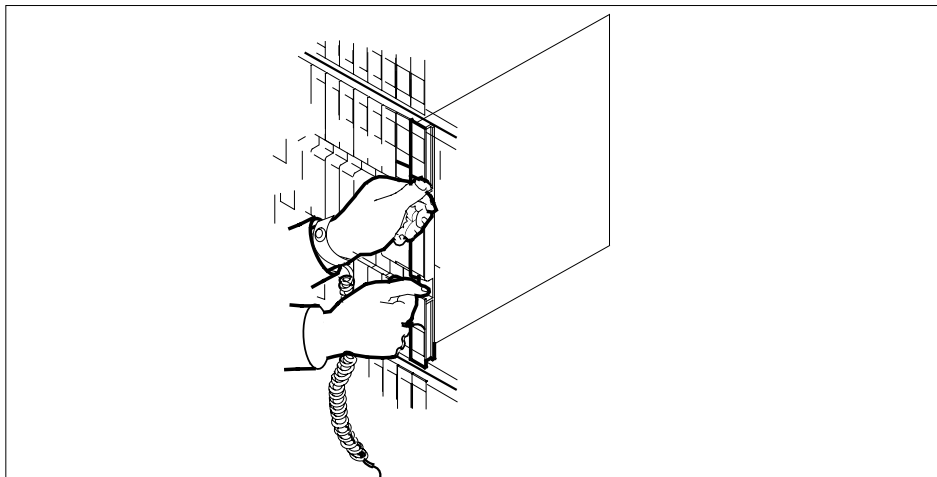

- 17** Reseat the NT6X69 card in slot 18.

NTMX77

in an SMS-R (continued)

At the MAP terminal

- 18** The peripheral remote loader (PRL) card (NT7X05) allows local loading of the SMS-R data. Local data loading reduces recovery time. Check if the NT7X05 card is provisioned by typing:

>QUERYPM FILES

and pressing the Enter key.

Example of a MAP display:

```

CM   MS   IOD   Net   PM   CCS   LNS   Trks   Ext   APPL
.    .    .    .    1SMSR .    .    .    .    .

SMSR          SysB   ManB   OffL   Cbsy   ISTb   InSv
0 Quit      PM      2       0       2       0       2       25
2 Post      SMSR    1       0       0       0       1       1
3 ListSet
4           SMSR    0 ISTb Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0: Inact ManB
6 TST_      Unit 1: Act  InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_  NT7X05 load File: ESR06BD
11 Disp_    NT7X05 Image File: ESR06BD
12 Next_    CMR Load: CMR03A
13 SwAct
14 QueryPM  Unit 1:
15          NT7X05 load File: ESR06BD
16          NT7X05 Image File: ESR06BD
17 Perform  CMR Load: CMR03A
18

```

NT7X05 image file_name

Note: If the NT7X05 card is not provisioned the MAP response is:

Example of a MAP response:

Nt7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 19
not provisioned	step 21

- 19** Load the SMS-R from the local image by typing

>LOADPM UNIT unit_no LOCAL IMAGE

and pressing the Enter key.

where

NTMX77 in an SMS-R (continued)

smsr_unit_no
is the number of the inactive SMS-R unit

If the load	Do
passed	step 25
failed	step 20

20

**DANGER****Possible service interruption**

The LOCAL LOADFILE option of the LOADPM command has a parameter of [<file> string]], if this file_name parameter is used, the loadfile named in the parameter will be used which is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the SMS-R from the local loadfile by typing

>LOADPM UNIT unit_no LOCAL LOADFILE

and pressing the Enter key.

where

smsr_unit_no
is the number of the inactive SMS-R unit

If the load	Do
passed	step 25
failed	step 21

21 After replacing the faulty card, load the inactive SMS-R unit by typing

>LOADPM UNIT unit_no CC

and pressing the Enter key.

where

unit_no
is the number of the faulty SMS-R unit busied in step 9

If the load	Do
passes	step 22
fails	step 28

NTMX77 in an SMS-R (continued)


- 22 Query the SMS-R counters for the firmware load on the NTMX77 by typing:

>QUERYPM CNTRS

and pressing the Enter key.

Example of a MAP display:

```
Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0
Unit 0:
Ram Load: ECR06BD
EPRom Version: AB02
EEPROM Load: Loadable: MX77NG03, Executable: MX77NG03
CMR LOAD: CMR03A
UP:MX77AA
Unit 1:
Ram Load: ECR06BD
EPRom Version: AB02
EEPROM Load: Loadable: [MX77NH08], Executable: [MX77NH08],
CMR LOAD: CMR03A
UP:MX77AA
```

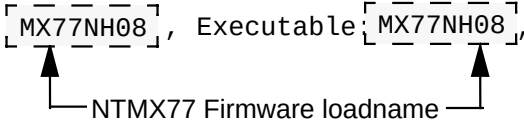

If firmware is	Do
valid	step 25
invalid	step 23

- 23 Load the firmware in the inactive SMS-R unit by typing

>LOADFW INACTIVE

and pressing the Enter key.

Note: If the firmware load is not specified with the LOADFW command, the command applies the firmware file datafilled in the appropriate inventory table.

If the LOADFW	Do
passes	step 24
fails	step 28

- 24 Update the firmware in the inactive SMS-R unit by typing

>LOADFW INACTIVE UPGRADE

and pressing the Enter key.

If the LOADFW UPGRADE	Do
passes	step 25

NTMX77 in an SMS-R (end)

	If the LOADFW UPGRADE	Do
	fails	step 28
25	Return the inactive SMS-R unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the inactive SMS-R unit	
	If the RTS	Do
	passes	step 26
	fails	step 28
26	Send any faulty cards for repair according to local procedure.	
27	Return to <i>Alarm Clearing Procedures</i> section of this manual. At the point where a faulty card list is initiated, identify the next faulty card on the list, and go to the appropriate card replacement procedure for that card in this manual.	
28	Obtain further assistance in replacing this card by contacting personnel responsible for a higher level of support.	
29	Remove the sign from the active SMS-R unit.	
30	Record the following items in office records: • date the card was replaced • serial number of the card • symptoms that prompted replacement of the card	
31	You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.	
32	For further assistance with switch of activity, contact the personnel responsible for the next level of support. Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.	

NTMX77 in an SMU

Application

Use this procedure to replace the following card in a host SMU.

PEC	Suffixes	Name
NTMX77	AA	Unified processor (UP)

Common procedures


None

Action

The following flowchart is a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX77 in an SMU (continued)

Summary of card replacement procedure for an NTMX77 card in an SMU

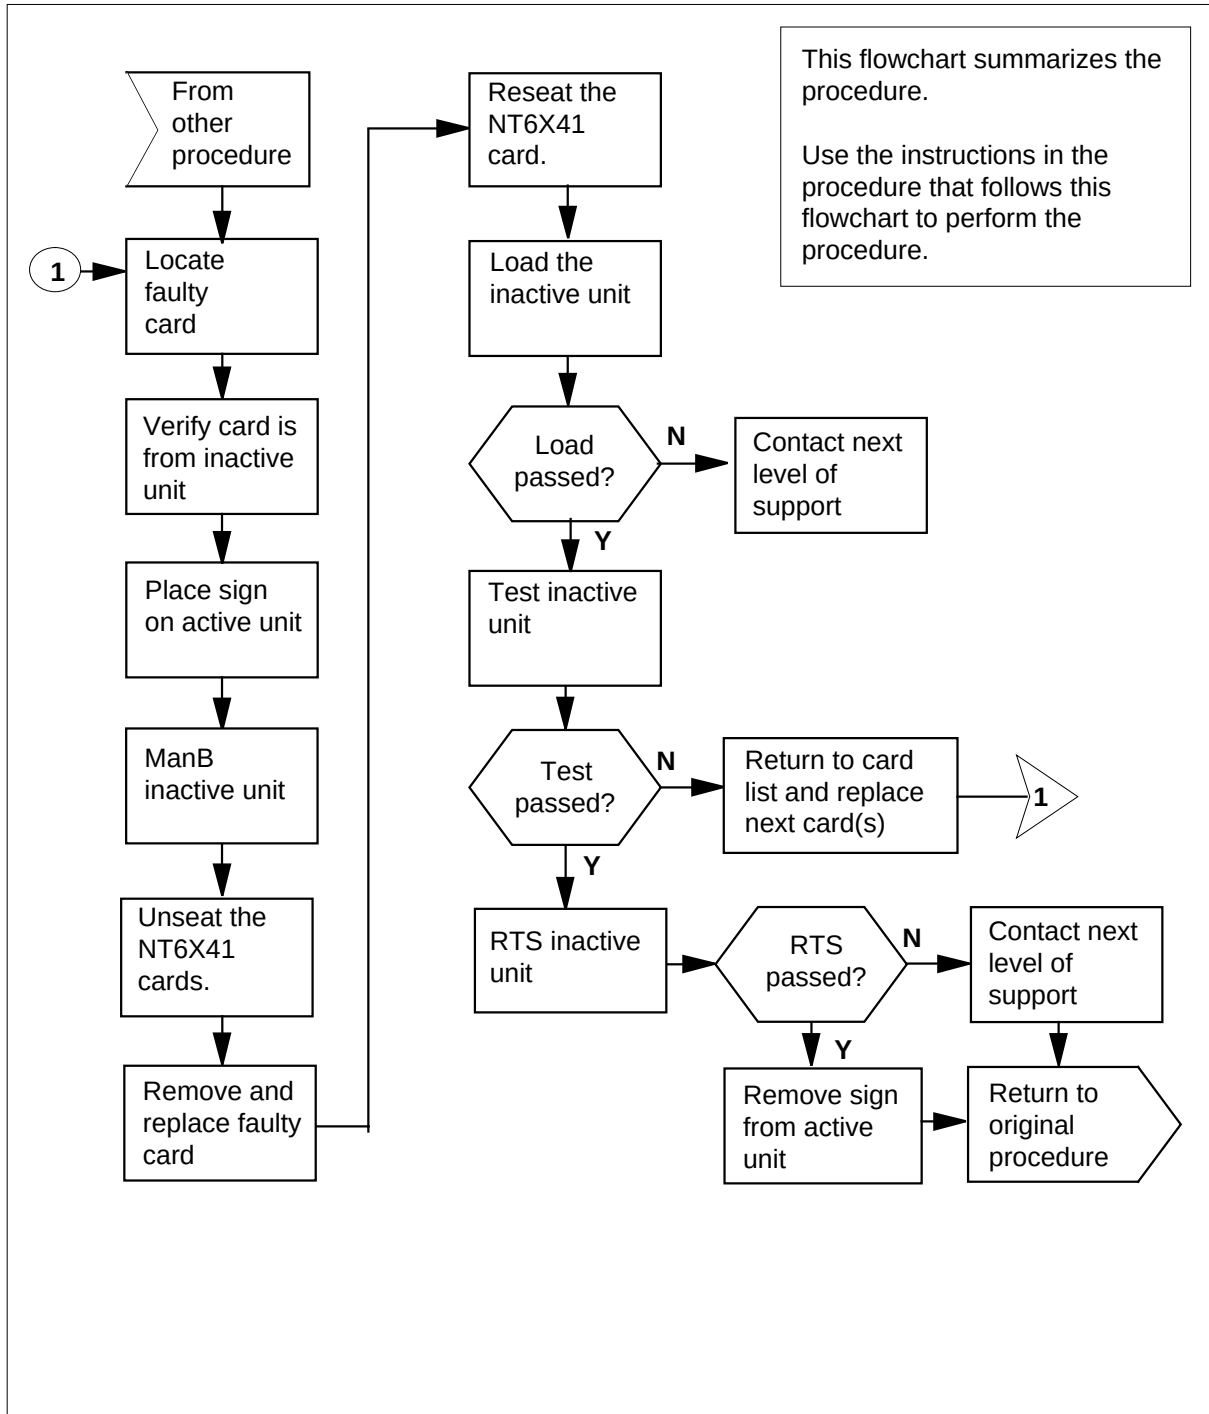

NTMX77 in an SMU (continued)

Replacing an NTMX77 card in an SMU

At your Current Location

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to verify or accept cards, or were directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the SMU ensure the unit where you are replacing the card is **INACTIVE** and the mate unit is **ACTIVE**.

Obtain a replacement card. Ensure the replacement card has the same product equipment code (PEC) including suffix, as the card to be removed.

At the MAP terminal

- 3 Access the PM level and post the SMU by typing
>MAPCI;MTC;PM;POST SMU smu_unit_no
and pressing the Enter key.
where
smu
is the number of the host SMU
smu_unit_no
is the number of the host SMU unit to be posted
Example of a MAP display:

NTMX77
in an SMU (continued)

```
CM  MS  IOD  Net  PM  CCS  LNS  Trks  Ext  APPL
.    .    .    .    1LTC  .    .    .    .    .
SMU  SysB  ManB  OffL  CBsy  ISTb  InSv
0 Quit  PM  0    0    2    0    2    25
2 Post_ SMU  0    0    0    0    0    1
3 ListSet
4      SMU  0 ISTb Links_00S: CSide 0, PSide 0
5 TRNSL_ Unit 0: Inact SysB
6 TST_   Unit 1: Act  InSv
7 BSY_
8 RTS_
9 OffL
10 LoadPM_
11 Disp_
12 Next_
13 SWACT
14 QueryPM
15
16
17 Perform
18
```

- 4 By observing the MAP display, be sure the card to be removed is on the inactive unit.

If the faulty card is on an	Do
ACTIVE unit	step 5
INACTIVE unit	step 8
- 5 Switch the processing activity to the inactive unit by typing >SWACT and pressing the Enter key.

The system determines the type of SWACT it can perform and displays a confirmation prompt for the selected SWACT.

If SWACT	Do
can continue at this time	step 6
cannot continue at this time	step 52
- 6 Switch the activity of the unit by typing >YES and pressing the Enter key.

NTMX77

in an SMU (continued)

The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.

If the message is	Do
SWACT passed	step 8
SWACT failed	step 7
SWACT failedReason: SMU SWACTback	step 7
SWACT refused by SWACT controller	step 7

- 7 Return to the *Alarm Clearing Procedure* to clear the alarm condition on the inactive unit. When the alarm is cleared, return to step 1 of this procedure.

At the SME frame

- 8 Put a sign on the active unit bearing the words **Active unit—Do not touch.**

At the MAP terminal

- 9 Busy the inactive unit by typing
>BSY UNIT SMU_unit_no
 and pressing the Enter key.
where
smu_unit_no
 is the number of the inactive unit (0 or 1)
- 10 Set the inactive unit to the ROM level by typing
>PMRESET UNIT smu_unit_no NORUN
 and pressing the Enter key.
where
smu_unit_no
 is the number of the inactive unit (0 or 1)

NTMX77
in an SMU (continued)**At the SME frame****11****DANGER****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel of the SMU. This protects the equipment against damage caused by static electricity.

**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

12 Unseat the NT6X41 card in slot 21.


13 Remove the NTMX77 card as shown in the following figures.

a Locate the card to be removed on the appropriate shelf.

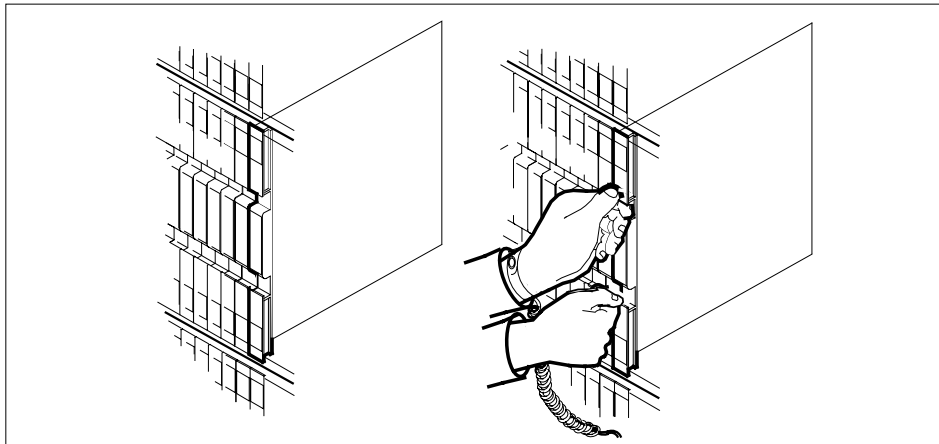

14 Open the locking levers on the card to be replaced and gently pull the card towards you until it clears the shelf.


NTMX77 in an SMU (continued)

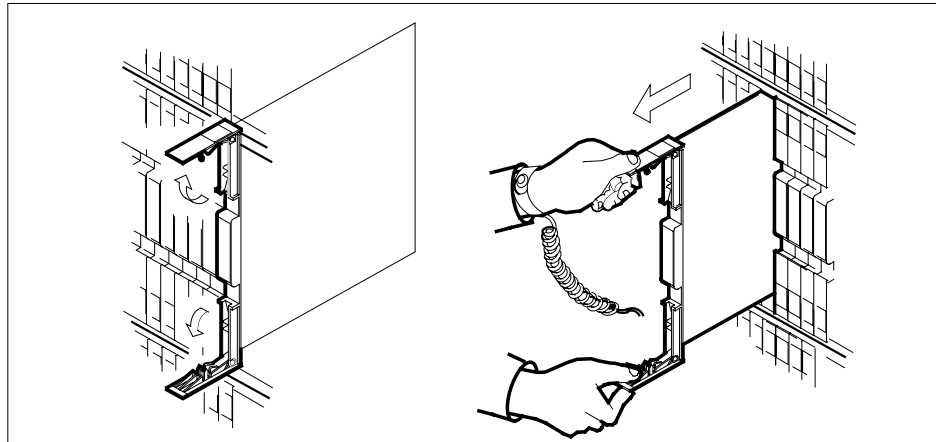

- 15** Ensure that the replacement card has the same PEC including suffix, as the card you just removed. Also ensure that all replacement card DIP switch settings match settings of the card just removed.

Note: If the NTMX77 has DIP switch S1, set DIP switch S1 to XPM.

- 16** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf and gently slide the card into the shelf.

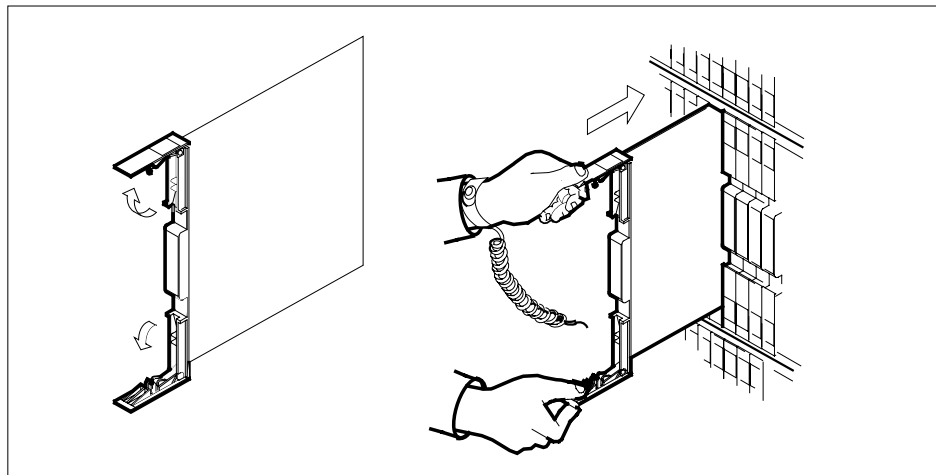

NTMX77
in an SMU (continued)

17


**DANGER****Possible loss of P-side nodes**

Monitor the LEDs on the faceplate of the replacement NTMX77 when installing.

1. The INSV and ESA LEDs may come ON and must go OFF in less than 4 seconds.
2. The ACT LCD may come ON and light for less than 1 second. If the ACT LED remains ON for more than 1 second, immediately remove the NTMX77 card and return to step 13 c. with a new NTMX77 card. If the NTMX77 card is allowed to remain with both units having an active processor, this is a condition of dual activity, which will result in the loss of P-side nodes.

Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

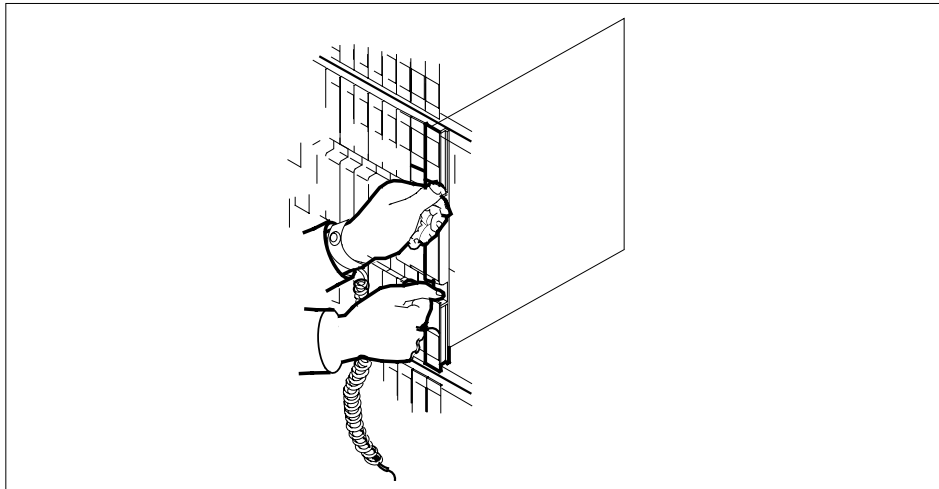

18 Reseat the NT6X41 card in slot 21.

NTMX77 in an SMU (continued)

- 19** Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
an alarm clearing procedure	step 49
other	step 23

At the MAP terminal

- 20** The peripheral loader card (NT7X05) allows local loading of the SMU data. Local data loading reduces recovery time. Determine if an NT7X05 is located in slot 12. Check if the NT7X05 card is provisioned by typing:

>QUERYPM FILES

and pressing the Enter key.

Example of a MAP display:

```

CM      MS      IOD      Net      PM      CCS      LNS      Trks      Ext      APPL
.        .        .        .        1SMU      .        .        .        .        .
          *C*
SMU
0 Quit          PM      2          0          2          0          2          25
2 Post          SMU      1          0          0          0          1          1
3 ListSet
4              SMU          0 ISTb Links_OOS: CSide 0, PSide 0
5 TRNSL_        Unit 0: Inact ManB
6 TST_          Unit 1: Inact InSv
7 BSY_
8 RTS_          QUERYPM files
9 OffL          Unit 0:
10 LoadPM_      NT7X05 load File: ESU06AZ
11 Disp_        NT7X05 Image File:
12 Next_        Unit 1:
13 SwAct        NT7X05 load File: ESU06AZ
14 QueryPM      NT7X05 Image File:
15
16 IRLINK
17 Perform
18

```

If the NT7X05 card is	Do
provisioned	step 21
not provisioned	step 23

Note: If the NT7X05 card is not provisioned the MAP response is:
Nt7X05 not datafilled, QueryPm files invalid

NTMX77 in an SMU (continued)

- 21** Load the SMU from the local image by typing
>LOADPM UNIT unit_no LOCAL IMAGE
 and pressing the Enter key.

where

SMU_unit_no
 is the number of the inactive SMU unit

If the load	Do
passed	step 43
failed	step 22

- 22**



DANGER

Possible service interruption

The LOADPM command, LOCAL LOADFILE option, parameter [<file> string], will load the file_name from the parameter. The loadfile name will not be patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the SMU from the local loadfile by typing

>LOADPM UNIT unit_no LOCAL LOADFILE

and pressing the Enter key.

where

SMU_unit_no
 is the number of the inactive SMU unit

If the load	Do
passed	step 43
failed	step 23

- 23** After replacing the faulty card, load the inactive unit by typing
>LOADPM UNIT smu_unit_no CC
 and pressing the Enter key.

where

NTMX77

in an SMU (continued)

smu_unit_no
is the number of the inactive unit

	If	Do
	message loadfile not found in directory is received	step 22
	load passes	step 43
	load fails	step 50
24	Determine the type of device where the PM load files are located.	
	If load files are located on	Do
	tape	step 25
	IOC disk	step 31
	SLM disk	step 36
25	Locate the tape that contains the PM load files.	
26	Mount the tape on a magnetic tape drive.	
	At the MAP terminal	
27	Download the tape by typing >MOUNT tape_no and pressing the Enter key. <i>where</i> tape_no is the number of the tape drive containing the PM load files	
28	List the contents of the tape in your user directory by typing >LIST T tape_no and pressing the Enter key. <i>where</i> tape_no is the number of the tape drive containing the PM load files	
29	Demount the tape drive by typing >DEMOUNT T tape_no and pressing the Enter key. <i>where</i>	

NTMX77
in an SMU (continued)

tape_no

is the number of the tape drive containing the PM load files

- 30** Go to step 41.
- 31** From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.
- 32** Access the disk utility level of the MAP display by typing
>DSKUT
and pressing the Enter key.
- 33** List the IOC file names into your user directory by typing
>LISTVOL volume_name ALL
and pressing the Enter key.
where
volume_name
is the name of the volume that contains the PM load files obtained in step 31.
- 34** Leave the disk utility by typing
>QUIT
and pressing the Enter key.
- 35** Go to step 41.
- 36** From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 37** Access the disk utility level of the MAP display by typing
>DISKUT
and pressing the Enter key.
- 38** List the SLM disk volumes by typing
>LV CM
and pressing the Enter key.
- 39** List the SLM file names into your user directory by typing
>LISTFL volume_name
and pressing the Enter key.
where
volume_name
is the name of the volume that contains the PM load files, obtained in step 36.
- 40** Leave the disk utility by typing
>QUIT
and pressing the Enter key.

NTMX77 in an SMU (continued)

- 41** After listing the PM load files, load the inactive SMU unit by typing
>LOADPM UNIT smu_unit_no
 and pressing the Enter key.

where

smu_unit_no
 is the number of the inactive unit

If load	Do
passed	step 42
failed	step 50

- 42** Query the XPM counts for the firmware load on the NTMX77 by typing:
>QUERYPM CNTRS
 and pressing the Enter key.

Example of a MAP display:

Unsolicited MSG limit = 250, Unit 0 = 0, Unit 1 = 0

Unit 0:

Ram Load: ESU05AW

EProm Version: AB02

EEProm Load: Loadable: MX77NG03, Executable: MX77NG03

CMR LOAD: CMR33A15

UP:MX77AA

IP:BX01

Unit 1:

Ram Load: ESU05AW

EProm Version: AB02

EEProm Load: Loadable: MX77NG03, Executable: MX77NG03

CMR LOAD: CMR33A15

UP:MX77AA

IP:BX01

If firmware is	Do
valid	step 45
invalid	step 43

- 43** To load the firmware on the inactive unit type
>LOADFW INACTIVE

NTMX77 in an SMU (continued)

and pressing the Enter key.

Note: If the `firmware_file` is not specified with the `LOADFW` command, the command applies the `firmware_file` datafile in the appropriate inventory table.

	If LOADFW	Do
	passed	step 44
	failed	step 50
44	To upgrade the firmware on the inactive unit type >LOADFW INACTIVE UPGRADE and pressing the Enter key.	
	If LOADFW UPGRADE	Do
	passed	step 45
	failed	step 50
45	Test the inactive unit by typing >TST UNIT smu_unit_no and pressing the Enter key. <i>where</i> smu_unit_no is the number of the inactive unit	
	If TST	Do
	passed	step 46
	failed	step 50
46	Return the inactive unit to service by typing >RTS UNIT smu_unit_no and pressing the Enter key. <i>where</i> smu_unit_no is the number of the inactive unit	
	If the RTS	Do
	passed	step 47
	failed	step 50

NTMX77

in an SMU (end)

- 47 Send any faulty cards for repair according to local procedure.
- 48 Record the following items in office records:
- date the card was replaced
 - serial number of the card
 - symptoms that prompted replacement of the card
- Go to step 51.
- 49 Return to the *Alarm Clearing Procedure* or other procedure that directed you to this procedure. If necessary, go to the point where the faulty card list was produced, identify the next faulty card on the list, and go to the appropriate procedure for that card in this manual.
- 50 Obtain further assistance in replacing this card by contacting personnel responsible for higher level of support.
- 51 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.
- 52 For further assistance with switch of activity, contact the personnel responsible for the next level of support.

Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.

**NTMX79
in an RSC EXT**

Application

Use this procedure to replace an NTMX79 card in an RSCE EXT.

PEC	Suffixes	Name
NTMX79	AA	DS60 Extender

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX79 in an RSC EXT (continued)

Summary of card replacement procedure for an NTMX79 card in RSC EXT

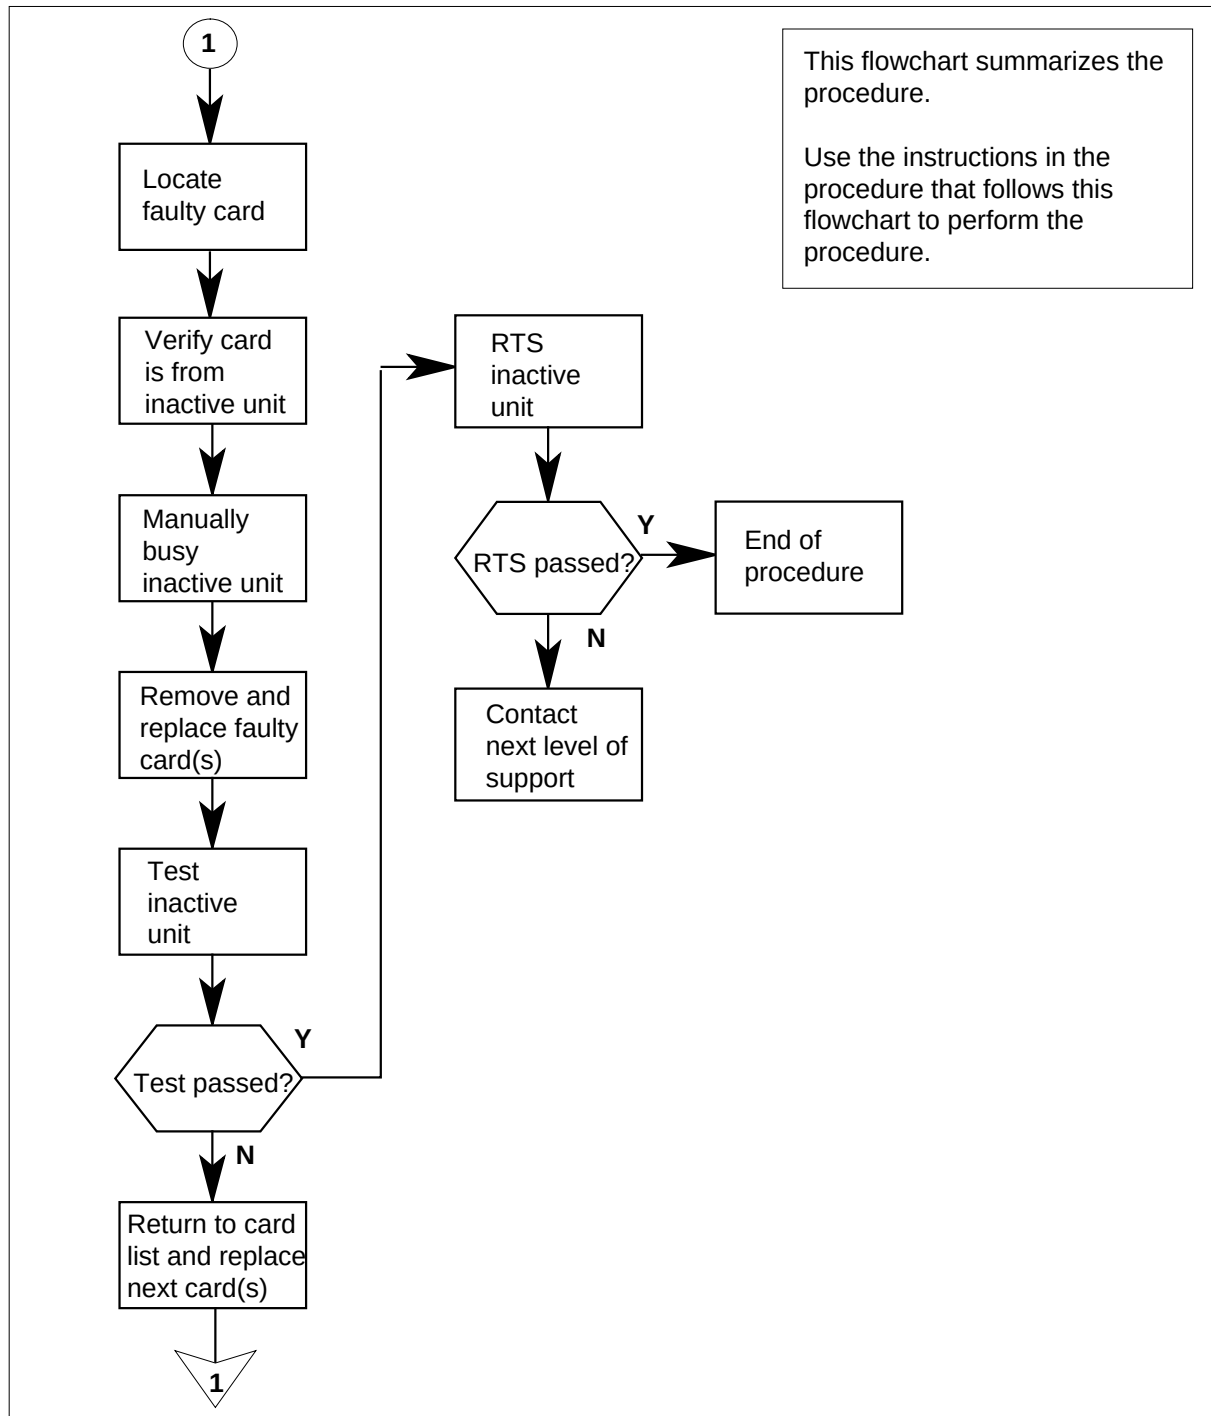

NTMX79 in an RSC EXT (continued)

Replacing an NTMX79 card in an RSCE EXT

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX79 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where
rcc2_no
is the number of the RCC2 with the faulty card
- 4 Determine on which side of the extension shelf (right or left side) the faulty card is located by typing
QUERYPM
and pressing the Enter key.
Example of a MAP response:

NTMX79 in an RSC EXT (continued)

```
PM Type: RCC2 PM No.: 0 PM Int. No.: 2 Node_No.: 126
PMs Equipped: 61 Loadname: CRI05AW
ESA equipped: YES IntraSwitching is ON
WARM SWACT is supported and available.
REX on RCC2 0 is included in the REX schedule.
Node Status; {OK, FALSE}
Unit 0 Act, Status; {OK, FALSE}
Unit 1 Inact, Status; {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
R113 01 AA00 CRSC 00 05 RCC2 : 000 MX85AA
R113 01 AA01 CEXT 00 05 EXT : [LEFT] MX86AA
```

(Extension shelf location of faulty card) —

- 5 By observing the LED on the extension shelf, be sure that the card to be removed is on the inactive unit. The LED is lit (ON) on the active unit, and not lit (OFF) on the inactive unit.

At the RSCE frame

- 6 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 7 Busy the inactive RCC2 unit by typing
>bsy unit rcc2_unit_no
 and pressing the Enter key.
where
rcc2_unit_no
 is the number of the RCC2 unit to be busied (0 or 1)

At the RSCE frame

8



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

NTMX79
in an RSC EXT (continued)

9

**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Power down the NTMX72 card in the inactive RCC2.


10

**CAUTION****Loss of subscriber service**

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the NTMX79 card is set to the ON position before removing the NTMX79 card.


Remove the NTMX79 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

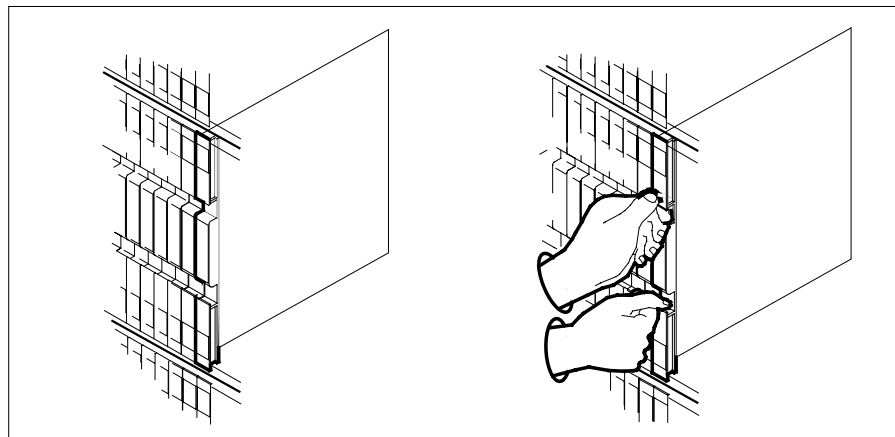

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.


NTMX79 in an RSC EXT (continued)

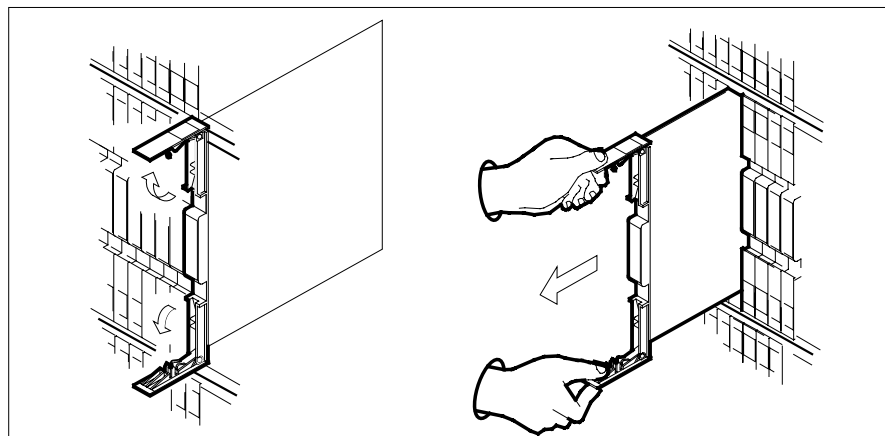

- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

11 Open the locking levers on the replacement card.

- a Align the card with the slots in the shelf.
- b Gently slide the card into the shelf.

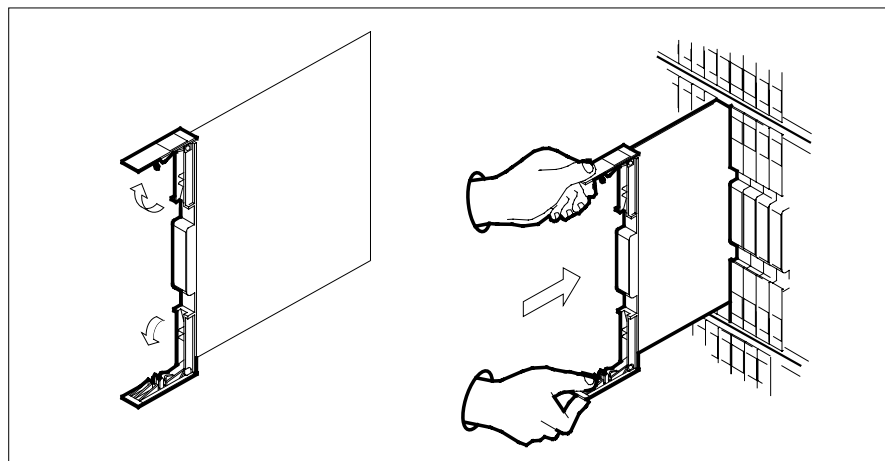

12



CAUTION


Loss of subscriber service

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the NTMX79 card is set to the OFF position before seating the NTMX79 card.

NTMX79 in an RSC EXT (continued)

Seat and lock the NTMX79 card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

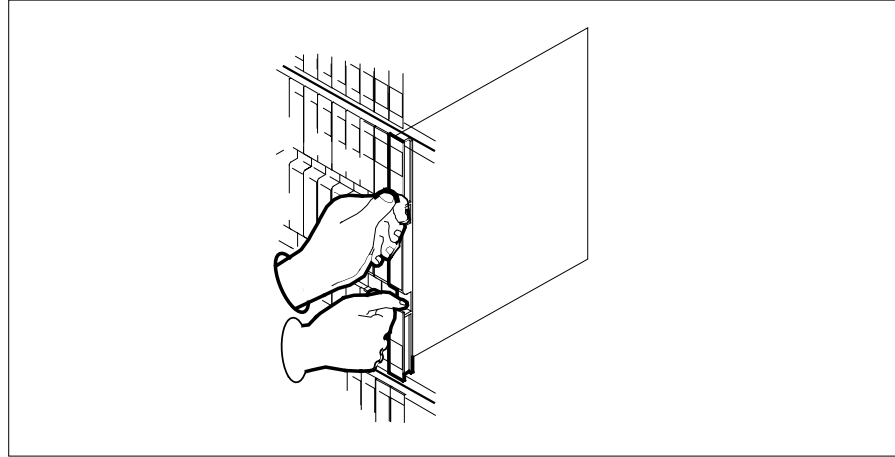

13 Power up the inactive RCC2 unit as follows:

- a Ensure that the power converter (NTMX72) is fully inserted. A major audible alarm may sound. This alarm is silenced when power is restored to the converter.

Note: Some release levels of the NTMX72AA do not require the simultaneous operation of the Reset switch on the power converter and the circuit breaker on the MSP. This is reflected in the following step.

- b If the power converter replaced is an NTMX72AA, set the switch on the power converter to the Reset position. Set the associated circuit breaker on the MSP to the ON position.

If both the converter FAIL LED and FRAME FAIL lamp on the MSP go OFF, go to step 14.

If both the converter FAIL LED and FRAME FAIL lamp on the MSP do not go OFF, hold the switch on the NTMX72AA power converter in the Reset position and simultaneously set the associated circuit breaker on the MSP to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will go OFF. Go to step 14.

- c If the power converter replaced is an NTMX72AB, set the associated circuit breaker on the MSP to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will go OFF. Go to step 14.

14 The peripheral loader card (NT7X05) allows local loading of RCC2 data, which reduces recovery time. Check if the NT7X05 card is provisioned by typing

>QUERYPM FILES

and pressing the Enter key.

NTMX79
in an RSC EXT (continued)

Example of a MAP display:

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	APPL
.	.	.	.	1RCC2	.	.	.	.	.
				C					
RCC2			SysB	ManB	OffL		CBsy	ISTb	InSv
0 Quit		PM	2	0	2		0	2	25
2 Post		RCC2	1	0	0		0	1	1
3 ListSet									
4		RCC2		0 ISTb	Links_00S:	CSide	0,	PSide	0
5 TRNSL_		Unit 0:		Inact	ManB				
6 TST_		Unit 1:		ACT	InSv				
7 BSY_									
8 RTS_		QUERYPM		files					
9 OffL		Unit 0:							
10 LoadPM_			NT7X05	load File:	CRI05AW				
11 Disp_			NT7X05	Image File:					
12 Next_			CMR	Load:	CMR03A				
13 SwAct		Unit 1:							
14 QueryPM			NT7X05	load File:	CRI05AW				
15			NT7X05	Image File:					
16 IRLINK			CMR	Load:	CMR03A				
17 Perform									
18									

Note: If the NT7X05 card is not provisioned the MAP response is:NT7X05 not datafilled, QueryPm files invalid

	If the NT7X05 card is	Do
	provisioned	step 15
	not provisioned	step 16
15	Load the inactive RCC2 unit from the local load file by typing >LOADPM UNIT unit_no LOCAL LOADFILE and pressing the Enter key. where rcc2_unit_no is the number of the inactive RCC2 unit	
	If the load	Do
	passed	step 17
	failed	step 16
16	Load the inactive RCC2 unit (from the CM) by typing >LOADPM UNIT rcc2_unit_no	

NTMX79 in an RSC EXT (continued)

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

	If load	Do
	passed	step 17
	failed	step 24
17	Use the following information to determine what step to go to next in this procedure.	
	If you entered this procedure from	Do
	alarm clearing procedures	step 23
	other	step 18
18	Return the inactive RCC2 unit to service by typing >RTS UNIT rcc2_unit_no and pressing the Enter key. <i>where</i> rcc2_unit_no is the number of the inactive RCC2 unit	
19	Use the following information to determine where to proceed.	
	If RTS	Do
	passed	step 20
	failed	step 24
20	Remove the sign from the active RCC2 unit.	
21	Send any faulty cards for repair according to local procedure.	
22	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 25.	
23	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.	
24	Obtain further assistance in replacing this card by contacting operating company maintenance personnel.	

NTMX79

in an RSC EXT (end)

- 25 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX79 in an RSC-M

Application

Use this procedure to replace an NTMX79 circuit card in a Remote Switching Center Multi-access (RSC-M) extension (EXT) shelf.

Note: In this section, RSC-M is known as RCO2 in the examples. When software outputs messages to the MAP terminal, software does not differ between the two RCO2 types.

PEC	Suffixes	Name
NTMX79	AA	DS60 Extender

Common procedures

Two common procedures are referenced in this section:


- replacing a card
- returning a card

Action

This procedure is the procedure to replace the card. This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX79 in an RSC-M (continued)

Summary of replacing an NTMX79 in an RSC-M

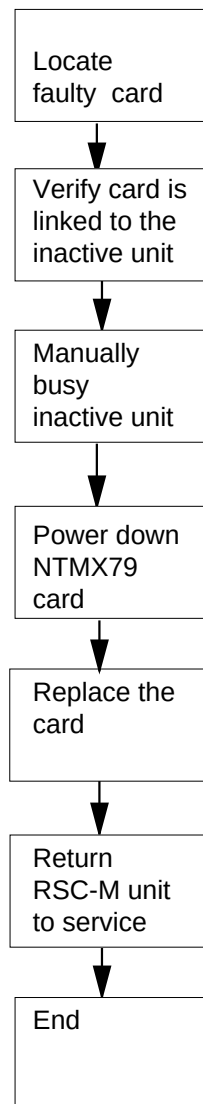

This flowchart summarizes the procedure.

Use the instructions that follow this flowchart to perform the procedure.

NTMX79 in an RSC-M (continued)

To replace an NTMX79 in an RSC-M

At the MAP display

- 1 Proceed only if one of the following conditions applies. The maintenance support group or a step in a maintenance procedure directs you to this card replacement procedure. Use the procedure to verify or accept cards.
- 2



WARNING

Loss of service

To replace a card in the RSC-M, make sure the unit in which you replace the card is *inactive* and the mate unit is *active*.

Obtain an NTMX79 replacement circuit card. Verify the replacement circuit card has the same product engineering code (PEC) and suffix as the old circuit card.

At the MAP terminal

- 3 Make sure the system displays the peripheral module (PM) level of the MAP display. To post the RSC-M/RCO2, type

>MAPCI;MTC;PM;POST RCO2 rco2_no

and press the Enter key.

where

rco2_no

is the number of the RCO2 with the defective card

Example of a MAP response:

```

RCO2          SysB      ManB      OffL      Cbsy      ISTb      InSv
0 Quit      PM          0          0          2          0          25
2 Post_     RCO2        0          0          0          0          1
3 ListSet
4           RCO2        0 ISTb  Links_00S: CSide 1, PSide 1
5 TRNSL     Unit0:      Inact ISTb
6 TST       Unit1:      Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_

```

NTMX79 in an RSC-M (continued)

- 4 To determine the location of the RCO2 extension half shelf (left or right) that contains the circuit card to replace, type

>QUERYPM

and press the Enter key.

Example of a MAP response:

```
PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname: KRI07BI1 EEPROM Load:MX77NG03
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RCO2: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA
```

- 5 Observe the LED on the defective NTMX79 circuit card. The system removes the LED when the unit to which the LED connects is inactive.

If the defective card	Do
connects to the active unit	step 6
connects to the inactive unit	step 8

- 6 To switch the processing activity (SWACT) to the inactive unit, type

>SWACT

and press the Enter key.

Example of a MAP response:

```
RCO2 0 A Warm SwAct will be performed after
data sync of active terminals.
Please confirm ("YES", "Y", "NO", or "N"):
```

If the system	Do
prompts you to confirm a warm SWACT	step 7
rejects the SWACT	step 25

- 7 To confirm the command, type

>YES

and press the Enter key.

NTMX79 in an RSC-M (continued)

Example of a MAP response:

```
Unit0:   Inact SysB Mtce
Unit1:   Act   ISTb
```

```
RC02 0      SwAct Passed
```

If the MAP response	Do
is SWACT passed	step 8
is other than listed here	step 24

- 8 A maintenance flag (Mtce) can appear. This flag indicates that maintenance tasks that the system initiates are in progress. Wait until the flag disappears from the status lines for both PM units before you proceed to the next step.

At the cabinet

- 9 Place a sign on the active unit that bears the words *Active unit-Do not touch*. Do not attach this sign with magnets or tape.

At the MAP terminal

- 10 To busy the inactive PM unit, type
>bsy INACTIVE
 and press the Enter key.

- 11 Locate the circuit card to replace.

Note: The location of NTMX79 circuit cards are in slots 2 and 13 of the extension (EXT) shelf connected to unit 0. The location of these cards are also in slots 14 and 25 of the EXT shelf connected to unit 1.

12



WARNING

Static electricity damage

Wear a wrist strap that connects to the wrist-strap grounding point on the left side of the modular supervisory panel (MSP) to remove cards. The wrist strap protects the equipment against static electricity damage.

Power down the NTMX79 circuit card on the extension shelf.

- 13 To replace the card, use the common replacing a card procedure in this document. When the procedure is complete, return to this point.

Note: If the circuit card to replace has switches, make sure the switches on the replacement circuit card have the same settings.

- 14 Power up the NTMX79 circuit card as follows:

NTMX79 in an RSC-M (end)

- a Make sure that insertion of the NTMX79 circuit card is correct..
- b Set the POWER switch to the ON position.
- 15 To determine the circuit breaker that controls the NTMX79 circuit card that you replace, observe the MSP. Note the circuit breaker that trips.
- 16 Press and hold the circuit breaker on the MSP to the ON position. When the circuit breaker is ON, place the power switch on the NTMX79 circuit card to the RESET position. The CONVERTER FAIL LED on the NTMX79 circuit card, and the FRAME FAIL lamp on the MSP are ON.
- 17 To determine where to proceed next in this procedure, use the following information.
- | If you | Do |
|---|---------|
| entered this procedure from alarm clearing procedures | step 18 |
| entered this procedure from other | step 19 |
- 18 Remove the sign from the active unit. Return to the procedure that directed you to this procedure. At the point where the system produced a defective card list, identify the next defective card on the list. Go to the correct card replacement procedure for that card in this manual.
- 19 To return the inactive RCO2 unit to service, type
>RTS UNIT unit_no
and press the Enter key.
where
 unit_no
 is the number of the inactive unit
- 20 Use the following information to determine where to proceed.
- | If RTS | Do |
|--------|---------|
| passed | step 21 |
| failed | step 24 |
- 21 Remove the sign from the active unit.
- 22 Go to the common returning a card procedure in this document.
- 23 This procedure is complete.
- 24 For additional help to replace this card, contact operating company maintenance personnel.
- 25 For additional help with switch of activity, contact the next level of support.
- Note:** If the system recommends the use of the SWACT command with the FORCE option, consult office personnel. Office personnel can advise you to not use the FORCE option.

NTMX79 in an RSC-S (DS-1) Model A EXT

Application

Use this procedure to replace an NTMX79 card in an RSC-S EXT.

PEC	Suffixes	Name
NTMX79	AA	DS60 Extender

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX79 in an RSC-S (DS-1) Model A EXT (continued)

Summary of card replacement procedure for an NTMX79 card in RSC-S EXT

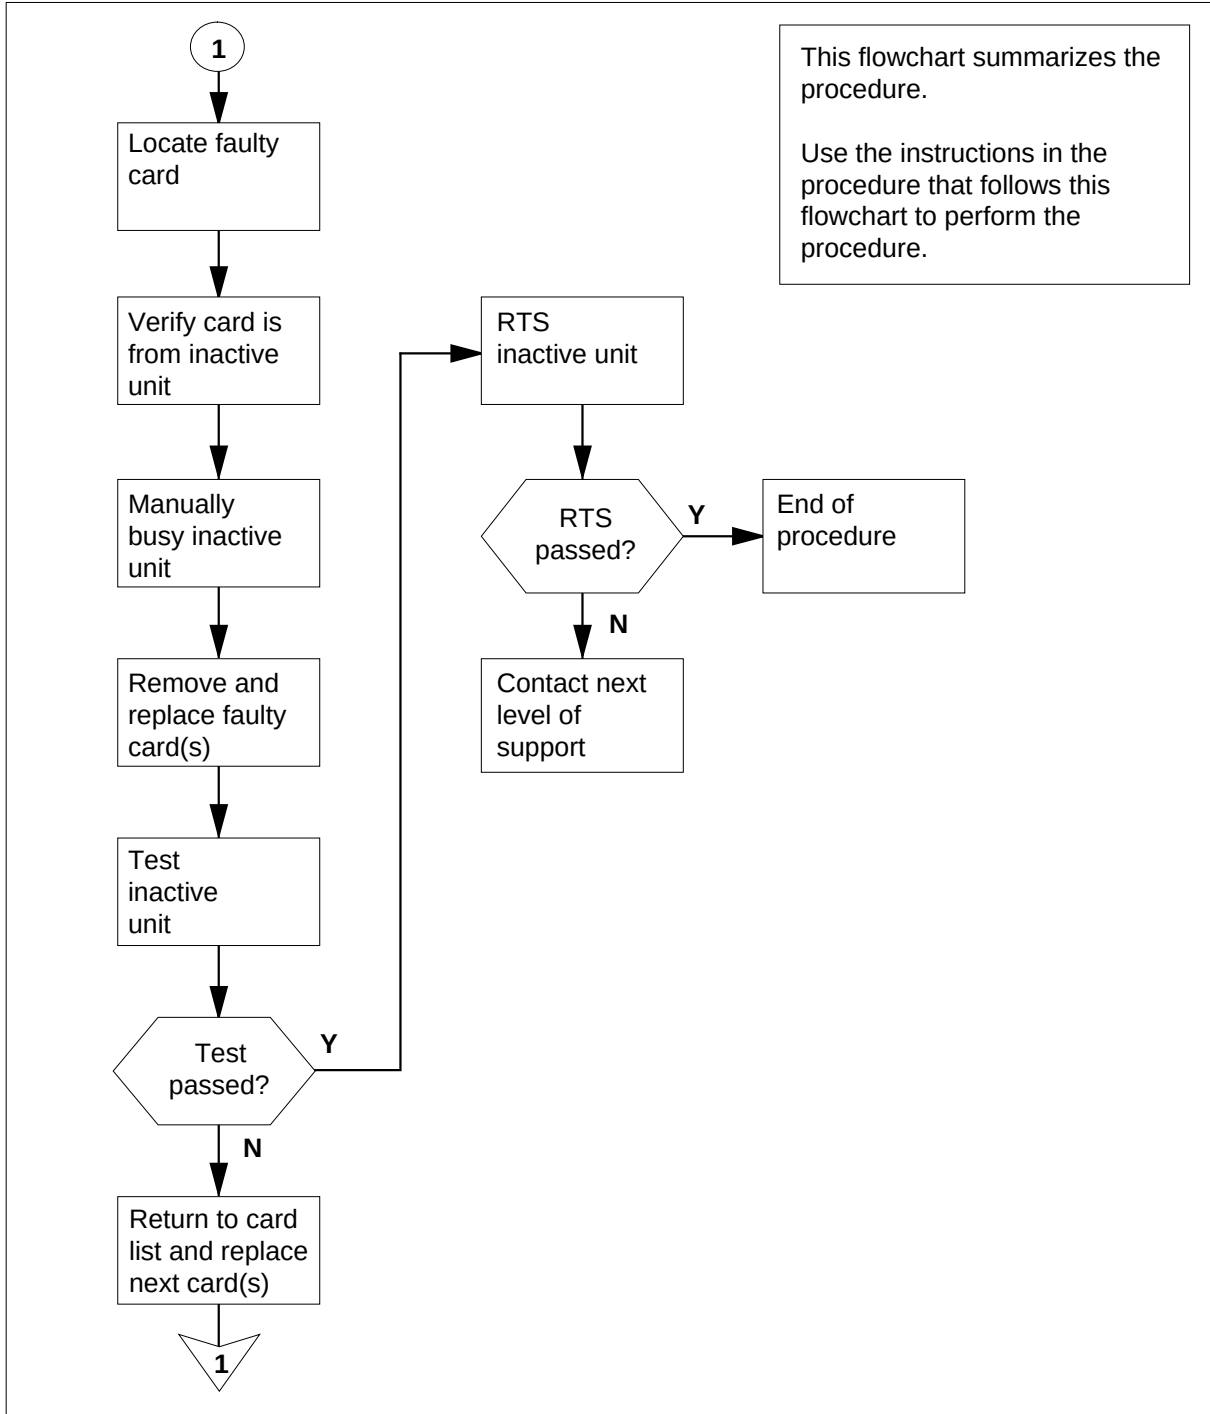

NTMX79 in an RSC-S (DS-1) Model A EXT (continued)

Replacing an NTMX79 card in an RSC-S EXT

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure the unit in which the card is being replaced is *inactive* and the mate unit is *active*.

Obtain an NTMX79 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where
rcc2_no
is the number of the RCC2 with the faulty card
- 4 Determine on which side of the extension shelf (right or left side) the faulty card is located by typing
QUERYPM
and pressing the Enter key.
Example of a MAP response:

NTMX79

in an RSC-S (DS-1) Model A EXT (continued)

```

PM Type: RCC2 PM No1.: 0 PM Int. No.: 2 Node_No.: 126
PMs Equipped: 61 Loadname: CRI06AY
ESA equipped: YES IntraSwitching is ON
WARM SWACT is supported and available.
REX on RCC2 0 is included in the REX schedule.
Node Status; {OK, FALSE}
Unit 0 Act, Status; {OK, FALSE}
Unit 1 Inact, Status; {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
R113 01 AA00 CRSC 00 05 RCC2 : 000 MX85AA
R113 01 AA01 CEXT 00 05 EXT : [LEFT] MX86AA

```

(Extension shelf location of faulty card) —

At the RCE frame

- 5 By observing the LED on the extension shelf, be sure that the card to be removed is on the inactive unit. The LED is lit (ON) on the active unit, and not lit (OFF) on the inactive unit.

If faulty card is on	Do
active unit	step 6
inactive unit	step 8

At the MAP display

- 6 Switch the processing activity (SWACT) to the inactive RCC2 unit by typing
>SWACT
 and pressing the Enter key.
- Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 7 Confirm the system prompt by typing
>YES
 and pressing the Enter key.
- After both units are in service, proceed to the next step.

At the RCE frame

- 8 Place a sign on the active RCC2 unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

NTMX79 in an RSC-S (DS-1) Model A EXT (continued)

At the MAP terminal

- 9 Busy the inactive RCC2 unit by typing
>bsy unit rcc2_unit_no
and pressing the Enter key.
where
rcc2_unit_no
is the number of the RCC2 unit with the faulty card (0 or 1)

At the RCE frame

10



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

11



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Power down the NTMX72 card on the inactive RCC2 unit.

12



CAUTION


Loss of subscriber service

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the NTMX79 card is set to the ON position before removing the NTMX79 card.


Remove the NTMX79 card as shown in the following figures.

NTMX79 in an RSC-S (DS-1) Model A EXT (continued)

- a Locate the card to be removed on the appropriate shelf.

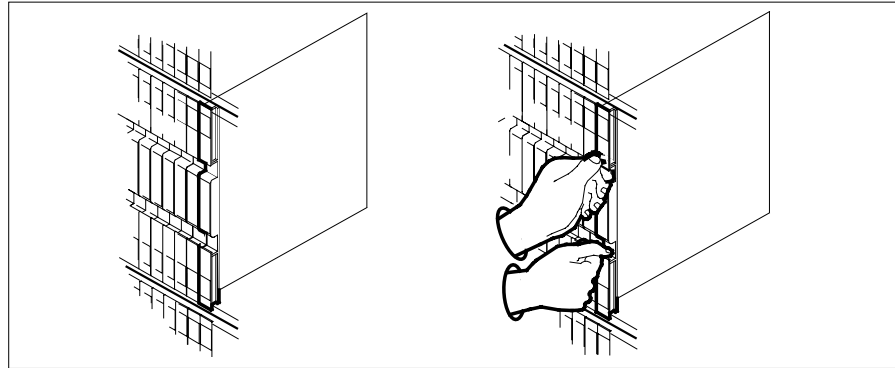

- b Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

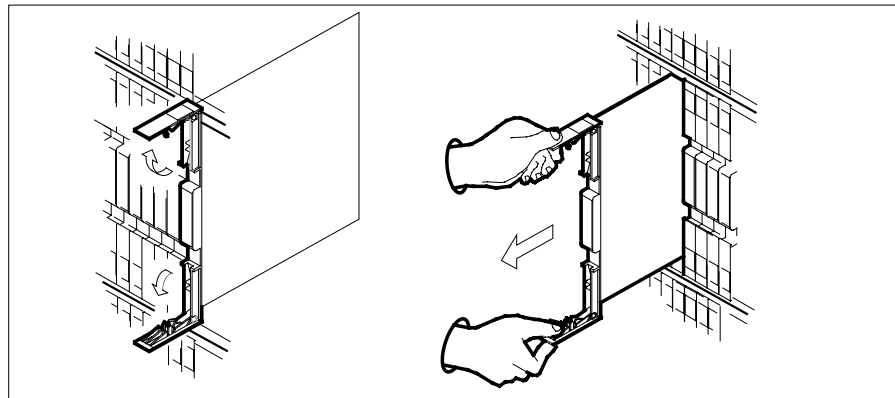


- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

13 Open the locking levers on the replacement card.

- a Align the card with the slots in the shelf.
b Gently slide the card into the shelf.


NTMX79
in an RSC-S (DS-1) Model A EXT (continued)

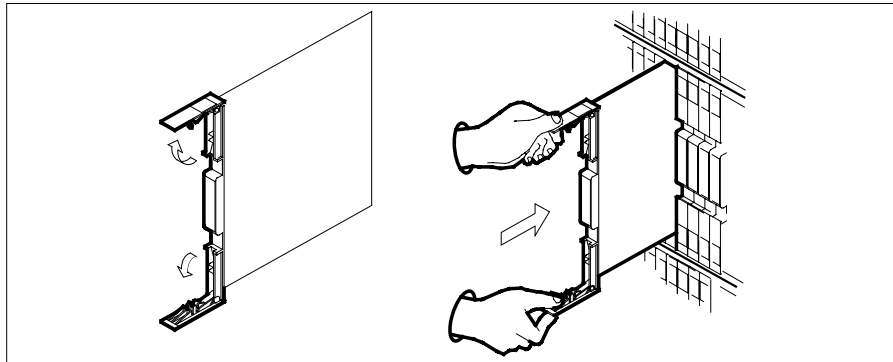**14****CAUTION****Loss of subscriber service**

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the NTMX79 card is set to the OFF position before seating the NTMX79 card.

Seat and lock the card.

- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b** Close the locking levers.

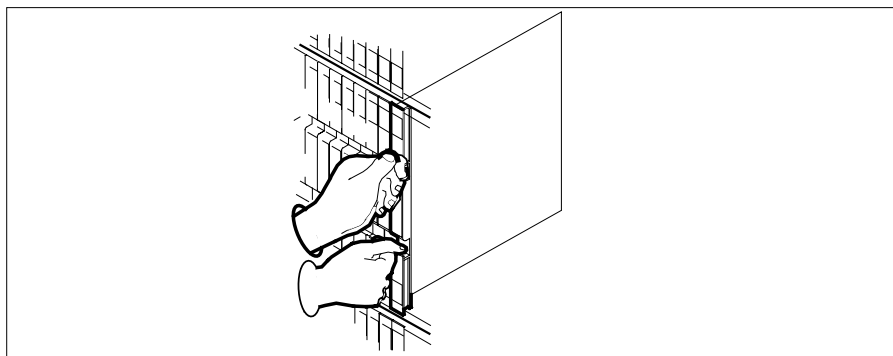**15**

Power up the inactive RCC2 unit as follows:

- a** Ensure that the power converter (NTMX72) is fully inserted. A major audible alarm may sound. This alarm is silenced when power is restored to the converter.

Note:

NTMX79**in an RSC-S (DS-1) Model A EXT** (continued)

- b If the power converter is an NTMX72AA, set the switch on the power converter to the Reset position. Set the associated circuit breaker on the FSP to the ON position.

If both the converter FAIL LED and FRAME FAIL lamp on the FSP go OFF, go to step 16.

If both the converter FAIL LED and FRAME FAIL lamp on the FSP do not go OFF, hold the switch on the NTMX72AA converter in the Reset position and simultaneously set the associated circuit breaker on the FSP to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the FSP will go OFF. Go to step 16.

- c If the power converter is an NTMX72AB set the associated circuit breaker on the FSP to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the FSP will go OFF. Go to step 16.

- 16** The peripheral/remote loader-16 card (NT7X05) allows local loading of RCC2 data, which reduces recovery time. Check to see if the NT7X05 card is provisioned by typing

>QUERYPM FILES

and pressing the Enter key.

Example of a MAP display:

```

      CM   MS   IOD   Net   PM   CCS   LNS   Trks   Ext   APPL
      .    .    .    .    1RCC2 .    .    .    .    .
              *C*
RCC2          SysB   ManB   OffL   CBsy   ISTb   InSv
0 Quit      PM     2       0       2       0       2       25
2 Post      RCC2   1       0       0       0       1       1
3 ListSet
4           RCC2    0 ISTb  Links_00S: CSide 0, PSide 0
5 TRNSL_    Unit 0: Inact ManB
6 TST_      Unit 1: Act InSv
7 BSY_
8 RTS_      QUERYPM files
9 OffL      Unit 0:
10 LoadPM_  NT7X05 load File: CRI05AW
11 Disp_    NT7X05 Image File:
12 Next_    CMR Load: CMR03A
13 SwAct    Unit 1:
14 QueryPM  NT7X05 load File: CRI05AW
15          NT7X05 Image File:
16 IRLINK   CMR Load: CMR03A
17 Perform
18

```

Note: If the NT7X05 card is not provisioned the MAP response is: NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 17

NTMX79

in an RSC-S (DS-1) Model A EXT (continued)

17

If the NT7X05 card is	Do
not provisioned	step 18

**DANGER****Possible service interruption**

The LOCAL LOADFILE option of the LOADPDM command has a parameter of [<file> string]]. When this parameter is used, the loadfile named in the parameter is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the inactive RCC2 unit from the local loadfile by typing

>LOADPDM UNIT rcc2_unit_no LOCAL LOADFILE

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

If the load	Do
passed	step 19
failed	step 18

18

Load the inactive RCC2 unit (from the CM) by typing

>LOADPDM UNIT rcc2_unit_no

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

If load	Do
passed	step 19
failed	step 27

19

Test the inactive RCC2 unit by typing

>TST UNIT rcc2_unit_no

and pressing the Enter key.

where

NTMX79

in an RSC-S (DS-1) Model A EXT (end)

rcc2_unit_no is the number of the inactive RCC2 unit	
If TST	Do
passed	step 20
failed	step 26
20	Use the following information to determine what step to go to next in this procedure.
If you entered this procedure from	Do
alarm clearing procedures	step 26
other	step 21
21	Return the inactive RCC2 unit to service by typing >RTS UNIT rcc2_unit_no and pressing the Enter key. <i>where</i> rcc2_unit_no is the number of the inactive RCC2 unit
22	Use the following information to determine where to proceed.
If RTS	Do
passed	step 23
failed	step 27
23	Remove the sign from the active RCC2 unit.
24	Send any faulty cards for repair according to local procedure.
25	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 28.
26	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
27	Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
28	You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX79 in an RSC-S (DS-1) Model B EXT

Application

Use this procedure to replace an NTMX79 card in an RSC-S EXT.

PEC	Suffixes	Name
NTMX79	AA	DS60 Extender

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX79 in an RSC-S (DS-1) Model B EXT (continued)

Summary of card replacement procedure for an NTMX79 card in RSC-S EXT

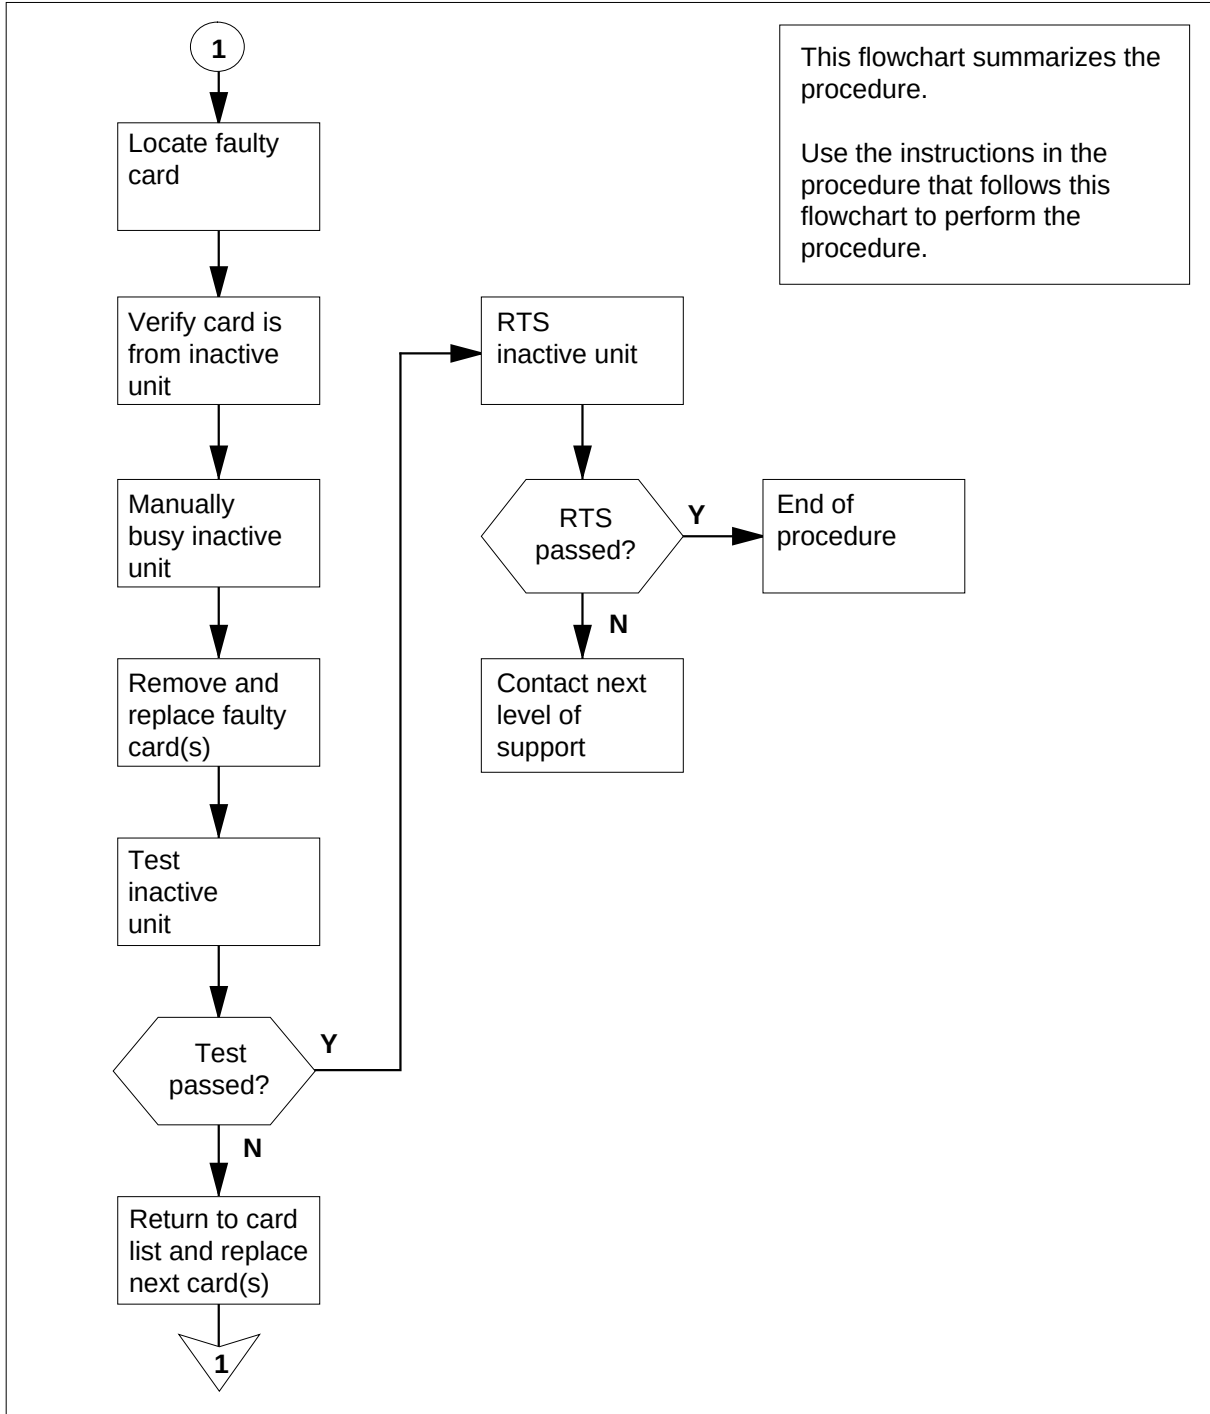

NTMX79 in an RSC-S (DS-1) Model B EXT (continued)

Replacing an NTMX79 card in an RSC-S EXT

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX79 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCC2 by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.
where
rcc2_no
is the number of the RCC2 with the faulty card
- 4 Determine on which side of the extension shelf (right or left side) the faulty card is located by typing
QUERYPM
and pressing the Enter key.
Example of a MAP response:

NTMX79

in an RSC-S (DS-1) Model B EXT (continued)

```

PM Type: RCC2 PM No.: 0 PM Int. No.: 2 Node_No.: 126
PMs Equipped: 61 Loadname: CRI05AW
ESA equipped: YES IntraSwitching is ON
WARM SWACT is supported and available.
REX on RCC2 0 is included in the REX schedule.
Node Status; {OK, FALSE}
Unit 0 Act, Status; {OK, FALSE}
Unit 1 Inact, Status; {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
R113 01 AA00 CRSC 00 05 RCC2 : 000 MX85AA
R113 01 AA01 CEXT 00 05 EXT : [LEFT] MX86AA

```

(Extension shelf location of faulty card) —

- 5 By observing the LED on the extension shelf, be sure that the card to be removed is on the inactive unit. The LED is lit (ON) on the active unit, and not lit (OFF) on the inactive unit.

If faulty card is on	Do
active unit	step 6
inactive unit	step 8

- 6 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT
 and pressing the Enter key.
Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 7 Confirm the system prompt by typing
>YES
 and pressing the Enter key.
 After both units are in service, proceed to the next step.

At the RCE frame

- 8 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 9 Busy the inactive RCC2 unit by typing
>bsy unit rcc2_unit_no
 and pressing the Enter key.
where
rcc2_unit_no
 is the number of the RCC2 unit to be busied (0 or 1)

NTMX79
in an RSC-S (DS-1) Model B EXT (continued)

At the RCE frame

10

**WARNING****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

11

**DANGER****Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Power down the NTMX72 card in the inactive RCC2.

12


**CAUTION****Loss of subscriber service**

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the NTMX79 card is set to the ON position before removing the NTMX79 card.


Remove the NTMX79 card as shown in the following figures.

- a** Locate the card to be removed on the appropriate shelf.

NTMX79 in an RSC-S (DS-1) Model B EXT (continued)

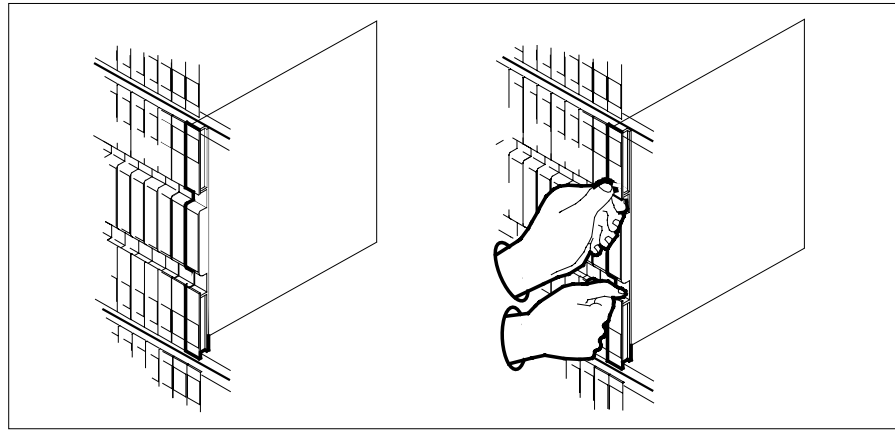


- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

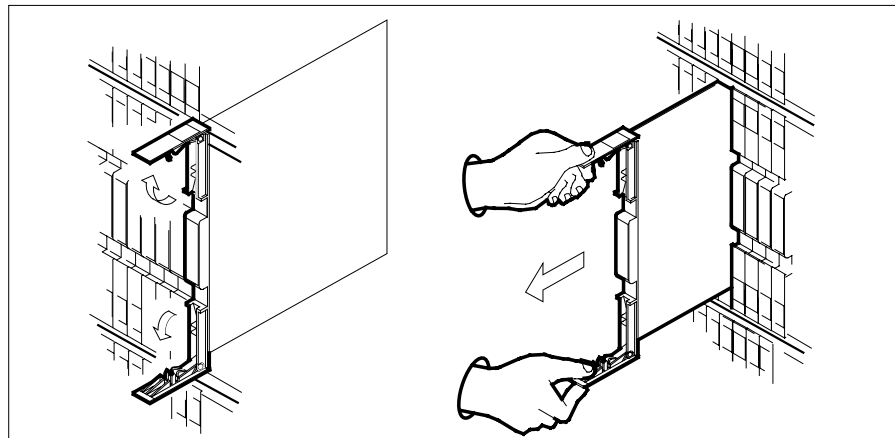

- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.
- 13** Open the locking levers on the replacement card.
- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX79 in an RSC-S (DS-1) Model B EXT (continued)

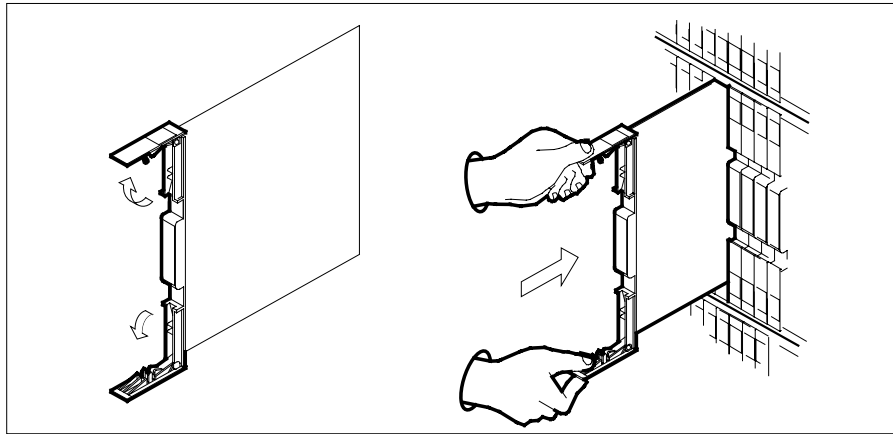


14

**CAUTION****Loss of subscriber service**

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the NTMX79 card is set to the OFF position before seating the NTMX79 card.

Seat and lock the NTMX79 card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

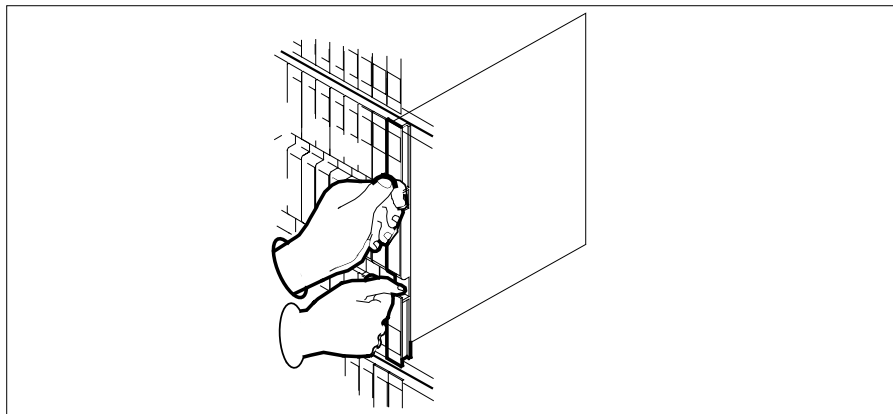

15 Power up the inactive RCC2 unit as follows:

NTMX79**in an RSC-S (DS-1) Model B EXT** (continued)

- a Ensure that the power converter (NTMX72) is fully inserted. A major audible alarm may sound. The alarm is silenced when power is restored to the converter.

Note:

- b If the power converter replaced is an NTMX72AA, set the switch on the power converter to the Reset position. Set the associated circuit breaker on the MSP to the ON position.

If both the converter FAIL LED and FRAME FAIL lamp on the MSP go OFF, go to step 16.

If both the converter FAIL LED and FRAME FAIL lamp on the MSP do not go OFF, hold the switch on the NTMX72AA power converter in the Reset position and simultaneously set the associated circuit breaker on the MSP to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will go OFF. Go to step 16.

- c If the power converter replaced is an NTMX72AB, set the associated circuit breaker on the MSP to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will go OFF. Go to step 16.

- 16** The peripheral/remote loader-16 card (NT7X05) allows local loading of RCC2 data, which reduces recovery time. Check to see if the NT7X05 card is provisioned by typing

>QUERYPM FILES

and pressing the Enter key.

Example of a MAP display:

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	APPL
.	.	.	.	1RCC2	.	.	.	.	.
				C					
RCC2		SysB	ManB	OffL		CBsy	ISTb	InSv	
0 Quit	PM	2	0	2	0	2	25		
2 Post	RCC2	1	0	0	0	1	1		
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	0,	PSide	0	
5 TRNSL_	Unit 0:	Inact	ManB						
6 TST_	Unit 1:	ACT	InSv						
7 BSY_									
8 RTS_	QUERYPM files								
9 OffL	Unit 0:								
10 LoadPM_	NT7X05 load File:	CRI06AY							
11 Disp_	NT7X05 Image File:								
12 Next_	CMR Load:	CMR03A							
13 SwAct	Unit 1:								
14 QueryPM	NT7X05 load File:	CRI06AY							
15	NT7X05 Image File:								
16 IRLINK	CMR Load:	CMR03A							
17 Perform									
18									

NTMX79

in an RSC-S (DS-1) Model B EXT (continued)

Note: If the NT7X05 card is not provisioned the MAP response is:NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 17
not provisioned	step 18

17

**DANGER****Possible service interruption**

The LOCAL LOADFILE option of the LOADPM command has a parameter of [<file> string]]. When this parameter is used, the loadfile named in the parameter is not patched. Do not use this parameter unless the NOPATCH option of the loadfile is desired.

Load the inactive RCC2 unit from the local load file by typing

>LOADPM UNIT unit_no LOCAL LOADFILE

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

If the load	Do
passed	step 19
failed	step 18

18

Load the inactive RCC2 unit (from the CM) by typing

>LOADPM UNIT rcc2_unit_no

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

If load	Do
passed	step 19
failed	step 27

NTMX79**in an RSC-S (DS-1) Model B EXT** (continued)

- 19** Test the inactive RCC2 unit by typing

>TST UNIT rcc2_unit_no

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

If TST	Do
passed	step 20
failed	step 26

- 20** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 26
other	step 21

- 21** Return the inactive RCC2 unit to service by typing

>RTS UNIT rcc2_unit_no

and pressing the Enter key.

where

rcc2_unit_no

is the number of the inactive RCC2 unit

- 22** Use the following information to determine where to proceed.

If RTS	Do
passed	step 23
failed	step 27

- 23** Remove the sign from the active RCC2 unit.

- 24** Send any faulty cards for repair according to local procedure.

- 25** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 28.

- 26** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 27** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.

NTMX79

in an RSC-S (DS-1) Model B EXT (end)

- 28** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX79 in an RSC-S (PCM-30) Model A EXT

Application

Use this procedure to replace an NTMX79 card in an RSC-S EXT.

PEC	Suffixes	Name
NTMX79	AA	DS60 Extender

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX79 in an RSC-S (PCM-30) Model A EXT (continued)

Summary of card replacement procedure for an NTMX79 card in RSC-S EXT

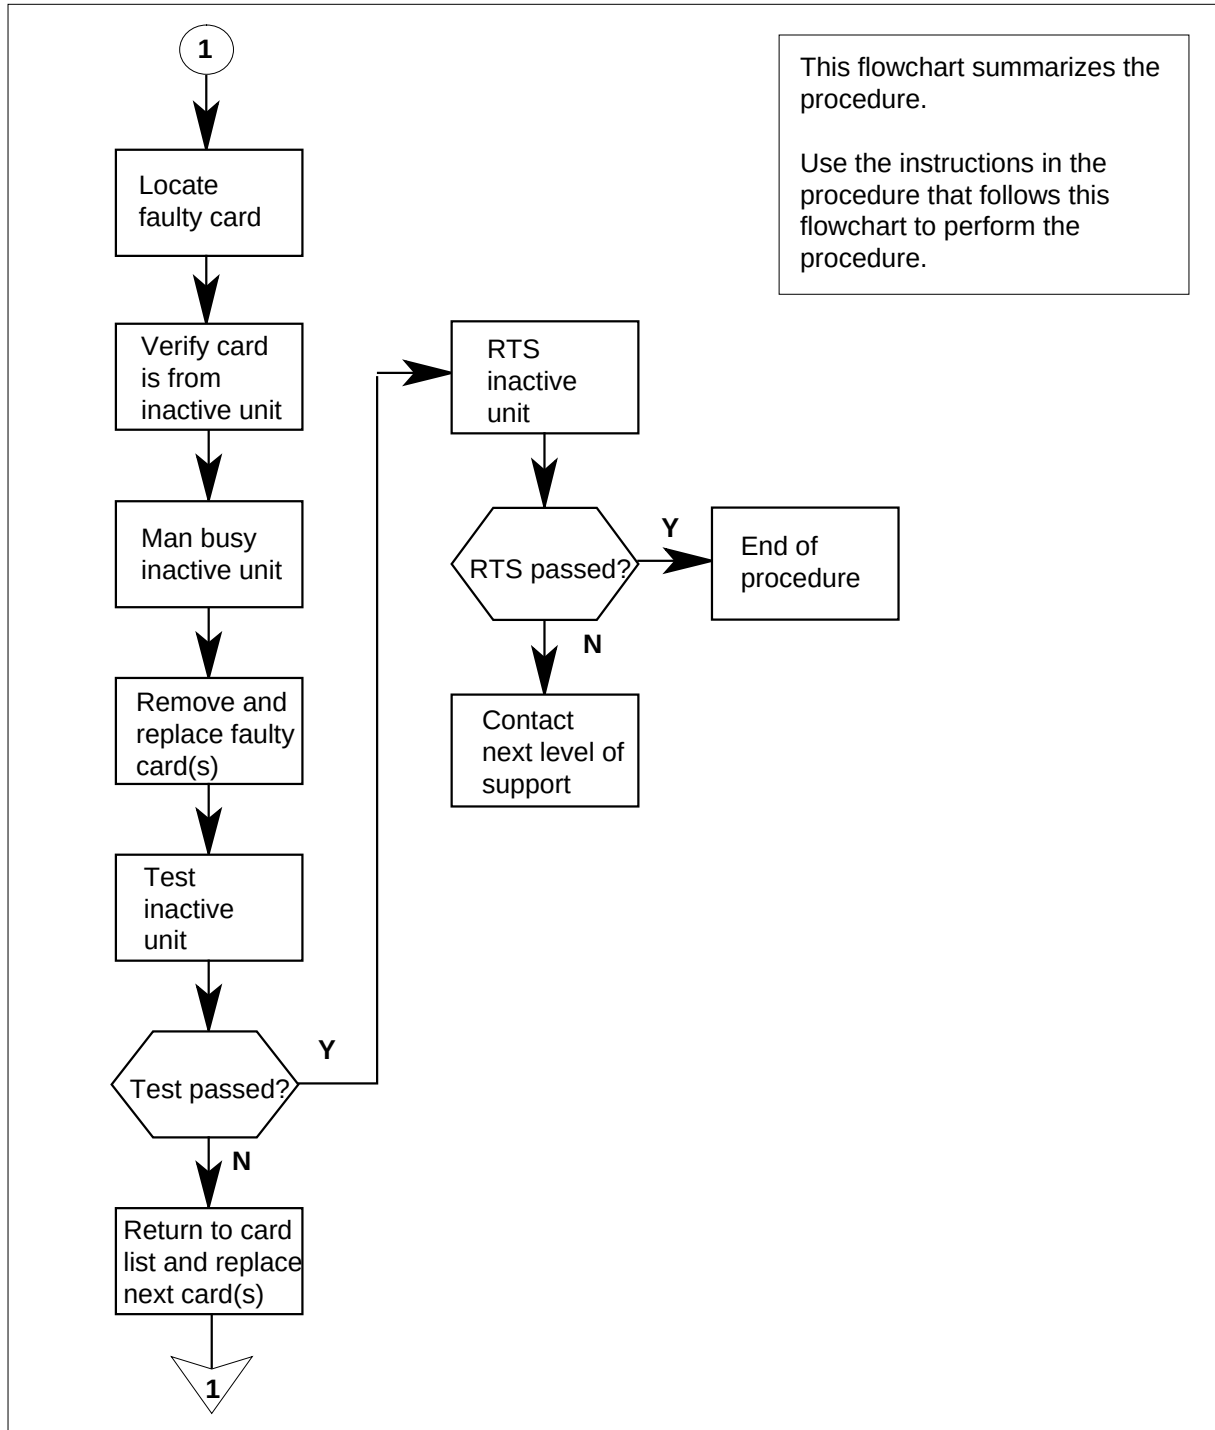

NTMX79 in an RSC-S (PCM-30) Model A EXT (continued)

Replacing an NTMX79 card in an RSC-S EXT

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.

2



CAUTION

Loss of service

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX79 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.

where

rco2_no

is the number of the RCO2 with the faulty card

- 4 Determine on which side of the extension shelf (right or left side) the faulty card is located by typing

QUERYPM

and pressing the Enter key.

Example of a MAP response:

```
PM Type: RCO2 PM Nol.: 0 PM Int. No.: 2 Node_No.: 126
PMs Equipped: 61 Loadname: KRI05AU
ESA equipped: YES IntraSwitching is ON
WARM SWACT is supported and available.
REX on RCO2 0 is included in the REX schedule.
Node Status; {OK, FALSE}
Unit 0 Act, Status; {OK, FALSE}
Unit 1 Inact, Status; {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
R113 01 AA00 CRSC 00 05 RCO2 : 000 MX85AA
R113 01 AA01 CEXT 00 05 EXT : [LEFT] MX86AA
```

(Extension shelf location of faulty card) —┐

NTMX79

in an RSC-S (PCM-30) Model A EXT (continued)

- 5 By observing the LED on the extension shelf, be sure that the card to be removed is on the inactive unit. The LED is lit (ON) on the active unit, and not lit (OFF) on the inactive unit.

If faulty card is on	Do
active unit	step 6
inactive unit	step 9

- 6 Switch the processing activity (SWACT) to the inactive unit by typing **>SWACT** and pressing the Enter key.

If prompt indicates a	Do
warm SWACT will be performed	step 8
cold SWACT will be performed	step 7

7



CAUTION

Loss of service

All calls being handled by this PM will be lost, including data calls. Perform the next step during a period of low traffic only.

- 8 Confirm the system prompt by typing **>YES** and pressing the Enter key.
After both units are in-service, proceed to the next step.

At the RCE frame

- 9 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 10 Busy the inactive PM unit by typing **>bsy unit unit_no** and pressing the Enter key.
where

NTMX79 in an RSC-S (PCM-30) Model A EXT (continued)

unit_no

is the number of the unit to be busied (0 or 1)

At the RCE frame

11



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

12



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Power down the NTMX72 card in the inactive RCO2.

13



CAUTION

Loss of subscriber service


To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the MX79 card is set to the ON position before removing the NTMX79 card.

Remove the NTMX79 card as shown in the following figures.


- a** Locate the card to be removed on the appropriate shelf.

NTMX79

in an RSC-S (PCM-30) Model A EXT (continued)

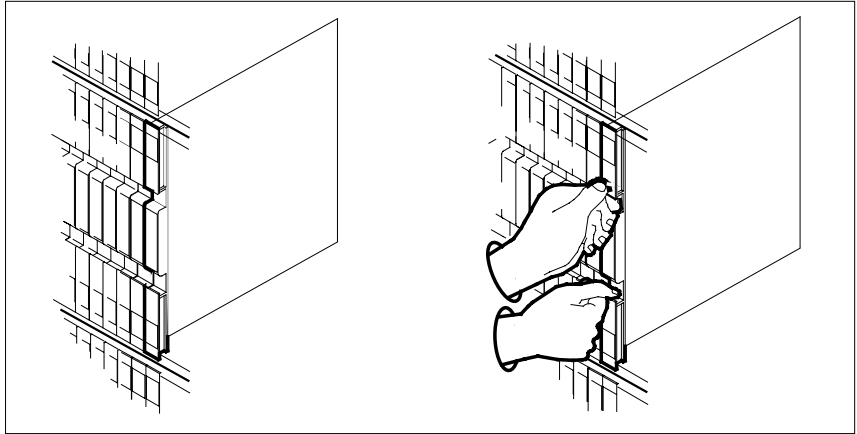

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

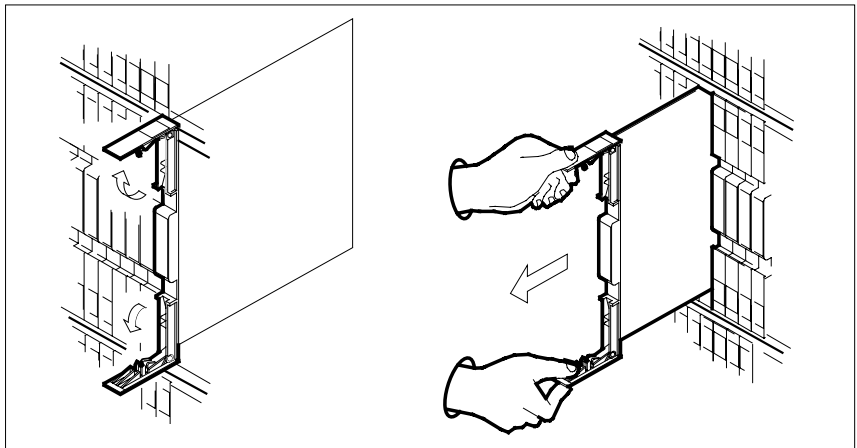


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

14 Open the locking levers on the replacement card.

- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX79 in an RSC-S (PCM-30) Model A EXT (continued)

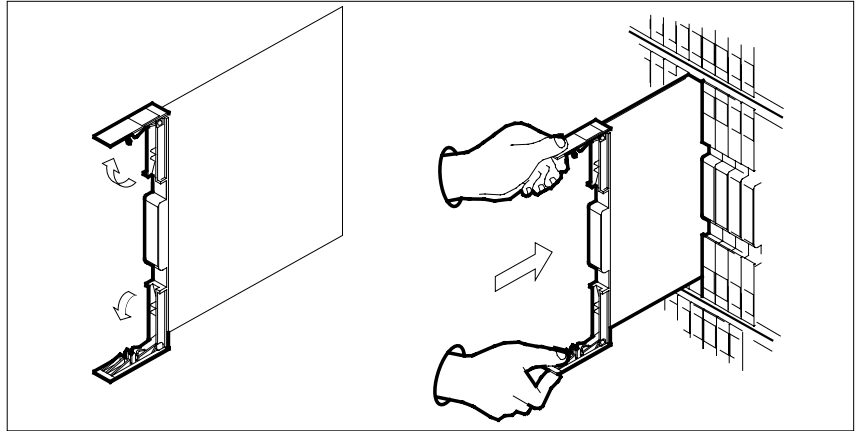

15




CAUTION

Loss of subscriber service

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the MX79 card is set to the OFF position before seating the NTMX79 card.

Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

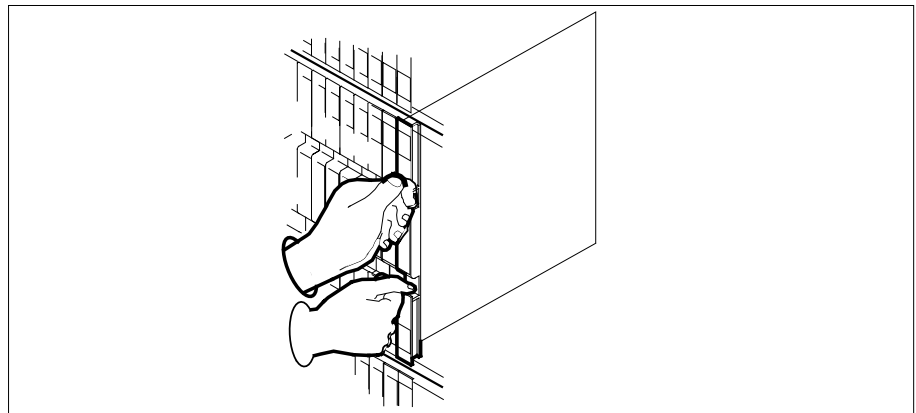

16 Power up the inactive RCO2 unit as follows:

NTMX79
in an RSC-S (PCM-30) Model A EXT (continued)

- a Ensure that the power converter (NTMX72) is inserted. A major audible alarm may sound. This alarm is silenced when power is restored to the converter.
 - b Set the POWER switch of the inactive unit to the ON position.
- 17 Press the RESET button while setting the circuit breaker to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will be ON.
- 18 The peripheral loader card (NT7X05) allows local loading of the RCO2 data. Local data loading reduces recovery time. Determine if an NT7X05 is located in slot 12. Check if the NT7X05 card is provisioned by typing

>QUERYPM FILES
and pressing the Enter key.
Example of a MAP display:

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	APPL
.	.	.	.	1RCO2	.	.	.	.	.
				C					
RCO2		SysB	ManB	OffL	CBsy	ISTb	InSv		
0 Quit	PM	2	0	2	0	2	25		
2 Post	RCO2	1	0	0	0	1	1		
3 ListSet									
4	RCO2	0	ISTb	Links_00S:	CSide	0,	PSide	0	
5 TRNSL_	Unit 0:	Inact	ManB						
6 TST_	Unit 1:	Inact	InSv						
7 BSY_									
8 RTS_	QUERYPM files								
9 OffL	Unit 0:								
10 LoadPM_	NT7X05	load	File:	KRI05AU					
11 Disp_	NT7X05	Image	File:	KRI05AU					
12 Next_									
13 SwAct	Unit 1:								
14 QueryPM	NT7X05	load	File:	KRI05AU					
15	NT7X05	Image	File:	KRI05AU					
16 IRLINK									
17 Perform									
18									

Note: If the NT7X05 card is not provisioned the MAP response is:NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 19
not provisioned	step 21

- 19 Load the inactive RCO2 unit from the local image by typing
>LOADPM UNIT rco2_unit_no LOCAL IMAGE
and pressing the Enter key.

NTMX79**in an RSC-S (PCM-30) Model A EXT** (continued)*where***rco2_unit_no**

is the number of the inactive RCO2 unit

If the load**Do**

passed

step 22

failed

step 20

20

Load the inactive RCO2 unit from the local loadfile by typing

>LOADPM UNIT unit_no LOCAL LOADFILE

and pressing the Enter key.

*where***rco2_unit_no**

is the number of the inactive RCO2 unit

If the load**Do**

passed

step 22

failed

step 21

21

After replacing the faulty card, load the inactive unit by typing

>LOADPM UNIT unit_no CC

and pressing the Enter key.

*where***unit_no**

is the number of the inactive unit

If LOAD**Do**

passed

step 22

failed

step 30

22

Test the inactive unit by typing

>TST UNIT unit_no

and pressing the Enter key.

*where***unit_no**

is the number of the inactive RCO2 unit

If TST**Do**

passed

step 23

NTMX79

in an RSC-S (PCM-30) Model A EXT (end)

	If TST	Do
	failed	step 29
23	Use the following information to determine what step to go to next in this procedure.	
	If you entered this procedure from	Do
	alarm clearing procedures	step 29
	other	step 24
24	Return the inactive RCO2 unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the inactive RCO2 unit	
25	Use the following information to determine where to proceed.	
	If RTS	Do
	passed	step 26
	failed	step 30
26	Remove the sign from the active RCO2 unit.	
27	Send any faulty cards for repair according to local procedure.	
28	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 31.	
29	Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.	
30	Obtain further assistance in replacing this card by contacting operating company maintenance personnel.	
31	You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.	

NTMX79 in an RSC-S (PCM-30) Model B EXT

Application

Use this procedure to replace an NTMX79 card in an RSC-S EXT.

PEC	Suffixes	Name
NTMX79	AA	DS60 Extender

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX79 in an RSC-S (PCM-30) Model B EXT (continued)

Summary of card replacement for an NTMX79 card in RSC-S-EXT

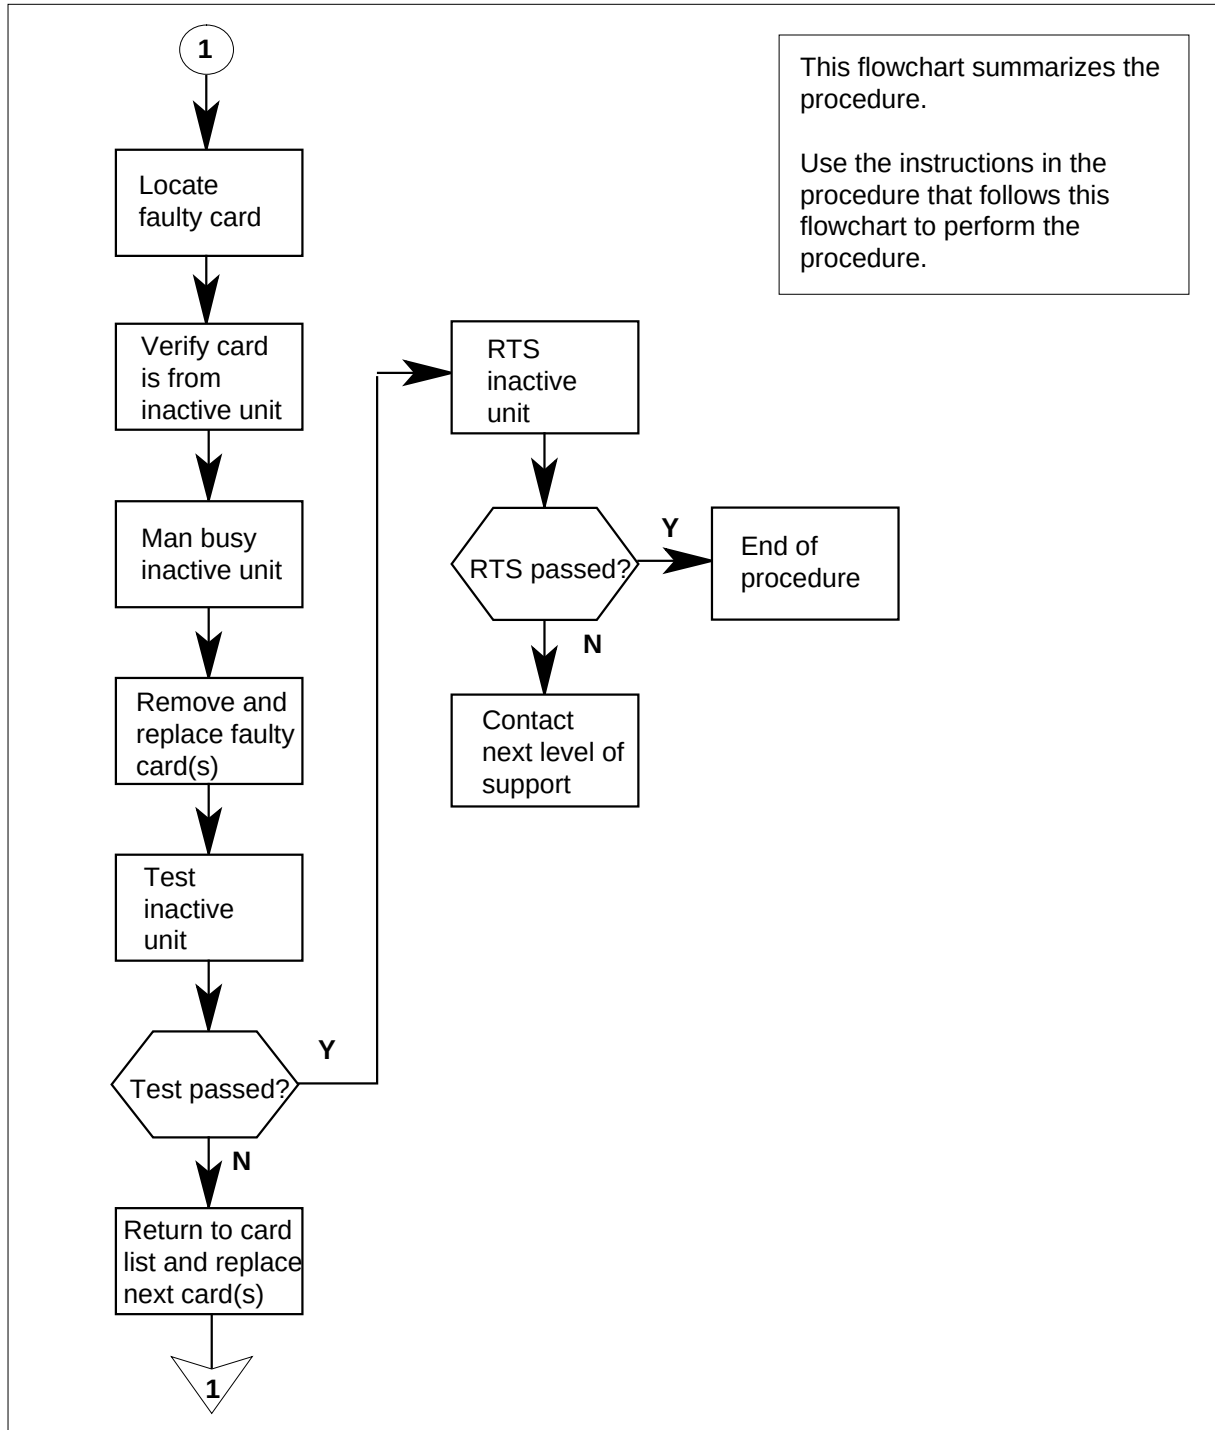

NTMX79 in an RSC-S (PCM-30) Model B EXT (continued)

Replacing an NTMX79 card in an RSC-S EXT

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX79 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Set the MAP display to the PM level and post the RCO2 by typing
>MAPCI;MTC;PM;POST RCO2 rco2_no
and pressing the Enter key.
where
rco2_no
is the number of the RCO2 with the faulty card
- 4 Determine on which side of the extension shelf (right or left side) the faulty card is located by typing

QUERYPM

and pressing the Enter key.

Example of a MAP response:

```
PM Type: RCO2 PM Nol.: 0 PM Int. No.: 2 Node_No.: 126
PMs Equipped: 61 Loadname: KRI05AU
ESA equipped: YES IntraSwitching is ON
WARM SWACT is supported and available.
REX on RCO2 0 is included in the REX schedule.
Node Status; {OK, FALSE}
Unit 0 Act, Status; {OK, FALSE}
Unit 1 Inact, Status; {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
R113 01 AA00 CRSC 00 05 RCO2 : 000 MX85AA
R113 01 AA01 CEXT 00 05 EXT : [LEFT] MX86AA
```

(Extension shelf location of faulty card) —┐

NTMX79

in an RSC-S (PCM-30) Model B EXT (continued)

- 5 By observing the LED on the extension shelf, be sure that the card to be removed is on the inactive unit. The LED is lit (ON) on the active unit, and not lit (OFF) on the inactive unit.

If faulty card is on

Do

active unit

step 6

inactive unit

step 8

- 6 Switch the processing activity (SWACT) to the inactive unit by typing
>SWACT

and pressing the Enter key.

Note: If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.

- 7 Confirm the system prompt by typing
>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 8 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 9 Busy the inactive PM unit by typing
>bsy unit unit_no

and pressing the Enter key.

where

unit_no

is the number of the unit to be busied (0 or 1)

NTMX79 in an RSC-S (PCM-30) Model B EXT (continued)

At the RCE frame

10



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Put on a wrist strap.

11



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Power down the NTMX72 card in the inactive RCO2.

12



CAUTION

Loss of subscriber service


To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the MX79 card is set to the ON position before removing the NTMX79 card.

Remove the NTMX79 card as shown in the following figures.


- a Locate the card to be removed on the appropriate shelf.

NTMX79

in an RSC-S (PCM-30) Model B EXT (continued)

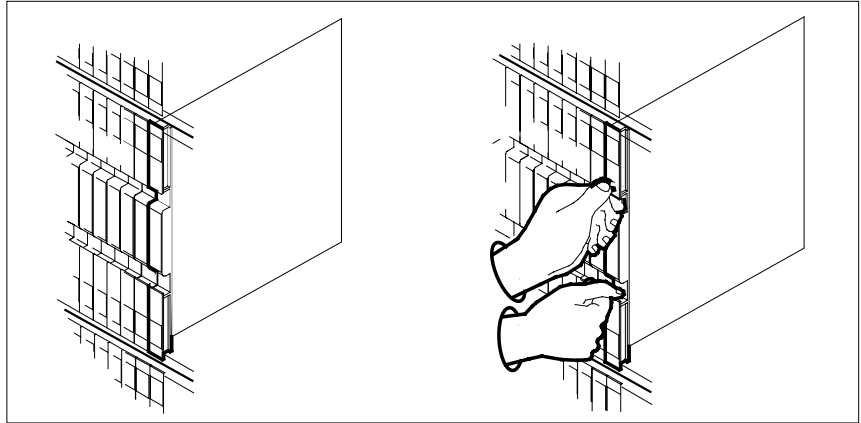

- b** Open the locking levers on the card to be replaced and gently pull the card toward you until it clears the shelf.

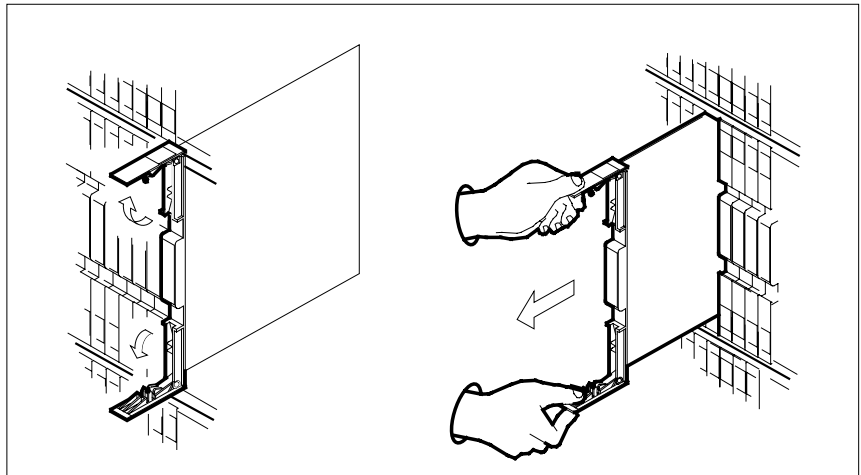


- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.

13 Open the locking levers on the replacement card.

- a** Align the card with the slots in the shelf.
- b** Gently slide the card into the shelf.

NTMX79 in an RSC-S (PCM-30) Model B EXT (continued)

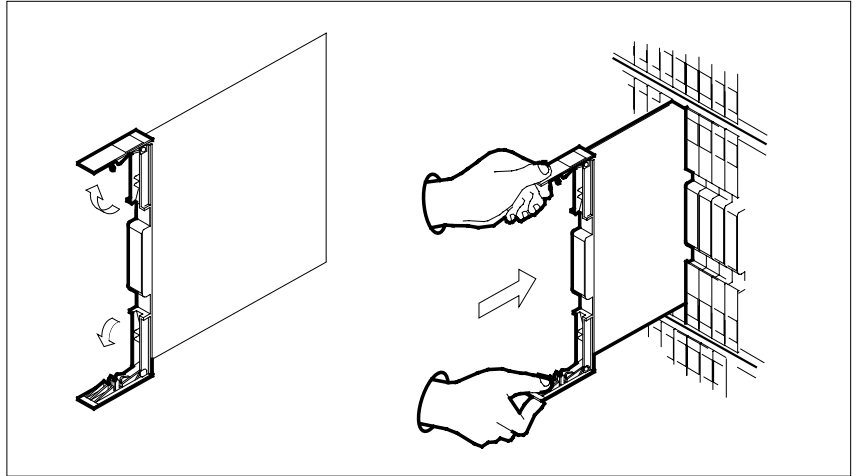

14




CAUTION

Loss of subscriber service

To prevent the D-channel handler (DCH) card from being set system busy (SysB), which causes a loss of subscriber service, make sure the toggle switch on the MX79 card is set to the OFF position before seating the NTMX79 card.

Seat and lock the card.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

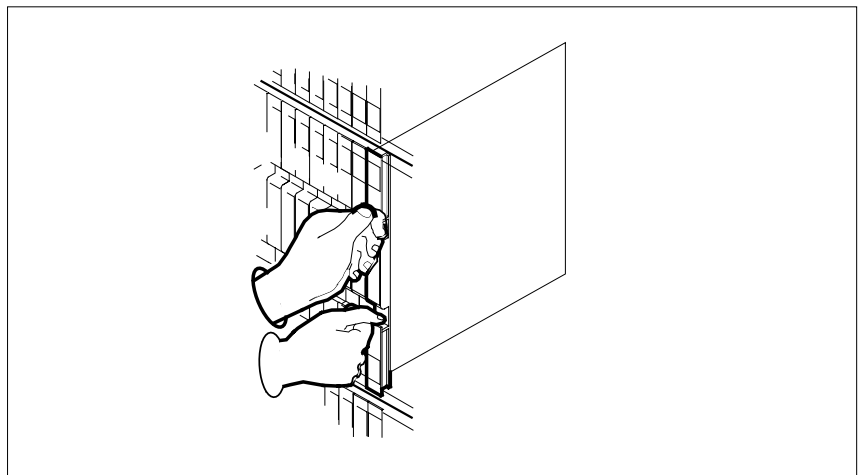

NTMX79

in an RSC-S (PCM-30) Model B EXT (continued)

- 15 Power up the inactive RCO2 unit as follows:
 - a Ensure that the power converter (NTMX72) is inserted. A major audible alarm may sound. This alarm is silenced when power is restored to the converter.
 - b Set the POWER switch of the inactive unit to the ON position.
- 16 Press the RESET button while setting the circuit breaker to the ON position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will be ON.
- 17 The peripheral loader card (NT7X05) allows local loading of the RCO2 data. Local data loading reduces recovery time. Determine if an NT7X05 is located in slot 12. Check if the NT7X05 card is provisioned by typing

>QUERYPM FILES

and pressing the Enter key.

Example of a MAP display:

```

      CM   MS   IOD   Net   PM   CCS   LNS   Trks   Ext   APPL
      .    .    .    .    1RCO2 .    .    .    .    .
                *C*
RCO2          SysB   ManB   OffL   CBsy   ISTb   InSv
0 Quit        PM     2       0       2       0       2       25
2 Post        RCO2   1       0       0       0       1       1
3 ListSet
4             RCO2   0 ISTb Links_00S: CSide 0, PSide 0
5 TRNSL_      Unit 0: Inact ManB
6 TST_        Unit 1: Inact InSv
7 BSY_
8 RTS_        QUERYPM files
9 OffL        Unit 0:
10 LoadPM_    NT7X05 load File: KRI05AU
11 Disp_      NT7X05 Image File:KRI05AU
12 Next_
13 SwAct      Unit 1:
14 QueryPM    NT7X05 load File: KRI05AU
15            NT7X05 Image File:KRI05AU
16 IRLINK
17 Perform
18

```

Note: If the NT7X05 card is not provisioned the MAP response is:NT7X05 not datafilled, QueryPm files invalid

If the NT7X05 card is	Do
provisioned	step 18
not provisioned	step 20

- 18 Load the inactive RCO2 unit from the local image by typing
>LOADPM UNIT rco2_unit_no LOCAL IMAGE

NTMX79**in an RSC-S (PCM-30) Model B EXT** (continued)

and pressing the Enter key.

where

rco2_unit_no

is the number of the inactive RCO2 unit

If the load	Do

passed	step 21

failed	step 19

- 19** Load the inactive RCO2 unit from the local loadfile by typing

>LOADPM UNIT unit_no LOCAL LOADFILE

and pressing the Enter key.

where

rco2_unit_no

is the number of the inactive RCO2 unit

If the load	Do

passed	step 21

failed	step 20

- 20** After replacing the faulty card, load the inactive unit by typing

>LOADPM UNIT unit_no CC

and pressing the Enter key.

where

unit_no

is the number of the inactive unit

If LOAD	Do

passed	step 21

failed	step 29

- 21** Test the inactive unit by typing

>TST UNIT unit_no

and pressing the Enter key.

where

NTMX79

in an RSC-S (PCM-30) Model B EXT (end)

- unit_no**
is the number of the inactive RCO2 unit
- | If TST | Do |
|--------|---------|
| passed | step 22 |
| failed | step 28 |
- 22** Use the following information to determine what step to go to next in this procedure.
- | If you entered this procedure from | Do |
|------------------------------------|---------|
| alarm clearing procedures | step 28 |
| other | step 23 |
- 23** Return the inactive RCO2 unit to service by typing
>RTS UNIT unit_no
 and pressing the Enter key.
where
unit_no
 is the number of the inactive RCO2 unit
- 24** Use the following information to determine where to proceed.
- | If RTS | Do |
|--------|---------|
| passed | step 25 |
| failed | step 29 |
- 25** Remove the sign from the active RCO2 unit.
- 26** Send any faulty cards for repair according to local procedure.
- 27** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 30.
- 28** Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 29** Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 30** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX79 in an SMA2

Application

Use this procedure to replace an NTMX79 card in an SMA2 extension shelf (CMVI and MVIE frame).

PEC	Suffixes	Name
NTMX79	AB	DS60 Extender

Common procedures

The following procedures are referenced in this procedure:

- “Locating a faulty card in an SMA2”
- replacing a card
- returning a card


Do not go to a common procedure unless directed to do so in the step-action procedure.

Action

The following flowchart is only a summary of the procedure. To replace the card, use the step-action instructions in the procedure that follows the flowchart.

NTMX79 in an SMA2 (continued)

Summary of card replacement procedure for an NTMX79 card in an SMA2

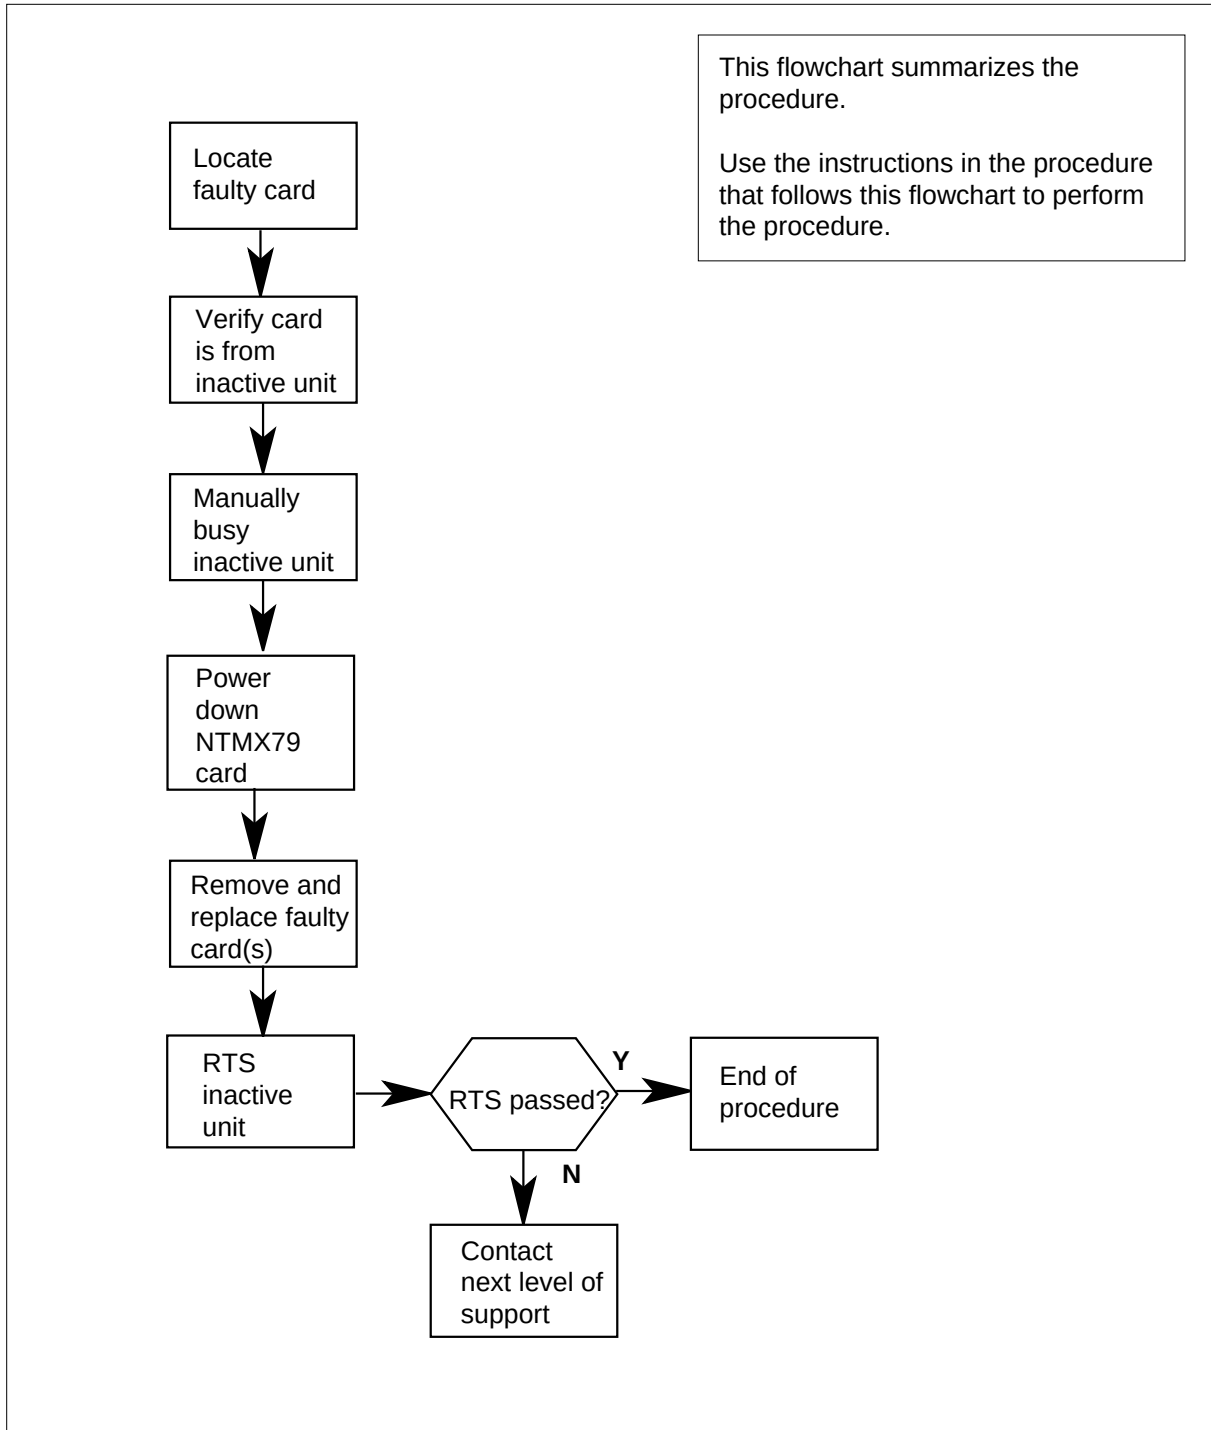

NTMX79 in an SMA2 (continued)

Replacing an NTMX79 card in an SMA2

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Ensure you know the physical location of the faulty card.

If card location is	Do
known	step 4
unknown	step 3

- 3 Perform the procedure "Locating a faulty card in an SMA2."
- 4



CAUTION

Loss of service

When replacing a card in the SMA2, ensure the unit in which you are replacing the card is *inactive* and the mate unit is *active*.

Obtain an NTMX79 replacement card. Verify the replacement card has the same product engineering code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 5 Set the MAP display to the PM level and post the SMA2 by typing
>MAPCI;MTC;PM;POST SMA2 sma2_no
 and pressing the Enter key.

where

sma2_no

is the number of the SMA2 with the faulty card

Example of a MAP display:

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2	0	ISTb	Links_00S:	CSide	0,	PSide	0
Unit0:	Act	InSv					
Unit1:	InAct	IsTb					

NTMX79 in an SMA2 (continued)

6	Observe the MAP display and determine if the faulty card is in the active or the inactive unit.		
	If faulty card is on	Do	
	active unit	step 7	
	inactive unit	step 11	
7	Switch the processing activity (SWACT) to the inactive unit by typing >SWACT and pressing the Enter key. A confirmation prompt for the SWACT command is displayed at the MAP terminal.		
	If prompt indicates	Do	
	cannot continue at this time	step 8	
	can continue at this time	step 9	
8	Reject the prompt to SWACT of the units by typing >NO and pressing the Enter key. The system discontinues the SWACT.		
9	Confirm the system prompt by typing >YES and pressing the Enter key. The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably. Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.		
	If the message is	Do	
	SWACT passed	step 11	
	SWACT failed Reason: XPM SWACTback	step 10	
	SWACT refused by SWACT Controller	step 10	
10	The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on		

NTMX79 in an SMA2 (continued)

the inactive unit before attempting to clear the alarm condition on the active unit.

Go to step 23.

At the frame or cabinet

- 11** Place a sign on the active unit bearing the words *Active unit-Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 12** Busy the inactive PM unit by typing
>bsy INACTIVE
and pressing the Enter key.

At the frame or cabinet

13



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.


Power down the NTMX79 card on the extension shelf.

Perform the common replacing a card procedure in this document.

- 14** Power up the NTMX79 as follows:
- a** Ensure the NTMX79 is inserted.
 - b** Set the POWER switch to the ON position.
- 15** Determine which circuit breaker controls the NTMX79 being replaced by observing the MSP and noting the circuit breaker that is tripped. In addition, verify that you are selecting the correct circuit breaker based on the figure that follows.

NTMX79
in an SMA2 (continued)

MSP (CMVI and MVIE with an extension shelf)

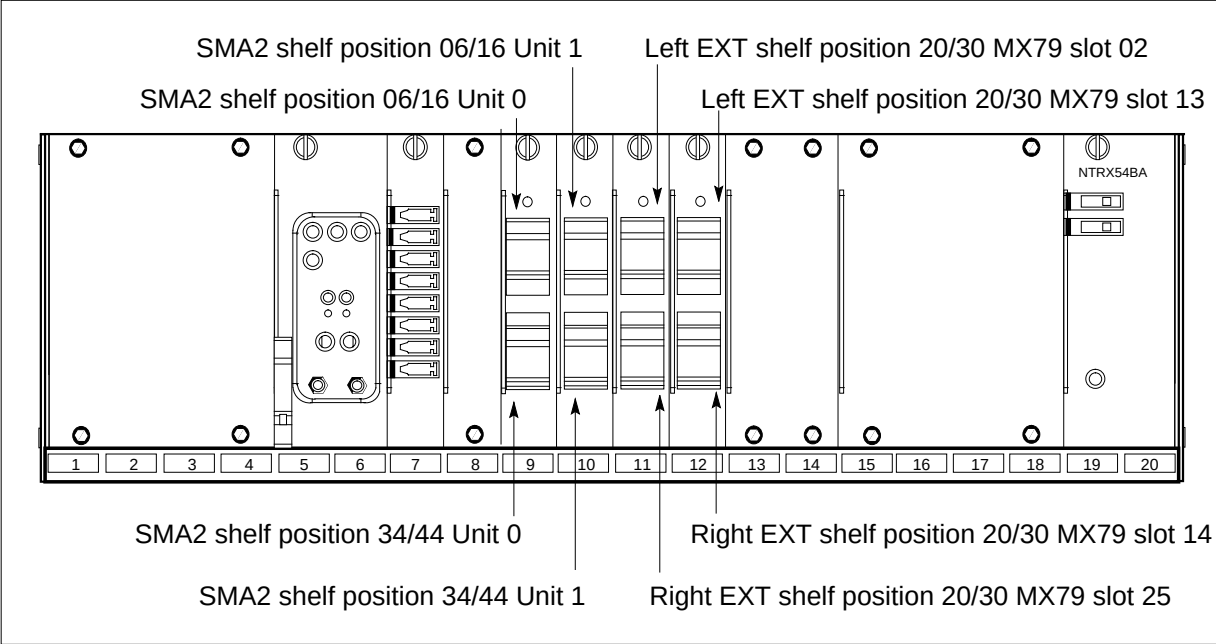

16 Press and hold the circuit breaker on the MSP to the ON position while placing the power switch on the NTMX79 card to the RESET position. Both the CONVERTER FAIL LED on the NTMX79 card and the FRAME FAIL lamp on the MSP will be ON.

17 Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 22
other	step 18

18 Return the inactive SMA2 unit to service by typing **>RTS INACTIVE** and pressing the Enter key.

19 Use the following information to determine where to proceed.

If RTS	Do
passed	step 20
failed	step 23

20 Remove the sign from the active unit.

NTMX79
in an SMA2 (end)

- 21 Go to the common returning a card procedure in this document.
Go to step 24.
- 22 Return to the procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 23 Obtain further assistance in replacing this card by contacting operating company maintenance personnel.
- 24 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

**NTMX81
in an RSC RCC2**

Application

Use this procedure to replace an NTMX81 card in an RSC RCC2.

PEC	Suffixes	Name
NTMX81	AA, BA	Dual DS-1 Interface

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX81 in an RSC RCC2 (continued)

Summary of card replacement procedure for an NTMX81 card in RSC RCC2

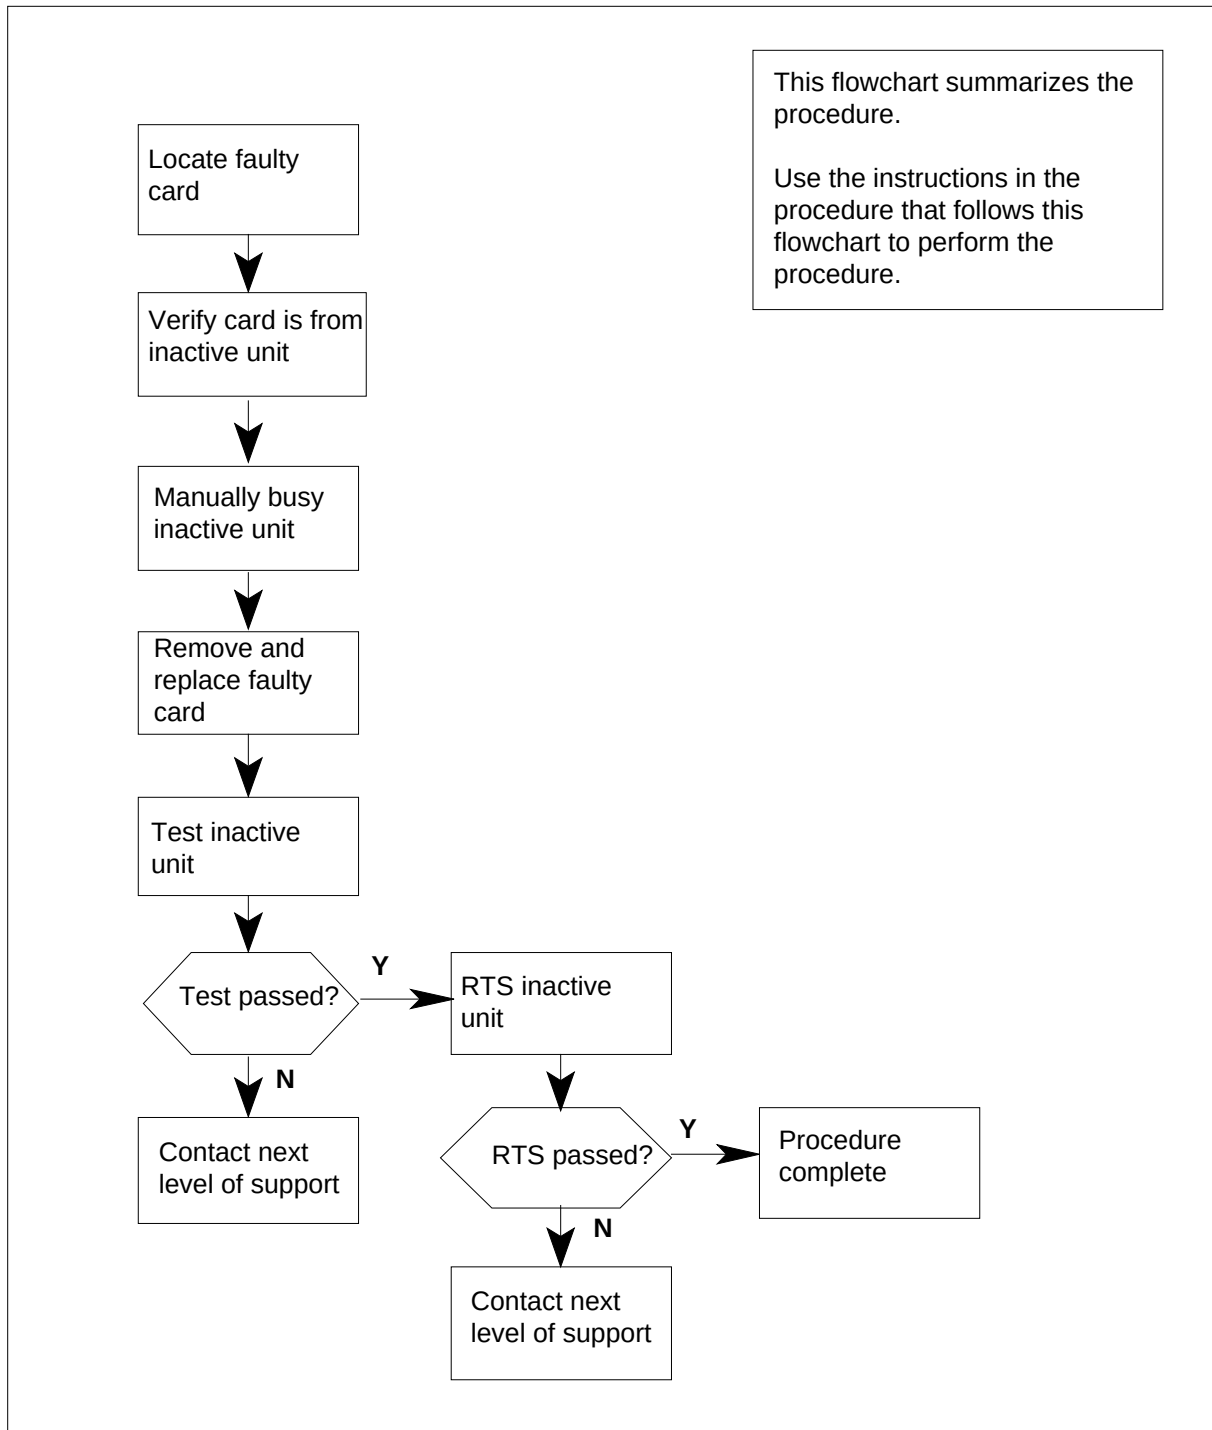

NTMX81 in an RSC RCC2 (continued)

Replacing an NTMX81 card in RSC RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



CAUTION

Loss of service

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX81 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Ensure the PM level of the MAP display is currently displayed by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 with the faulty card

Example of a MAP display:

NTMX81 in an RSC RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2		SysB	ManB	OffL	CBsy	ISTb	InSv		
0 Quit	PM	0	0	2	0	2	25		
2 Post_	RCC2	0	0	0	0	1	1		
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	1, PSide	1		
5 TRNSL	Unit0:	Inact	InSv						
6 TST	Unit1:	Act	InSv						
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, be sure the card to be removed is in the inactive unit.

At the RSCE frame

- 5 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

If faulty card is	Do
C-side of RCC2	step 11
P-side faulty	step 17

At the MAP terminal

- 6 Determine if the RCC2 is in a single or dual configuration by typing

>POST RCC2 rcc2_no ;IRLINK

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 associated with the faulty NTMX87 card

Note: If the posted RCC2 is in a single RCC2 configuration, the system will respond with the following message:

NTMX81 in an RSC RCC2 (continued)

NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

If the RCC2 is in a	Do
single configuration	step 9
dual configuration	step 7

- 7 Translate the dual RCC2s IRLINKS by typing

>TRNSL

and pressing the Enter key.

Example of a MAP response

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	App1
.	.	.	.	1RCC2	.	.	.	.	.
IRLINK			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	2	0	2	25		
2	RCC2	0	0	0	0	1	1		
3									
4	RCC2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST_	Unit1:	Act	InSv						
7 BSY_									
8 RTS_									
9									
10		IR	From	To		CAP	STATE	MSGCOND	
11		0	RCC2 0, 0	RCC2 1, 0		MS	OK	OPN	
12		1	RCC2 0, 8	Rcc2 1, 8		MS	OK	OPN	
13		2	RCC2 0, 12	RCC2 1, 12		S	OK		
14 QueryIR	3	RCC2 0, 13	RCC2 1, 13			S	OK		
15									
16									
17									
18									

- 8 Busy IRLINKS in the faulty NTMX87 circuit card by typing

>BSY irlink_no

and pressing the Enter key.

where

irlink_no

is the number of the irlink that must be busied

Note 1: This step must be performed for each provisioned link in the slot position.

Note 2: For link-to-slot assignments, reference step 16 for the main shelf.

- 9 Busy the inactive PM unit by typing

>bsy unit unit_no

NTMX81 in an RSC RCC2 (continued)

and pressing the Enter key.

where

unit_no

is the number of the inactive RCC2 unit (unit 0 or 1)

When both units are in-service, proceed to next step.

- 10** Display the C-side links associated with the DS-1 card by typing

>TRNSL C

and pressing the Enter key.

Example of a MAP response

LINK 0	LTC 0	0;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 1	LTC 0	1;CAP	S:STATUS SBsy		
LINK 2	LTC 0	2;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 3	LTC 0	3;CAP	S:STATUS OK		
LINK 4	LTC 0	4;CAP	S:STATUS OK		
LINK 5	LTC 0	5;CAP	S:STATUS SBsy		

If C-side links are

Do

faulty

step 14

not faulty

step 11

- 11** Display the P-side links associated with the DS-1 card by typing

>TRNSL P

and pressing the Enter key.

Example of a MAP response

LINK 0	RCC2 0 5	27;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 1	RCC2 1 5	27;CAP	MS:STATUS SBsy	MSGCOND	CLS
LINK 2	RCC2 0 7	47;CAP	MS:STATUS OK		
LINK 3	RCC2 1 7	47;CAP	MS:STATUS OK		
LINK 4	RCC2 0 5	50;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 5	RCC2 1 5	50;CAP	MS:STATUS SBsy	MSGCOND	CLS

If P-side links are

Do

faulty

step 14

not faulty

step 28

- 12** Busy the links associated with the RCC2 by typing

>BSY LINK 0

and pressing the Enter key.

NTMX81 in an RSC RCC2 (continued)

Example of a MAP response:

Please confirm ("Yes" or "No")

Confirm by typing

>YES

and pressing the Enter key.

Example of a MAP response:

LTC 0 LINK 0 Bsy Passed

Note: To busy the other links associated with the RCC2, execute the procedures in this step for each link until all links are busied.

- 13** Post the host PM by typing

>POST host_pm host_pm_no

and pressing the Enter key.

where

host_pm

is either a line group controller (LGC), a line group controller with ISDN (LGCI), a line trunk controller (LTC), or a line trunk controller with ISDN (LTCI)

host_pm_no

is the number of either an LGC, LGCI, LTC, or LTCI

Example of a MAP display:

CM	MS	IOD	Net	PM	CCS	Lns	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
LTC			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	1	0	4	12		
2 Post_	LTC	0	0	2	0	2	9		
3 ListSet									
4	LTC	1	ISTb	Links_00S:	CSide	0, PSide	1		
5 Trnsl_	Unit0:		Act	InSv					
6 Tst_	Unit1:		Inact	InSv					
7 Bsy_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next									
13 SwAct									
14 QueryPM									
15									
16									
17 Perform									
18									

NTMX81 in an RSC RCC2 (continued)

- 14 Manually busy the links connected to the faulty card by typing

>BSY LINK link_no

and pressing the Enter key.

where

link_no

is the number of the link associated with the faulty MX81 card, from step 11

Note: Each NTMX81 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; or 6,7.

At the RCE frame

- 15



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

- 16 After identifying the faulty link, use the following charts to determine which NTMX81 is to be removed by first identifying whether the link is a C-side or P-side link then by matching the link number with the slot number and the packet number to the left of each respective table.

NTMX81 in an RSC RCC2 (continued)

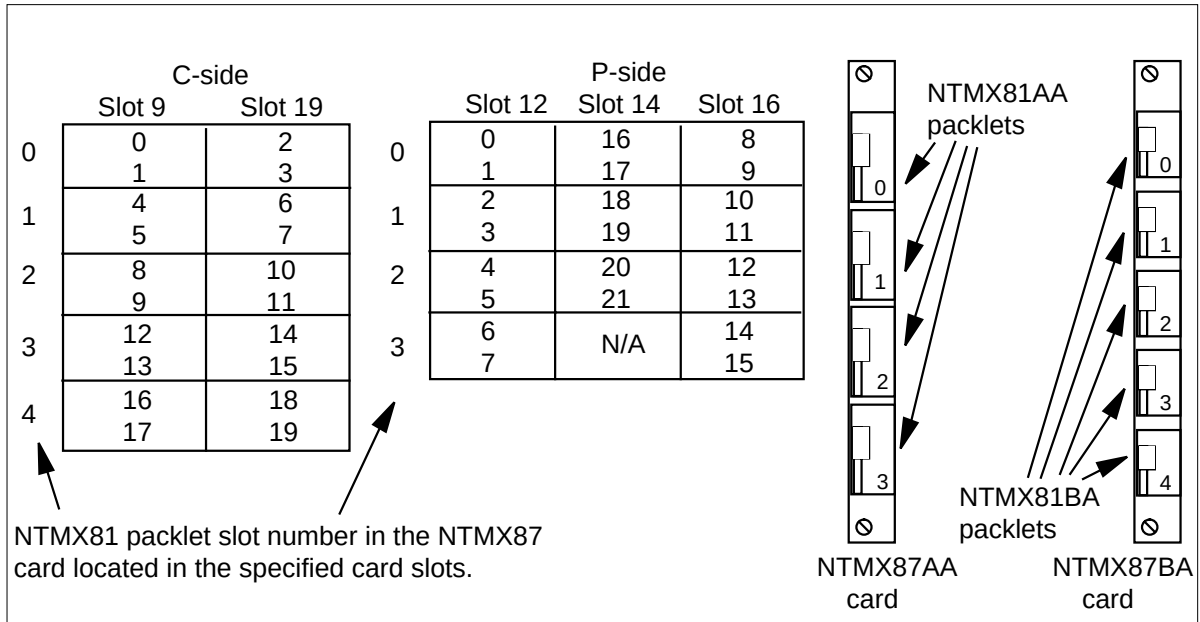

Remove the NTMX81 card as described in the following steps:

- Locate the packet to be removed on the appropriate NTMX87 card slot.
- Open the locking lever on the packet to be replaced and gently pull the card toward you until it clears the shelf.
- Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.

- 17** Before inserting the replacement card, set the DS-1 switch settings according to the following table.

(Sheet 1 of 2)

Distance to cross connect				
Feet	Meters	S3/6	S2/5	S1/4
0-133	0-41	On	Off	Off
133-266	41-81	Off	On	On
266-399	81-122	Off	On	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1-S3 belong to even port, and S4-S6 belong to odd port.				

NTMX81 in an RSC RCC2 (continued)

(Sheet 2 of 2)

Distance to cross connect				
Feet	Meters	S3/6	S2/5	S1/4
399-533	122-163	Off	Off	On
533-655	163-200	Off	Off	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1-S3 belong to even port, and S4-S6 belong to odd port.				

- 18 Open the locking lever on the replacement packlet.
 - a Align the packlet with the slots in the shelf.
 - b Gently slide the packlet into the card slot in the NTMX87 card.
- 19 Seat and lock the packlet.
 - a Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
 - b Close the locking lever.
- 20 Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 27
other	step 21

At the MAP terminal

- 21 Test the busied network links from step 12 by typing
>TST LINK link_no
and pressing the Enter key
 where
 link_no
 is the number of the link that was manually busied in step 14. This step must be performed for each link that is manually busied.
Note: To test the other links associated with the RCC2, execute this step for each link until all links are tested.

If TST	Do
passed	step 22

NTMX81 in an RSC RCC2 (continued)

	If TST	Do
	failed	step 28
22	Return to service the P-side links by typing >RTS LINK 0 and pressing the Enter key. Note: To RTS the other links associated with the RCC2, execute this step for each link until all links are returned to service.	
	If RTS	Do
	passed	step 23
	failed	step 28
23	Post the inactive RCC2 in which the NTMX81 card is located by typing >POST RCC2 rcc2_no and pressing the Enter key. <i>where</i> rcc2_no is the number of the RCC2 associated with the faulty card	
24	Return the inactive RCC2 unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the RCC2 unit posted in step 23	
	If RTS	Do
	passes	step 25
	fails	step 28
25	Send any faulty cards for repair according to local procedure.	
26	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 29.	
27	Return to <i>Alarm Clearing Procedures</i> or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.	
28	Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.	

NTMX81
in an RSC RCC2 (end)

- 29 You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX81 in an RSC-S (DS-1) Model A RCC2

Application

Use this procedure to replace an NTMX81 card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX81	AA, BA	Dual DS-1 Interface

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX81 in an RSC-S (DS-1) Model A RCC2 (continued)

Summary of card replacement procedure for an NTMX81 card in RSC-S RCC2

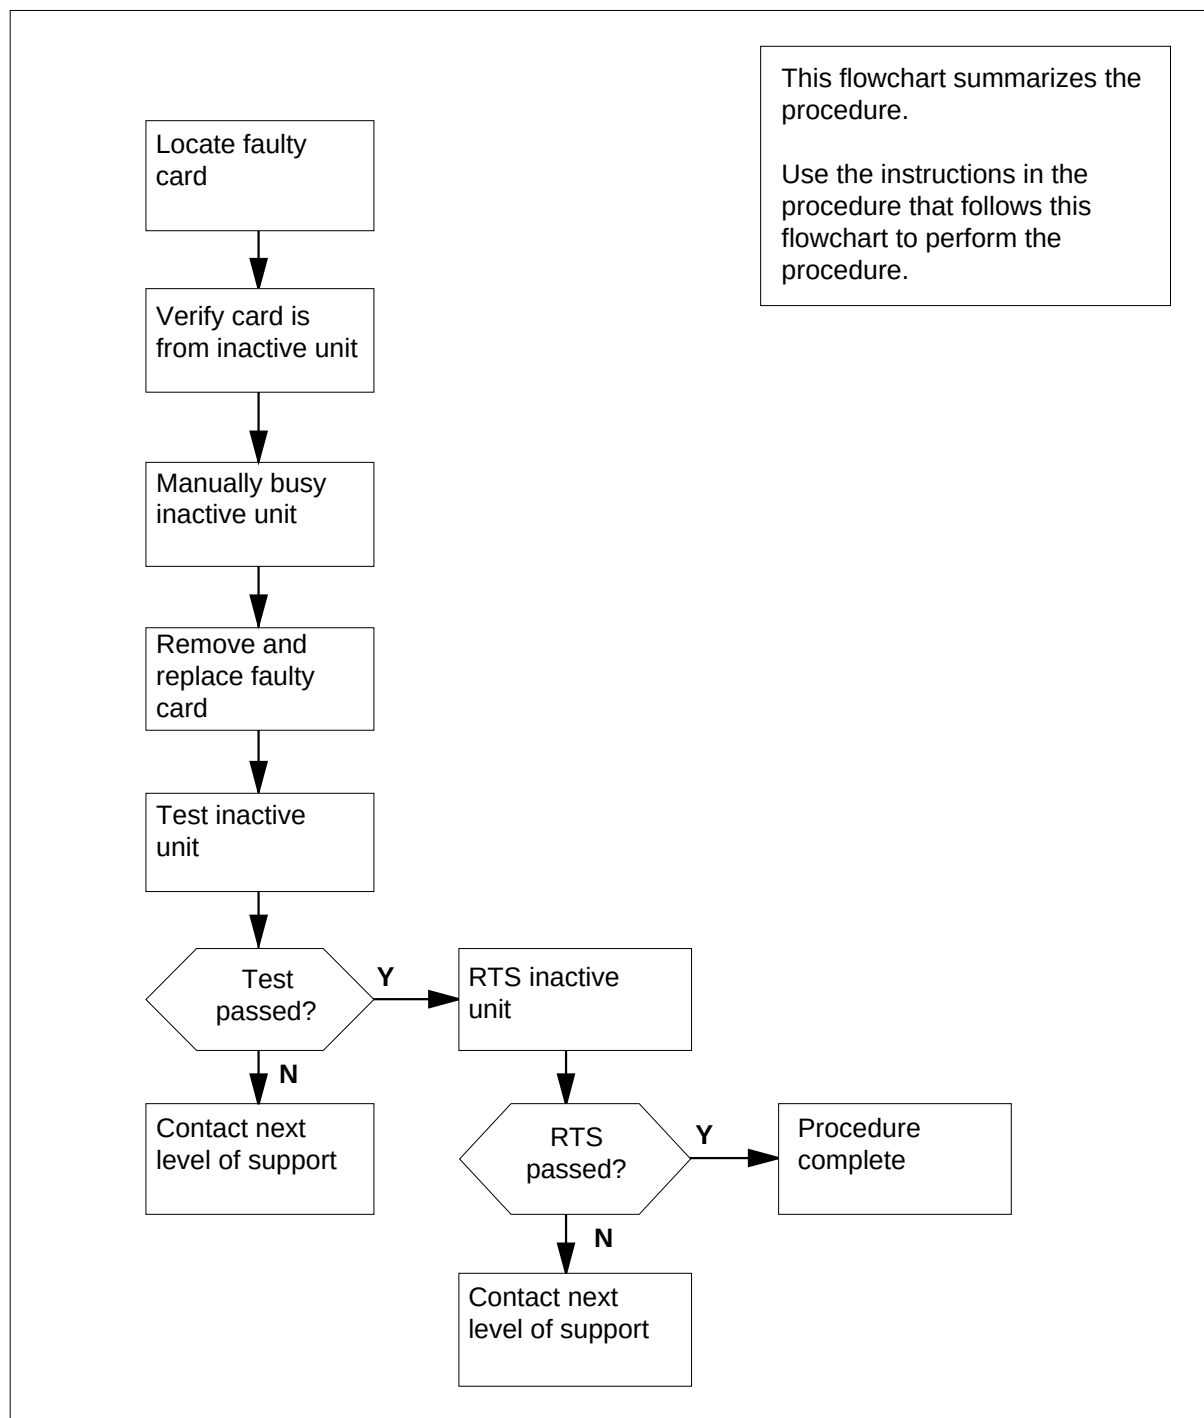

NTMX81 in an RSC-S (DS-1) Model A RCC2 (continued)

Replacing an NTMX81 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX81 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Ensure the PM level of the MAP display is currently displayed by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 with the faulty card

Example of a MAP display:

NTMX81**in an RSC-S (DS-1) Model A RCC2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	2	0	2	25	
2 Post_	RCC2		0	0	0	0	1	1	
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, be sure the card to be removed is in the inactive unit.

If faulty card is in the	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

- 6 Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

If faulty card is	Do
C-side of RCC2	step 11

NTMX81
in an RSC-S (DS-1) Model A RCC2 (continued)

If faulty card is	Do
P-side faulty	step 8

At the MAP terminal

- 8** Determine if the RCC2 is in a single or dual configuration by typing

>POST RCC2 rcc2_no ;IRLINK

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 associated with the faulty NTMX87 card

Note: If the posted RCC2 is in a single RCC2 configuration, the system will respond with the following message:

NO IRLINKS DATA FILLED, IRLINK LEVEL CANNOT BE ENTERED.

If the RCC2 is in a	Do
single configuration	step 11
dual configuration	step 9

- 9** Translate the dual RCC2s IRLINKS by typing

>TRNSL

and pressing the Enter key.

Example of a MAP response

NTMX81

in an RSC-S (DS-1) Model A RCC2 (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
IRLINK									
0	Quit	PM	SysB	ManB	OffL	CBsy	ISTb	InSv	
		0	0	0	2	0	2	25	
2		RCC2	0	0	0	0	1	1	
3									
4		RCC2	0	ISTb	Links_00S:	CSide	1, PSide	1	
5	TRNSL	Unit0:	Inact	InSv					
6	TST_	Unit1:	Act	InSv					
7	BSY_								
8	RTS_								
9									
10		IR	From	To		CAP	STATE	MSGCOND	
11		0	RCC2 0, 0	RCC2 1, 0		MS	OK	OPN	
12		1	RCC2 0, 8	Rcc2 1, 8		MS	OK	OPN	
13		2	RCC2 0, 12	RCC2 1, 12		S	OK		
14	QueryIR	3	RCC2 0, 13	RCC2 1, 13		S	OK		
15									
16									
17									
18									

- 10** Busy IRLINKS in the faulty NTMX87 circuit card by typing

>BSY irlink_no

and pressing the Enter key.

where

irlink_no

is the number of the irlink that must be busied

Note 1: This step must be performed for each provisioned link in the slot position.

Note 2: For link-to-slot assignments, reference step 18 for the main shelf.

- 11** Busy the inactive PM unit by typing

>bsy unit unit_no

and pressing the Enter key.

where

unit_no

is the number of the inactive RCC2 unit (unit 0 or 1)

- 12** Display the C-side links associated with the DS-1 card by typing

>TRNSL C

and pressing the Enter key.

Example of a MAP response

NTMX81

in an RSC-S (DS-1) Model A RCC2 (continued)

LINK 0	LTC 0	0;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 1	LTC 0	1;CAP	S:STATUS SBsy		
LINK 2	LTC 0	2;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 3	LTC 0	3;CAP	S:STATUS OK		
LINK 4	LTC 0	4;CAP	S:STATUS OK		
LINK 5	LTC 0	5;CAP	S:STATUS SBsy		

If C-side links are	Do
faulty	step 14
not faulty	step 11

- 13** Display the P-side links associated with the DS-1 card by typing
>TRNSL P
 and pressing the Enter key.

Example of a MAP response

LINK 0	RCC2 0 5	27;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 1	RCC2 1 5	27;CAP	MS:STATUS SBsy	MSGCOND	CLS
LINK 2	RCC2 0 7	47;CAP	MS:STATUS OK		
LINK 3	RCC2 1 7	47;CAP	MS:STATUS OK		
LINK 4	RCC2 0 5	50;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 5	RCC2 1 5	50;CAP	MS:STATUS SBsy	MSGCOND	CLS

If P-side links are	Do
faulty	step 14
not faulty	step 28

- 14** Busy the links associated with the RCC2 by typing
>BSY LINK 0
 and pressing the Enter key.

Example of a MAP response:

Please confirm ("Yes" or "No")

Confirm by typing

>YES

and pressing the Enter key.

Example of a MAP response:

LTC 0 LINK 0 Bsy Passed

NTMX81**in an RSC-S (DS-1) Model A RCC2** (continued)

Note: To busy the other links associated with the RCC2, execute the procedures in this step for each link until all links are busied.

- 15** Post the host PM by typing

>POST host_pm host_pm_no

and pressing the Enter key.

where

host_pm

is either a line group controller (LGC), a line group controller with ISDN (LGCI), a line trunk controller (LTC), or a line trunk controller with ISDN (LTCI)

host_pm_no

is the number of either an LGC, LGCI, LTC, or LTCI

Example of a MAP display:

CM	MS	IOD	Net	PM	CCS	Lns	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
LTC			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	1	0	4	12		
2 Post_	LTC	0	0	2	0	2	9		
3 ListSet									
4	LTC	1	ISTb	Links_00S:	CSide	0,	PSide	1	
5 TrnsL_	Unit0:	Act	InSv						
6 Tst_	Unit1:	Inact	InSv						
7 Bsy_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next									
13 SwAct									
14 QueryPM									
15									
16									
17 Perform									
18									

- 16** Manually busy the links connected to the faulty card by typing

>BSY LINK link_no

and pressing the Enter key.

where

link_no

is the number of the link associated with the faulty MX81 card, from step 11

Note: Each NTMX81 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; or 6,7.

NTMX81
in an RSC-S (DS-1) Model A RCC2 (continued)

At the RCE frame

17



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

18

After identifying the faulty link, use the following charts to determine which NTMX81 is to be removed by first identifying whether the link is a C-side or P-side link then by matching the link number with the slot number and the packet number to the left of each respective table.

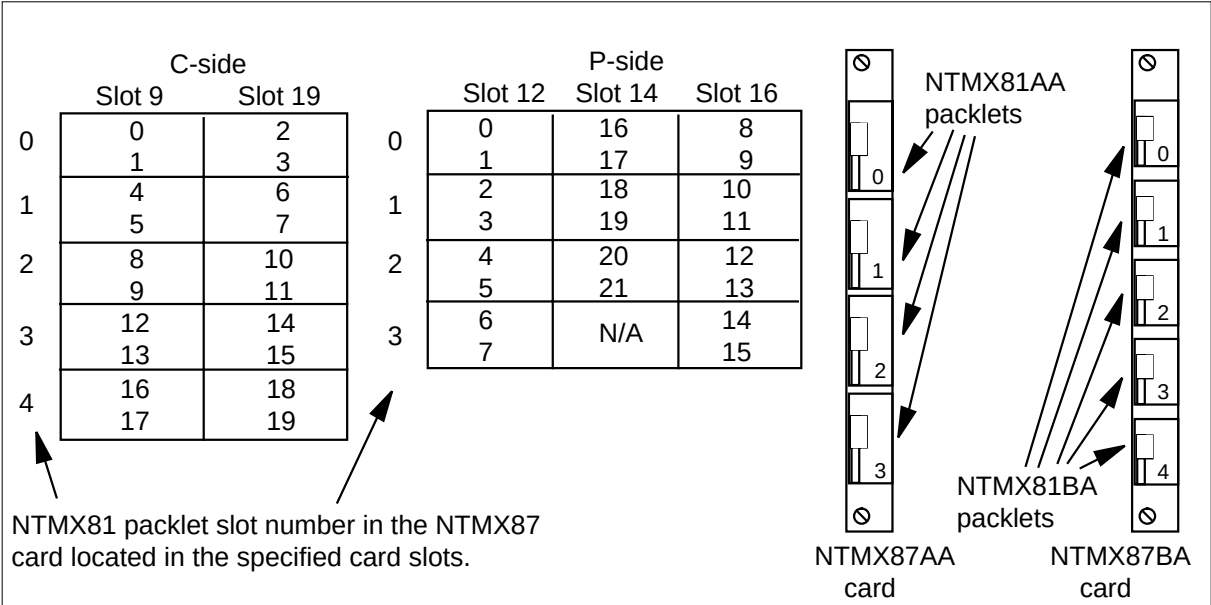

NTMX81 in an RSC-S (DS-1) Model A RCC2 (continued)

Remove the NTMX81 card as described in the following steps:

- a Locate the packlet to be removed on the appropriate NTMX87 card slot.
 - b Open the locking lever on the packlet to be replaced and gently pull the card toward you until it clears the shelf.
 - c Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 19** Before inserting the replacement card, set the DS-1 switch settings according to the following table.

Distance to cross connect		Dip switch settings		
Feet	Meters	S3/6	S2/5	S1/4
0-133	0-41	On	Off	Off
133-266	41-81	Off	On	On
266-399	81-122	Off	On	Off
399-533	122-163	Off	Off	On
533-655	163-200	Off	Off	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1-S3 belong to even port, and S4-S6 belong to odd port.				

- 20** Open the locking lever on the replacement packlet.
- a Align the packlet with the slots in the shelf.
 - b Gently slide the packlet into the card slot in the NTMX87 card.
- 21** Seat and lock the packlet.
- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
 - b Close the locking lever.
- 22** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 29
other	step 23

NTMX81

in an RSC-S (DS-1) Model A RCC2 (continued)

At the MAP terminal

- 23** Test the busied network links from step 12 by typing

>TST LINK link_no

and pressing the Enter key

where

link_no

is the number of the link that was manually busied in step 14. This step must be performed for each link that is manually busied.

Note: To test the other links associated with the RCC2, execute this step for each link until all links are tested.

If TST	Do
passed	step 24
failed	step 30

- 24** Return to service the P-side links by typing

>RTS LINK 0

and pressing the Enter key.

Note: To RTS the other links associated with the RCC2, execute this step for each link until all links are returned to service.

If RTS	Do
passed	step 25
failed	step 30

- 25** Post the inactive RCC2 unit in which the NTMX81 card is located by typing

>POST RCC2 UNIT unit_no

and pressing the Enter key.

where

unit_no

is the number of the RCC2 unit associated with the faulty card

- 26** Return the inactive RCC2 unit to service by typing

>RTS UNIT unit_no

and pressing the Enter key.

where

NTMX81

in an RSC-S (DS-1) Model A RCC2 (end)

unit_no

is the number of the RCC2 unit posted in step 25

	If RTS	Do
	passes	step 27
	fails	step 30
27	Send any faulty cards for repair according to local procedure.	
28	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 29.	
29	Return to <i>Alarm Clearing Procedures</i> or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.	
30	Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.	
31	You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.	

NTMX81 in an RSC-S (DS-1) Model B RCC2

Application

Use this procedure to replace the following card in an RSC-S RCC2.

PEC	Suffixes	Name
NTMX81	AA, BA	Dual DS-1 Interface

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

NTMX81 in an RSC-S (DS-1) Model B RCC2 (continued)

Summary of card replacement procedure for an NTMX81 card in RSC-S RCC2

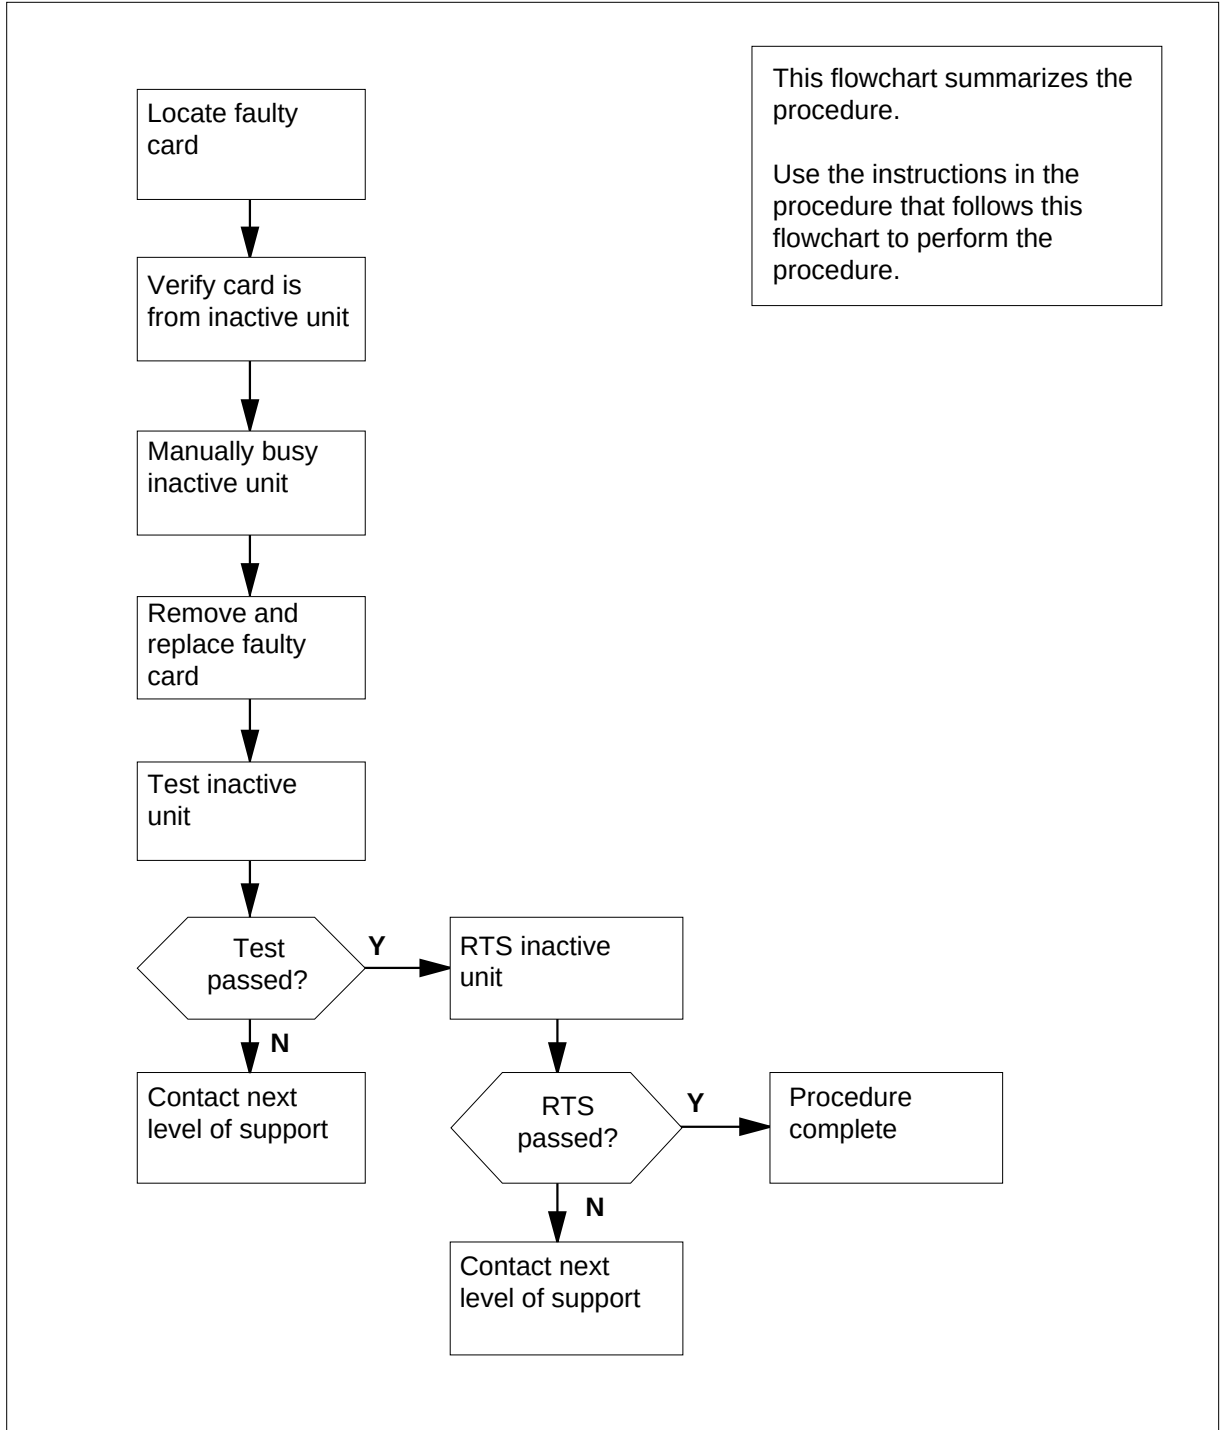

NTMX81 in an RSC-S (DS-1) Model B RCC2 (continued)

Replacing an NTMX81 card in RSC-S RCC2

At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION****Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX81 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 Ensure the PM level of the MAP display is currently displayed by typing
>MAPCI;MTC;PM;POST RCC2 rcc2_no
and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 with the faulty card

Example of a MAP display:

NTMX81**in an RSC-S (DS-1) Model B RCC2** (continued)

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
RCC2			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	2	0	2	25	
2 Post_	RCC2		0	0	0	0	1	1	
3 ListSet									
4	RCC2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:		Inact	InSv					
6 TST	Unit1:		Act	InSv					
7 BSY									
8 RTS									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next_									
13									
14 QueryPM									
15									
16									
17									
18									

- 4 By observing the MAP display, be sure the card to be removed is in the inactive unit.

If faulty card is in the	Do
active unit	step 5
inactive unit	step 7

- 5 Switch the processing activity (SWACT) to the inactive unit by typing

>SWACT

and pressing the Enter key.

- 6 Confirm the system prompt by typing

>YES

and pressing the Enter key.

After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

If faulty card is	Do
C-side of RCC2	step 21

NTMX81

in an RSC-S (DS-1) Model B RCC2 (continued)

If faulty card is	Do
P-side faulty	step 8

At the MAP terminal

- 8 Determine if the RCC2 is in a single or dual configuration by typing

>POST RCC2 rcc2_no ;IRLINK

and pressing the Enter key.

where

rcc2_no

is the number of the RCC2 associated with the faulty NTMX87 card

Note: If the posted RCC2 is in a single RCC2 configuration, the system responds with:

NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

- 9 Before reconfiguring (adding, removing, or moving) interlinks of a posted RCC2 of a DRCC2, enter the following command from the IRLINK MAP level to disable interswitching capability:

>INTERSW DISABLE

Note: If the INTERSW DISABLE command is not entered before an attempt is made to busy (BSY) a specified IRLINK, the MAP terminal displays the following response:

interswitched calls should be disabled before an interlink is busied.

- 10 To confirm that interswitching is disabled, enter the QUERYIR command. The QUERYIR command displays the status of interswitching capability for the posted RCC2:

>QUERYIR

Example of a MAP display

```
Interswitching is DISABLED
IR  FROM      TO      C  ALRM SLIP FRME BER STATE
0   RCC2  0, 0   RCC2  1, 0   .      0   0      OK
1   RCC2  0, 8   RCC2  1, 8   .      0   0      OK
2   RCC2  0, 4   RCC2  1, 7   .      0   0      OK
3   RCC2  0, 9   RCC2  1, 12  .      0   0      OK
```

- 11 When the interswitching capability has been disabled, begin reconfiguring the IRLINKS by entering the BSY command with the IRLINK number(s), to be reconfigured. The BSY command is enhanced to display the number of interswitched calls that will be reverted to the network using available C-side channels, as seen in the following example:

>BSY 3

NTMX81**in an RSC-S (DS-1) Model B RCC2** (continued)*Example of a MAP response*

67 interswitched calls will be reverted to the network. Potential loss of calls on the interlink if there are no available C-side channels.

- 12** Since the C-side channels of the RCC2 is a limited resource, reconfiguring IRLINKS should only be performed during periods of low traffic, otherwise some interswitched calls can be lost if there is an insufficient number of available C-side channels.
- 13** With the IRLINKS manually-busied (ManB), enter table IRLNKINV and make link changes for the desired IRLINK configuration. Static data is immediately downloaded to both units of both RCC2s of the DRCC2, if the units are InSv.
- 14** After DRCC2 IRLINKS are reconfigured, return to service the IRLINKS by entering the enhanced RTS command. The MAP terminal displays the following response to indicate interswitching is disabled.

>RTS 3

Example of a MAP response

Be aware that Interswitching is Disabled.

- 15** To enable interswitching, enter the following command from the IRLINK MAP level:
- >INTERSW ENABLE**
- 16** To confirm interswitching is enabled for the posted RCC2, enter the QUERYIR command from the IRLINK MAP level:

>QUERYIR

Example of a MAP display

Interswitching is ENABLED									
IR	FROM	TO	C	ALRM	SLIP	FRME	BER	STATE	
0	RCC2 0, 0	RCC2 1, 0	.		0	0		OK	
1	RCC2 0, 8	RCC2 1, 8	.		0	0		OK	
2	RCC2 0, 4	RCC2 1, 7	.		0	0		OK	
3	RCC2 0, 6	RCC2 1, 6	.		0	0		OK	

- 17** IRLINKS and ForceESA static data are dynamically downloaded to both RCC2s of the DRCC2. However, the ESA lines, trunks and ESA table control data, components of the ESA static data for both RCC2s must also be downloaded. For this reason, the units of both RCC2s are set to in-service trouble (ISTb) with the reason ESA STATIC DATA MISMATCH.
- 18** ESA static data can be manually downloaded at the PM Level of the MAP display with the RCC2s posted, by entering the LOADPM command with the source of CC. and file of ESADATA. ESA static data can also be updated at

NTMX81

in an RSC-S (DS-1) Model B RCC2 (continued)

the automatic nightly static data updates as defined in table OFCENG tuples RSC_XPMESASDUPD_BOOL and RSC_XPMESASDUPD_HOUR.

Note: To load ESADATA the RCC2 units must be in service.

If the RCC2 is in a	Do
single configuration	step 21
dual configuration	step 19

- 19** Translate the dual RCC2s IRLINKS by typing

>TRNSL

and pressing the Enter key.

Example of a MAP response

CM	MS	IOD	Net	PM	CCS	LNS	Trks	Ext	App1
.	.	.	.	1RCC2	.	.	.	.	.
IRLINK			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM	0	0	0	2	0	2	25	
2	RCC2	0	0	0	0	0	1	1	
3									
4	RCC2	0	ISTb	Links_00S:	CSide	1,	PSide	1	
5 TRNSL	Unit0:	Inact	InSv						
6 TST_	Unit1:	Act	InSv						
7 BSY_									
8 RTS_									
9									
10		IR	From	To		CAP	STATE	MSGCOND	
11		0	RCC2 0, 0	RCC2 1, 0		MS	OK	OPN	
12		1	RCC2 0, 8	Rcc2 1, 8		MS	OK	OPN	
13		2	RCC2 0, 12	RCC2 1, 12		S	OK		
14 QueryIR	3	RCC2 0, 13	RCC2 1, 13			S	OK		
15									
16									
17									
18									

- 20** Busy IRLINKS in the faulty NTMX87 circuit card by typing

>BSY irlink_no

and pressing the Enter key.

where

irlink_no

is the number of the irlink that must be busied

Note 1: This step must be performed for each provisioned link in the slot position.

Note 2: For link-to-slot assignments, reference step 28 for the main shelf.

NTMX81**in an RSC-S (DS-1) Model B RCC2** (continued)

- 21 Busy the inactive PM unit by typing

>bsy unit unit_no

and pressing the Enter key.

where

unit_no

is the number of the inactive RCC2 unit (unit 0 or 1)

When both units are in-service, proceed to next step.

- 22 Display the C-side links associated with the DS-1 card by typing

>TRNSL C

and pressing the Enter key.

Example of a MAP response

LINK 0	LTC 0	0;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 1	LTC 0	1;CAP	S:STATUS SBsy		
LINK 2	LTC 0	2;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 3	LTC 0	3;CAP	S:STATUS OK		
LINK 4	LTC 0	4;CAP	S:STATUS OK		
LINK 5	LTC 0	5;CAP	S:STATUS SBsy		

If C-side links are

Do

faulty

step 24

not faulty

step 21

- 23 Display the P-side links associated with the DS-1 card by typing

>TRNSL P

and pressing the Enter key.

Example of a MAP response

LINK 0	RCC2 0 5	27;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 1	RCC2 1 5	27;CAP	MS:STATUS SBsy	MSGCOND	CLS
LINK 2	RCC2 0 7	47;CAP	MS:STATUS OK		
LINK 3	RCC2 1 7	47;CAP	MS:STATUS OK		
LINK 4	RCC2 0 5	50;CAP	MS:STATUS OK	MSGCOND	OPN
LINK 5	RCC2 1 5	50;CAP	MS:STATUS SBsy	MSGCOND	CLS

If P-side links are

Do

faulty

step 24

not faulty

step 38

- 24 Busy the links associated with the RCC2 by typing

>BSY LINK 0

and pressing the Enter key.

NTMX81

in an RSC-S (DS-1) Model B RCC2 (continued)

Example of a MAP response:

Please confirm ("Yes" or "No")

Confirm by typing

>YES

and pressing the Enter key.

Example of a MAP response:

LTC 0 LINK 0 Bsy Passed

Note: To busy the other links associated with the RCC2, execute the procedures in this step for each link until all links are busied.

25 Post the host PM by typing

>POST host_pm host_pm_no

and pressing the Enter key.

where

host_pm

is either a line group controller (LGC), a line group controller with ISDN (LGCI), a line trunk controller (LTC), or a line trunk controller with ISDN (LTCI)

host_pm_no

is the number of either an LGC, LGCI, LTC, or LTCI

Example of a MAP display:

CM	MS	IOD	Net	PM	CCS	Lns	Trks	Ext	Appl
.	.	.	.	1RCC2	.	.	.	.	.
LTC			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	1	0	4	12	
2 Post_	LTC		0	0	2	0	2	9	
3 ListSet									
4	LTC	1	ISTb	Links_00S:	CSide	0,	PSide	1	
5 Trnsl_	Unit0:		Act	InSv					
6 Tst_	Unit1:		Inact	InSv					
7 Bsy_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next									
13 SwAct									
14 QueryPM									
15									
16									
17 Perform									
18									

NTMX81

in an RSC-S (DS-1) Model B RCC2 (continued)

- 26 Manually busy the links connected to the faulty card by typing

>BSY LINK link_no

and pressing the Enter key.

where

link_no

is the number of the link associated with the faulty MX81 card, from step 21

Note: Each NTMX81 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; or 6,7.

At the RCE frame

27



DANGER

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.



DANGER

Equipment damage

Take the following precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

- 28 After identifying the faulty link, use the following charts to determine which NTMX81 is to be removed. First identify whether the link is a C-side or P-side link, then by matching the link number with the slot number and packet number to the left of each respective table.

NTMX81

in an RSC-S (DS-1) Model B RCC2 (continued)

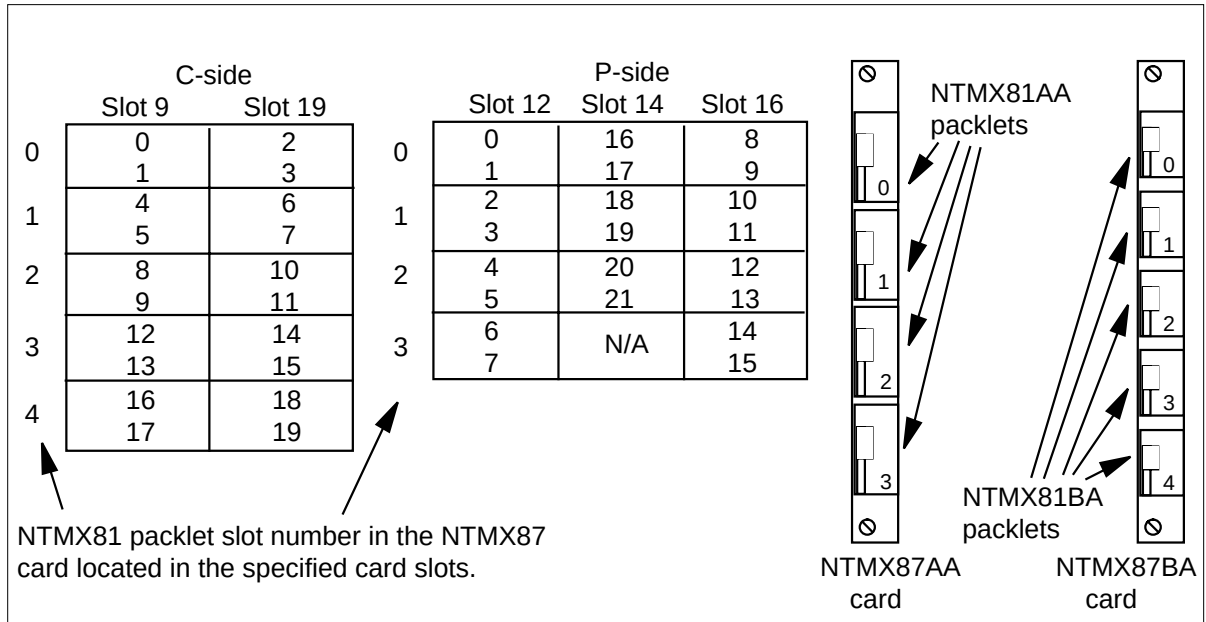

Remove the NTMX81 card as described in the following steps:

- a Locate the packet to be removed on the appropriate NTMX87 card slot.
- b Open the locking lever on the packet to be replaced and gently pull the card toward you until it clears the shelf.
- c Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.

29 Before inserting the replacement card, set the DS-1 switch settings according to the following table.

(Sheet 1 of 2)

Distance to cross connect		Dip switch settings		
Feet	Meters	S3/6	S2/5	S1/4
0—133	0—41	On	Off	Off
133—266	41—81	Off	On	On
266—399	81—122	Off	On	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1—S3 belong to even port, and S4—S6 belong to odd port.				

NTMX81 in an RSC-S (DS-1) Model B RCC2 (continued)

(Sheet 2 of 2)

Distance to cross connect		Dip switch settings		
Feet	Meters	S3/6	S2/5	S1/4
399—533	122—163	Off	Off	On
533—655	163—200	Off	Off	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1—S3 belong to even port, and S4—S6 belong to odd port.				

- 30** Open the locking lever on the replacement packlet.
- a** Align the packlet with the slots in the shelf.
 - b** Gently slide the packlet into the card slot in the NTMX87 card.
- 31** Seat and lock the packlet.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
 - b** Close the locking lever.
- 32** Use the following information to determine what step to go to next in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 39
other	step 33

At the MAP terminal

- 33** Test the busied network links from step 22 by typing
>TST LINK link_no
and pressing the Enter key
where
link_no
 is the number of the link that was manually busied in step 24. This step must be performed for each link that is manually busied.
- Note:** To test the other links associated with the RCC2, execute this step for each link until all links are tested.

If TST	Do
passed	step 34

NTMX81

in an RSC-S (DS-1) Model B RCC2 (continued)

	If TST	Do
	failed	step 40
34	Return to service the P-side links by typing >RTS LINK 0 and pressing the Enter key. Note: To RTS the other links associated with the RCC2, execute this step for each link until all links are returned to service.	
	If RTS	Do
	passed	step 35
	failed	step 40
35	Post the inactive RCC2 unit in which the NTMX81 card is located by typing >POST RCC2 UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the RCC2 unit associated with the faulty card	
36	Return the inactive RCC2 unit to service by typing >RTS UNIT unit_no and pressing the Enter key. <i>where</i> unit_no is the number of the RCC2 unit posted in step 35	
	If RTS	Do
	passes	step 37
	fails	step 40
37	Send any faulty cards for repair according to local procedure.	
38	Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 39.	
39	Return to <i>Alarm Clearing Procedures</i> or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.	
40	Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.	

NTMX81
in an RSC-S (DS-1) Model B RCC2 (end)

- 41** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

**NTMX81
in an SMA2**

Application

Use this procedure to replace an NTMX81 card in an SMA2.

PEC	Suffixes	Name
NTMX81	AA	Dual DS-1 Interface

Common procedures

The following procedures are referenced in this procedure:

- “Locating a faulty card in an SMA2”
- returning a card


Do not go to a common procedure unless directed to do so in the step-action procedure.


Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

NTMX81 in an SMA2 (continued)

Summary of card replacement procedure for an NTMX81 card in an SMA2

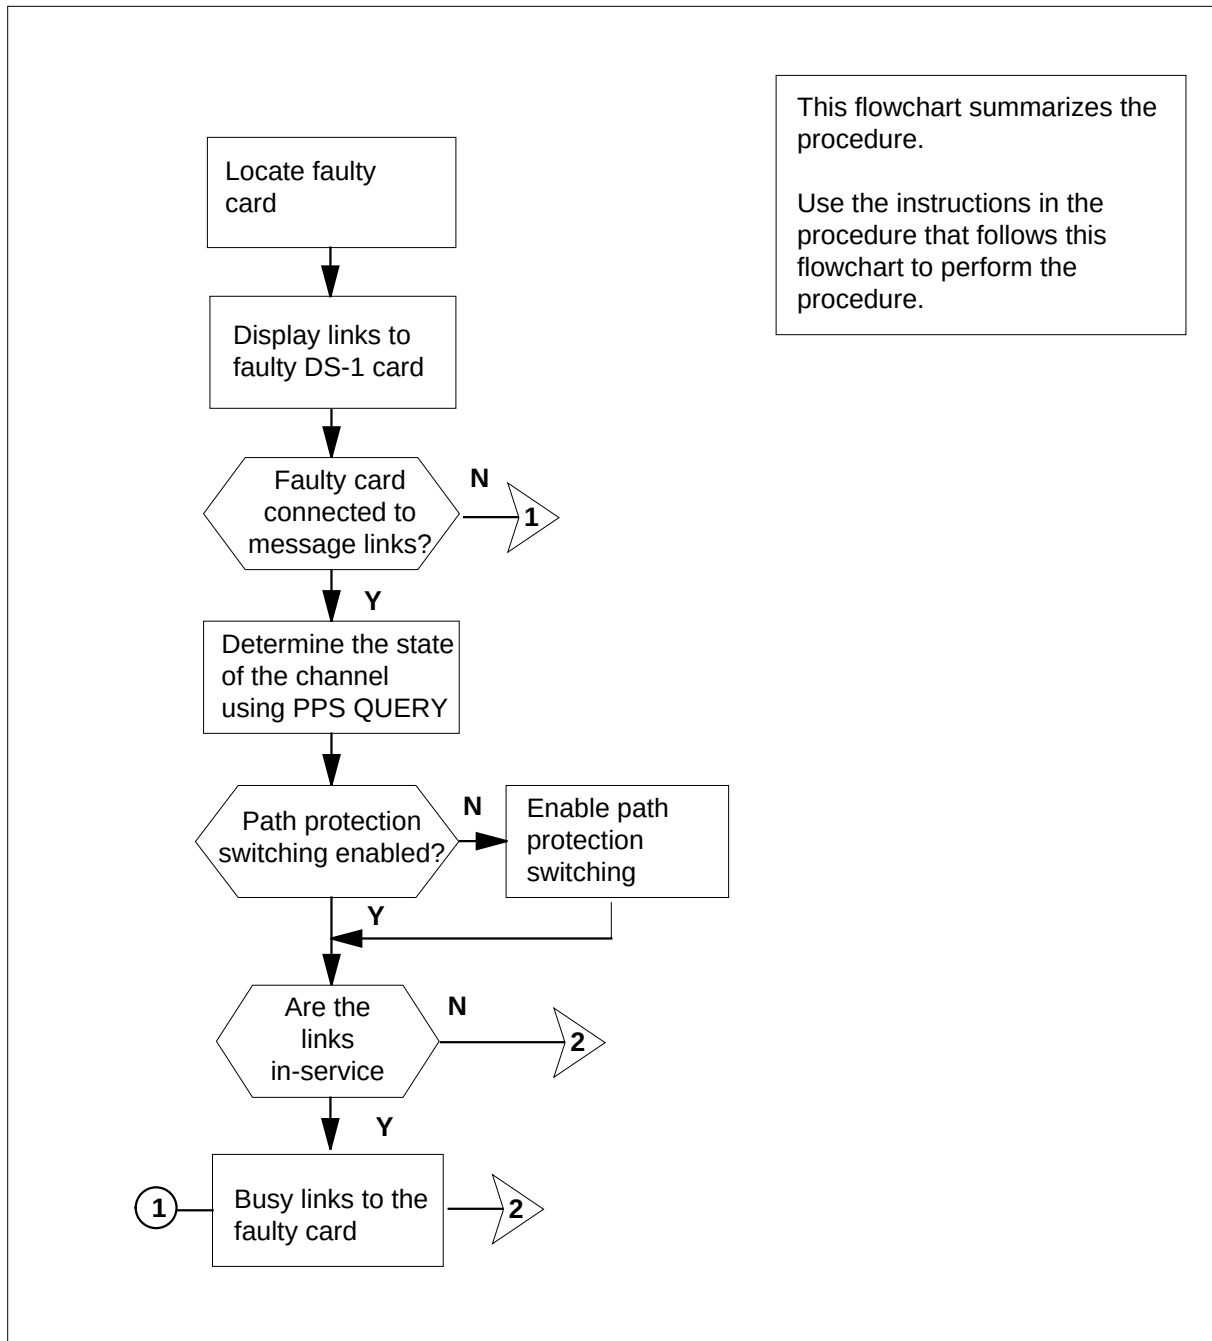

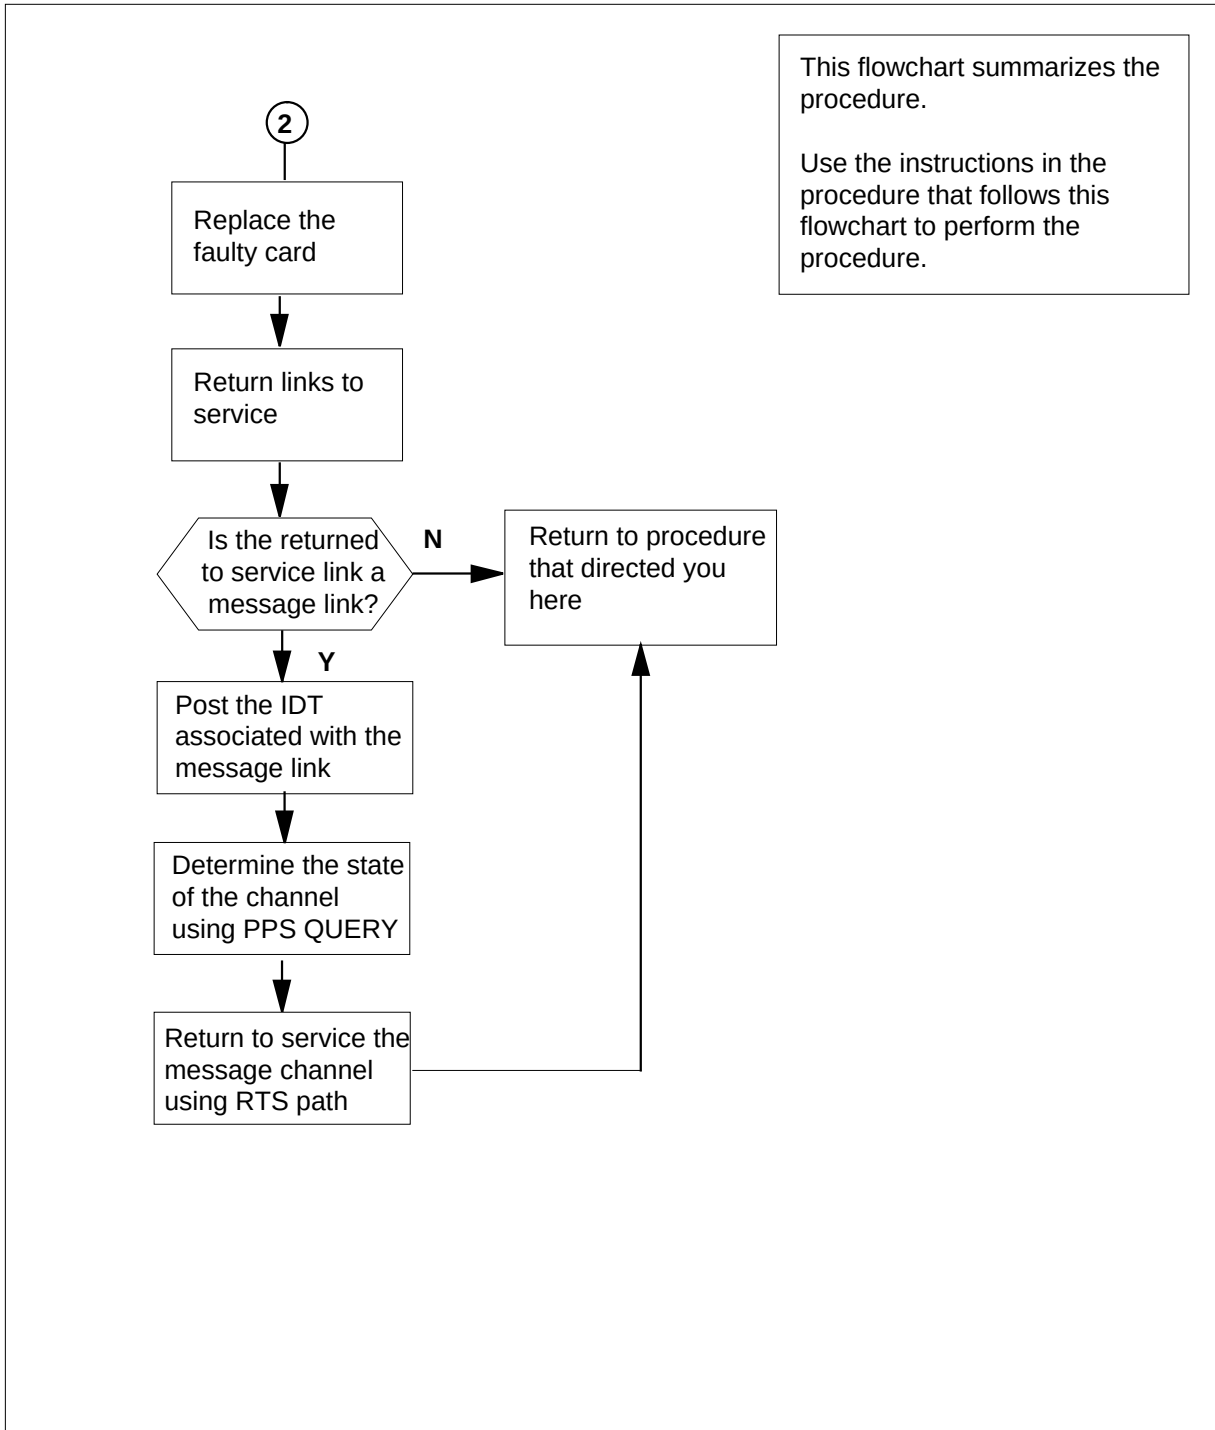NTMX81
in an SMA2 (continued)**Summary of card replacement procedure for an NTMX81 card in an SMA2 (continued)**

NTMX81 in an SMA2 (continued)

Replacing an NTMX81 card in an SMA2



CAUTION

Service disruption: calls may be dropped!

Perform this card replacement activity only during a period of low traffic. All calls being handled by the links connected to the DS-1 interface card being replaced will be dropped.

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Ensure you know the physical location of the faulty card. If card location is known continue to step 3, if card location is unknown refer to "Locating a faulty card in an SMA2".
- 3



CAUTION

Loss of service

Ensure that you replace the card in the inactive unit and verify the mate unit is active.

Obtain an NTMX81 replacement card. Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

At the MAP terminal

- 4 Ensure the PM level of the MAP display is currently displayed by typing
>MAPCI;MTC;PM;POST SMA2 sma2_no
and pressing the Enter key.

where

sma2_no

is the number of the SMA2 with the faulty card

Example of a MAP display:

NTMX81 in an SMA2 (continued)

SMA2	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2 0 ISTb Links_OOS: CSide 0, PSide 0
 Unit0: Act InSv
 Unit1: InAct IsTb

- 5** Observe the MAP display and determine if the faulty card is in the active or the inactive unit.

If the faulty card is in the	Do
active unit	step 6
inactive unit	step 10

- 6** SWACT the units by typing

>SWACT

and pressing the Enter key.

A confirmation prompt for the SWACT command is displayed at the MAP terminal.

If SWACT	Do
cannot continue at this time	step 7
can continue at this time	step 8

- 7** Reject the prompt to SWACT the units by typing

>NO

and pressing the Enter key.

The system discontinues the SWACT. Go to step 48.

- 8** Confirm the system prompt by typing

>YES

and pressing the Enter key.

The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

Note: A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.

If the message is	Do
SWACT passed	step 10

NTMX81 in an SMA2 (continued)

	If the message is	Do
	SWACT failed Reason: XPM SWACTback	step 9
	SWACT refused by SWACT Controller	step 9
9	The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on the inactive unit before attempting to clear the alarm condition on the active unit. Go to step 48.	

At the equipment frame

- 10 Hang a sign on the active unit bearing the words: *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

At the MAP terminal

- 11 Display the P-side links associated with the DS-1 card by typing
>TRNSL P
and pressing the Enter key.

Example of a MAP response

```
Link 1 IDT 1 0;Cap: MS;Status:OK ;MsgCond;OPN
Link 2 IDT 1 1;Cap MS;Status:OK ;MsgCond;CLS
Link 3 IDT 1 2;Cap S;Status:OK
Link 4 IDT 1 3;Cap S;Status:SysB
```


The first line indicates that DS-1 link 1 is connected to IDT1 at C-side link 0.

Record the link numbers, IDT number, and capability (CAP) of the links connected to the NTMX81 card to be replaced.

Note: Each NTMX81 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; 6,7; and so forth.

- 12 After identifying the faulty link, use the following figure to determine which NTMX81 is to be removed in the main or extension shelf. The extension shelf is available only in the CMVI and MVIE frame or cabinet. In the MVDD frame the NTMX81 is found in the main shelf. Match the link number with the slot number and the packlet number to the left of the table. Each NTMX81 packlet is connected to two DS-1 links.

NTMX81
in an SMA2 (continued)

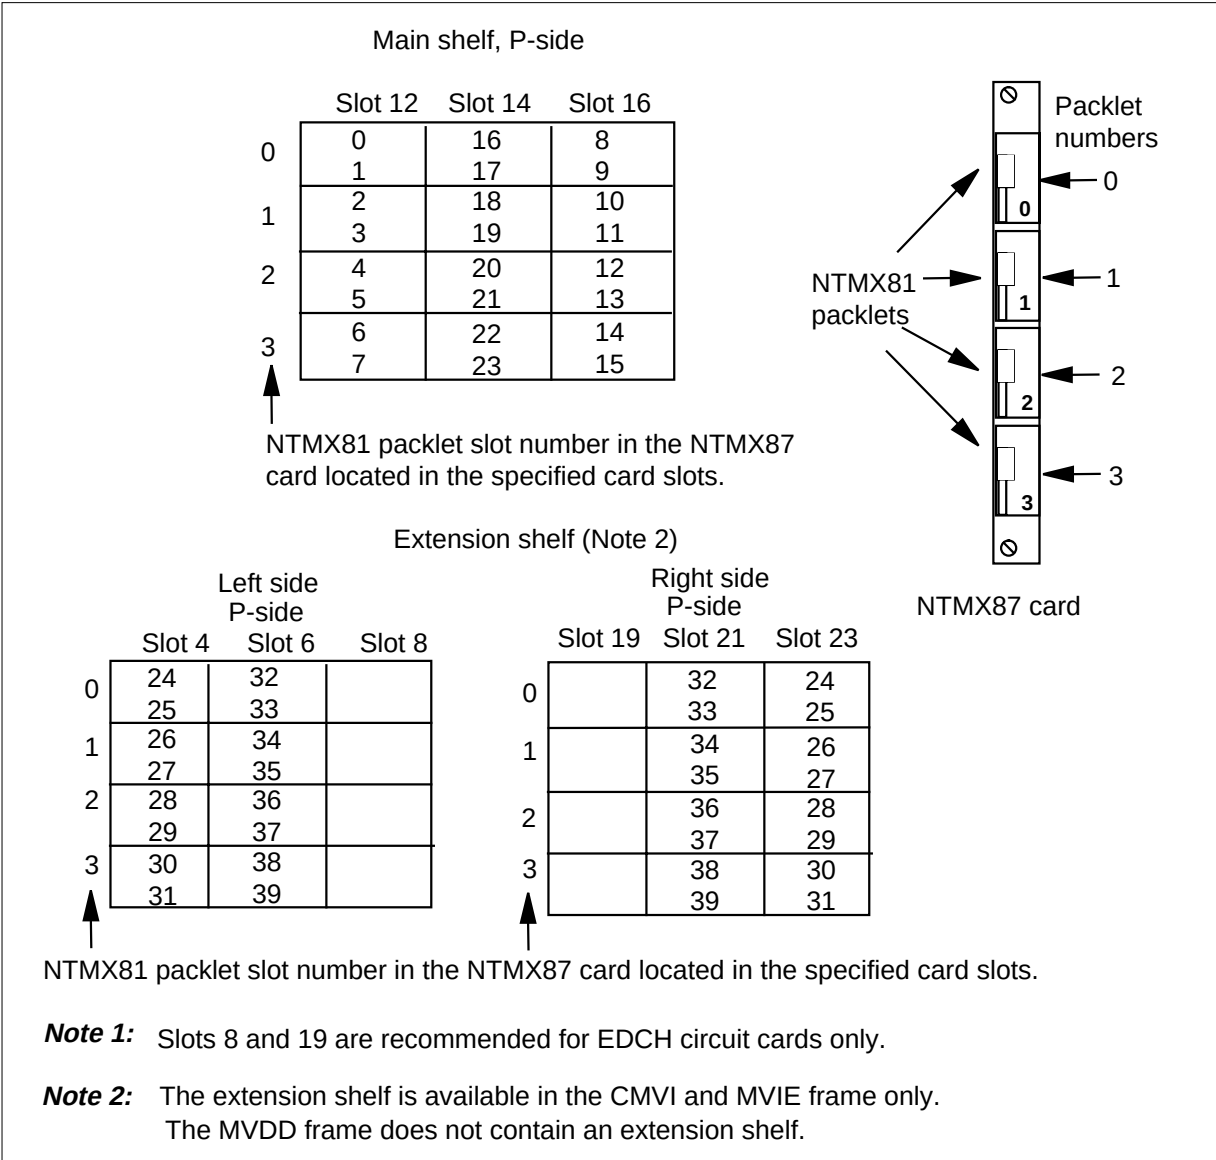

- Note 1:** Slots 8 and 19 are recommended for EDCH circuit cards only.
- Note 2:** The extension shelf is available in the CMVI and MVIE frame only.
The MVDD frame does not contain an extension shelf.

13	If the NTMX81 to be replaced is connected to IDT message links, then the appropriate message channels (TMC or CSC and EOC) must be busied.	
	If the link has a CAP of	Do
	MS, as identified in step 11	step 14
	S, as identified in step 11	step 22

NTMX81 in an SMA2 (continued)

- 14** Post the IDT associated with the DS-1 link to be taken out of service, as recorded in step 11, by typing

>POST IDT idt_no

and pressing the Enter key.

where

idt_no

is the number of the IDT being posted

Example of a MAP response:

IDT	SysB	ManB	Offl	CBSy	ISTb	InSv
PM	3	0	1	0	2	13
IDT	0	0	0	0	1	7

IDT 2 ISTb Links_00S:1

- 15** Display information about the state of the channels between the IDT and the RDT by typing

>PPS QUERY

and pressing the Enter key

Example of a MAP response:

TMC1: SMA2 7 7 24; 00S;Standby;Enable
 EOC1: SMA2 7 7 12; 00S;Standby ;Enable
 TMC2: SMA2 7 8 24;InSv;Active;Enable
 EOC2: SMA2 7 8 12;InSv;Active;Enable

Determine if path protection is enabled for all channels.

If one or both TMC, CSC, or EOC channels are	Do

inhibited	step 16

enabled	step 18

- 16** Enable path protection on an inhibited TMC, CSC, or EOC message channel by typing

>PPS ENA path

and pressing the Enter key.

where

path

is the inhibited TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2

NTMX81 in an SMA2 (continued)

17	Determine if path protection switching must be enabled on additional TMC, CSC, or EOC message channels.		
	If	Do	
	additional channels must be enabled	step 16	
	all channels are enabled	step 18	
18	Determine if the TMC, CSC, or EOC message channels for the link to be taken out of service are in-service.		
	If TMC, CSC, or EOC channels are	Do	
	in-service	step 19	
	out-of-service (OOS)	step 21	
19	Busy the TMC, CSC, or EOC message channel associated with the link to be taken out of service by typing >BSY path <i>where</i> path is TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2		
20	Determine if there are additional TMC, CSC, or EOC message channels to be taken out of service.		
	If	Do	
	more channels must be taken out of service	step 19	
	no more channels are to be taken out of service	step 21	
21	Determine if an additional link, as recorded in step 11, must be taken out of service associated with the NTMX81 to be replaced.		
	If	Do	
	an additional link must be taken out of service	step 13	
	no more links are to be taken out of service	step 22	

NTMX81 in an SMA2 (continued)

- 22 Post the SMA2 identified in step 4 by typing

>POST SMA2 sma2_no

and pressing the Enter key.

where

sma2_no

is the number of the SMA2 being posted

Example of a MAP response:

SMA2	SysB	ManB	Offl	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2 7 ISTb Links_00S: CSide 0, PSide 1

Unit0: Act InSv

Unit1: Inact InSv

- 23



CAUTION

Service disruption: calls may be dropped!

If you are prompted to confirm a BSY LINK command, perform this activity only during a period of low traffic. All calls being handled by the busied link will be dropped.

Busy one of the links connected to the faulty NTMX81, as recorded in step 11, by typing

>BSY LINK link_no

and pressing the Enter key.

where

link_no

is the number of the link connected to the faulty NTMX81 card

A confirmation prompt for the BSY command is displayed at the MAP terminal

Example of a MAP response:

bsy link 0

Any active call may be lost

Please confirm ("Yes", "Y", "No", or "N"):

If	Do
cannot continue at this time	step 24
can continue at this time	step 31

NTMX81 in an SMA2 (continued)

- 24** Reject the prompt to BSY the link by typing

>NO

and pressing the Enter key.

The system discontinues the BSY command.

- 25** Determine if the link is a message link

If the link has a CAP of	Do
MS	step 26
S	step 48

- 26** Post the IDT associated with the link by typing

>POST IDT idt_no

and pressing the Enter key.

where

idt_no

is the number of the IDT being posted

Example of a MAP response:

IDT	SysB	ManB	Offl	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
IDT	0	0	0	0	1	7

IDT 2 ISTb Links_00S:1

- 27** Display information about the state of the channels between the IDT and the RDT by typing

>PPS QUERY

and pressing the Enter key

Example of a MAP response:

```
TMC1: SMA2 7 7 24; 00S;Standby;Enable
EOC1: SMA2 7 7 12; 00S;Active ;Enable
TMC2: SMA2 7 8 24;InSv;Standby;Enable
EOC2: SMA2 7 8 12;InSv;Standby;Enable
```

- 28** Determine if there are any TMC, CSC, or EOC message channels for the link to be returned to service.

If TMC, CSC, or EOC channels are	Do
all in-service	step 48
out-of-service (OOS)	step 29

NTMX81 in an SMA2 (continued)

- 29 Return to service the message channels which were taken out of service in step 19 by typing
>RTS path
where
path
is TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2

- 30 Determine if there are additional TMC, CSC, or EOC message channels to be returned to service.

If there are	Do
more channels to be returned to service	step 29
no more channels to be returned to service	step 48

- 31 Confirm the system prompt by typing
>YES
and pressing the Enter key.
Go to step 32.

- 32 Determine if there are additional links on the NTMX81 to be taken out of service.
Note: Remember that there two links connected to each NTMX81 card.

If	Do
there is another link to be taken out of service with a CAP of S	step 23
there is another link to be taken out of service with a CAP of MS and the associated IDT message channel has not been taken out of service	step 14
all links have been taken out of service	step 33
there is another link to be taken out of service with a CAP of MS and the associated IDT message channel has been taken out of service	step 23

NTMX81 in an SMA2 (continued)

33

**WARNING****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

Remove the NTMX81 card as described in the following steps:

- a Locate the packlet to be removed on the appropriate NTMX87 card slot.
- b Open the locking lever on the packlet to be replaced and gently pull the card toward you until it clears the shelf.
- c Ensure the replacement card has the same PEC, including suffix, as the card you just removed.
- d Go to step 34.

34 Ensure the switches on the replacement card are set to the same settings as those on the card you have just removed.

Refer to the following table for information on correct DS-1 switch settings.

Distance to cross connect				
Feet	Meters	S3/6	S2/5	S1/4
0-133	0-41	On	Off	Off
133-266	41-81	Off	On	On
266-399	81-122	Off	On	Off
399-533	122-163	Off	Off	On
533-655	163-200	Off	Off	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1-S3 belong to even port, and S4-S6 belong to odd port.				

35 Open the locking lever on the replacement packlet.

- a Align the packlet with the slots in the shelf.
- b Gently slide the packlet into the card slot in the NTMX87 card.

36 Seat and lock the packlet.

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure the packlet is fully seated in the slot.

NTMX81 in an SMA2 (continued)

- b Close the locking lever.
- c Go to step 38.

At the MAP terminal

- 37** Post the SMA2 identified in step 4 by typing

>POST SMA2 sma2_no

and pressing the Enter key.

where

sma2_no

is the number of the SMA2 being posted

Example of a MAP response:

SMA2	SysB	ManB	Offl	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
SMA2	0	0	0	0	1	7

SMA2 0 ISTb Links_00S: CSide 0, PSide 0
Unit0: Act InSv
Unit1: Inact ISTb

- 38** Return to service the P-side links by typing

>RTS LINK link_no

and pressing the Enter key.

where

link_no

is the number of the link connected to the NTMX81 card

Note: To RTS the other links associated with the SMA2, execute this step for each link until all links are returned to service.

If RTS	Do
passed	step 39
failed	step 48

- 39** Determine if the link that was returned to service is a messaging link.

If the link has a CAP of	Do
MS, as identified in step 11	step 41
S, as identified in step 11	step 40

NTMX81 in an SMA2 (continued)

- 40** Determine if additional links are to be returned to service

If	Do
an additional link must be re- turned to service	step 38
no more links are to be returned to service	step 46

- 41** Post the IDT associated with the DS-1 link that has been returned to service by typing

>POST IDT idt_no

and pressing the Enter key.

where

idt_no

is the number of the IDT being posted

Example of a MAP response:

IDT	SysB	ManB	Offl	CBsy	ISTb	InSv
PM	3	0	1	0	2	13
IDT	0	0	0	0	1	7

IDT 1 SysB Links_00S:0

- 42** Display information about the state of the channels between the IDT and the RDT by typing

>PPS QUERY

and pressing the Enter key

Example of a MAP response:

```
TMC1: SMA2 7 7 24; 00S;Standby;Enable
EOC1: SMA2 7 7 12; InSv;Active;Enable
TMC2: SMA2 7 8 24; 00S;Standby;Enable
EOC2: SMA2 7 8 12; 00S;Standby;Enable
```

- 43** Return to service the message channels which were taken out of service in step 19 by typing

>RTS path

where

path

is TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2

NTMX81
in an SMA2 (end)

44	Determine if there are additional TMC, CSC, or EOC message channels to be returned to service.	
	If there are	Do
	more channels to be returned to service	step 43
	no more channels to be returned to service	step 45
45	Determine if there are additional links on the NTMX81 to be returned service.	
	If	Do
	there is another link to be returned to service	step 37
	all links have been returned to service	step 46

At the equipment frame

- 46** Remove the sign from the active SMA2 unit.
- 47** Go to the common returning a card procedure in this document.
Go to step 49.
- 48** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.
- 49** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

**NTMX81
in a STAR**

Application

Use this procedure to replace an NTMX81 card in a STAR.

PEC	Suffixes	Name
NTMX81	AA	Dual DS-1 Interface

Common procedures


None

Action

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

NTMX81 in a STAR (continued)

Summary of card replacement procedure for an NTMX81 card in a STAR

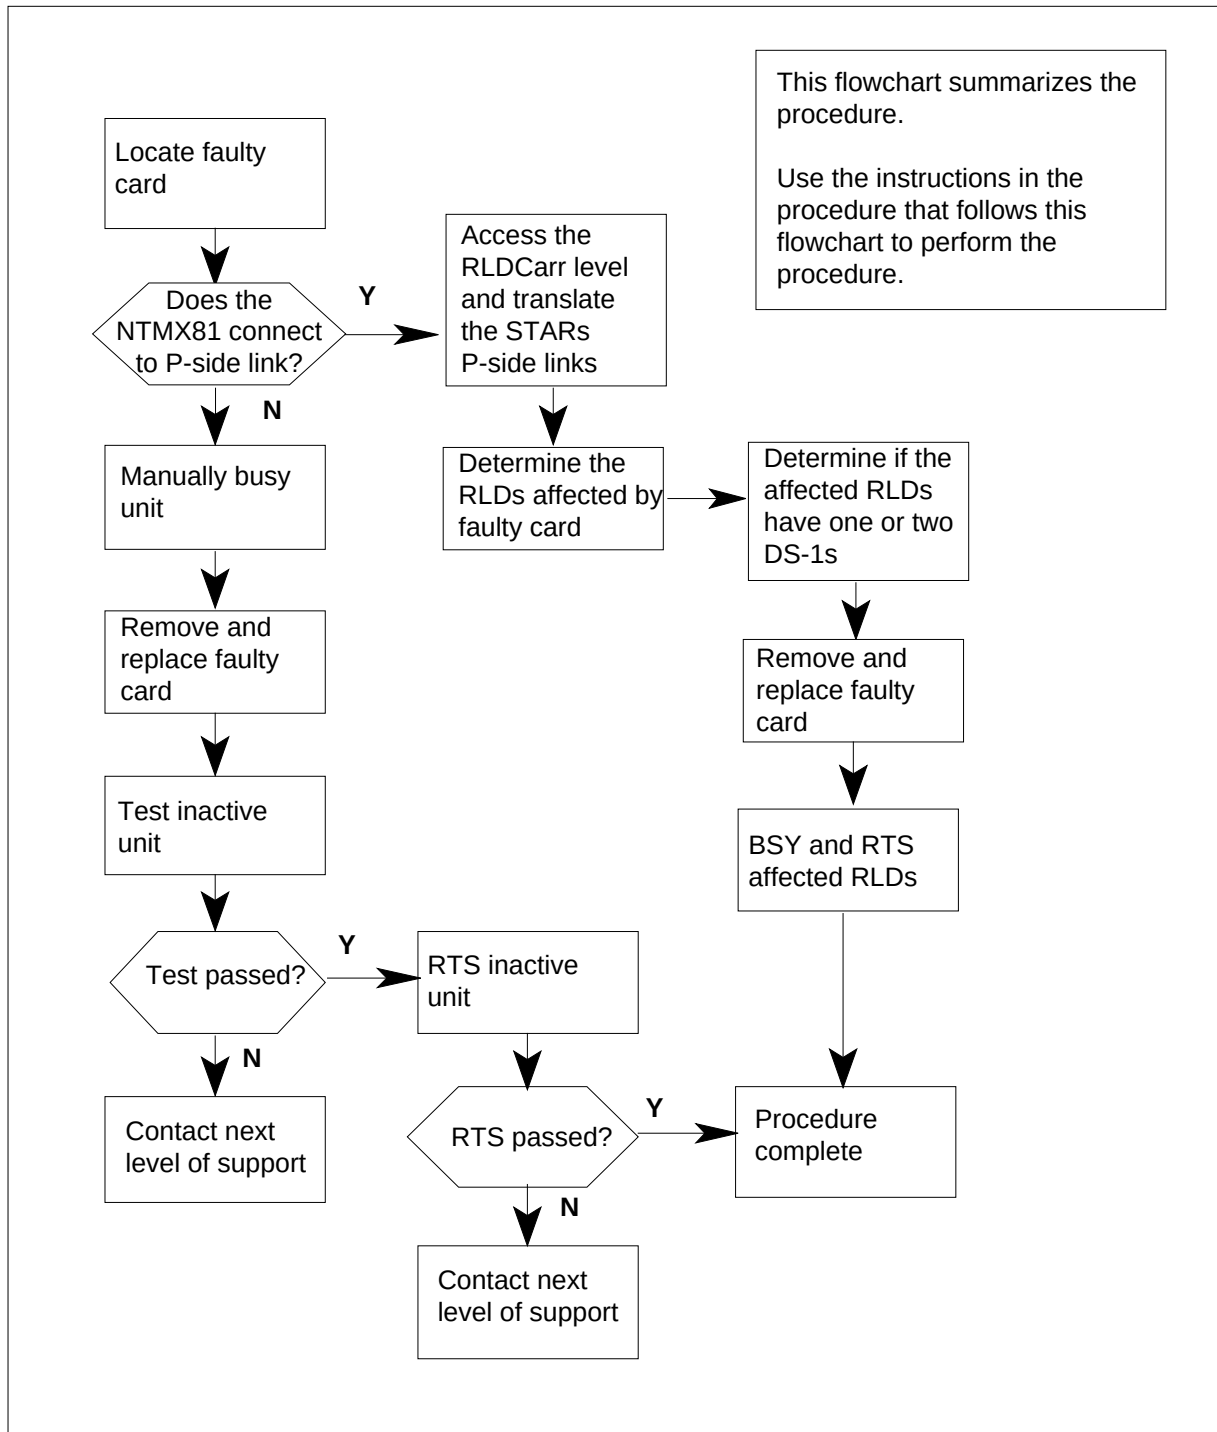

NTMX81 in a STAR (continued)

Replacing an NTMX81 card in a STAR

At your current location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for checking or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

At the MAP terminal

- 3 To access the PM level and post the STAR, type
>MAPCI;MTC;PM;POST STAR site frame unit
 and press the Enter key.

where

site

is the name of the site where the STAR is located

frame

is the frame number of the STAR with the faulty card (0 to 511)

unit

is 0 for the STAR

Example of a MAP response:

```

SysB      ManB      OffL      CBSy      ISTb      InSv
PM         0         0         2         0         1         12
STAR      0         0         2         0         1         9

STAR REM1 00 0  ISTb  Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0:  ISTb      /RG: 0
Unit 1:  InSv      /RG: 0
Drwr:      11 11 11 11 11 22 22 22 22 22 33 33 33  RG:
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45  Stby 0 InSv
. . . . .

```

- 4 Determine the slot location of the NTMX81 with faults.

If the NTMX81 is in an NTTR87 in slot Do

8 or 16 (C-side DS-1 links to host PM) step 5

9, 10, 14, or 15 (P-side DS-1 links to Star Module) step 11

NTMX81 in a STAR (continued)

- 5 To display the C-side link information, type

>TRNSL C

and press the Enter key.

Example of a MAP response

LINK	0	LTC	0	0;CAP	MS:STATUS OK	MSGCOND	OPN
LINK	1	LTC	0	1;CAP	S:STATUS SBsy		
LINK	2	LTC	0	2;CAP	MS:STATUS OK	MSGCOND	OPN
LINK	3	LTC	0	3;CAP	S:STATUS OK		
LINK	4	LTC	0	4;CAP	S:STATUS OK		
LINK	5	LTC	0	5;CAP	S:STATUS SBsy		

- 6 To busy the inactive STAR unit, type

>bsy unit unit_no

and press the Enter key.

where

unit_no

is the number of the inactive unit (unit 0 or 1)

- 7 From the display in step 5, determine the C-side host PM where the STAR is connected. To post the host PM, type

>POST pm_type pm_no

and press the Enter key.

where

pm_type

is the host PM type, such as LTC, LGC, RCC2

pm_no

is the number of the host PM

Example of a MAP display:

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	0	0	1	0	4	12
LTC	0	0	2	0	2	9
LTC	0	ISTb	Links_00S:	CSide	0, PSide	4
Unit0:	Act	InSv				
Unit1:	Inact	InSv				

- 8 To display the P-side link information for the host PM, type

>TRNSL P

and press the Enter key.

Example of a MAP response

NTMX81 in a STAR (continued)


```

LINK 0: STAR REM1 00 0 0;CAP MS:STATUS OK MSGCOND: OPN
LINK 1: STAR REM1 00 0 1;CAP MS:STATUS SBsy MSGCOND: CLS
LINK 2: STAR REM1 00 0 0;CAP MS:STATUS OK MSGCOND: OPN
LINK 3: STAR REM1 00 0 1;CAP MS:STATUS OK MSGCOND: OPN
LINK 4: STAR REM1 00 0 0;CAP MS:STATUS OK MSGCOND: OPN
LINK 5: STAR REM1 00 0 1;CAP MS:STATUS OK MSGCOND: OPN
LINK 6: STAR REM1 00 0 0;CAP MS:STATUS SBsy MSGCOND: CLS
LINK 7: STAR REM1 00 0 1;CAP MS:STATUS OK MSGCOND: OPN

```

9 Record the numbers of the links with status not OK.

After identifying the link with faults, use the following chart to determine which NTMX81 to remove by matching the STAR link number with the slot number and the packet number to the left of the table.

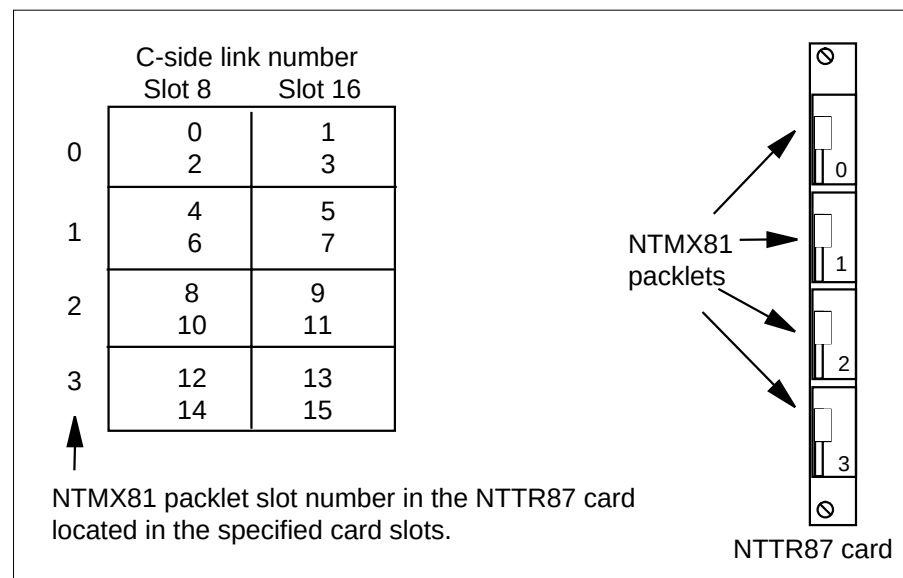

10 To manually busy the links connected to the card with faults, type

>BSY LINK link_no

and press the Enter key.

where

link_no

is the number of the link connected with the NTMX81 card with faults, from step 9

Note: Each NTMX81 card has two links connected to it. Each link must be manually busied. Possible link number pairs are as follows: 0,2; 1,3; 4,6; 5,7; 8,10; 9,11; 12,14; or 13,15.

Go to step 17.

NTMX81

in a STAR (continued)

At the MAP terminal

- 11** To access the RLDCarr level and display the C-side links from all RLDs to the posted STAR, type

>RLDCARR;TRNSL

and press the Enter key.

Example of a MAP display:

```
Port 0: Unit 0 RLD 0 0;CAP MS;STATUS: InSv
Port 1: Unit 1 RLD 0 1;CAP MS;STATUS: InSv
Port 2: Unit 0 RLD 1 0;CAP MS;STATUS: InSv
Port 3: Unit 1 RLD 1 1;CAP MS;STATUS: InSv

Port 14: Unit 0 RLD 7 0;CAP MS;STATUS: InSv
Port 15: Unit 1 RLD 7 1;CAP MS;STATUS: InSv
Port 16: Unit 0 RLD 8 0;CAP MS;STATUS: SysB
Port 17: Unit 1 RLD 8 1;CAP MS;STATUS: InSv
Port 18: Unit 0 RLD 9 0;CAP MS;STATUS: SysB
Port 19: Unit 1 RLD 9 1;CAP MS;STATUS: InSv
```

Record the RLDs with link faults that connect to the STAR posted in step 3.

- 12** To access the RLD MAP level, type

>RLD

and press the Enter key.

- 13** Post the RLD. To post the RLD, type

>POST rld_no

and press the Enter key.

where

rld_no

is the number of the RLD with the C-side link that has faults

Example of a MAP display:

```
PM      SysB      ManB      OffL      CBsy      ISTb      InSv
STAR    4         0         10        3         3         3
STAR REM1 00 0    ISTb    Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0:  ISTb                      /RG: 0
Unit 1:  ManB                      /RG: 0
Drwr:    11 11 11 11 11 22 22 22 22 22 33 33 33  RG Pref 0 InSv
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 1 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- -- --

REM9 RLD DRWR  8 SYSB                      LogDrwr: 16 17
BANK_0: Active                      Links_00S: 1
BANK_1: Stby                      RLD BDch: -
```

- 14** To display the posted RLDs C-side links, type

>TRNSL

NTMX81 in a STAR (continued)

and press the Enter key.

Example of a MAP response

Port 16: HUB Owner Unit 0 RLD 8 Link 0; Cap MS; Status: SysB
Port 17: HUB Owner Unit 1 RLD 8 Link 1; Cap MS; Status: InSv

- 15** Use the following table and figure to determine which NTMX81 card to remove by matching the provisioned link number with the slot number.

Note: When replacing an NTMX81 card at the Star Hub, determine if the RLDs affected by the card change have one or two DS-1 links. If the RLDs have one link, then each RLD must be posted, busied, and returned to service. If the RLD has two DS-1 links, the system automatically returns to service the DS-1 link.

Mapping Star Module ports to DS-1 slot and port numbers (Sheet 1 of 2)

Star Module and link numbers	Star Hub DS-1 slot and port numbers	Star Hub P-side port numbers	Star Module and link numbers	Star Hub DS-1 slot and port numbers	Star Hub P-side port numbers
Module 0 link 0	Slot 9, port 0	0	Module 8 link 0	Slot 10, port 8	16
Module 0 link 1	Slot 15, port 0	1	Module 8 link 1	Slot 14, port 8	17
Module 1 link 0	Slot 9, port 1	2	Module 9 link 0	Slot 10, port 9	18
Module 1 link 1	Slot 15, port 1	3	Module 9 link 1	Slot 14, port 9	19
Module 2 link 0	Slot 9, port 2	4	Module 10 link 0	Slot 10, port 10	20
Module 2 link 1	Slot 15, port 2	5	Module 10 link 1	Slot 14, port 10	21
Module 3 link 0	Slot 9, port 3	6	Module 11 link 0	Slot 10, port 11	22
Module 3 link 1	Slot 15, port 3	7	Module 11 link 1	Slot 14, port 11	23
Module 4 link 0	Slot 9, port 4	8	Module 12 link 0	Slot 10, port 12	24
Module 4 link 1	Slot 15, port 4	9	Module 12 link 1	Slot 14, port 12	25
Module 5 link 0	Slot 9, port 5	10	Module 13 link 0	Slot 10, port 13	26
Module 5 link 1	Slot 15, port 5	11	Module 13 link 1	Slot 14, port 13	27
Module 6 link 0	Slot 9, port 6	12	Module 14 link 0	Slot 10, port 14	28
Module 6 link 1	Slot 15, port 6	13	Module 14 link 1	Slot 14, port 14	29


NTMX81 **in a STAR** (continued)

Mapping Star Module ports to DS-1 slot and port numbers (Sheet 2 of 2)

Star Module and link numbers	Star Hub DS-1 slot and port numbers	Star Hub P-side port numbers	Star Module and link numbers	Star Hub DS-1 slot and port numbers	Star Hub P-side port numbers
Module 7 link 0	Slot 9, port 7	14	Module 15 link 0	Slot 10, port 15	30
Module 7 link 1	Slot 15, port 7	15	Module 15 link 1	Slot 14, port 15	31

NTMX81 in a STAR (continued)

Star Hub P-side links mapping

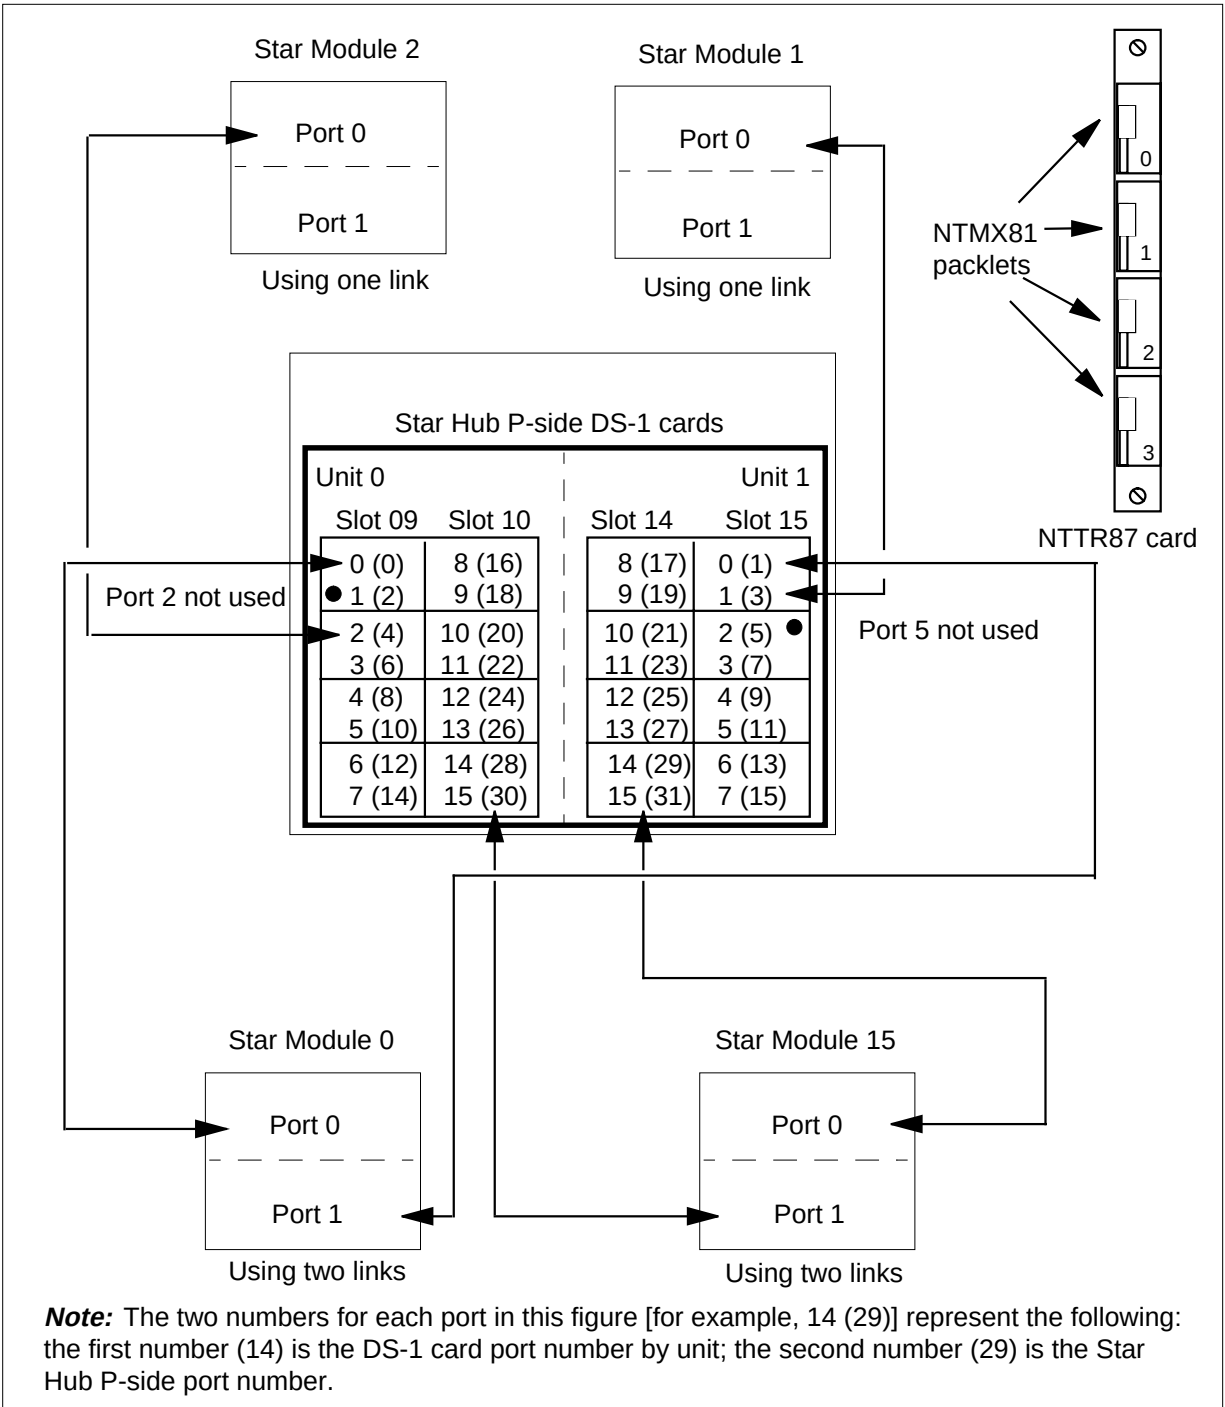

NTMX81 in a STAR (continued)

- 16 Determine if an additional RLD connects to the NTMX81 card.

If an additional RLD is	Do
connected	step 13
not connected	step 17

At the SRHE frame

17



WARNING

Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP). This protects the equipment against damage caused by static electricity.



WARNING

Equipment damage

Take the following precautions when removing or inserting a card.

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

Remove the NTMX81 card as described in the following steps:

- a Locate the packet to be removed on the appropriate NTTR87 card slot.
- b Open the locking lever on the packet to be replaced. Carefully pull the card toward you until it clears the shelf.
- c Make sure the replacement card has the same PEC, including suffix, as the card you just removed.

NTMX81 in a STAR (continued)

- 18** Before inserting the replacement card, set the DS-1 switch settings according to the following table.

Distance to cross connect				
Feet	Meters	S3/6	S2/5	S1/4
0-133	0-41	On	Off	Off
133-266	41-81	Off	On	On
266-399	81-122	Off	On	Off
399-533	122-163	Off	Off	On
533-655	163-200	Off	Off	Off
Note: S indicates switch number(s). On S1 dip switch (6 position): S1-S3 belong to even port, and S4-S6 belong to odd port.				

- 19** Open the locking lever on the replacement packlet.
- a** Align the packlet with the slots in the shelf.
 - b** Carefully slide the packlet into the card slot in the NTTR87 card.
- 20** Seat and lock the packlet.
- a** Use your fingers or thumbs to push on the upper and lower edges of the faceplate of the packlet to make sure the packlet is fully seated in the slot.
 - b** Close the locking lever.
- 21** Use the following information to determine the next step in this procedure.

If you entered this procedure from	Do
alarm clearing procedures	step 33
other	step 22

- 22** Use the following table to determine the next step in this procedure.

If you replaced an NTMX81 that connects DS-1 links for the	Do
Star Hub C-side	step 23
Star Hub P-side	step 27

NTMX81 in a STAR (continued)

At the MAP terminal

23 To test the busied links from step 10, type

>TST LINK link_no

and press the Enter key

where

link_no

is the number of the link that was manually busied in step 10.

Note 1: This step must be performed for each link that is manually busied.

Note 2: To test the other links connected to the STAR, execute this step for each link until all links are tested.

If TST	Do
passes	step 24
fails	step 34

24 To return to service the P-side links, type

>RTS LINK link_no

and press the Enter key.

where

link_no

is the number of the link that was tested in step 23.

Note: To RTS the other links connected to the STAR, perform this step for each link until all links are returned to service.

If RTS	Do
passes	step 25
fails	step 34

25 To post the STAR where the NTMX81 card is located, type

>POST STAR site frame unit

and press the Enter key.

where

site

is the name of the site where the STAR is located

frame

is the frame number of the STAR with the card with faults (0 to 511)

unit

is 0 for the STAR

NTMX81 in a STAR (continued)

- 26 To return the inactive STAR unit to service, type

>RTS UNIT unit_no

and press the Enter key.

where

unit_no

is the number of the STAR unit busied in step 6

If RTS	Do
passes	step 31
fails	step 34

- 27 Determine how many DS-1 links connect to the RLD affected by the NTMX81 card replacement.

If the RLD affected by the card replacement has	Do
one DS-1 link	step 28
two DS-1 links, the affected link returns to service automatically	step 31

Note: If there are two RLDs, each with one DS-1 link affected by this card replacement, both RLDs must be busied and returned to service.

- 28 To busy the posted RLD, type

>BSY DRWR

and press the Enter key.

Example of a MAP display:

Warning: Calls on RLD may be affected.
Do you wish to continue?
Please confirm ("YES", "Y", "NO", "N")

- 29 To respond affirmatively to the confirmation request, type

>Y

and press the Enter key.

- 30 To return the RLD to service, type

>RTS DRWR

NTMX81 in a STAR (end)

and press the Enter key.

If RTS	Do
passes and there are no more RLDs to RTS	step 31
passes and there is another RLD to return to service	step 28
fails	step 34

- 31** Send any cards with faults for repair according to local procedure.
- 32** Record the following items in office records
- date the card was replaced
 - serial number of the card
 - indications that prompted replacement of the card
- Go to step 35.
- 33** Return to "Star Remote System alarm clearing procedures" in this manual or another procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 34** Get additional help replacing this card by contacting the personnel responsible for a higher level support.
- 35** You have correctly completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

NTMX82 in an RSC-M

Application

Use this procedure to replace an NTMX82 circuit card in a Remote Switching Center Multi-access (RSC-M) main or extension (EXT) shelf.

Note: In this section, the examples refer to RSC-M as RCO2. When software outputs messages to the MAP terminal, the software does not differentiate between the two types of RCO2.

PEC	Suffixes	Name
NTMX82	AA	Dual PCM30 interface

Common procedures


The common returning a card procedure is referenced in this procedure.

Action

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

NTMX82 in an RSC-M (continued)

Summary of replacing an NTMX82 in an RSC-M

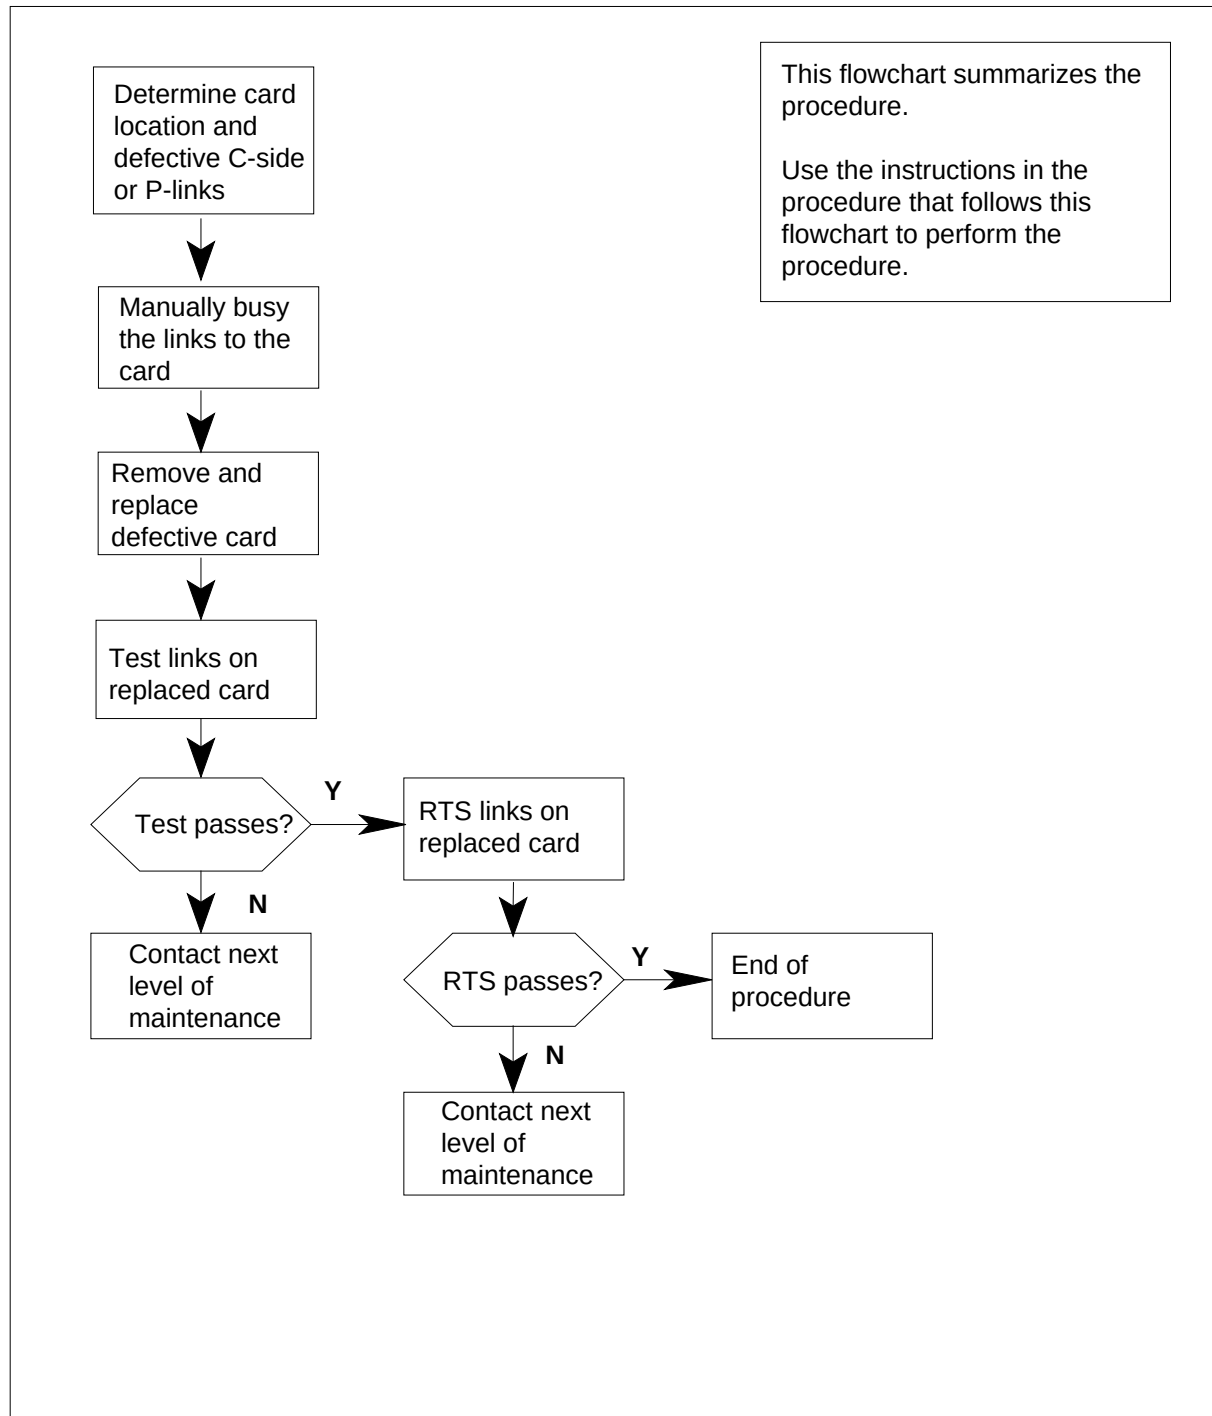

NTMX82 in an RSC-M (continued)

Replacing an NTMX82 in an RSC-M

At the MAP display

- 1 Proceed to step 2 if one of the following conditions applies:
 - another maintenance procedure directed you to this card replacement procedure
 - you use the procedure to verify or accept cards
 - your maintenance support group directed you to this procedure

2



WARNING

Loss of service

When you replace an NTMX82 circuit card in RSC-M, both links that the circuit card serves must be BSY. Active calls on the affected links are lost. Execute this procedure in periods of low traffic.

Obtain an NTMX82 replacement circuit card. Make sure the replacement circuit card has the same product equipment code (PEC) and PEC suffix as the circuit card to remove.

At the MAP terminal

- 3 To post the RSC-M/RCO2 with the defective card(s), type
>MAPCI;MTC;PM;POST RCO2 rco2_no
and press the Enter key.
where
rco2_no
is the number of the RCO2 with the defective card(s)

Example of a MAP response:

NTMX82

in an RSC-M (continued)

```

RC02          SysB      ManB      OffL      CBsy      ISTb      InSv
0 Quit      PM          0          0          2          0          2          25
2 Post_     RC02        0          0          0          0          1          1
3 ListSet
4           RC02        0 ISTb  Links_00S:  CSide  1, PSide  1
5 TRNSL     Unit0:      Inact ISTb
6 TST       Unit1:      Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_

```

- 4 To determine the location of the RC02 main or extension half shelf (left or right) with the circuit card to replace, type

>QUERYPM

and press the Enter key.

Example of a MAP display:

```

PM Type: RC02 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname:KRI07BI1 EEPROM Load:MX77MNG03
WARM SWACT is supported and available
RC02 0 is included in the REX schedule.
REX on RC02 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RC02: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA

```

- 5 To display defective C-side links, type

>TRNSL C

and press the Enter key.

Example of a MAP response:

```

LINK 0 PLGC 0 0;CAP MS:STATUS OK MSGCOND OPN
LINK 1 PLGC 0 1;CAP S:STATUS SBsy
LINK 2 PLGC 0 2;CAP MS:STATUS OK MSGCOND OPN
LINK 3 PLGC 0 3;CAP S:STATUS OK
LINK 4 PLGC 0 4;CAP S:STATUS OK
LINK 5 PLGC 0 5;CAP S:STATUS SBsy

```

If C-side links

Do

are defective

step 7

NTMX82 in an RSC-M (continued)

If C-side links	Do
are not defective	step 6

- 6 To display the peripheral-side (P-side) links that associate with the NTMX82 circuit card, type

>TRNSL P

and press the Enter key.

Example of a MAP response

```
Link 0:  REM1 11 0 0;Cap MS;Status:OK      ;MsgCond:OPN
Link 1:  Carrier of Class - Trunk ;Status:OK
Link 2:  Carrier of Class - Trunk ;Status:SBsy
Link 3:  Carrier of Class - Trunk ;Status:SBsy
Link 4:  Carrier of Class - Trunk ;Status:SBsy
Link 5:  Carrier of Class - Trunk ;Status:OK
Link 6:  Carrier of Class - Trunk ;Status:OK
Link 7:  Carrier of Class - Trunk ;Status:OK
Link 8:  REM1 11 1 0;Cap MS;Status:OK;    MsgCond:OPN
```

The following table displays the P-side link configuration for an RSC-M cabinet. The cabinet has three RCO2 main shelves and two extension half shelves.

Note 1: Other configurations, like two RCO2 main shelves and four extension half shelves, can be provisioned in an RCO2 cabinet. For P-side link configurations other than the link that the following table describes, consult office administration, or review office records.

Note 2: The RCO2 can have an associated extension half shelf. Consult office administration, or review office records for the P-side link configuration for the extension half shelf.

Note 3: The NTMX82 packets bear the numbers 0 through 3 from the top of each NTMX87 circuit card.

RCO2 P-side link connections (Sheet 1 of 2)

Card Location	MX87 Slot No.	Links for MX82 Card 0	Links for MX82 Card 1	Links for MX82 Card 2	Links for MX82 Card 3
RCO2 main, shelf, pos. 05	12	0, 1	2, 3	4, 5	6, 7
	16	8, 9	10, 11	12, 13	14, 15
	14	16, 17	18, 19	20, 21	22, 23
Left extension half shelf	4	24, 25	26, 27	28, 29	30, 31

NTMX82 in an RSC-M (continued)

RCO2 P-side link connections (Sheet 2 of 2)

Card Location	MX87 Slot No.	Links for MX82 Card 0	Links for MX82 Card 1	Links for MX82 Card 2	Links for MX82 Card 3
	6	32, 33	34, 35	36, 37	38, 39
	8	40, 41	42, 43	44, 45	46, 47
RCO2 main shelf, position 19 (optional)	12	0, 1	2, 3	4, 5	6, 7
	16	8, 9	10, 11	12, 13	14, 15
	14	16, 17	18, 19	20, 21	22, 23
Right extension half shelf	19	40, 41	42, 43	44, 45	46, 47
	21	32, 33	34, 35	36, 37	38, 39
	23	24, 25	26, 27	28, 29	30, 31
Provisioned RCO2 shelf, position 33	12	0, 1	2, 3	4, 5	6, 7
	16	8, 9	10, 11	12, 13	14, 15
	14	16, 17	18, 19	20, 21	22, 23

Note: Proceed to step 10.

- 7 To post the host PM, type
>POST host_pm host_pm_no
 and press the Enter key.
where
host_pm
 is a PCM-30 line group controller (PLGC)
host_pm_no
 is the number of the PLGC that connects to the defective card
Example of a MAP display:

NTMX82
in an RSC-M (continued)

CM	MS	IOD	Net	PM	CCS	Lns	Trks	Ext	Appl
.	.	.	.	1RC02	.	.	.	.	.
PLGC			SysB	ManB	OffL	CBsy	ISTb	InSv	
0 Quit	PM		0	0	1	0	4	12	
2 Post_	PLGC		0	0	2	0	2	9	
3 ListSet									
4	PLGC	1	ISTb	Links_00S:	CSide	0,	PSide	1	
5 Trnsl_	Unit0:		Act	InSv					
6 Tst_	Unit1:		Inact	InSv					
7 Bsy_									
8 RTS_									
9 OffL									
10 LoadPM_									
11 Disp_									
12 Next									
13 SwAct									
14 QueryPM									
15									
16									
17 Perform									
18									

- 8 To display the P-side links that associate with the NTMX82 card, type
>TRNSL P
and press the Enter key.


Example of a MAP response:

LINK 0	RC02 0 RMIO 1 0;CAP	MS:STATUS OK	MSGCOND OPN
LINK 1	RC02 1 RMIO 0 0;CAP	MS:STATUS SBsy	MSGCOND CLS
LINK 2	RC02 0 RMIO 1 1;CAP	MS:STATUS OK	
LINK 3	RC02 1 RMIO 0 1;CAP	MS:STATUS OK	
LINK 4	RC02 0 RMIO 2 0;CAP	MS:STATUS OK	MSGCOND OPN
LINK 5	RC02 1 RMIO 2 1;CAP	MS:STATUS SBsy	MSGCOND CLS

- 9 After you identify the defective C-side link, use the following chart to determine which NTMX82 card you remove. Match the link number with the slot number and the packet number to the left of each table.

NTMX82 in an RSC-M (continued)

RCO2 C-side link connections

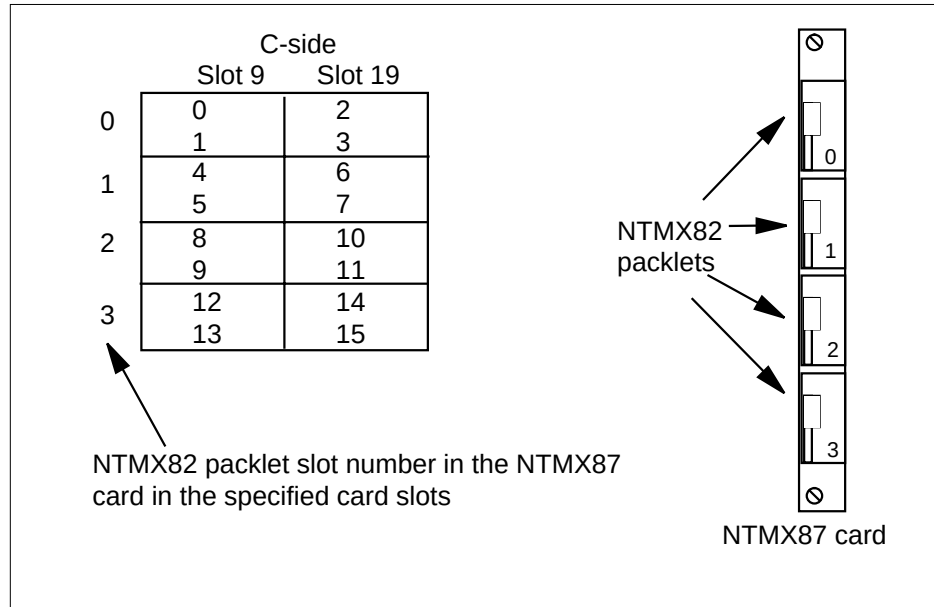

- 10 Record the RCO2 number, shelf location, slot number, and numbers of the associated links for the circuit card you want to replace.
- 11 To manually busy (ManB) the links that connect to the defective circuit card, type

>BSY LINK link_no

and press the Enter key.

where

link_no

is the number of the link that associate with the defective NTMX82 circuit card

Note 1: Each NTMX82 circuit card has two associated links. Each link must be ManB. Possible link number pairs are as follows: 0 & 1; 2 & 3; 4 & 5; or 6 & 7.

Note 2: To busy the other links that associate with the RCO2, execute this step for each link until all links are busy.

NTMX82 in an RSC-M (continued)

At the cabinet

12

**WARNING****Static electricity damage**

Wear a wrist strap that connects to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. The wrist strap protects the equipment against static electricity damage.

**DANGER****Equipment damage**

Take the following precautions when you remove or insert a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

Remove the NTMX82 packet(s) as described in the following steps:

- a Locate the packet to remove on the appropriate NTMX87 circuit card slot.
 - b Open the locking lever on the packet you replace. Carefully pull the circuit card toward you until the card clears the shelf.
 - c Make sure the replacement circuit card has the same PEC and PEC suffix as the circuit card you remove.
- 13** Before you insert the replacement circuit card, make sure the switch settings match the settings on the circuit card that you remove. The next table describes the PCM30 DIP switch settings on the NTMX82 circuit card.

NTMX82 switch settings (Sheet 1 of 2)

Port	Impedance	Output
Even port	75 OHM	Switch S3 pos 1, 2, 3, and 4 ON , pos 5 and 6 OFF
Even port	120 OHM	Switch S3 pos 1 and 5 ON, pos 2, 3, 4, and 6 OFF
Note: Set switch S2 positions 1 & 2 to ON to enable messaging.		

NTMX82 in an RSC-M (continued)

NTMX82 switch settings (Sheet 2 of 2)

Port	Impedance	Output
Odd port	75 OHM	Switch S1 pos 1, 2, 3, and 4 ON , pos 5 and 6 OFF
Odd port	120 OHM	Switch S1 pos 1 and 5 ON, pos 2, 3, 4, and 6 OFF
Note: Set switch S2 positions 1 & 2 to ON to enable messaging.		

- 14** Open the locking lever on the replacement packlet.
- a** Align the packlet with the slots in the shelf.
 - b** Carefully slide the packlet into the circuit card slot in the NTMX87 circuit card.
- 15** Seat and lock the packlet.
- a** Use your fingers to push on the upper and lower edges of the faceplate of the packlet. Perform this action to make sure the packlet is seated in the slot.
 - b** Close the locking lever.
- 16** Use the following information to determine your next action in this procedure.
- | If the procedure you followed
previous to this procedure | Do |
|---|---------|
| is alarm clearing procedures | step 17 |
| is other than listed here | step 18 |
- 17** Return to the procedure that directed you to this procedure. At the point where the system produces a defective card list, identify the next defective card on the list. Proceed to the corresponding card replacement procedure for the card in this manual.

At the MAP terminal

- 18** To test the busied links from step 11, type
- ```
>TST LINK link_no
```
- and press the Enter key.
- where

## NTMX82 in an RSC-M (end)

**link\_no**

is the number of the link ManB in step 11

**Note 1:** Perform this step for each link ManB.

**Note 2:** To test the other links that associate with the RCO2, execute the procedures in this step. Execute the procedures for each link until all links are tested.

| If the test of the link(s) | Do      |
|----------------------------|---------|
| passes                     | step 19 |
| fails                      | step 22 |

**19** To return to service (RTS) the links, type

**>RTS LINK link\_no**

and press the Enter key.

where

**link\_no**

is the number of the link tested in step 18

**Note:** To RTS the other links that associate with the RCO2, execute the procedures in this step. Execute the procedures for each link until all links are RTS.

| If RTS              | Do      |
|---------------------|---------|
| passes on all links | step 20 |
| fails               | step 22 |

**20** Proceed to the common returning a card procedure in this document.

**21** The procedure is complete. Return to the maintenance procedure that directed you to this card replacement procedure. Continue as directed.

**22** For additional help, contact the next level of maintenance.

## **NTMX82 in an RSC-S (PCM-30) Model A RCO2**

---

### **Application**

Use this procedure to replace an NTMX82 card in an RSC-S RCO2.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>           |
|------------|-----------------|-----------------------|
| NTMX82     | AA              | Dual PCM-30 Interface |

### **Common procedures**


None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

## NTMX82 in an RSC-S (PCM-30) Model A RCO2 (continued)

### Summary of card replacement procedure for an NTMX82 card in RSC-S RC02

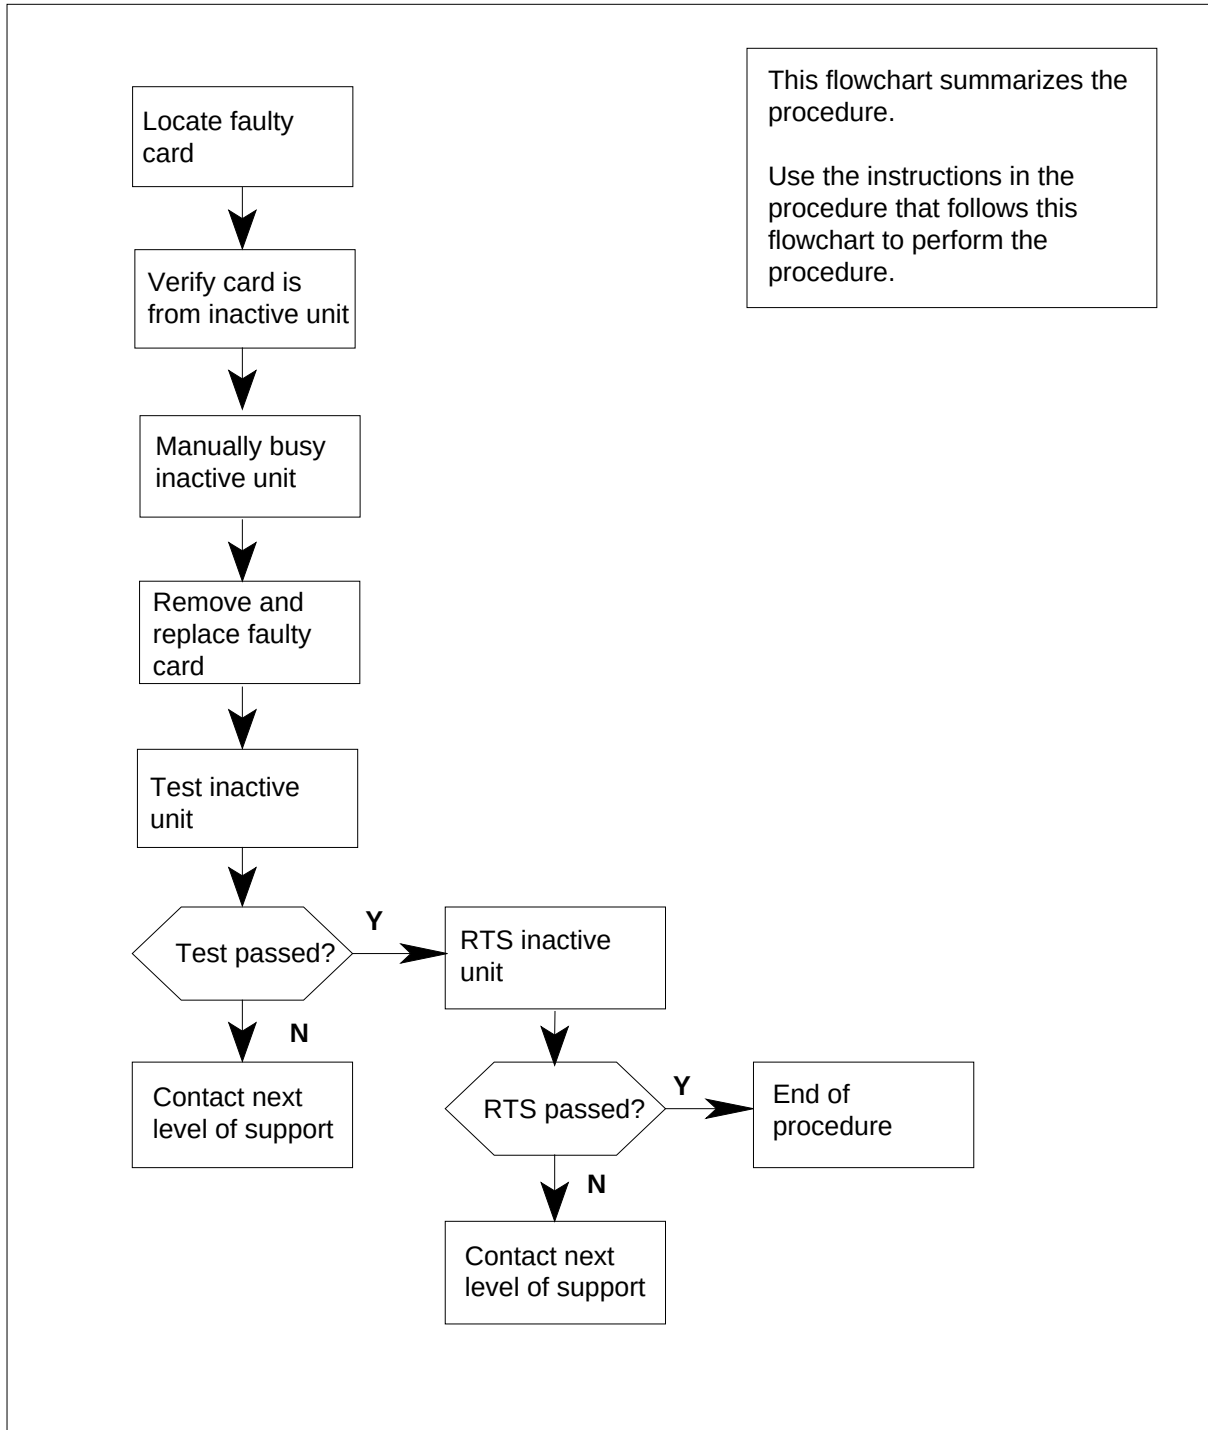

## NTMX82 in an RSC-S (PCM-30) Model A RCO2 (continued)

---

### Replacing an NTMX82 card in RSC-S RCO2

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



#### **CAUTION**

##### **Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX82 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal*

- 3 Ensure the PM level of the MAP display is currently displayed by typing  
**>MAPCI;MTC;PM;POST RCO2 rco2\_no**  
and pressing the Enter key.

*where*

**rco2\_no**

is the number of the RCO2 with the faulty card

*Example of a MAP display:*

NTMX82  
in an RSC-S (PCM-30) Model A RCO2 (continued)

| CM         | MS     | IOD   | Net  | PM         | CCS   | LNS  | Trks  | Ext | Appl |
|------------|--------|-------|------|------------|-------|------|-------|-----|------|
| .          | .      | .     | .    | 1RCO2      | .     | .    | .     | .   | .    |
| RCO2       |        | SysB  | ManB | OffL       | CBsy  | ISTb | InSv  |     |      |
| 0 Quit     | PM     | 0     | 0    | 2          | 0     | 2    | 25    |     |      |
| 2 Post_    | RCO2   | 0     | 0    | 0          | 0     | 1    | 1     |     |      |
| 3 ListSet  |        |       |      |            |       |      |       |     |      |
| 4          | RCO2   | 0     | ISTb | Links_00S: | CSide | 1,   | PSide | 1   |      |
| 5 TRNSL    | Unit0: | Inact | InSv |            |       |      |       |     |      |
| 6 TST      | Unit1: | Act   | InSv |            |       |      |       |     |      |
| 7 BSY      |        |       |      |            |       |      |       |     |      |
| 8 RTS      |        |       |      |            |       |      |       |     |      |
| 9 OffL     |        |       |      |            |       |      |       |     |      |
| 10 LoadPM_ |        |       |      |            |       |      |       |     |      |
| 11 Disp_   |        |       |      |            |       |      |       |     |      |
| 12 Next_   |        |       |      |            |       |      |       |     |      |
| 13         |        |       |      |            |       |      |       |     |      |
| 14 QueryPM |        |       |      |            |       |      |       |     |      |
| 15         |        |       |      |            |       |      |       |     |      |
| 16         |        |       |      |            |       |      |       |     |      |
| 17         |        |       |      |            |       |      |       |     |      |
| 18         |        |       |      |            |       |      |       |     |      |

- 4 By observing the MAP display, be sure that the card to be removed is in the inactive unit.

| If faulty card is in the | Do     |
|--------------------------|--------|
| active unit              | step 5 |
| inactive unit            | step 7 |

- 5 Switch the processing activity (SWACT) to the inactive unit by typing **>SWACT** and pressing the Enter key.
- Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 6 Confirm the system prompt by typing **>YES** and pressing the Enter key.
- After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

## NTMX82

### in an RSC-S (PCM-30) Model A RCO2 (continued)

#### At the MAP terminal

- 8 Busy the inactive PM unit by typing

**>bsy unit unit\_no**

and pressing the Enter key.

where

**unit\_no**

is the number of the inactive RCO2 unit (unit 0 or 1)

When both units are in-service, proceed to the next step.

- 9 Display the C-side links associated with the DS-1 card by typing

**>TRNSL C**

and pressing the Enter key.

*Example of a MAP response:*

|        |        |       |               |         |     |
|--------|--------|-------|---------------|---------|-----|
| LINK 0 | PLGC 0 | 0;CAP | MS:STATUS OK  | MSGCOND | OPN |
| LINK 1 | PLGC 0 | 1;CAP | S:STATUS SBsy |         |     |
| LINK 2 | PLGC 0 | 2;CAP | MS:STATUS OK  | MSGCOND | OPN |
| LINK 3 | PLGC 0 | 3;CAP | S:STATUS OK   |         |     |
| LINK 4 | PLGC 0 | 4;CAP | S:STATUS OK   |         |     |
| LINK 5 | PLGC 0 | 5;CAP | S:STATUS SBsy |         |     |

#### If C-side links are

#### Do

faulty

step 11

not faulty

step 10

- 10 Display the P-side links associated with the DS-1 card by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

|        |          |        |                |         |     |
|--------|----------|--------|----------------|---------|-----|
| LINK 0 | RCO2 0 5 | 27;CAP | MS:STATUS OK   | MSGCOND | OPN |
| LINK 1 | RCO2 1 5 | 27;CAP | MS:STATUS SBsy | MSGCOND | CLS |
| LINK 2 | RCO2 0 7 | 47;CAP | MS:STATUS OK   |         |     |
| LINK 3 | RCO2 1 7 | 47;CAP | MS:STATUS OK   |         |     |
| LINK 4 | RCO2 0 5 | 50;CAP | MS:STATUS OK   | MSGCOND | OPN |
| LINK 5 | RCO2 1 5 | 50;CAP | MS:STATUS SBsy | MSGCOND | CLS |

#### If P-side links are

#### Do

faulty

step 12

not faulty

step 26

- 11 Post the host PM by typing

**>POST host\_pm host\_pm\_no**



## NTMX82

### in an RSC-S (PCM-30) Model A RCO2 (continued)

and pressing the Enter key.

where

**host\_pm**

is a PCM-30 line group controller (PLGC)

**host\_pm\_no**

is the number of the PLGC with the faulty card

*Example of a MAP display:*

| CM         | MS     | IOD | Net   | PM         | CCS   | Lns      | Trks | Ext  | Appl |
|------------|--------|-----|-------|------------|-------|----------|------|------|------|
| .          | .      | .   | .     | 1RCO2      | .     | .        | .    | .    | .    |
| PLGC       |        |     | SysB  | ManB       | OffL  | CBsy     | ISTb | InSv |      |
| 0 Quit     | PM     |     | 0     | 0          | 1     | 0        | 4    | 12   |      |
| 2 Post_    | PLGC   |     | 0     | 0          | 2     | 0        | 2    | 9    |      |
| 3 ListSet  |        |     |       |            |       |          |      |      |      |
| 4          | PLGC   | 1   | ISTb  | Links_00S: | CSide | 0, PSide | 1    |      |      |
| 5 Trnsl_   | Unit0: |     | Act   | InSv       |       |          |      |      |      |
| 6 Tst_     | Unit1: |     | Inact | InSv       |       |          |      |      |      |
| 7 Bsy_     |        |     |       |            |       |          |      |      |      |
| 8 RTS_     |        |     |       |            |       |          |      |      |      |
| 9 OffL     |        |     |       |            |       |          |      |      |      |
| 10 LoadPM_ |        |     |       |            |       |          |      |      |      |
| 11 Disp_   |        |     |       |            |       |          |      |      |      |
| 12 Next    |        |     |       |            |       |          |      |      |      |
| 13 SwAct   |        |     |       |            |       |          |      |      |      |
| 14 QueryPM |        |     |       |            |       |          |      |      |      |
| 15         |        |     |       |            |       |          |      |      |      |
| 16         |        |     |       |            |       |          |      |      |      |
| 17 Perform |        |     |       |            |       |          |      |      |      |
| 18         |        |     |       |            |       |          |      |      |      |

- 12** Manually busy the links connected to the faulty card by typing

**>BSY LINK link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link associated with the faulty MX82 card

**Note 1:** Each NTMX82 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; or 6,7.

**Note 2:** To busy the other links associated with the RCO2, execute this step for each link until all links are busied.

## NTMX82 in an RSC-S (PCM-30) Model A RCO2 (continued)

*At the RCE frame*

13



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



### DANGER

#### Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

14

After identifying the faulty link, use the following charts to determine which NTMX82 is to be removed by first identifying whether the link is a C-side or P-side link, then by matching the link number with the slot number and the packet number to the left of each respective table.

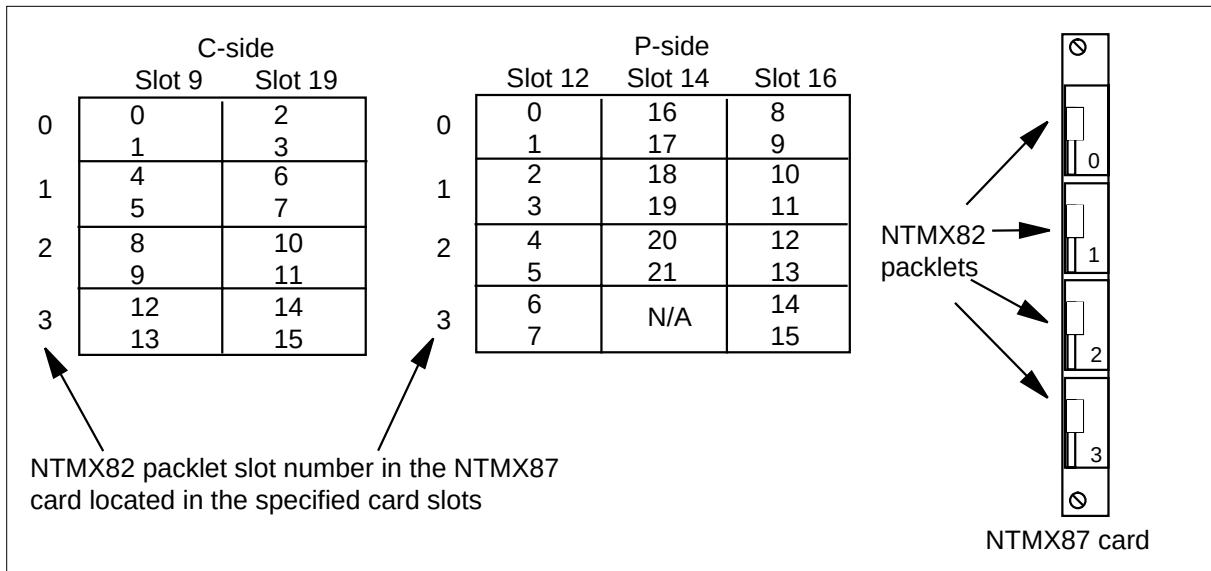

## NTMX82

### in an RSC-S (PCM-30) Model A RCO2 (continued)

Remove the NTMX82 card as described in the following steps:

- a Locate the packlet to be removed on the appropriate NTMX87 card slot.
  - b Open the locking lever on the packlet to be replaced and gently pull the card toward you until it clears the shelf.
  - c Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 15** Before inserting the replacement card ensure the switch settings are the same as on the card that was removed. The following table describes the PCM-30 DIP switch settings on the NTMX82. Set switch S2 positions 1 & 2 on to enable messaging.

| Port                                                                                  | Impedance | Input                                  | Output                                          |
|---------------------------------------------------------------------------------------|-----------|----------------------------------------|-------------------------------------------------|
| Even port                                                                             | 75 OHM    | Switch S3<br>pos 1,2, & 3 ON           | Switch S3<br>pos 4 ON<br>Switch S3<br>pos 5 OFF |
| Even port                                                                             | 120 OHM   | Switch S3<br>pos 1 ON<br>pos 2 & 3 OFF | Switch S3<br>pos 4 OFF<br>Switch S3<br>pos 5 ON |
| Odd port                                                                              | 75 OHM    | Switch S1<br>pos 1,2, & 3 ON           | Switch S1<br>pos 4 ON<br>Switch S1<br>pos 5 OFF |
| Odd port                                                                              | 120 OHM   | Switch S1<br>pos 1 ON<br>pos 2 & 3 OFF | Switch S1<br>pos 4 OFF<br>Switch S1<br>pos 5 ON |
| <b>Note:</b> Switch position 6 of both switches is not used and should be set to OFF. |           |                                        |                                                 |

- 16** Open the locking lever on the replacement packlet.
- a Align the packlet with the slots in the shelf.
  - b Gently slide the packlet into the card slot in the NTMX87 card.
- 17** Seat and lock the packlet.
- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
  - b Close the locking lever.

## NTMX82

### in an RSC-S (PCM-30) Model A RCO2 (continued)

---

- 18** Use the following information to determine what step to go to next in this procedure.

---

| If you entered this procedure from | Do      |
|------------------------------------|---------|
| alarm clearing procedures          | step 25 |
| other                              | step 19 |

---

**At the MAP terminal**

- 19** Test the busied network links from step 12 by typing

**>TST LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link that was manually busied in step 12

**Note 1:** This step must be performed for each link that is manually busied.

**Note 2:** To test the other links associated with the RCO2, execute the procedures in this step for each link until all links are tested.

---

| If the test of the link(s) | Do      |
|----------------------------|---------|
| passed                     | step 20 |
| failed                     | step 26 |

---

- 20** Return to service the P-side links by typing

**>RTS Link 0**

**and pressing the Enter key.**

**Note:** To RTS the other links associated with the RCO2, execute the procedures in this step for each link until all links are returned to service.

---

| If RTS | Do      |
|--------|---------|
| passed | step 21 |
| failed | step 26 |

---

- 21** Post the inactive RCO2 in which the NTMX82 card is located by typing

**>POST RCO2 rco2\_no**

**and pressing the Enter key.**

*where*

**rco2\_no**

is the number of the RCO2 associated with the faulty card

---

**NTMX82**  
**in an RSC-S (PCM-30) Model A RCO2 (end)**

---

- 22** Return the inactive RCO2 unit to service by typing

**>RTS UNIT unit\_no**

and pressing the Enter key.

where

**unit\_no**

is the number of the RCO2 unit posted in step 21

---

| If RTS | Do      |
|--------|---------|
| passed | step 23 |
| failed | step 26 |

---

- 23** Send any faulty cards for repair according to local procedure.

- 24** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 27.

- 25** Return to the *Alarm Clearing Procedures* or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 26** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.

- 27** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTMX82 in an RSC-S (PCM-30) Model B RCO2**

---

### **Application**

Use this procedure to replace an NTMX82 card in an RSC-S RCO2.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>           |
|------------|-----------------|-----------------------|
| NTMX82     | AA              | Dual PCM-30 Interface |

### **Common procedures**


None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

## NTMX82 in an RSC-S (PCM-30) Model B RCO2 (continued)

### Summary of card replacement procedure for an NTMX82 card in RSC-S RCO2

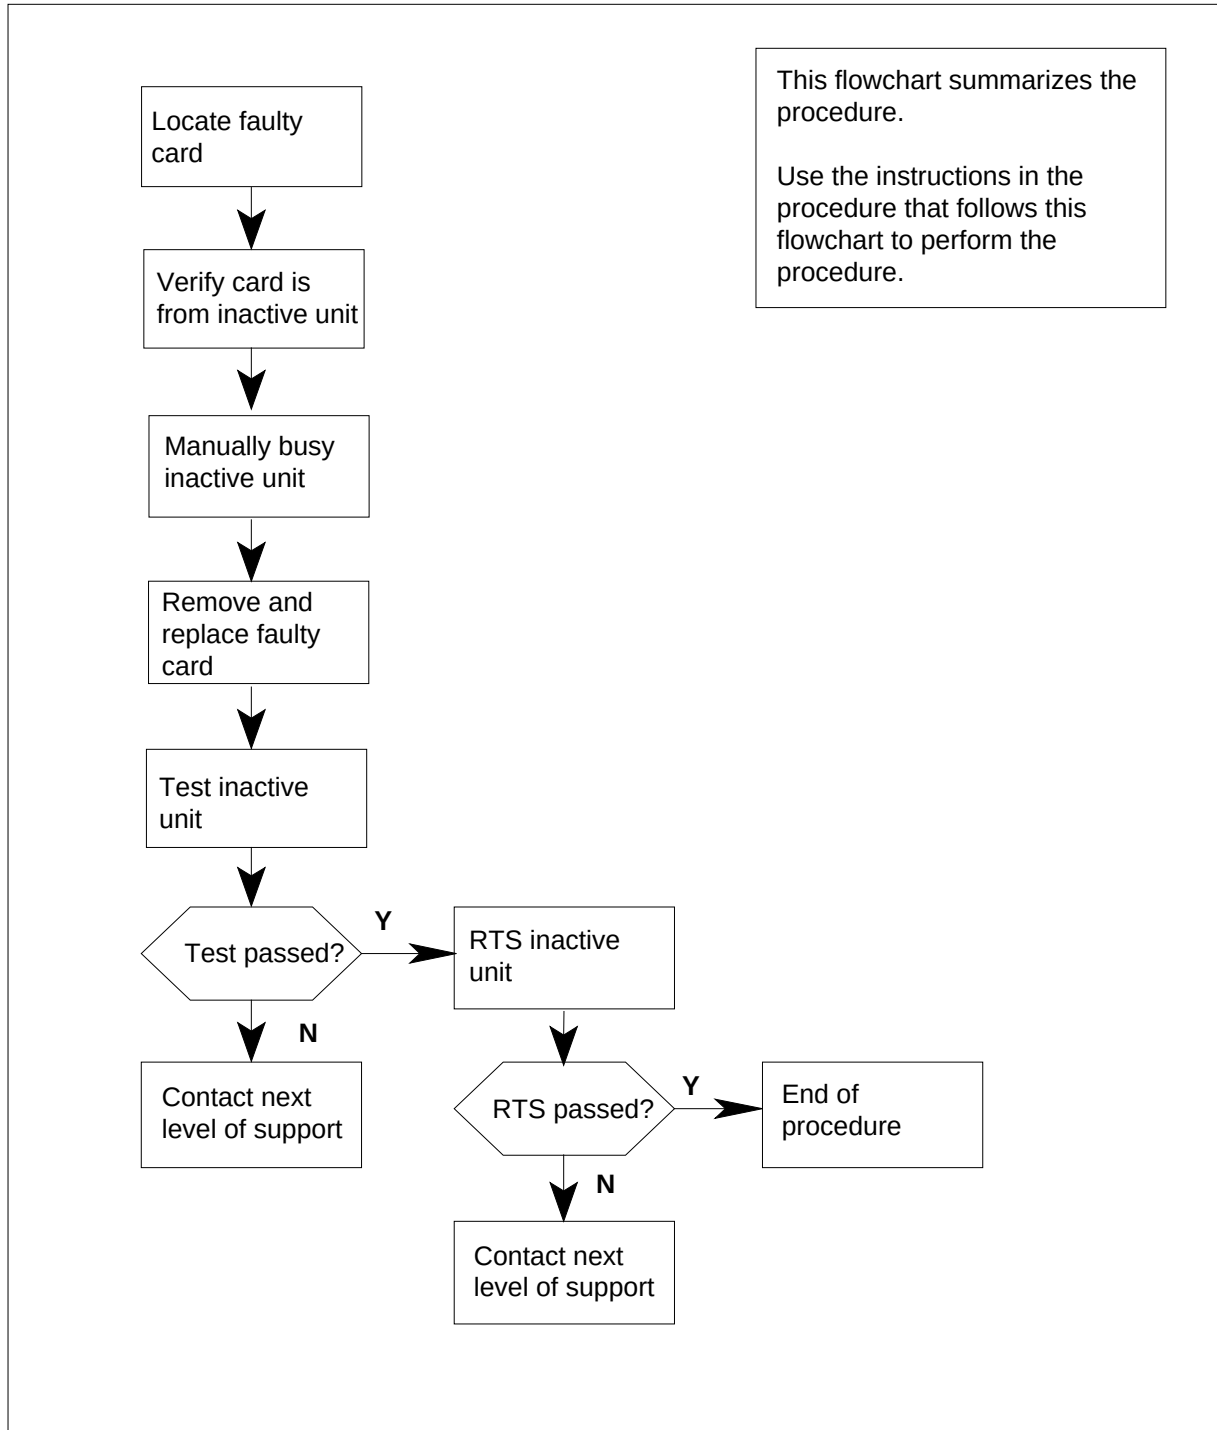

## NTMX82 in an RSC-S (PCM-30) Model B RCO2 (continued)

---

### Replacing an NTMX82 card in RSC-S RCO2

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



#### **CAUTION**

##### **Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX82 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal*

- 3 Ensure the PM level of the MAP display is currently displayed by typing  
**>MAPCI;MTC;PM;POST RCO2 rco2\_no**  
and pressing the Enter key.

*where*

**rco2\_no**

is the number of the RCO2 with the faulty card

*Example of a MAP display:*



NTMX82  
in an RSC-S (PCM-30) Model B RCO2 (continued)

| CM         | MS     | IOD   | Net  | PM         | CCS   | LNS  | Trks  | Ext | Appl |
|------------|--------|-------|------|------------|-------|------|-------|-----|------|
| .          | .      | .     | .    | 1RCO2      | .     | .    | .     | .   | .    |
| RCO2       |        | SysB  | ManB | OffL       | CBsy  | ISTb | InSv  |     |      |
| 0 Quit     | PM     | 0     | 0    | 2          | 0     | 2    | 25    |     |      |
| 2 Post_    | RCO2   | 0     | 0    | 0          | 0     | 1    | 1     |     |      |
| 3 ListSet  |        |       |      |            |       |      |       |     |      |
| 4          | RCO2   | 0     | ISTb | Links_00S: | CSide | 1,   | PSide | 1   |      |
| 5 TRNSL    | Unit0: | Inact | InSv |            |       |      |       |     |      |
| 6 TST      | Unit1: | Act   | InSv |            |       |      |       |     |      |
| 7 BSY      |        |       |      |            |       |      |       |     |      |
| 8 RTS      |        |       |      |            |       |      |       |     |      |
| 9 OffL     |        |       |      |            |       |      |       |     |      |
| 10 LoadPM_ |        |       |      |            |       |      |       |     |      |
| 11 Disp_   |        |       |      |            |       |      |       |     |      |
| 12 Next_   |        |       |      |            |       |      |       |     |      |
| 13         |        |       |      |            |       |      |       |     |      |
| 14 QueryPM |        |       |      |            |       |      |       |     |      |
| 15         |        |       |      |            |       |      |       |     |      |
| 16         |        |       |      |            |       |      |       |     |      |
| 17         |        |       |      |            |       |      |       |     |      |
| 18         |        |       |      |            |       |      |       |     |      |

- 4 By observing the MAP display, be sure that the card to be removed is in the inactive unit.

| If faulty card is in the | Do     |
|--------------------------|--------|
| active unit              | step 5 |
| inactive unit            | step 7 |

- 5 Switch the processing activity (SWACT) to the inactive unit by typing **>SWACT** and pressing the Enter key.
- Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 6 Confirm the system prompt by typing **>YES** and pressing the Enter key.
- After both units are in-service, proceed to the next step.

At the RCE frame

- 7 Place a sign on the active unit bearing the words “Active unit—Do not touch.” This sign should not be attached by magnets or tape.

## NTMX82

### in an RSC-S (PCM-30) Model B RCO2 (continued)

#### At the MAP terminal

- 8 Busy the inactive PM unit by typing

**>bsy unit unit\_no**

and pressing the Enter key.

where

**unit\_no**

is the number of the inactive RCO2 unit (unit 0 or 1)

When both units are in-service, proceed to the next step.

- 9 Display the C-side links associated with the DS-1 card by typing

**>TRNSL C**

and pressing the Enter key.

*Example of a MAP response:*

|        |        |       |               |         |     |
|--------|--------|-------|---------------|---------|-----|
| LINK 0 | PLGC 0 | 0;CAP | MS:STATUS OK  | MSGCOND | OPN |
| LINK 1 | PLGC 0 | 1;CAP | S:STATUS SBsy |         |     |
| LINK 2 | PLGC 0 | 2;CAP | MS:STATUS OK  | MSGCOND | OPN |
| LINK 3 | PLGC 0 | 3;CAP | S:STATUS OK   |         |     |
| LINK 4 | PLGC 0 | 4;CAP | S:STATUS OK   |         |     |
| LINK 5 | PLGC 0 | 5;CAP | S:STATUS SBsy |         |     |

#### If C-side links are

#### Do

faulty

step 11

not faulty

step 10

- 10 Display the P-side links associated with the DS-1 card by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

|        |          |        |                |         |     |
|--------|----------|--------|----------------|---------|-----|
| LINK 0 | RCO2 0 5 | 27;CAP | MS:STATUS OK   | MSGCOND | OPN |
| LINK 1 | RCO2 1 5 | 27;CAP | MS:STATUS SBsy | MSGCOND | CLS |
| LINK 2 | RCO2 0 7 | 47;CAP | MS:STATUS OK   |         |     |
| LINK 3 | RCO2 1 7 | 47;CAP | MS:STATUS OK   |         |     |
| LINK 4 | RCO2 0 5 | 50;CAP | MS:STATUS OK   | MSGCOND | OPN |
| LINK 5 | RCO2 1 5 | 50;CAP | MS:STATUS SBsy | MSGCOND | CLS |

#### If P-side links are

#### Do

faulty

step 12

not faulty

step 26

- 11 Post the host PM by typing

**>POST host\_pm host\_pm\_no**

## NTMX82

### in an RSC-S (PCM-30) Model B RCO2 (continued)

and pressing the Enter key.

where

**host\_pm**

is a PCM-30 line group controller (PLGC)

**host\_pm\_no**

is the number of the PLGC with the faulty card

*Example of a MAP display:*

| CM         | MS     | IOD | Net   | PM         | CCS   | Lns  | Trks  | Ext  | Appl |
|------------|--------|-----|-------|------------|-------|------|-------|------|------|
| .          | .      | .   | .     | 1RCO2      | .     | .    | .     | .    | .    |
| PLGC       |        |     | SysB  | ManB       | OffL  | CBsy | ISTb  | InSv |      |
| 0 Quit     | PM     |     | 0     | 0          | 1     | 0    | 4     | 12   |      |
| 2 Post_    | PLGC   |     | 0     | 0          | 2     | 0    | 2     | 9    |      |
| 3 ListSet  |        |     |       |            |       |      |       |      |      |
| 4          | PLGC   | 1   | ISTb  | Links_00S: | CSide | 0,   | PSide | 1    |      |
| 5 Trnsl_   | Unit0: |     | Act   | InSv       |       |      |       |      |      |
| 6 Tst_     | Unit1: |     | Inact | InSv       |       |      |       |      |      |
| 7 Bsy_     |        |     |       |            |       |      |       |      |      |
| 8 RTS_     |        |     |       |            |       |      |       |      |      |
| 9 OffL     |        |     |       |            |       |      |       |      |      |
| 10 LoadPM_ |        |     |       |            |       |      |       |      |      |
| 11 Disp_   |        |     |       |            |       |      |       |      |      |
| 12 Next    |        |     |       |            |       |      |       |      |      |
| 13 SwAct   |        |     |       |            |       |      |       |      |      |
| 14 QueryPM |        |     |       |            |       |      |       |      |      |
| 15         |        |     |       |            |       |      |       |      |      |
| 16         |        |     |       |            |       |      |       |      |      |
| 17 Perform |        |     |       |            |       |      |       |      |      |
| 18         |        |     |       |            |       |      |       |      |      |

- 12** Manually busy the links connected to the faulty card by typing

**>BSY LINK link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link associated with the faulty MX82 card

**Note 1:** Each NTMX82 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; or 6,7.

**Note 2:** To busy the other links associated with the RCO2, execute this step for each link until all links are busied.

## NTMX82 in an RSC-S (PCM-30) Model B RCO2 (continued)

*At the RCE frame*

13



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



### DANGER

#### Equipment damage


Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

14

After identifying the faulty link, use the following charts to determine which NTMX82 is to be removed by first identifying whether the link is a C-side or P-side link, then by matching the link number with the slot number and the packet number to the left of each respective table.

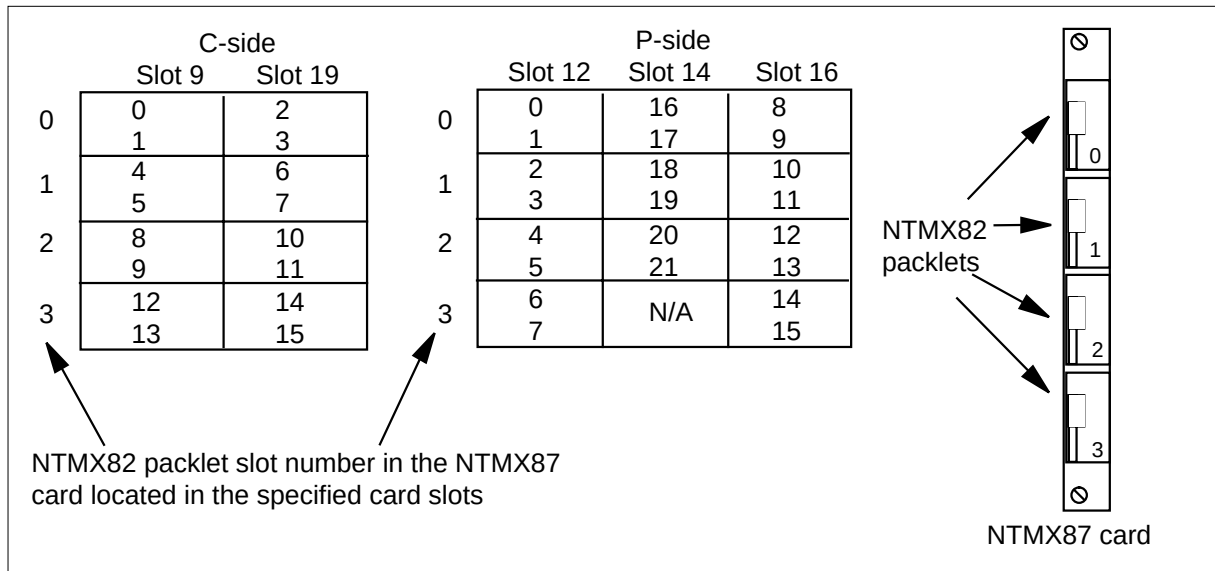

## NTMX82

### in an RSC-S (PCM-30) Model B RCO2 (continued)

Remove the NTMX82 card as described in the following steps:

- a Locate the packlet to be removed on the appropriate NTMX87 card slot.
  - b Open the locking lever on the packlet to be replaced and gently pull the card toward you until it clears the shelf.
  - c Ensure that the replacement card has the same PEC, including suffix, as the card you just removed.
- 15** Before inserting the replacement card ensure the switch settings are the same as on the card that was removed. The following table describes the PCM-30 DIP switch settings on the NTMX82. Set switch S2 positions 1 & 2 on to enable messaging.

| Port                                                                                  | Impedance | Input                                  | Output                                          |
|---------------------------------------------------------------------------------------|-----------|----------------------------------------|-------------------------------------------------|
| Even port                                                                             | 75 OHM    | Switch S3<br>pos 1,2, & 3 ON           | Switch S3<br>pos 4 ON<br>Switch S3<br>pos 5 OFF |
| Even port                                                                             | 120 OHM   | Switch S3<br>pos 1 ON<br>pos 2 & 3 OFF | Switch S3<br>pos 4 OFF<br>Switch S3<br>pos 5 ON |
| Odd port                                                                              | 75 OHM    | Switch S1<br>pos 1,2, & 3 ON           | Switch S1 pos 4<br>ON Switch S1<br>pos 5 OFF    |
| Odd port                                                                              | 120 OHM   | Switch S1<br>pos 1 ON<br>pos 2 & 3 OFF | Switch S1<br>pos 4 OFF<br>Switch S1<br>pos 5 ON |
| <b>Note:</b> Switch position 6 of both switches is not used and should be set to OFF. |           |                                        |                                                 |

- 16** Open the locking lever on the replacement packlet.
  - a Align the packlet with the slots in the shelf.
  - b Gently slide the packlet into the card slot in the NTMX87 card.
- 17** Seat and lock the packlet.
  - a Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
  - b Close the locking lever.

## NTMX82

### in an RSC-S (PCM-30) Model B RCO2 (continued)

---

- 18 Use the following information to determine what step to go to next in this procedure.

---

| If you entered this procedure from | Do      |
|------------------------------------|---------|
| alarm clearing procedures          | step 25 |
| other                              | step 19 |

---

**At the MAP terminal**

- 19 Test the busied network links from step 12 by typing

**>TST LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link that was manually busied in step 12

**Note 1:** This step must be performed for each link that is manually busied.

**Note 2:** To test the other links associated with the RCO2, execute the procedures in this step for each link until all links are tested.

---

| If the test of the link(s) | Do      |
|----------------------------|---------|
| passed                     | step 20 |
| failed                     | step 26 |

---

- 20 Return to service the P-side links by typing

**>RTS Link 0**

**and pressing the Enter key.**

**Note:** To RTS the other links associated with the RCO2, execute the procedures in this step for each link until all links are returned to service.

---

| If RTS | Do      |
|--------|---------|
| passed | step 21 |
| failed | step 26 |

---

- 21 Post the inactive RCO2 in which the NTMX82 card is located by typing

**>POST RCO2 rco2\_no**

**and pressing the Enter key.**

*where*

**rco2\_no**

is the number of the RCO2 associated with the faulty card

---

**NTMX82**  
**in an RSC-S (PCM-30) Model B RCO2 (end)**

---

- 22** Return the inactive RCO2 unit to service by typing

**>RTS UNIT unit\_no**

and pressing the Enter key.

where

**unit\_no**

is the number of the RCO2 unit posted in step 21

---

| If RTS | Do      |
|--------|---------|
| passed | step 23 |
| failed | step 26 |

---

- 23** Send any faulty cards for repair according to local procedure.

- 24** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 27.

- 25** Return to *Alarm Clearing Procedures* or other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 26** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.

- 27** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## NTMX87 in an RSC-M

---

### Application

Use this procedure to replace an NTMX87 circuit card in a Remote Switching Center Multi-access (RSC-M) main or extension (EXT) shelf.

**Note:** In this section this manual refers to RSC-M as RCO2 in the examples. When software outputs messages to the MAP terminal, software does not differentiate between the two types of RCO2.

| PEC    | Suffixes | Name               |
|--------|----------|--------------------|
| NTMX87 | AA       | Quad Frame Carrier |


### Common procedures

The common returning a card procedure is referenced in this procedure.

### Action

The following flowchart is a summary of the procedure. Use the instructions in the step-action procedure that follows the flowchart to replace the card.

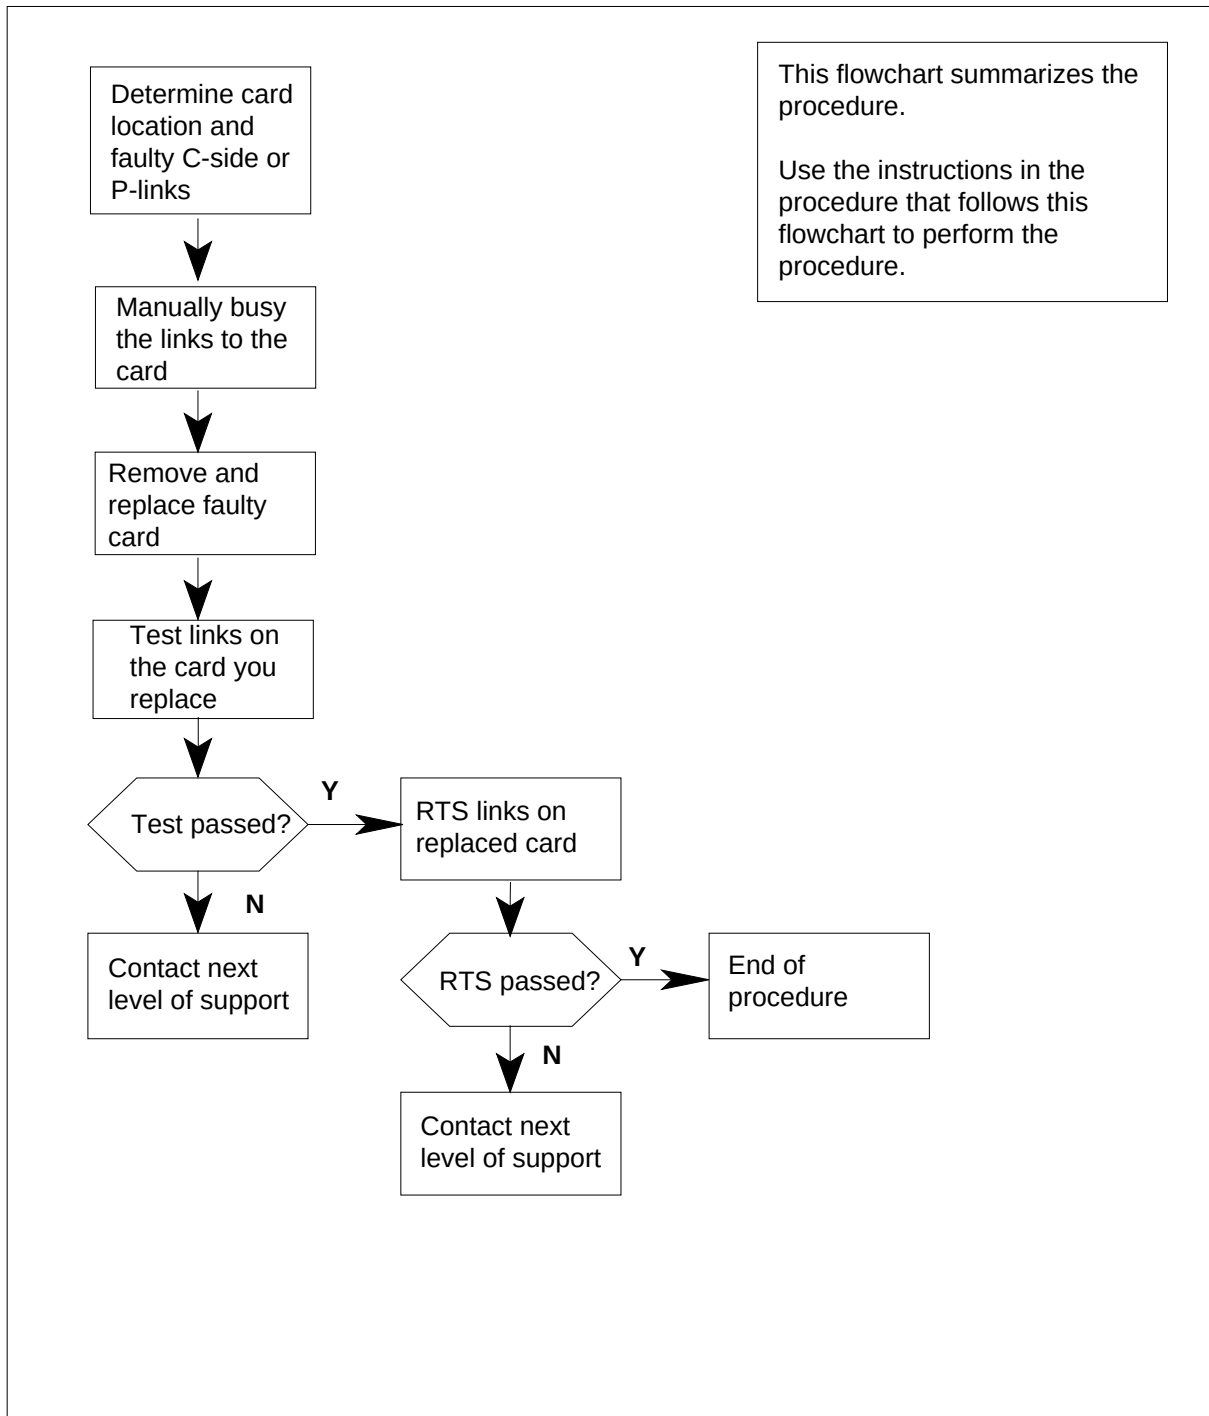

**NTMX87**  
**in an RSC-M (continued)****Summary of replacing an NTMX87 in an RSC-M**

## NTMX87 in an RSC-M (continued)

---

### Replacing an NTMX87 in an RSC-M

#### *At the MAP display*

- 1 Proceed only under the following conditions:
  - a step in a maintenance procedure directed you to this card replacement procedure
  - you are using the procedure to verify or to accept cards
  - your maintenance support group directed you to this procedure
- 2



#### **WARNING**

##### **Loss of service**

When you replace an NTMX87 circuit card in the RSC-M all links served by that card must be BSYed. All active calls on the affected links are lost. Make sure to perform this procedure only during periods of low traffic.

Obtain an NTMX87 replacement circuit card. The replacement circuit card must have the same product equipment code (PEC), including suffix, as the circuit card you must remove.

#### *At the MAP terminal*

- 3 To post the RSC-M/RCO2 with the defective card(s), type  
**>MAPCI;MTC;PM;POST RCO2 rco2\_no**  
and press the Enter key.  
*where*  
**rco2\_no**  
is the number of the RCO2 with the defective card(s)

*Example of a MAP response:*

## NTMX87 in an RSC-M (continued)

```

RC02 SysB ManB OffL CBsy ISTb InSv
0 Quit PM 0 0 2 0 2 25
2 Post_ RC02 0 0 0 0 1 1
3 ListSet
4 RC02 0 ISTb Links_00S: CSide 1, PSide 1
5 TRNSL Unit0: Inact ISTb
6 TST Unit1: Act InSv
7 BSY
8 RTS
9 OffL
10 LoadPM_
11 Disp_
12 Next_

```

- 4 To determine the location of the RC02 main or extension half shelf (left or right) that contains the circuit card you must replace, type

**>QUERYPM**

and press the Enter key.

*Example of a MAP display:*

```

PM Type: RC02 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname:KRI07BI1 EEPROM Load:MX77NG03
WARM SWACT is supported and available
RC02 0 is included in the REX schedule.
REX on RC02 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
RSC-M 00 C02 RSC-M 00 05 RC02: 000 MX85AA
RSC-M 00 C02 RSC-M 00 47 EXT:LEFT 01:13 MX86AA

```

- 5 To display any defective central side (C-side) links, type

**>TRNSL C**

and press the Enter key.

*Example of a MAP response:*

```

LINK 0 PLGC 0 0;CAP MS:STATUS OK MSGCOND OPN
LINK 1 PLGC 0 1;CAP S:STATUS SBsy
LINK 2 PLGC 0 2;CAP MS:STATUS OK MSGCOND OPN
LINK 3 PLGC 0 3;CAP S:STATUS OK
LINK 4 PLGC 0 4;CAP S:STATUS OK
LINK 5 PLGC 0 5;CAP S:STATUS SBsy

```

**If C-side links are**

**Do**

defective

step 7

## NTMX87 in an RSC-M (continued)

|   | If C-side links are                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Do     |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|   | not defective                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | step 6 |
| 6 | <p>To display the peripheral-side (P-side) links associated with the NTMX87 circuit card, type</p> <p><b>&gt;TRNSL P</b></p> <p>and press the Enter key.</p> <p><i>Example of a MAP response</i></p> <pre> Link 0:  REM1 11 0 0;Cap MS;Status:OK      ;MsgCond:OPN Link 1:  Carrier of Class - Trunk ;Status:OK Link 2:  Carrier of Class - Trunk ;Status:SBsy Link 3:  Carrier of Class - Trunk ;Status:SBsy Link 4:  Carrier of Class - Trunk ;Status:SBsy Link 5:  Carrier of Class - Trunk ;Status:OK Link 6:  Carrier of Class - Trunk ;Status:OK Link 7:  Carrier of Class - Trunk ;Status:OK Link 8:    REM1 11 1 0;Cap MS;Status:OK;    MsgCond:OPN </pre> |        |

The following table shows the P-side link configuration for an RSC-M cabinet. The cabinet has three RCO2 main shelves and two extension half shelves.

**Note 1:** A RCO2 cabinet can include other configurations like two RCO2 main shelves and four extension half shelves. Consult office administration or review office records for P-side link configurations other than the configurations mentioned in the following table.

**Note 2:** If the RCO2 has an associated extension half shelf, consult office administration or review office records for the P-side link configuration.

**Note 3:** NTMX82 packets number from 0 to 3 starting at the top of each NTMX87 circuit card.

### RCO2 P-side link connections (Sheet 1 of 2)

| Card Location             | MX87 Slot No. | Links for MX82 Card 0 | Links for MX82 Card 1 | Links for MX82 Card 2 | Links for MX82 Card 3 |
|---------------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|
| RCO2 main, shelf, pos. 05 | 12            | 0, 1                  | 2, 3                  | 4, 5                  | 6, 7                  |
|                           | 16            | 8, 9                  | 10, 11                | 12, 13                | 14, 15                |
|                           | 14            | 16, 17                | 18, 19                | 20, 21                | 22, 23                |
| Left ext. half shelf      | 4             | 24, 25                | 26, 27                | 28, 29                | 30, 31                |
|                           | 6             | 32, 33                | 34, 35                | 36, 37                | 38, 39                |

## NTMX87 in an RSC-M (continued)

### RCO2 P-side link connections (Sheet 2 of 2)

| Card Location                          | MX87<br>Slot No. | Links for<br>MX82<br>Card 0 | Links for<br>MX82<br>Card 1 | Links for<br>MX82<br>Card 2 | Links for<br>MX82<br>Card 3 |
|----------------------------------------|------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
|                                        | 8                | 40, 41                      | 42, 43                      | 44, 45                      | 46, 47                      |
| RCO2 main shelf, pos. 19<br>(optional) | 12               | 0, 1                        | 2, 3                        | 4, 5                        | 6, 7                        |
|                                        | 16               | 8, 9                        | 10, 11                      | 12, 13                      | 14, 15                      |
|                                        | 14               | 16, 17                      | 18, 19                      | 20, 21                      | 22, 23                      |
| Right ext. half shelf                  | 19               | 40, 41                      | 42, 43                      | 44, 45                      | 46, 47                      |
|                                        | 21               | 32, 33                      | 34, 35                      | 36, 37                      | 38, 39                      |
|                                        | 23               | 24, 25                      | 26, 27                      | 28, 29                      | 30, 31                      |
| Prov. RCO2 shelf, pos. 33              | 12               | 0, 1                        | 2, 3                        | 4, 5                        | 6, 7                        |
|                                        | 16               | 8, 9                        | 10, 11                      | 12, 13                      | 14, 15                      |
|                                        | 14               | 16, 17                      | 18, 19                      | 20, 21                      | 22, 23                      |

**Note:** Go to step 10.

- 7 To post the host peripheral module (PM), type

**>POST host\_pm host\_pm\_no**

and press the Enter key.

where

**host\_pm**

is a PCM-30 line group controller (PLGC)

**host\_pm\_no**

is the number of the PLGC connected to the defective card

*Example of a MAP display:*

NTMX87  
in an RSC-M (continued)

| CM         | MS     | IOD | Net   | PM         | CCS   | Lns  | Trks  | Ext  | Appl |
|------------|--------|-----|-------|------------|-------|------|-------|------|------|
| .          | .      | .   | .     | 1RC02      | .     | .    | .     | .    | .    |
| PLGC       |        |     | SysB  | ManB       | OffL  | CBsy | ISTb  | InSv |      |
| 0 Quit     | PM     |     | 0     | 0          | 1     | 0    | 4     | 12   |      |
| 2 Post_    | PLGC   |     | 0     | 0          | 2     | 0    | 2     | 9    |      |
| 3 ListSet  |        |     |       |            |       |      |       |      |      |
| 4          | PLGC   | 1   | ISTb  | Links_00S: | CSide | 0,   | PSide | 1    |      |
| 5 Trnsl_   | Unit0: |     | Act   | InSv       |       |      |       |      |      |
| 6 Tst_     | Unit1: |     | Inact | InSv       |       |      |       |      |      |
| 7 Bsy_     |        |     |       |            |       |      |       |      |      |
| 8 RTS_     |        |     |       |            |       |      |       |      |      |
| 9 OffL     |        |     |       |            |       |      |       |      |      |
| 10 LoadPM_ |        |     |       |            |       |      |       |      |      |
| 11 Disp_   |        |     |       |            |       |      |       |      |      |
| 12 Next    |        |     |       |            |       |      |       |      |      |
| 13 SwAct   |        |     |       |            |       |      |       |      |      |
| 14 QueryPM |        |     |       |            |       |      |       |      |      |
| 15         |        |     |       |            |       |      |       |      |      |
| 16         |        |     |       |            |       |      |       |      |      |
| 17 Perform |        |     |       |            |       |      |       |      |      |
| 18         |        |     |       |            |       |      |       |      |      |

- 8 To display the P-side links associated with the NTMX87 card, type  
**>TRNSL P**  
and press the Enter key.


*Example of a MAP response*

|        |      |   |   |        |                |             |
|--------|------|---|---|--------|----------------|-------------|
| LINK 0 | RC02 | 0 | 5 | 27;CAP | MS:STATUS OK   | MSGCOND OPN |
| LINK 1 | RC02 | 1 | 5 | 27;CAP | MS:STATUS SBsy | MSGCOND CLS |
| LINK 2 | RC02 | 0 | 7 | 47;CAP | MS:STATUS OK   |             |
| LINK 3 | RC02 | 1 | 7 | 47;CAP | MS:STATUS OK   |             |
| LINK 4 | RC02 | 0 | 5 | 50;CAP | MS:STATUS OK   | MSGCOND OPN |
| LINK 5 | RC02 | 1 | 5 | 50;CAP | MS:STATUS SBsy | MSGCOND CLS |

- 9 After you identify the defective C-side link, determine which NTMX87 to remove by using the following chart. Match the link number with the slot number and the packet number to the left of each correct table.

## NTMX87 in an RSC-M (continued)

### RCO2 C-side link connections

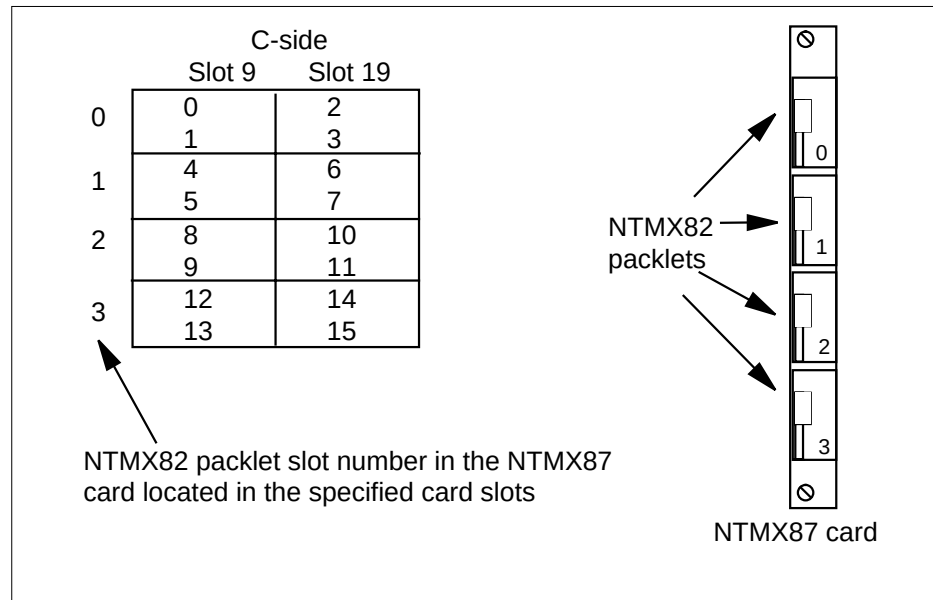

- 10** Record the RCO2 number, shelf location, slot number, and numbers of the associated links for the circuit card you replace.

- 11** To manually busy (ManB) the links that connect to the defective NTMX87 circuit card, type

**>BSY LINK link\_no**

and press the Enter key.

where

**link\_no**

is the number of the link associated with the defective NTMX87 circuit card

**Note 1:** Each NTMX87 circuit card has eight links associated with it. Each link must be ManB. Possible link number pairs are as follows: 0 to 7; 8 to 15; 16 to 23.

**Note 2:** To busy the other links for the RCO2, perform this step for each link until all links are busy.

## NTMX87 in an RSC-M (continued)

---

*At the cabinet*

12



### **WARNING**

#### **Static electricity damage**

When you handle circuit cards, make sure wear a wrist strap that connects to the wrist strap grounding point. The grounding point is on the left side of the modular supervisory panel (MSP) of the RCO2. The wrist strap protects the equipment against damage caused by static electricity.



### **DANGER**

#### **Equipment damage**

Take the following precautions when you remove or insert a card:


1. Make sure you do not apply direct pressure to the components.
2. Make sure you do not force the cards into the slots.

Put on a wrist strap.

- 13** Remove the NTMX82 packlet(s) as described in the following steps:
- a** Locate the packlet you must remove on the correct NTMX87 circuit card slot.
  - b** Open the locking lever on the packlet you must replace. Carefully pull the circuit card toward you until the circuit card clears the shelf.
  - c** Make sure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- 14** Use the T9908 wrist grounding strap and a T1324 screwdriver to remove the NTMX87 quad frame carrier circuit card.



**NTMX87**  
**in an RSC-M (continued)**

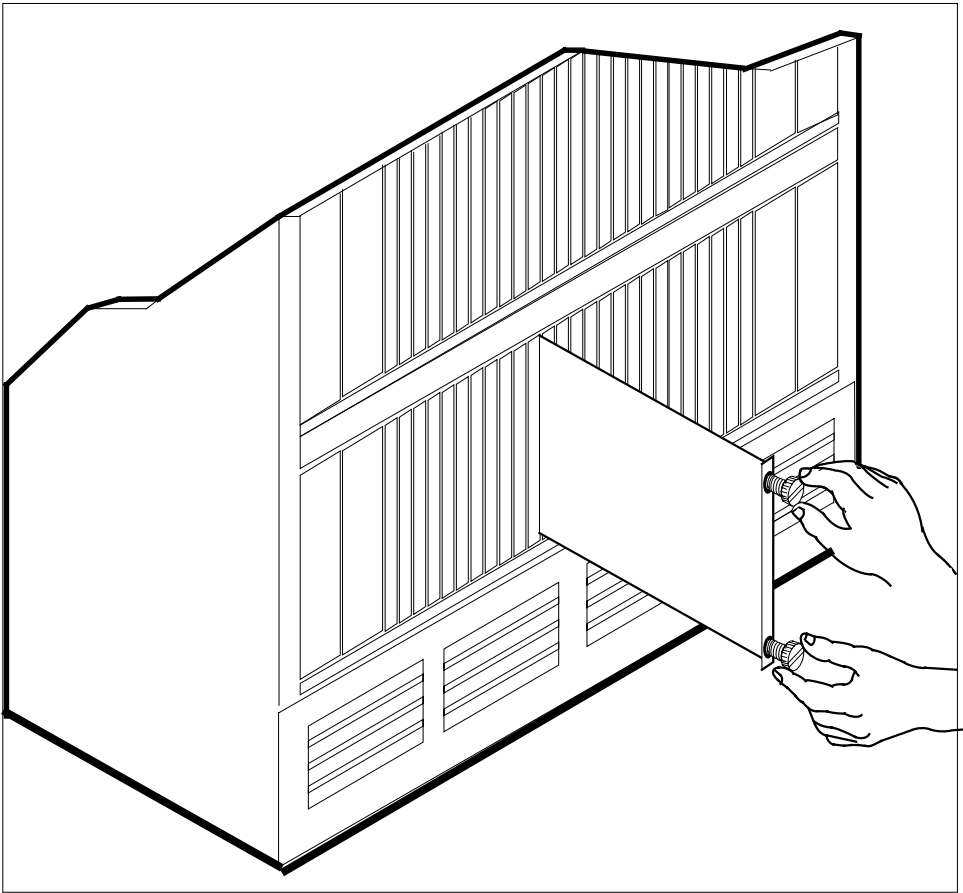

- 15** Before you insert the replacement NTMX82 circuit card, make sure the switch settings are identical to the switch settings on the circuit card you removed. The next table describes the PCM30 DIP switch settings on the NTMX82 circuit card.

**NTMX82 switch settings (Sheet 1 of 2)**

| Port                                                              | Impedance | Output                                            |
|-------------------------------------------------------------------|-----------|---------------------------------------------------|
| Even port                                                         | 75 OHM    | Switch S3 pos 1, 2, 3, and 4 ON , pos 5 and 6 OFF |
| Even port                                                         | 120 OHM   | Switch S3 pos 1 and 5 ON, pos 2, 3, 4, and 6 OFF  |
| <b>Note:</b> Set switch S2 positions 1 & 2 ON to allow messaging. |           |                                                   |

## NTMX87 in an RSC-M (continued)

### NTMX82 switch settings (Sheet 2 of 2)

| Port                                                              | Impedance | Output                                            |
|-------------------------------------------------------------------|-----------|---------------------------------------------------|
| Odd port                                                          | 75 OHM    | Switch S1 pos 1, 2, 3, and 4 ON , pos 5 and 6 OFF |
| Odd port                                                          | 120 OHM   | Switch S1 pos 1 and 5 ON, pos 2, 3, 4, and 6 OFF  |
| <b>Note:</b> Set switch S2 positions 1 & 2 ON to allow messaging. |           |                                                   |

- 16** Open the locking lever on the replacement packlet.
- a** Align the packlet with the slots in the shelf.
  - b** Carefully slide the packlet into the circuit card slot in the NTMX87 circuit card.
- 17** Seat and lock the packlet.
- a** Use your fingers to push on the upper and lower edges of the faceplate of the packlet. Make sure the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 18** Insert and secure the new NTMX87 quad frame carrier card. Remove wrist strap.
- 19** Use the following information to determine the next step in this procedure.
- | If you entered this procedure from | Do      |
|------------------------------------|---------|
| alarm clearing procedures          | step 20 |
| other                              | step 21 |
- 20** Return to the procedure that directed you to this procedure. At the point where the system produced a defective card list, identify the next defective card on the list. Go to the correct card replacement procedure for that card in this manual.

### *At the MAP terminal*

- 21** To test the busied links from step, type
- >TST LINK link\_no**
- and press the Enter key.
- where

## NTMX87 in an RSC-M (end)

**link\_no**

is the number of the link ManB in step 11

**Note 1:** Perform this step for each link ManB.

**Note 2:** To test the other links associated with the RCO2, execute the procedures in this step for each link. Continue until all links are tested.

| If the test of the link(s) | Do      |
|----------------------------|---------|
| passed                     | step 22 |
| failed                     | step 25 |

**22** To return to service (RTS) the links, type

**>RTS link\_number**

and press the Enter key.

where

**link\_number**

is the number of the link tested in step 21

**Note:** To RTS the other links associated with the RCO2, execute the procedures in this step for each link. Continue until all links are RTS.

| If RTS              | Do      |
|---------------------|---------|
| passed on all links | step 23 |
| failed              | step 25 |

**23** Go to the common returning a card procedure in this document.

**24** You have completed this procedure. Remove the sign from the active unit. Return to the maintenance procedure that directed you to this card replacement procedure. Continue as directed.

**25** Contact the personnel responsible for higher level support for additional help to replace this card.

## **NTMX87 in an RSC RCC2**

---

### **Application**

Use this procedure to replace an NTMX87 card in an RSC RCC2.


| PEC    | Suffixes | Name                       |
|--------|----------|----------------------------|
| NTMX87 | AA, AB   | Quad Frame Carrier         |
|        | BA       | Penta DS-1 Packlet Carrier |

### **Common procedures**

None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

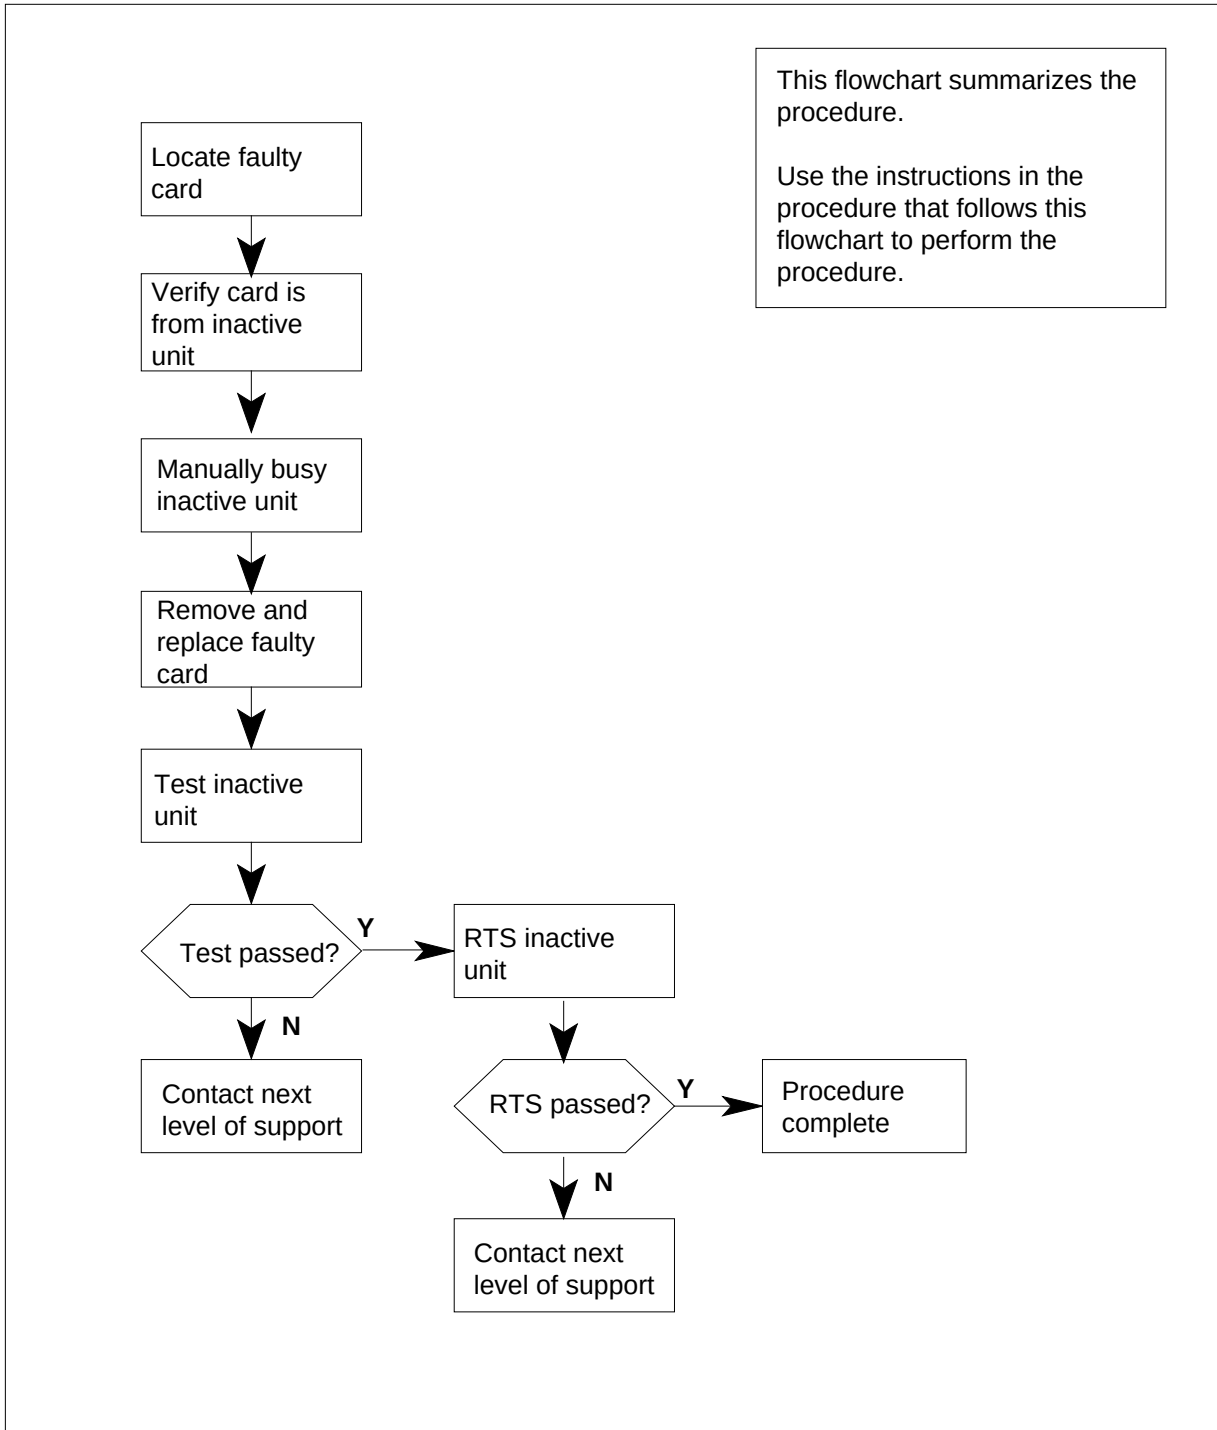**NTMX87**  
**in an RSC RCC2 (continued)****Summary of card replacement procedure for an NTMX87 card in RSC RCC2**

## NTMX87 in an RSC RCC2 (continued)

---

### Replacing an NTMX87 card in RSC RCC2

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



#### **CAUTION**

Several configurations of the NTMX87 carrier card are detailed in this procedure.

Be sure you are using the steps for the configuration of your RCC2, such as a single or dual RCC2 (DRCC2), main or extension shelf, or links versus carrier trunks.



#### **CAUTION**

##### **Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX87 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal*

- 3 Ensure the PM level of the MAP display is currently displayed by typing

**>MAPCI;MTC;PM;POST RCC2 rcc2\_no**

and pressing the Enter key.

*where*

**rcc2\_no**

is the number of the RCC2 with the faulty card

*Example of a MAP display:*

## NTMX87 in an RSC RCC2 (continued)

| CM         | MS     | IOD   | Net  | PM         | CCS   | LNS      | Trks | Ext | Appl |
|------------|--------|-------|------|------------|-------|----------|------|-----|------|
| .          | .      | .     | .    | 1RCC2      | .     | .        | .    | .   | .    |
| RCC2       |        | SysB  | ManB | OffL       | CBsy  | ISTb     | InSv |     |      |
| 0 Quit     | PM     | 0     | 0    | 2          | 0     | 2        | 25   |     |      |
| 2 Post_    | RCC2   | 0     | 0    | 0          | 0     | 1        | 1    |     |      |
| 3 ListSet  |        |       |      |            |       |          |      |     |      |
| 4          | RCC2   | 0     | ISTb | Links_00S: | CSide | 1, PSide | 1    |     |      |
| 5 TRNSL    | Unit0: | Inact | InSv |            |       |          |      |     |      |
| 6 TST      | Unit1: | Act   | InSv |            |       |          |      |     |      |
| 7 BSY      |        |       |      |            |       |          |      |     |      |
| 8 RTS      |        |       |      |            |       |          |      |     |      |
| 9 OffL     |        |       |      |            |       |          |      |     |      |
| 10 LoadPM_ |        |       |      |            |       |          |      |     |      |
| 11 Disp_   |        |       |      |            |       |          |      |     |      |
| 12 Next_   |        |       |      |            |       |          |      |     |      |
| 13         |        |       |      |            |       |          |      |     |      |
| 14 QueryPM |        |       |      |            |       |          |      |     |      |
| 15         |        |       |      |            |       |          |      |     |      |
| 16         |        |       |      |            |       |          |      |     |      |
| 17         |        |       |      |            |       |          |      |     |      |
| 18         |        |       |      |            |       |          |      |     |      |

- 4 Display and record the C-side link status of the posted RCC2 associated with the faulty NTMX87 carrier card by typing

**>TRNSL C**

and pressing the Enter key.

*Example of a MAP response*

```
LINK 0 LTC 0 0;CAP MS: STATUS SysB MSGCOND CLS RESTRICT
LINK 1 LTC 0 1;CAP S: STATUS SysB
LINK 2 LTC 0 2;CAP MS: STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 LTC 0 3;CAP S: STATUS OK
LINK 4 LTC 0 4;CAP S: STATUS SysB
LINK 5 LTC 0 5;CAP S: STATUS SysB
```

- 5 Display and record the P-side link status of the posted RCC2 associated with the faulty NTMX87 carrier card by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

## NTMX87

### in an RSC RCC2 (continued)

```

LINK 1 Carrier of Class - Trunk ;Status;OK
LINK 2 Carrier of Class - Trunk ;Status;OK
LINK 3 Carrier of Class - Trunk ;Status;OK
LINK 10 DCH 6; Status :OK
LINK 13 DCH 7; Status :OK
LINK 17 DCH 4; Status :OK
LINK 22 RMM 6 0;CAP MS;Status OK MSGCOND OPN
LINK 24 LCME RSCS 00 0 0;CAP MS;Status OK MSGCOND OPN
LINK 25 LCME RSCS 00 0 1;CAP MS;Status OK MSGCOND OPN
LINK 26 LCME RSCS 00 0 2;CAP S;Status OK

```

- 6 By observing the MAP display, be sure the card that is to be removed is in the inactive unit.

#### At the RSCE frame

- 7 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

| If faulty card is | Do      |
|-------------------|---------|
| C-side of RCC2    | step 8  |
| P-side faulty     | step 14 |

#### At the MAP terminal

- 8 Busy the inactive PM unit by typing

**>bsy unit unit\_no**

and pressing the Enter key.

where

**unit\_no**

is the number of the inactive RCC2 unit (unit 0 or 1)

- 9 Post the host PM by typing

**>POST host\_pm host\_pm\_no**

and pressing the Enter key.

where

**host\_pm**

is either a line group controller (LGC), a line group controller with ISDN (LGCI), a line trunk controller (LTC), or a line trunk controller with ISDN (LTCI)

**host\_pm\_no**

is the number of either an LGC, LGCI, LTC, or LTCI

*Example of a MAP display:*



## NTMX87 in an RSC RCC2 (continued)

| CM         | MS     | IOD | Net   | PM         | CCS   | Lns  | Trks  | Ext  | Appl |
|------------|--------|-----|-------|------------|-------|------|-------|------|------|
| .          | .      | .   | .     | 1RCC2      | .     | .    | .     | .    | .    |
| LTC        |        |     | SysB  | ManB       | OffL  | CBsy | ISTb  | InSv |      |
| 0 Quit     | PM     |     | 0     | 0          | 1     | 0    | 4     | 12   |      |
| 2 Post_    | LTC    |     | 0     | 0          | 2     | 0    | 2     | 9    |      |
| 3 ListSet  |        |     |       |            |       |      |       |      |      |
| 4          | LTC    | 1   | ISTb  | Links_00S: | CSide | 0,   | PSide | 1    |      |
| 5 Trnsl_   | Unit0: |     | Act   | InSv       |       |      |       |      |      |
| 6 Tst_     | Unit1: |     | Inact | InSv       |       |      |       |      |      |
| 7 Bsy_     |        |     |       |            |       |      |       |      |      |
| 8 RTS_     |        |     |       |            |       |      |       |      |      |
| 9 OffL     |        |     |       |            |       |      |       |      |      |
| 10 LoadPM_ |        |     |       |            |       |      |       |      |      |
| 11 Disp_   |        |     |       |            |       |      |       |      |      |
| 12 Next    |        |     |       |            |       |      |       |      |      |
| 13 SwAct   |        |     |       |            |       |      |       |      |      |
| 14 QueryPM |        |     |       |            |       |      |       |      |      |
| 15         |        |     |       |            |       |      |       |      |      |
| 16         |        |     |       |            |       |      |       |      |      |
| 17 Perform |        |     |       |            |       |      |       |      |      |
| 18         |        |     |       |            |       |      |       |      |      |

- 10** Display the host peripherals P-side links associated with the RCC2 by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

```
LINK 0 RCC2 0 0;CAP MS:STATUS SysB MSGCOND CLS RESTRICT
LINK 1 RCC2 0 1;CAP S:STATUS SBsy
LINK 2 RCC2 0 2;CAP MS:STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 RCC2 0 3;CAP S:STATUS OK
LINK 4 RCC2 0 4;CAP S:STATUS SysB
LINK 5 RCC2 0 5;CAP S:STATUS Sysb
```

- 11** Manually busy the links connected to the faulty NTMX87 card by typing

**>BSY LINK link\_no**

and pressing the Enter key.

*where*

**link\_no**

is the number of the link associated with the faulty NTMX87 card


**Note 1:** All provisioned links in the slot must be busied.

**Note 2:** Reference the chart in step 12 for the RCC2 C-side link-to-slot assignments.

## NTMX87 in an RSC RCC2 (continued)

### At the RCE frame

- 12 Use the following charts to determine which NTMX87 card is to be removed by matching the provisioned link number with the slot number and the packet number to the left of each respective table.

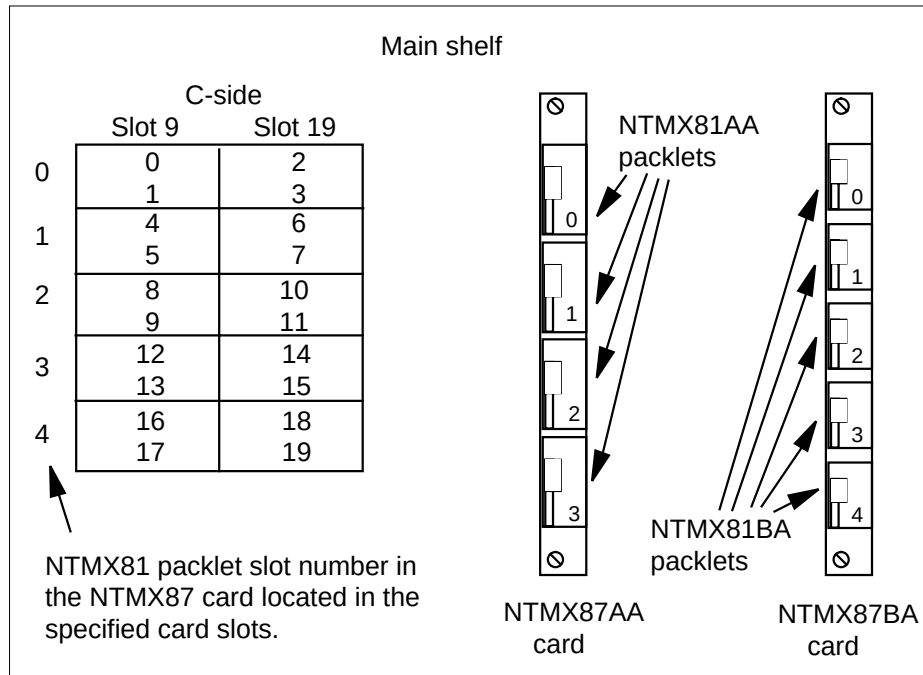

13



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Remove the NTMX81 packet as described in the following steps:

- a Locate the NTMX81 packet to be removed on the appropriate NTMX87 carrier card slot.
- b Open the locking lever on the NTMX81 packet and gently pull the packet toward you until it clears the shelf.
- c Ensure the NTMX81 packets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 carrier card.

## NTMX87 in an RSC RCC2 (continued)

d Go to step 30.

### **At the MAP terminal**

- 14** Determine if the RCC2 is in a single or dual configuration by typing

**>POST RCC2 rcc2\_no ;IRLINK**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the faulty NTMX87 card

**Note:** If the posted RCC2 is in a single RCC2 configuration, the system will respond with the following message:  
NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

| <b>If the RCC2 is in a</b> | <b>Do</b> |
|----------------------------|-----------|
| single configuration       | step 15   |
| dual configuration         | step 28   |

- 15** Determine if P-side ports are links or carrier trunks by observing the information obtained in step 5.

| <b>If P-side port is</b> | <b>Do</b> |
|--------------------------|-----------|
| links                    | step 16   |
| trunks                   | step 18   |

- 16** Manually busy all provisioned links connected to the faulty NTMX87 circuit card by typing

**>bsy link link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link associated with the faulty NTMX87 circuit card

**Note 1:** Each NTMX81 card has two links, and each link must be manually busied. Possible link pairs are 0 and 1, 2 and 3, 4 and 5, 6 and 7. This pair relationship continues throughout all 54 P-side links.

**Note 2:** Reference the charts in steps 24 and 26 for P-side link-to-slot assignments. All provisioned links in the slot must be busied.

## NTMX87 in an RSC RCC2 (continued)

- 17** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the faulty NTMX87 is on the | Do      |
|--------------------------------|---------|
| main shelf                     | step 24 |
| extension shelf                | step 26 |

- 18** Access the TRKS;TTP MAP display level, and busy the trunks assigned to the P-side carriers associated with the faulty NTMX87 by typing

**>TRKS;TTP;POST D RCC2 rcc2\_no carrier\_no**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

*Example of a MAP response*

```
LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED
```

```
POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCC2 0 1 WADEOUT796 11 LO
```

- 19** Busy the trunks associated with the faulty NTMX87 circuit card by typing

**>BSY ALL**

and pressing the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** To busy other carriers associated with the faulty NTMX87 circuit card, reference the link-to-slot assignment charts in steps 24 and 26.

- 20** Installation busy all the trunks to prevent carrier alarms by typing

**>BSY INB ALL**

and pressing the Enter key.

- 21** Access the CARRIER level and post the P-side carriers associated with the faulty NTMX87 circuit card by typing

**>CARRIER;POST RCC2 rcc2\_no carrier\_no**

and pressing the Enter key.

## NTMX87 in an RSC RCC2 (continued)

where

**rcc2\_no**

is the number of the RCC2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.

- 22** Busy and offline the P-side carriers associated with the faulty NTMX87 circuit card by typing

**>BSY carrier\_no ;OFFL carrier\_no**

and pressing the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.


- 23** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| <b>If the faulty NTMX87 is on the</b> | <b>Do</b> |
|---------------------------------------|-----------|
| main shelf                            | step 24   |
| extension shelf                       | step 26   |

### **At the RSCE frame**

- 24** Use the following figure to determine slot assignments on the P-side of the main shelf.

## NTMX87 in an RSC RCC2 (continued)

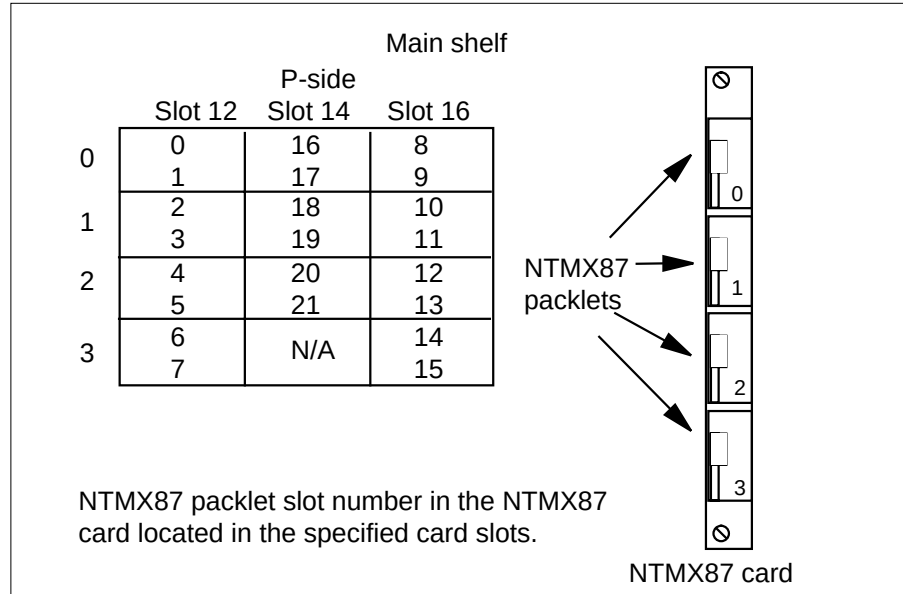

25



### **DANGER**

#### **Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.


Remove the NTMX81 packlet as described in the following steps:

- a Locate the NTMX81 packlet to be removed on the appropriate NTMX87 carrier card slot.
- b Open the locking lever on the NTMX81 packlet and gently pull the packlet toward you until it clears the shelf.
- c Ensure the NTMX81 packlets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 carrier card.
- d Go to step 30.

### **At the RSCE frame**

- 26 Determine which side of the extension shelf the faulty NTMX87 circuit card is located by referencing field SIDE of table RCCINV.

**NTMX87**  
**in an RSC RCC2 (continued)**

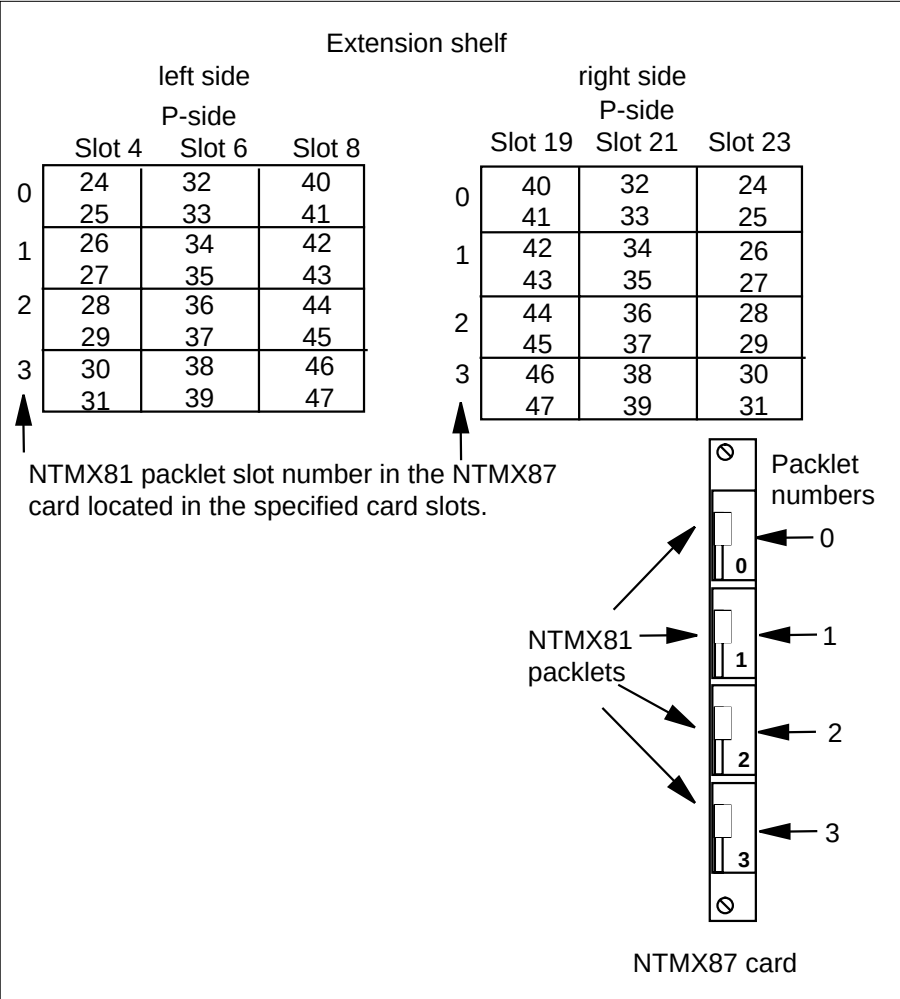

27



**DANGER**  
**Static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

- Remove the NTMX81 packet as described in the following steps:
- a** Locate the NTMX81 packet to be removed on the appropriate NTMX87 carrier card slot.

- [illegible]

- Note 2:** For link-to-slot assignments, reference step 24 for the main shelf, and step 26 for the extension shelf.



---

**NTMX87**  
**in an RSC RCC2** (continued)

---

*At the RSCE frame*

30



**DANGER**

**Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.



**DANGER**

**Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

31

Using the T9908 wrist grounding strap and a T1324 screwdriver, remove the NTMX87 carrier circuit card. Insert the new carrier card and secure.

## NTMX87 in an RSC RCC2 (continued)

---

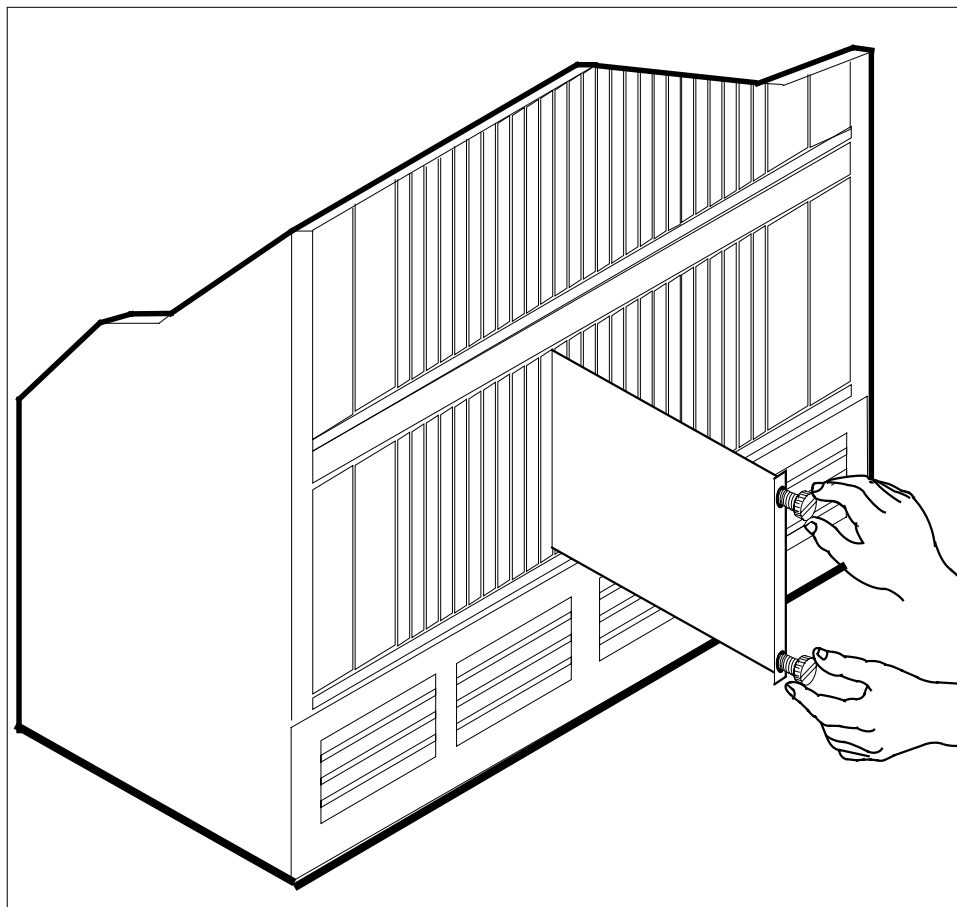

- 32** Replace the NTMX81 packlets previously removed. Align the packlet with the slots in the shelf and gently slide the packlet into the circuit card slot in the NTMX87 circuit card.
- 33** Seat and lock the packlet.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 34** Use the following information to determine what step to go to next in this procedure.

---

| <b>If you entered this procedure from</b> | <b>Do</b> |
|-------------------------------------------|-----------|
| alarm clearing procedures                 | step 51   |
| other                                     | step 35   |

---

## NTMX87 in an RSC RCC2 (continued)

- 35** Use the following information to determine what step to go to next in this procedure.

| <b>If you entered this section of the procedure from</b>    | <b>Do</b> |
|-------------------------------------------------------------|-----------|
| step 13 for a single RCC2 with C-side links affected        | step 36   |
| step 25 or 27 for an RCC2 with P-side trunks affected       | step 44   |
| step 25 or 27, for a single RCC2 with P-side links affected | step 40   |
| step 29 for a DRCC2 with irlinks affected                   | step 42   |

### ***At the MAP terminal***

- 36** Test the busied network links from step 11 by typing

**>TST LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link associated with the new NTMX87 carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCC2, execute this step for each link until all links are tested.

| <b>If TST</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 37   |
| failed        | step 52   |

- 37** Return to service the P-side links by typing

**>RTS LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link manually busied in step 11

**Note 1:** This step must be performed for each link that is manually busied.

## NTMX87 in an RSC RCC2 (continued)

**Note 2:** To RTS the other links associated with the RCC2, execute the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 38 |
| failed | step 52 |

- 38** Post the inactive RCC2 in which the NTMX87 card is located by typing  
**>POST RCC2 rcc2\_no**  
 and pressing the Enter key.  
*where*

**rcc2\_no**  
 is the number of the RCC2 associated with the faulty card

- 39** Return the inactive RCC2 unit to service by typing  
**>RTS UNIT unit\_no**  
 and pressing the Enter key.  
*where*

**unit\_no**  
 is the number of the RCC2 unit posted in step 38

| If RTS | Do      |
|--------|---------|
| passes | step 49 |
| fails  | step 52 |

### **At the MAP terminal**

- 40** Test the busied links from step 16 by typing  
**>TST LINK link\_no**  
 and pressing the Enter key.  
*where*

**link\_no**  
 is the number of the link associated with the new NTMX87 carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCC2, execute this step for each link until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 41 |
| failed | step 52 |

## NTMX87 in an RSC RCC2 (continued)

- 41** Return to service the P-side links by typing

**>RTS LINK link\_no**

and pressing the Enter key.

*where*

**link\_no**

is the number of the link manually busied in step 11

**Note 1:** This step must be performed for each link that is manually busied.

**Note 2:** To RTS the other links associated with the RCC2, execute the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 49 |
| failed | step 52 |

### ***At the MAP terminal***

- 42** Test the IRLINKS by typing

**>TST irlink\_no**

**and pressing the Enter key.**

*where*

**irlink\_no**

is the number of the link busied in step 29

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other irlinks associated with the RCC2, execute this step for each irlink until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 43 |
| failed | step 52 |

- 43** Return to service the IRLINKS by typing

**>RTS irlink\_no**

and pressing the Enter key.

*where*

**irlink\_no**

is the number of the link manually busied in step 29

**Note 1:** This step must be performed for each irlink that is manually busied.

## NTMX87 in an RSC RCC2 (continued)

**Note 2:** To RTS the other links associated with the RCC2, execute this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 49 |
| failed | step 52 |

### At the MAP terminal

- 44** Busy and return to service P-side carriers that were offlined in step 22 by typing

**>BSY carrier\_no; RTS carrier\_no**

and pressing the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

| If carrier RTS | Do      |
|----------------|---------|
| passed         | step 45 |
| failed         | step 52 |

- 45** Access the TTP MAP level to post the P-side links associated with the new NTMX87 circuit card by typing

**>TTP;POST D RCC2 rcc2\_no carrier\_no**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the new NTMX87 circuit card

**carrier\_no**

is the number of the P-side link trunks are assigned

*Example of a MAP response*

```
LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED
```

```
POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCC2 0 1 WADEOUT796 11 INB
```

## NTMX87 in an RSC RCC2 (end)

- 46** Busy the trunks associated with the new NTMX87 circuit card by typing  
**>BSY ALL**  
 and pressing the Enter key.  
**Note 1:** Wait for the busy queue to clear.  
**Note 2:** Busy the other carriers associated with the faulty NTMX87 circuit card. Reference the link-to-slot assignment charts in steps 24 and 26 .
- 47** Test the trunks associated with the new NTMX87 circuit card by typing  
**>TST ;NEXT**  
 and pressing the Enter key.  
**Note:** Perform this step for each carrier span associated with the new NTMX87 circuit card.
- | If trunks TST | Do      |
|---------------|---------|
| passed        | step 48 |
| failed        | step 52 |
- 48** Return-to-service trunks assigned to links on the new NTMX87 circuit card by typing  
**>RTS ALL**  
 and pressing the Enter key.
- | If RTS | Do      |
|--------|---------|
| passed | step 49 |
| failed | step 52 |
- 49** Send any faulty cards for repair according to local procedure.
- 50** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 53.
- 51** Return to *Alarm Clearing Procedures* or the other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 52** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.
- 53** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTMX87 in an RSC-S (DS-1) Model A RCC2**

---

### **Application**

Use this procedure to replace an NTMX87 card in an RSC-S RCC2.

| PEC    | Suffixes | Name                       |
|--------|----------|----------------------------|
| NTMX87 | AA, AB   | Quad Frame Carrier         |
|        | BA       | Penta DS-1 Packlet Carrier |

### **Common procedures**

None


### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.



## NTMX87 in an RSC-S (DS-1) Model A RCC2 (continued)

### Summary of card replacement procedure for an NTMX87 card in RSC RCC2

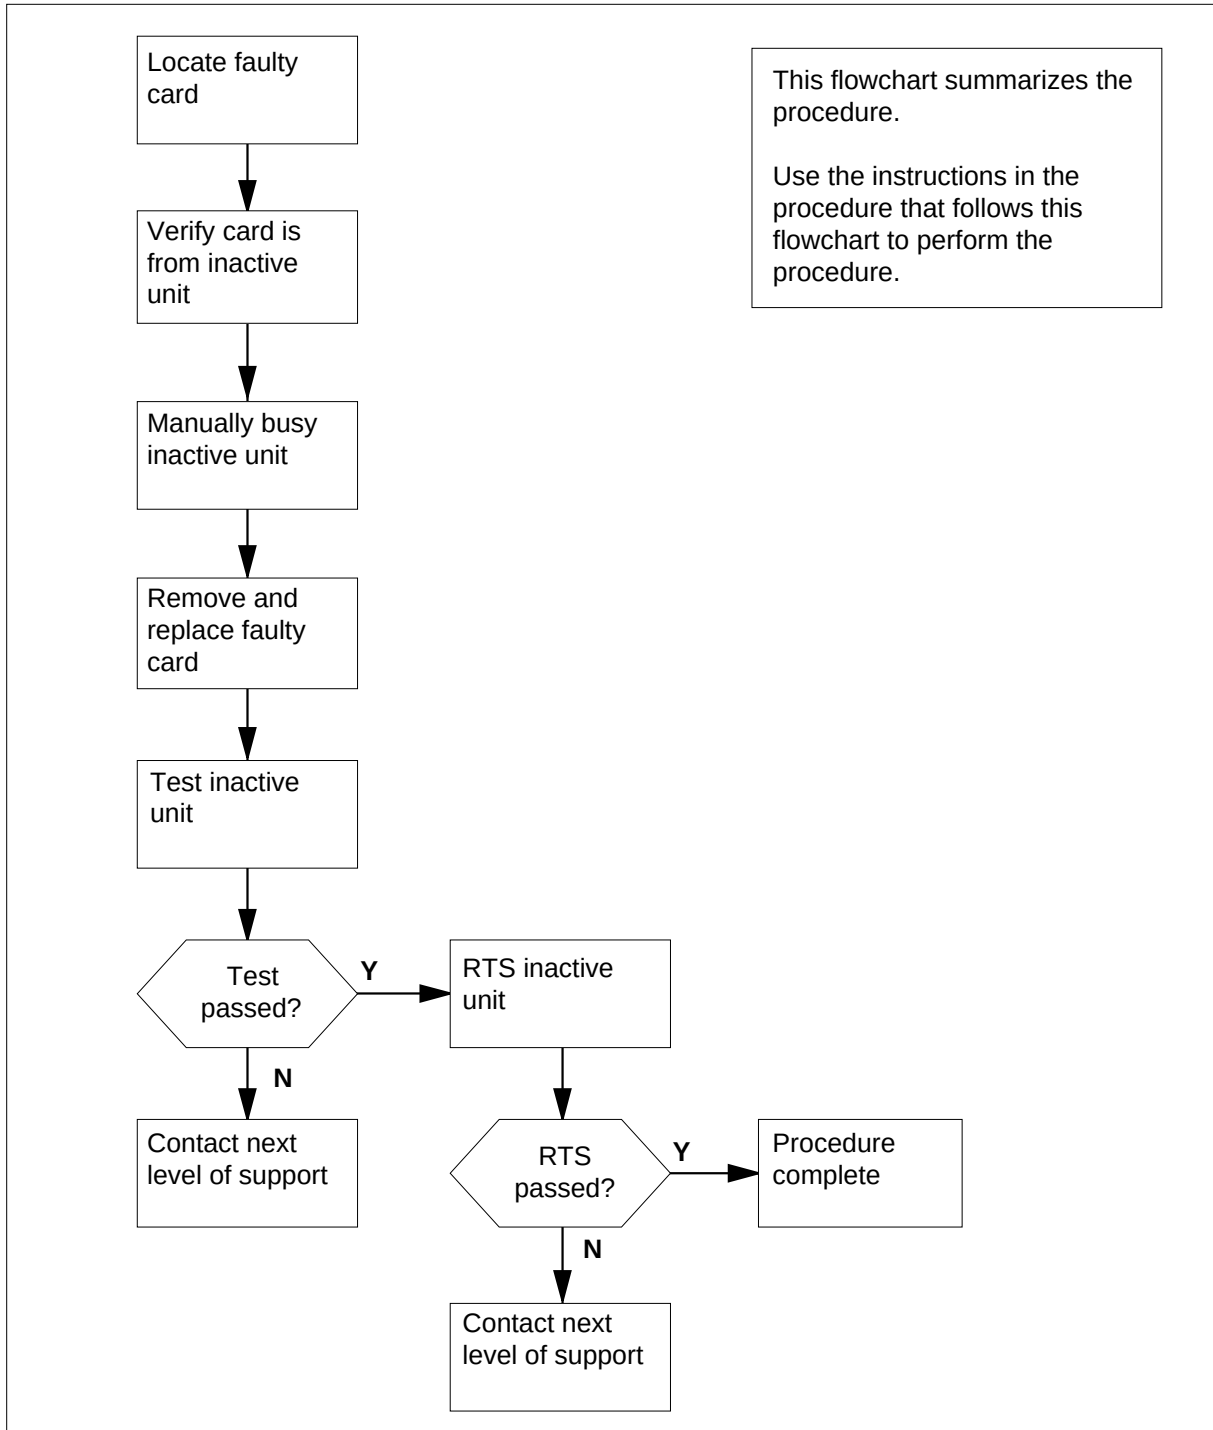

## NTMX87 in an RSC-S (DS-1) Model A RCC2 (continued)

---

### Replacing an NTMX87 card in RSC-S RCC2

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



#### **CAUTION**

Several configurations of the NTMX87 quad frame carrier card are detailed in this procedure.

Be sure you are using the steps for the configuration of your RCC2, such as a single or dual RCC2 (DRCC2), main or extension shelf, or links versus carrier trunks.



#### **CAUTION**

##### **Loss of service**

When replacing a card in the RCC2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX87 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal*

- 3 Ensure the PM level of the MAP display is currently displayed by typing

**>MAPCI;MTC;PM;POST RCC2 rcc2\_no**

and pressing the Enter key.

*where*

**rcc2\_no**

is the number of the RCC2 with the faulty card

*Example of a MAP display:*

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

| CM         | MS     | IOD | Net   | PM         | CCS   | LNS  | Trks  | Ext | Appl |
|------------|--------|-----|-------|------------|-------|------|-------|-----|------|
| .          | .      | .   | .     | 1RCC2      | .     | .    | .     | .   | .    |
| RCC2       |        |     | SysB  | ManB       | OffL  | CBsy | ISTb  |     | InSv |
| 0 Quit     | PM     | 0   | 0     | 0          | 2     | 0    | 2     |     | 25   |
| 2 Post_    | RCC2   | 0   | 0     | 0          | 0     | 0    | 1     |     | 1    |
| 3 ListSet  |        |     |       |            |       |      |       |     |      |
| 4          | RCC2   | 0   | ISTb  | Links_00S: | CSide | 1,   | PSide | 1   |      |
| 5 TRNSL    | Unit0: |     | Inact | InSv       |       |      |       |     |      |
| 6 TST      | Unit1: |     | Act   | InSv       |       |      |       |     |      |
| 7 BSY      |        |     |       |            |       |      |       |     |      |
| 8 RTS      |        |     |       |            |       |      |       |     |      |
| 9 OffL     |        |     |       |            |       |      |       |     |      |
| 10 LoadPM_ |        |     |       |            |       |      |       |     |      |
| 11 Disp_   |        |     |       |            |       |      |       |     |      |
| 12 Next_   |        |     |       |            |       |      |       |     |      |
| 13         |        |     |       |            |       |      |       |     |      |
| 14 QueryPM |        |     |       |            |       |      |       |     |      |
| 15         |        |     |       |            |       |      |       |     |      |
| 16         |        |     |       |            |       |      |       |     |      |
| 17         |        |     |       |            |       |      |       |     |      |
| 18         |        |     |       |            |       |      |       |     |      |

- 4 Display and record the C-side link status of the posted RCC2 associated with the faulty NTMX87 carrier card by typing

**>TRNSL C**

and pressing the Enter key.

*Example of a MAP response*

```
LINK 0 LTC 0 0;CAP MS: STATUS SysB MSGCOND CLS RESTRICT
LINK 1 LTC 0 1;CAP S: STATUS SysB
LINK 2 LTC 0 2;CAP MS: STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 LTC 0 3;CAP S: STATUS OK
LINK 4 LTC 0 4;CAP S: STATUS SysB
LINK 5 LTC 0 5;CAP S: STATUS SysB
```

- 5 Display and record the P-side link status of the posted RCC2 associated with the faulty NTMX87 carrier card by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

```

LINK 1 Carrier of Class - Trunk ;Status;OK
LINK 2 Carrier of Class - Trunk ;Status;OK
LINK 3 Carrier of Class - Trunk ;Status;OK
LINK 10 DCH 6; Status :OK
LINK 13 DCH 7; Status :OK
LINK 17 DCH 4; Status :OK
LINK 22 RMM 6 0;CAP MS;Status OK MSGCOND OPN
LINK 24 LCME RSCS 00 0 0;CAP MS;Status OK MSGCOND OPN
LINK 25 LCME RSCS 00 0 1;CAP MS;Status OK MSGCOND OPN
LINK 26 LCME RSCS 00 0 2;CAP S;Status OK

```

- 6 By observing the MAP display, be sure the card that is to be removed is in the inactive unit.

| If faulty card is in the | Do     |
|--------------------------|--------|
| active unit              | step 7 |
| inactive unit            | step 9 |

- 7 Switch the processing activity (SWACT) to the inactive unit by typing  
**>SWACT**

and pressing the Enter key.

- 8 Confirm the system prompt by typing  
**>YES**

and pressing the Enter key.

After both units are in-service, proceed to the next step.

#### At the RCE frame

- 9 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

| If faulty card is | Do      |
|-------------------|---------|
| C-side of RCC2    | step 10 |
| P-side faulty     | step 16 |

#### At the MAP terminal

- 10 Busy the inactive PM unit by typing

**>bsy unit unit\_no**

and pressing the Enter key.

where

**unit\_no**

is the number of the inactive RCC2 unit (unit 0 or 1)

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

- 11** Post the host PM by typing  
**>POST host\_pm host\_pm\_no**  
 and pressing the Enter key.

*where*

**host\_pm**

is either a line group controller (LGC), a line group controller with ISDN (LGCI), a line trunk controller (LTC), or a line trunk controller with ISDN (LTCI)

**host\_pm\_no**

is the number of either an LGC, LGCI, LTC, or LTCI

*Example of a MAP display:*

| CM         | MS     | IOD   | Net  | PM         | CCS   | Lns  | Trks  | Ext  | Appl |
|------------|--------|-------|------|------------|-------|------|-------|------|------|
| .          | .      | .     | .    | 1RCC2      | .     | .    | .     | .    | .    |
| LTC        |        |       | SysB | ManB       | OffL  | CBsy | ISTb  | InSv |      |
| 0 Quit     | PM     | 0     | 0    | 1          | 0     | 4    | 12    |      |      |
| 2 Post_    | LTC    | 0     | 0    | 2          | 0     | 2    | 9     |      |      |
| 3 ListSet  |        |       |      |            |       |      |       |      |      |
| 4          | LTC    | 1     | ISTb | Links_00S: | CSide | 0,   | PSide | 1    |      |
| 5 Trnsl_   | Unit0: | Act   | InSv |            |       |      |       |      |      |
| 6 Tst_     | Unit1: | Inact | InSv |            |       |      |       |      |      |
| 7 Bsy_     |        |       |      |            |       |      |       |      |      |
| 8 RTS_     |        |       |      |            |       |      |       |      |      |
| 9 OffL     |        |       |      |            |       |      |       |      |      |
| 10 LoadPM_ |        |       |      |            |       |      |       |      |      |
| 11 Disp_   |        |       |      |            |       |      |       |      |      |
| 12 Next    |        |       |      |            |       |      |       |      |      |
| 13 SwAct   |        |       |      |            |       |      |       |      |      |
| 14 QueryPM |        |       |      |            |       |      |       |      |      |
| 15         |        |       |      |            |       |      |       |      |      |
| 16         |        |       |      |            |       |      |       |      |      |
| 17 Perform |        |       |      |            |       |      |       |      |      |
| 18         |        |       |      |            |       |      |       |      |      |

- 12** Display the host peripherals P-side links associated with the RCC2 by typing  
**>TRNSL P**  
 and pressing the Enter key.

*Example of a MAP response*

```
LINK 0 RCC2 0 0;CAP MS:STATUS SysB MSGCOND CLS RESTRICT
LINK 1 RCC2 0 1;CAP S:STATUS SBsy
LINK 2 RCC2 0 2;CAP MS:STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 RCC2 0 3;CAP S:STATUS OK
LINK 4 RCC2 0 4;CAP S:STATUS SysB
LINK 5 RCC2 0 5;CAP S:STATUS Sysb
```

- 13** Manually busy the links connected to the faulty NTMX87 card by typing  
**>BSY LINK link\_no**

## NTMX87 in an RSC-S (DS-1) Model A RCC2 (continued)

and pressing the Enter key.

where

**link\_no**


is the number of the link associated with the faulty NTMX87 card

**Note 1:** All provisioned links in the slot must be busied.

**Note 2:** Reference the chart in step 14 for the RCC2 C-side link-to-slot assignments.

### At the RCE frame

- 14** Use the following charts to determine which NTMX87 card is to be removed by matching the provisioned link number with the slot number and the packet number to the left of each respective table.

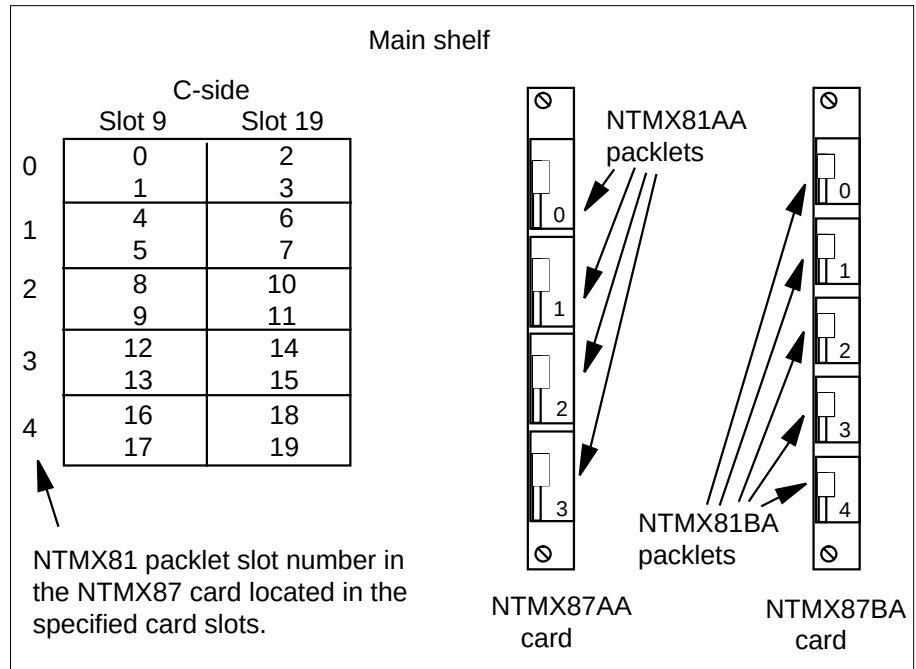

**15**



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (FSP) of the RCC2. This protects the equipment against damage caused by static electricity.

Remove the NTMX81 packet as described in the following steps:

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

- a Locate the NTMX81 packlet to be removed on the appropriate NTMX87 carrier card slot.
- b Open the locking lever on the NTMX81 packlet and gently pull the packlet toward you until it clears the shelf.
- c Ensure the NTMX81 packlets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 carrier card.
- d Go to step 32.

#### **At the MAP terminal**

- 16** Determine if the RCC2 is in a single or dual configuration by typing

**>POST RCC2 rcc2\_no ;IRLINK**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the faulty NTMX87 card

**Note:** If the posted RCC2 is in a single RCC2 configuration, the system will respond with the following message:  
NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

| If the RCC2 is in a  | Do      |
|----------------------|---------|
| single configuration | step 17 |
| dual configuration   | step 30 |

- 17** Determine if P-side ports are links or carrier trunks by observing the information obtained in step 5.

| If P-side port is | Do      |
|-------------------|---------|
| links             | step 18 |
| trunks            | step 20 |

- 18** Manually busy all provisioned links connected to the faulty NTMX87 circuit card by typing

**>bsy link link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link associated with the faulty NTMX87 circuit card

**Note 1:** Each NTMX81 card has two links, and each link must be manually busied. Possible link pairs are 0 and 1, 2 and 3, 4 and 5, 6 and 7. This pair relationship continues throughout all 54 P-side links.

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

**Note 2:** Reference the charts in steps 26 and 28 for P-side link-to-slot assignments. All provisioned links in the slot must be busied.

- 19** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the faulty NTMX87 is on the | Do      |
|--------------------------------|---------|
| main shelf                     | step 26 |
| extension shelf                | step 28 |

- 20** Access the TRKS;TTP MAP display level, and busy the trunks assigned to the P-side carriers associated with the faulty NTMX87 by typing

**>TRKS;TTP;POST D RCC2 rcc2\_no carrier\_no**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

*Example of a MAP response*

```
LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED
```

```
POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCC2 0 1 WADEOUT796 11 LO
```

- 21** Busy the trunks associated with the faulty NTMX87 circuit card by typing

**>BSY ALL**

and pressing the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** To busy other carriers associated with the faulty NTMX87 circuit card, reference the link-to-slot assignment charts in steps 26 and 28.

- 22** Installation busy all the trunks to prevent carrier alarms by typing

**>BSY INB ALL**

and pressing the Enter key.



## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

- 23** Access the CARRIER level and post the P-side carriers associated with the faulty NTMX87 circuit card by typing  
**>CARRIER;POST RCC2 rcc2\_no carrier\_no**  
 and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.

- 24** Busy and offline the P-side carriers associated with the faulty NTMX87 circuit card by typing  
**>BSY carrier\_no ;OFFL carrier\_no**  
 and pressing the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.


- 25** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the faulty NTMX87 is on the | Do      |
|--------------------------------|---------|
| main shelf                     | step 26 |
| extension shelf                | step 28 |

#### **At the RCE frame**

- 26** Use the following figure to determine slot assignments on the P-side of the main shelf.

## NTMX87 in an RSC-S (DS-1) Model A RCC2 (continued)

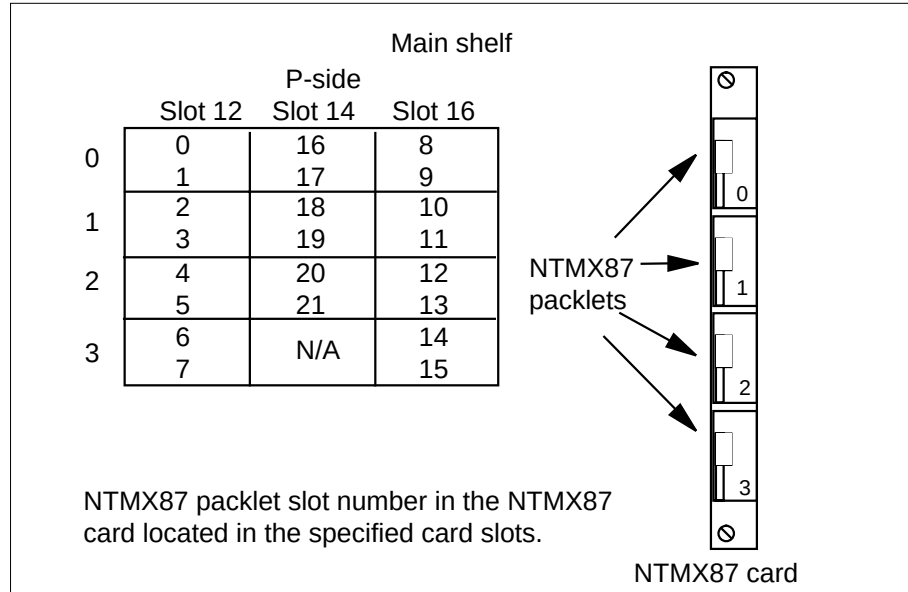

27



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.


Remove the NTMX81 packet as described in the following steps:

- a Locate the NTMX81 packet to be removed on the appropriate NTMX87 carrier card slot.
- b Open the locking lever on the NTMX81 packet and gently pull the packet toward you until it clears the shelf.
- c Ensure the NTMX81 packets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 carrier card.
- d Go to step 32.

### At the RCE frame

- 28 Determine which side of the extension shelf the faulty NTMX87 circuit card is located by referencing field SIDE of table RCCINV.

**NTMX87**  
**in an RSC-S (DS-1) Model A RCC2 (continued)**

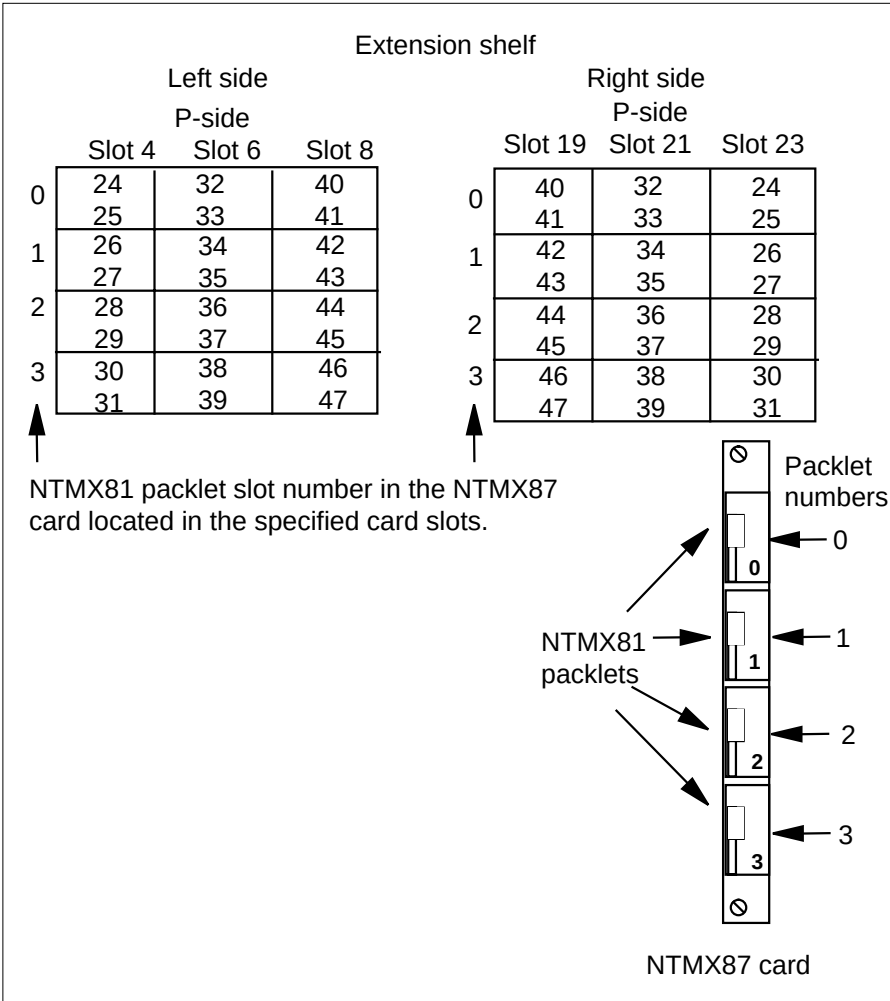

29



**DANGER**  
**Static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.

- Remove the NTMX81 packet as described in the following steps:
- a Locate the NTMX81 packet to be removed on the appropriate NTMX87 carrier card slot.

**NTMX87****in an RSC-S (DS-1) Model A RCC2** (continued)

- b Open the locking lever on the NTMX81 packlet and gently pull the packlet toward you until it clears the shelf.
  - c Ensure the NTMX81 packlets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 carrier card.
  - d Go to step 32.
- 30** Translate the dual RCC2s IRLINKS by typing  
**>TRNSL**  
 and pressing the Enter key.  
*Example of a MAP response*

| CM         | MS     | IOD   | Net        | PM           | CCS   | LNS  | Trks  | Ext     | App'l |
|------------|--------|-------|------------|--------------|-------|------|-------|---------|-------|
| .          | .      | .     | .          | <b>1RCC2</b> | .     | .    | .     | .       | .     |
| IRLINK     |        |       | SysB       | ManB         | OffL  | CBsy | ISTb  | InSv    |       |
| 0 Quit     | PM     | 0     | 0          | 0            | 2     | 0    | 2     | 25      |       |
| 2          | RCC2   | 0     | 0          | 0            | 0     | 0    | 1     | 1       |       |
| 3          |        |       |            |              |       |      |       |         |       |
| 4          | RCC2   | 0     | ISTb       | Links_00S:   | CSide | 1,   | PSide | 1       |       |
| 5 TRNSL    | Unit0: | Inact | InSv       |              |       |      |       |         |       |
| 6 TST_     | Unit1: | Act   | InSv       |              |       |      |       |         |       |
| 7 BSY_     |        |       |            |              |       |      |       |         |       |
| 8 RTS_     |        |       |            |              |       |      |       |         |       |
| 9          |        |       |            |              |       |      |       |         |       |
| 10         |        | IR    | From       | To           |       | CAP  | STATE | MSGCOND |       |
| 11         |        | 0     | RCC2 0, 0  | RCC2 1, 0    |       | MS   | OK    | OPN     |       |
| 12         |        | 1     | RCC2 0, 8  | Rcc2 1, 8    |       | MS   | OK    | OPN     |       |
| 13         |        | 2     | RCC2 0, 12 | RCC2 1, 12   |       | S    | OK    |         |       |
| 14 QueryIR |        | 3     | RCC2 0, 13 | RCC2 1, 13   |       | S    | OK    |         |       |
| 15         |        |       |            |              |       |      |       |         |       |
| 16         |        |       |            |              |       |      |       |         |       |
| 17         |        |       |            |              |       |      |       |         |       |
| 18         |        |       |            |              |       |      |       |         |       |

- 31** Busy IRLINKS in the faulty NTMX87 circuit card by typing  
**>BSY irlink\_no**  
 and pressing the Enter key.  
*where*

**irlink\_no**

is the number of the irlink that must be busied

**Note 1:** This step must be performed for each provisioned link in the slot position.

**Note 2:** For link-to-slot assignments, reference step 26 for the main shelf, and step 28 for the extension shelf.

---

**NTMX87**

**in an RSC-S (DS-1) Model A RCC2** (continued)

---

*At the RCE frame*

32



**DANGER**

**Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCC2. This protects the equipment against damage caused by static electricity.



**DANGER**

**Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.


33

Using the T9908 wrist grounding strap and a T1324 screwdriver, remove the NTMX87 carrier circuit card. Insert the new carrier card and secure.

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

---

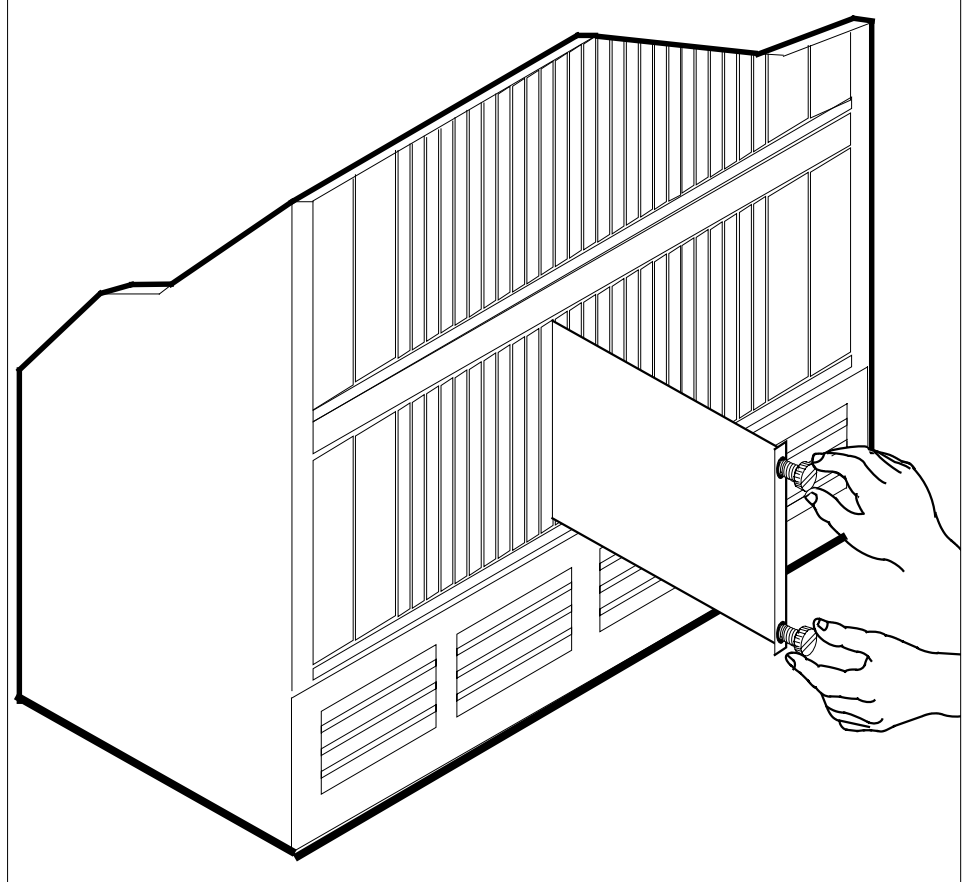

- 34** Replace the NTMX81 packlets previously removed. Align the packlet with the slots in the shelf and gently slide the packlet into the circuit card slot in the NTMX87 circuit card.
- 35** Seat and lock the packlet.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 36** Use the following information to determine what step to go to next in this procedure.

---

| If you entered this procedure from | Do      |
|------------------------------------|---------|
| alarm clearing procedures          | step 53 |
| other                              | step 37 |

---

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

- 37** Use the following information to determine what step to go to next in this procedure.

| If you entered this section of the procedure from           | Do      |
|-------------------------------------------------------------|---------|
| step 15 for a single RCC2 with C-side links affected        | step 38 |
| step 27 or 29 for an RCC2 with P-side trunks affected       | step 46 |
| step 27 or 29, for a single RCC2 with P-side links affected | step 42 |
| step 31 for a DRCC2 with irlinks affected                   | step 44 |

#### **At the MAP terminal**

- 38** Test the busied network links from step 13 by typing

**>TST LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link associated with the new NTMX87 carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCC2, execute this step for each link until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 39 |
| failed | step 53 |

- 39** Return to service the P-side links by typing

**>RTS LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link manually busied in step 13

**Note 1:** This step must be performed for each link that is manually busied.

**NTMX87****in an RSC-S (DS-1) Model A RCC2** (continued)

**Note 2:** To RTS the other links associated with the RCC2, execute the procedures in this step for each link until all links are returned to service.

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 40   |
| failed        | step 53   |

- 40** Post the inactive RCC2 in which the NTMX87 card is located by typing  
**>POST RCC2 rcc2\_no**  
 and pressing the Enter key.  
*where*

**rcc2\_no**  
 is the number of the RCC2 associated with the faulty card

- 41** Return the inactive RCC2 unit to service by typing  
**>RTS UNIT unit\_no**  
 and pressing the Enter key.  
*where*

**unit\_no**  
 is the number of the RCC2 unit posted in step 40

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passes        | step 51   |
| fails         | step 53   |

**At the MAP terminal**

- 42** Test the busied links from step 18 by typing  
**>TST LINK link\_no**  
 and pressing the Enter key.  
*where*

**link\_no**  
 is the number of the link associated with the new NTMX87 carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCC2, execute this step for each link until all links are tested.

| <b>If TST</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 43   |
| failed        | step 53   |



## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (continued)

- 43** Return to service the P-side links by typing

**>RTS LINK link\_no**

and pressing the Enter key.

*where*

**link\_no**

is the number of the link manually busied in step 13

**Note 1:** This step must be performed for each link that is manually busied.

**Note 2:** To RTS the other links associated with the RCC2, execute the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

#### **At the MAP terminal**

- 44** Test the IRLINKS by typing

**>TST irlink\_no**

and pressing the Enter key.

*where*

**irlink\_no**

is the number of the link busied in step 31

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other irlinks associated with the RCC2, execute this step for each irlink until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 45 |
| failed | step 53 |

- 45** Return to service the IRLINKS by typing

**>RTS irlink\_no**

and pressing the Enter key.

*where*

**irlink\_no**

is the number of the link manually busied in step 31

**Note 1:** This step must be performed for each irlink that is manually busied.

**NTMX87****in an RSC-S (DS-1) Model A RCC2** (continued)

**Note 2:** To RTS the other links associated with the RCC2, execute this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

**At the MAP terminal**

- 46** Busy and return to service P-side carriers that were offlined in step 24 by typing

**>BSY carrier\_no; RTS carrier\_no**

and pressing the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

| If carrier RTS | Do      |
|----------------|---------|
| passed         | step 47 |
| failed         | step 53 |

- 47** Access the TTP MAP level to post the P-side links associated with the new NTMX87 circuit card by typing

**>TTP;POST D RCC2 rcc2\_no carrier\_no**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the new NTMX87 circuit card

**carrier\_no**

is the number of the P-side link trunks are assigned

*Example of a MAP response*

```

LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED

```

```

POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCC2 0 1 WADEOUT796 11 INB

```

## NTMX87

### in an RSC-S (DS-1) Model A RCC2 (end)

- 48** Busy the trunks associated with the new NTMX87 circuit card by typing  
**>BSY ALL**  
 and pressing the Enter key.  
**Note 1:** Wait for the busy queue to clear.  
**Note 2:** Busy the other carriers associated with the faulty NTMX87 circuit card. Reference the link-to-slot assignment charts in steps 26 and 28 .
- 49** Test the trunks associated with the new NTMX87 circuit card by typing  
**>TST ;NEXT**  
 and pressing the Enter key.  
**Note:** Perform this step for each carrier span associated with the new NTMX87 circuit card.
- | If trunks TST | Do      |
|---------------|---------|
| passed        | step 50 |
| failed        | step 53 |
- 50** Return-to-service trunks assigned to links on the new NTMX87 circuit card by typing  
**>RTS ALL**  
 and pressing the Enter key.
- | If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |
- 51** Send any faulty cards for repair according to local procedure.
- 52** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 55.
- 53** Return to *Alarm Clearing Procedures* or the other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 54** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.
- 55** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTMX87 in an RSC-S (DS-1) Model B RCC2**

---

### **Application**

Use this procedure to replace an NTMX87 card in an RSC-S RCC2.

| PEC    | Suffixes | Name                       |
|--------|----------|----------------------------|
| NTMX87 | AA, AB   | Quad Frame Carrier         |
|        | BA       | Penta DS-1 Packlet Carrier |

### **Common procedures**


There are no common procedures.

### **Action**

This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

## NTMX87 in an RSC-S (DS-1) Model B RCC2 (continued)

### Summary of card replacement procedure for an NTMX87 card in RSC-S RCC2

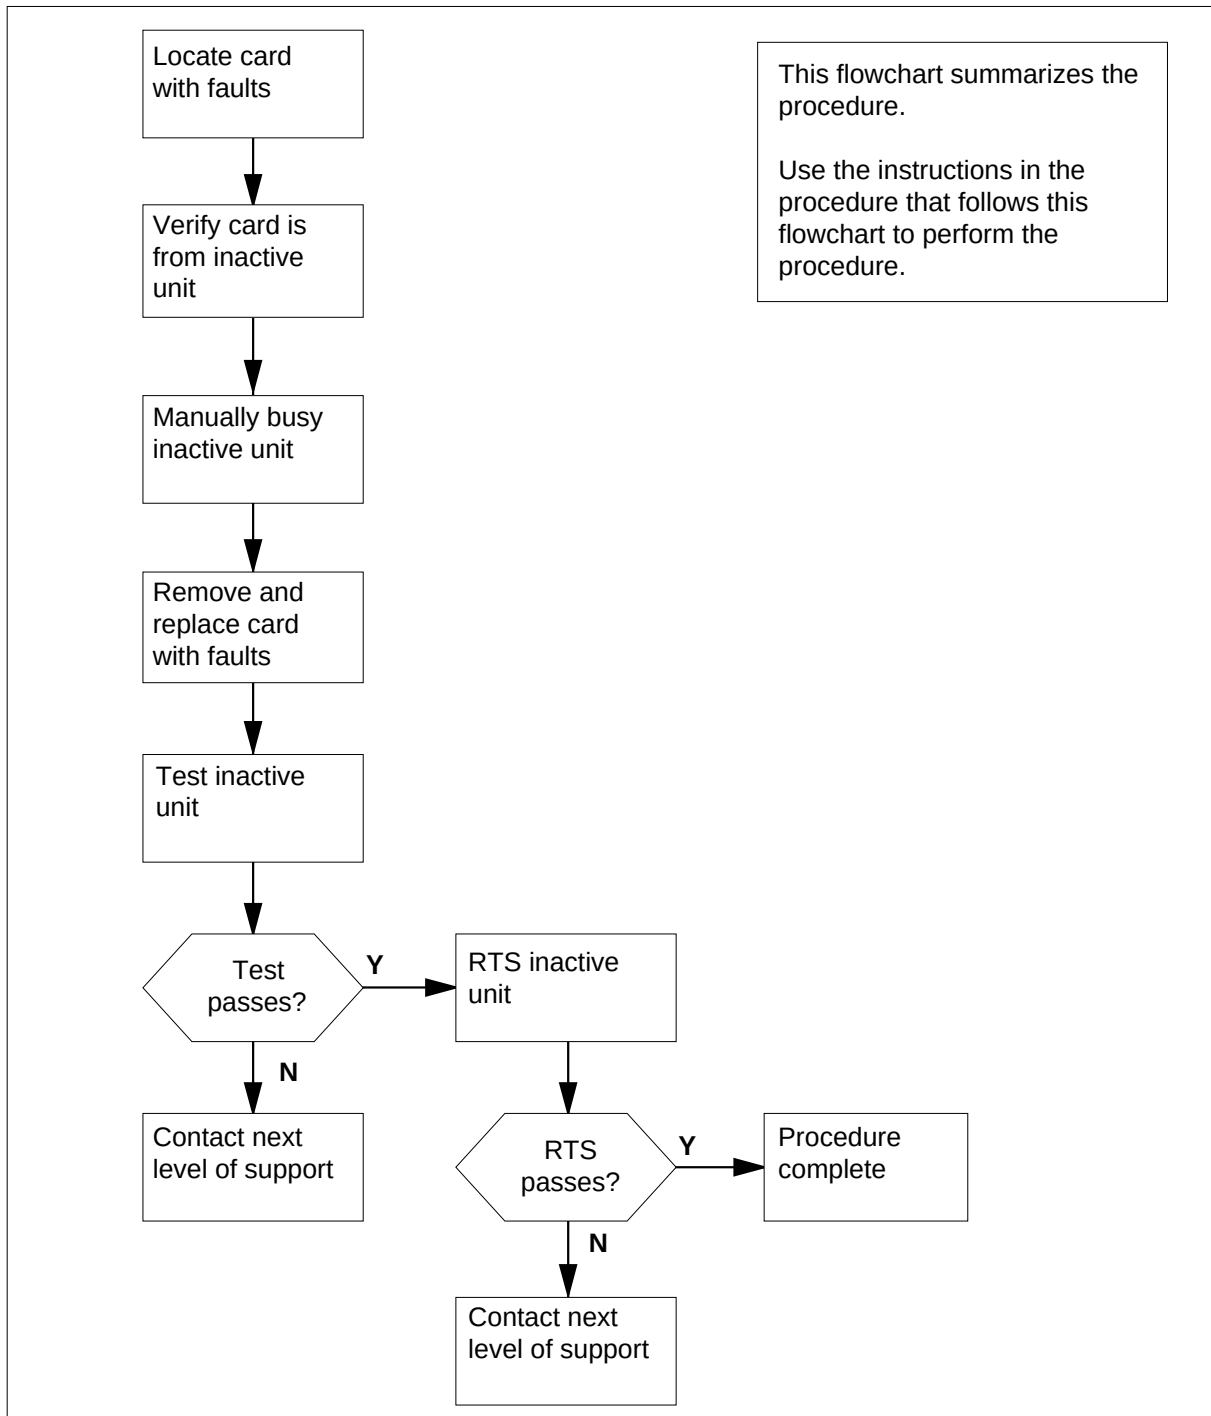

## NTMX87 in an RSC-S (DS-1) Model B RCC2 (continued)

---

### Replacing an NTMX87 card in RSC-S RCC2

#### *At the Current Location*

- 1 Proceed only if
  - a step in a maintenance procedure directed you to this card replacement procedure
  - you use the procedure to verify or accept cards
  - your maintenance support group directed you to this procedure
- 2



#### **WARNING**

This procedure describes several configurations of the NTMX87 carrier card.

Make sure you use the steps for the configuration of your RCC2. These steps include a single or dual RCC2 (DRCC2), main or extension shelf, or links compared to carrier trunks.



#### **WARNING**

##### **Loss of service**

When you replace a card in the RCC2, make sure the unit that contains the card you want to replace is *inactive*. Make sure the mate unit is *active*.

Obtain an NTMX87 replacement card. Make sure the replacement card has the same product equipment code (PEC) and suffix, as the card you want to remove.

#### *At the MAP terminal*

- 3 To view the PM level of the MAP display, type  
**>MAPCI;MTC;PM;POST RCC2 rcc2\_no**  
and press the Enter key.  
*where*  
**rcc2\_no**  
is the number of the RCC2 with the card with faults  
*Example of a MAP display:*

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

| CM         | MS     | IOD | Net   | PM         | CCS   | LNS  | Trks  | Ext  | Appl |
|------------|--------|-----|-------|------------|-------|------|-------|------|------|
| .          | .      | .   | .     | 1RCC2      | .     | .    | .     | .    | .    |
| RCC2       |        |     | SysB  | ManB       | OffL  | CBsy | ISTb  | InSv |      |
| 0 Quit     | PM     |     | 0     | 0          | 2     | 0    | 2     | 25   |      |
| 2 Post_    | RCC2   |     | 0     | 0          | 0     | 0    | 1     | 1    |      |
| 3 ListSet  |        |     |       |            |       |      |       |      |      |
| 4          | RCC2   | 0   | ISTb  | Links_00S: | CSide | 1,   | PSide | 1    |      |
| 5 TRNSL    | Unit0: |     | Inact | InSv       |       |      |       |      |      |
| 6 TST      | Unit1: |     | Act   | InSv       |       |      |       |      |      |
| 7 BSY      |        |     |       |            |       |      |       |      |      |
| 8 RTS      |        |     |       |            |       |      |       |      |      |
| 9 OffL     |        |     |       |            |       |      |       |      |      |
| 10 LoadPM_ |        |     |       |            |       |      |       |      |      |
| 11 Disp_   |        |     |       |            |       |      |       |      |      |
| 12 Next_   |        |     |       |            |       |      |       |      |      |
| 13         |        |     |       |            |       |      |       |      |      |
| 14 QueryPM |        |     |       |            |       |      |       |      |      |
| 15         |        |     |       |            |       |      |       |      |      |
| 16         |        |     |       |            |       |      |       |      |      |
| 17         |        |     |       |            |       |      |       |      |      |
| 18         |        |     |       |            |       |      |       |      |      |

- 4 To display and record the central-side (C-side) link status of the posted RCC2 associated with the NTMX87 carrier card with faults, type

**>TRNSL C**

and press the Enter key.

*Example of a MAP response*

```
LINK 0 LTC 0 0;CAP MS: STATUS SysB MSGCOND CLS RESTRICT
LINK 1 LTC 0 1;CAP S: STATUS SysB
LINK 2 LTC 0 2;CAP MS: STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 LTC 0 3;CAP S: STATUS OK
LINK 4 LTC 0 4;CAP S: STATUS SysB
LINK 5 LTC 0 5;CAP S: STATUS SysB
```

- 5 To display and record the P-side link status of the posted RCC2 associated with the NTMX87 carrier card that has faults, type

**>TRNSL P**

and press the Enter key.

*Example of a MAP response*

**NTMX87****in an RSC-S (DS-1) Model B RCC2** (continued)

```

LINK 1 Carrier of Class - Trunk ;Status;OK
LINK 2 Carrier of Class - Trunk ;Status;OK
LINK 3 Carrier of Class - Trunk ;Status;OK
LINK 10 DCH 6; Status :OK
LINK 13 DCH 7; Status :OK
LINK 17 DCH 4; Status :OK
LINK 22 RMM 6 0;CAP MS;Status OK MSGCOND OPN
LINK 24 LCME RSCS 00 0 0;CAP MS;Status OK MSGCOND OPN
LINK 25 LCME RSCS 00 0 1;CAP MS;Status OK MSGCOND OPN
LINK 26 LCME RSCS 00 0 2;CAP S;Status OK

```

- 6 Check the MAP display to make sure the card you want to remove is in the inactive unit.

| If the card with faults | Do     |
|-------------------------|--------|
| is in the active unit   | step 7 |
| is in the inactive unit | step 9 |

- 7 To switch the processing activity (SWACT) to the inactive unit, type  
**>SWACT**  
and press the Enter key.

- 8 To confirm the system prompt, type  
**>YES**  
and press the Enter key.  
When both units are in-service, proceed to the next step.

**At the RCE frame**

- 9 Place a sign on the active unit that bears the words *Active unit - Do not touch*. Do not attach this sign by magnets or tape.

| If defective card   | Do      |
|---------------------|---------|
| is C-side of RCC2   | step 10 |
| is P-side defective | step 16 |

**At the MAP terminal**

- 10 To busy the inactive PM unit, type  
**>bsy unit unit\_no**  
and press the Enter key.  
*where*  
**unit\_no**  
is the number of the inactive RCC2 unit (unit 0 or 1)



## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

- 11** To post the host PM, type  
**>POST host\_pm host\_pm\_no**

and press the Enter key.

where

**host\_pm**

is a line group controller (LGC) or a line group controller

with ISDN (LGCI), a line trunk controller (LTC), or a line trunk

controller with ISDN (LTCI)

**host\_pm\_no**

is the number of an LGC, LGCI, LTC, or LTCI

*Example of a MAP display:*

| CM  | MS      | IOD    | Net   | PM    | CCS        | Lns   | Trks | Ext   | Appl |
|-----|---------|--------|-------|-------|------------|-------|------|-------|------|
| .   | .       | .      | .     | 1RCC2 | .          | .     | .    | .     | .    |
| LTC |         |        |       |       |            |       |      |       |      |
| 0   | Quit    | PM     | 0     | 0     | 1          | 0     | 0    | 4     | 12   |
| 2   | Post_   | LTC    | 0     | 0     | 2          | 0     | 0    | 2     | 9    |
| 3   | ListSet |        |       |       |            |       |      |       |      |
| 4   |         | LTC    | 1     | ISTb  | Links_00S: | CSide | 0,   | PSide | 1    |
| 5   | Trnsl_  | Unit0: | Act   | InSv  |            |       |      |       |      |
| 6   | Tst_    | Unit1: | Inact | InSv  |            |       |      |       |      |
| 7   | Bsy_    |        |       |       |            |       |      |       |      |
| 8   | RTS_    |        |       |       |            |       |      |       |      |
| 9   | OffL    |        |       |       |            |       |      |       |      |
| 10  | LoadPM_ |        |       |       |            |       |      |       |      |
| 11  | Disp_   |        |       |       |            |       |      |       |      |
| 12  | Next    |        |       |       |            |       |      |       |      |
| 13  | SwAct   |        |       |       |            |       |      |       |      |
| 14  | QueryPM |        |       |       |            |       |      |       |      |
| 15  |         |        |       |       |            |       |      |       |      |
| 16  |         |        |       |       |            |       |      |       |      |
| 17  | Perform |        |       |       |            |       |      |       |      |
| 18  |         |        |       |       |            |       |      |       |      |

- 12** To display the P-side links of the host peripheral associated with the RCC2, type

**>TRNSL P**

and press the Enter key.

*Example of a MAP response*

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

```
LINK 0 RCC2 0 0;CAP MS:STATUS SysB MSGCOND CLS RESTRICT
LINK 1 RCC2 0 1;CAP S:STATUS SBsy
LINK 2 RCC2 0 2;CAP MS:STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 RCC2 0 3;CAP S:STATUS OK
LINK 4 RCC2 0 4;CAP S:STATUS SysB
LINK 5 RCC2 0 5;CAP S:STATUS Sysb
```

- 13** To manually busy the links connected to the defective NTMX87 card, type

**>BSY LINK link\_no**

and press the Enter key.

where

**link\_no**


is the number of the link associated with the defective NTMX87 card

**Note 1:** You must busy all provisioned links in the slot.

**Note 2:** Refer to the chart in step 14 for the RCC2 C-side link-to-slot assignments.

#### At the RCE frame

- 14** Use the following charts to determine which NTMX87 card you must remove. Match the provisioned link number with the slot number and the packet number to the left of each table.

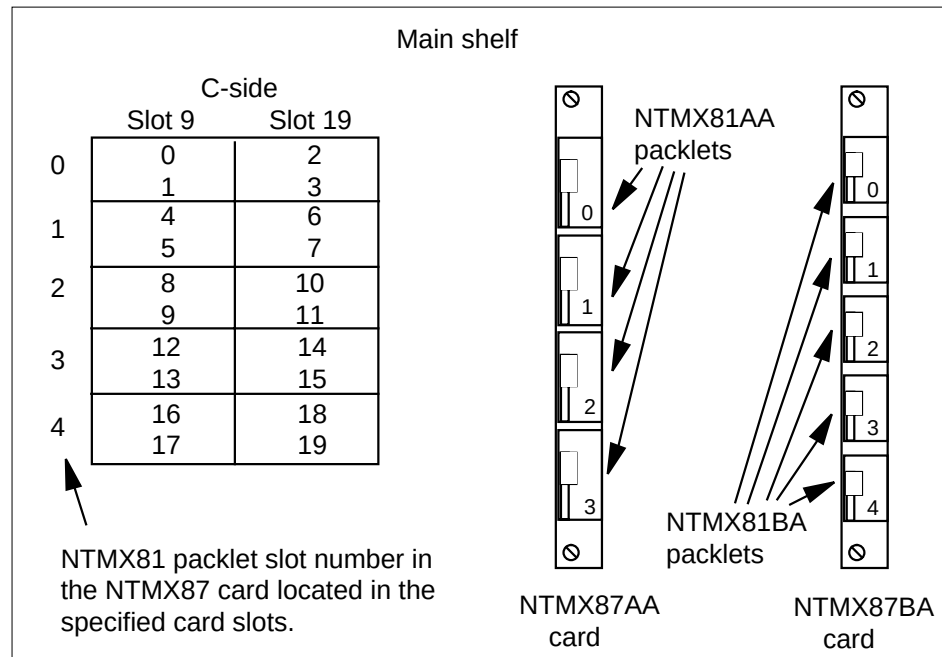

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

**At the MAP terminal****15****WARNING****Static electricity damage**

Put on a wrist strap before you remove any cards. Connect the wrist strap to the wrist strap grounding point. This point is on the left side of the modular supervisory panel (MSP) of the RCC2. This action protects the equipment against damage from static electricity.

Use the following steps to remove the NTMX81 packet:

- a Locate the NTMX81 packet you want to remove on the correct NTMX87 carrier card slot.
- b Open the locking lever on the NTMX81 packet. Carefully pull the packet toward you until the packet clears the shelf.
- c Make sure the NTMX81 packets are stored in an electrostatic discharge (ESD) container. This container protects the circuit card until you reinstall the packet in the NTMX87 carrier card.
- d Go to step 42.

**At the MAP terminal****16**

To determine if the RCC2 is in a single or dual configuration, type

**>POST RCC2 rcc2\_no ;IRLINK**

and press the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the defective NTMX87 card

**Note:** If the posted RCC2 is in a single RCC2 configuration, the system responds with:

NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

**17**

Before you add, remove, or move interlinks of a posted RCC2 of a DRCC2, enter the following command. Enter this command from the IRLINK MAP level. This command disables interswitching capability.

**>INTERSW DISABLE**

**Note:** If you do not enter the INTERSW DISABLE command before you attempt to busy (BSY) a specified IRLINK, the MAP terminal displays the following response:

interswitched calls should be disabled before an interlink is busied.

**NTMX87****in an RSC-S (DS-1) Model B RCC2** (continued)

- 18** To confirm that the system disabled interswitching, enter the QUERYIR command. The QUERYIR command displays the status of interswitching capability for the posted RCC2:

**>QUERYIR**

*Example of a MAP display*

| Interswitching is DISABLED |           |            |   |      |      |      |     |       |  |
|----------------------------|-----------|------------|---|------|------|------|-----|-------|--|
| IR                         | FROM      | TO         | C | ALRM | SLIP | FRME | BER | STATE |  |
| 0                          | RCC2 0, 0 | RCC2 1, 0  | . |      | 0    | 0    |     | OK    |  |
| 1                          | RCC2 0, 8 | RCC2 1, 8  | . |      | 0    | 0    |     | OK    |  |
| 2                          | RCC2 0, 4 | RCC2 1, 7  | . |      | 0    | 0    |     | OK    |  |
| 3                          | RCC2 0, 9 | RCC2 1, 12 | . |      | 0    | 0    |     | OK    |  |

- 19** When the system disables interswitching capability, reconfigure the IRLINKS. Enter the BSY command with the IRLINK number(s) to reconfigure. This action enhances the BSY command. The BSY command can display the number of interswitched calls. These calls use available C-side channels to revert to the network. The following example describes this process.

**>BSY 3**

*Example of a MAP response*

67 interswitched calls will be reverted to the network. Potential loss of calls on the interlink if there are no available C-side channels.

- 20** The C-side channels of the RCC2 are a limited resource. To prevent the loss of some interswitched calls, reconfigure IRLINKS only during periods of low traffic. The system can lose interswitched calls if not enough C-side channels are available.
- 21** Manually busy (ManB) the IRLINKS. Enter table IRLNKINV and make link changes for the required IRLINK configuration. The system downloads static data to both units of both RCC2s of the DRCC2. This action can only occur if the units are InSv.
- 22** When you reconfigured the DRCC2 IRLINKS, enter the enhanced RTS command to return to service the IRLINKS. The MAP terminal displays the following response to indicate that the system disabled interswitching.

**>RTS 3**

*Example of a MAP response*

Be aware that Interswitching is Disabled.

- 23** To enable interswitching, enter the following command from the IRLINK MAP level:

**>INTERSW ENABLE**

- 24** To confirm interswitching is enabled for the posted RCC2, enter the QUERYIR command from the IRLINK MAP level:

**>QUERYIR**

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

*Example of a MAP display*

```

Interswitching is ENABLED
IR FROM TO C ALRM SLIP FRME BER STATE
0 RCC2 0, 0 RCC2 1, 0 . 0 0 OK
1 RCC2 0, 8 RCC2 1, 8 . 0 0 OK
2 RCC2 0, 4 RCC2 1, 7 . 0 0 OK
3 RCC2 0, 6 RCC2 1, 6 . 0 0 OK

```

- 25** The system downloads RLINKS and ForceESA static data to both RCC2s of the DRCC2. The system must download the components of the ESA static data for both RCC2s. These components include the ESA lines, trunks and ESA table control data. The system sets the units of both RCC2s to in-service trouble (ISTb) with the reason ESA STATIC DATA MISMATCH.
- 26** You can download ESA static data at the PM Level of the MAP display with the RCC2s posted. To download this data, enter the LOADPM command with the source of CC . and file of ESADATA. You can update ESA static data at the automatic nightly static data updates. The table OFCENG tuples RSC\_XPMESASDUPD\_BOOL and RSC\_XPMESASDUPD\_HOUR define these updates.

**Note:** To load ESADATA the RCC2 units must be in service.

| If the RCC2                  | Do      |
|------------------------------|---------|
| is in a single configuration | step 27 |
| is in a dual configuration   | step 40 |

- 27** To determine if P-side ports are links or carrier trunks, refer to the information obtained in step 5.

| If P-side port | Do      |
|----------------|---------|
| is links       | step 28 |
| is trunks      | step 30 |

- 28** To manually busy all provisioned links connected to the defective NTMX87 circuit card, type

**>bsy link link\_no**

and press the Enter key.

where

**link\_no**

is the number of the link associated with the defective NTMX87 circuit card

**Note 1:** Each NTMX81 card has two links. The user must busy each link. Possible link pairs are 0 and 1, 2 and 3, 4 and 5, 6 and 7. This pair relationship continues in all 54 P-side links.

## NTMX87 in an RSC-S (DS-1) Model B RCC2 (continued)

**Note 2:** Refer to the charts in steps 36 and 38 for P-side link-to-slot assignments. You must busy all provisioned links in the slot.

- 29 Determine if the NTMX87 circuit card that has faults is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the defective NTMX87   | Do      |
|---------------------------|---------|
| is on the main shelf      | step 36 |
| is on the extension shelf | step 38 |

- 30 Access the TRKS;TTP MAP display level. Busy the trunks assigned to the P-side carriers associated with the defective NTMX87. To perform these actions, type

**>TRKS;TTP;POST D RCC2 rcc2\_no carrier\_no**

and press the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the NTMX87 that

has faults

**carrier\_no**

is the number of the P-side carrier assigned

*Example of a MAP response*

```
LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED
```

```
POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCC2 0 1 WADEOUT796 11 LO
```

- 31 To busy the trunks associated with the NTMX87 circuit card that has faults, type

**>BSY ALL**

and press the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** To busy other carriers associated with the NTMX87 circuit card that has faults, refer to the link-to-slot assignment charts. These charts appear in steps 36 and 38.

- 32 To installation busy all the trunks to prevent carrier alarms, type

**>BSY INB ALL**

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

and press the Enter key.

- 33** To access the CARRIER level and post the P-side carriers associated with the NTMX87 circuit card that has faults, type

**>CARRIER;POST RCC2 rcc2\_no carrier\_no**

and press the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the NTMX87 that

has faults

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the defective NTMX87 circuit card.

- 34** To busy and offline the P-side carriers associated with the NTMX87 circuit card that has faults, type

**>BSY carrier\_no ;OFFL carrier\_no**

and press the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the NTMX87 circuit card that has faults.


- 35** Determine if the NTMX87 circuit card that has faults is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the NTMX87 that has faults | Do      |
|-------------------------------|---------|
| is on the main shelf          | step 36 |
| is on the extension shelf     | step 38 |

#### **At the RCE frame**

- 36** Use the following figure to determine slot assignments on the P-side of the main shelf.

## NTMX87 in an RSC-S (DS-1) Model B RCC2 (continued)

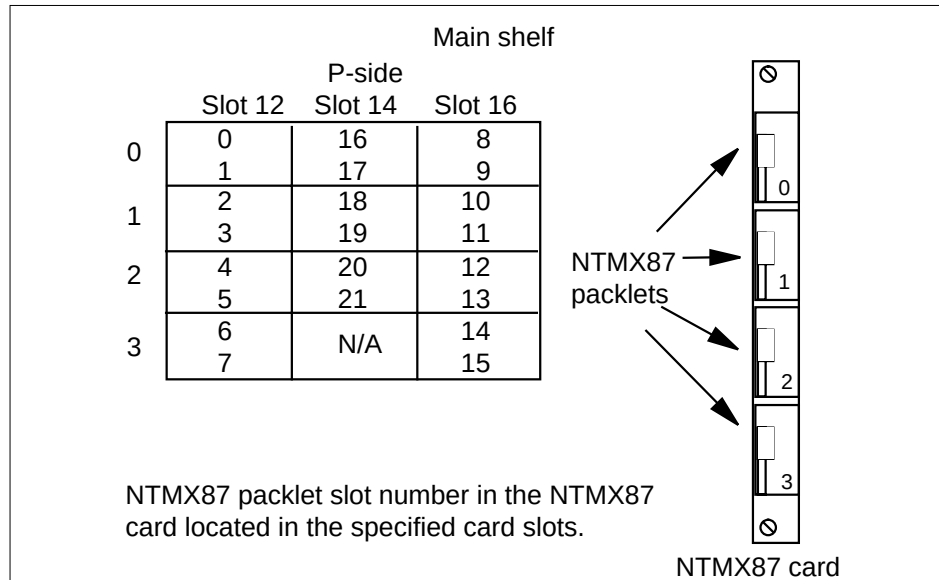

37



### WARNING

#### Static electricity damage

Before you remove any cards, put on a wrist strap and connect the wrist strap to the wrist strap grounding point. This point is on the left side of the modular supervisory panel (MSP) of the RCC2. This action protects the equipment against damage from static electricity.

Remove the NTMX81 packet as described in the following steps:


- a Locate the NTMX81 packet you want to remove on the correct NTMX87 carrier card slot.
- b Open the locking lever on the NTMX81 packet. Carefully pull the packet toward you until the packet clears the shelf.
- c Make sure the NTMX81 packets are stored in an electrostatic discharge (ESD) container. This container protects the circuit card until you reinstall the packet in the NTMX87 carrier card.
- d Go to step 42.

### At the RCE frame

- 38 Refer to field SIDE of table RCCINV to determine which side of the extension shelf contains the NTMX87 circuit card that has faults



**NTMX87**  
**in an RSC-S (DS-1) Model B RCC2 (continued)**

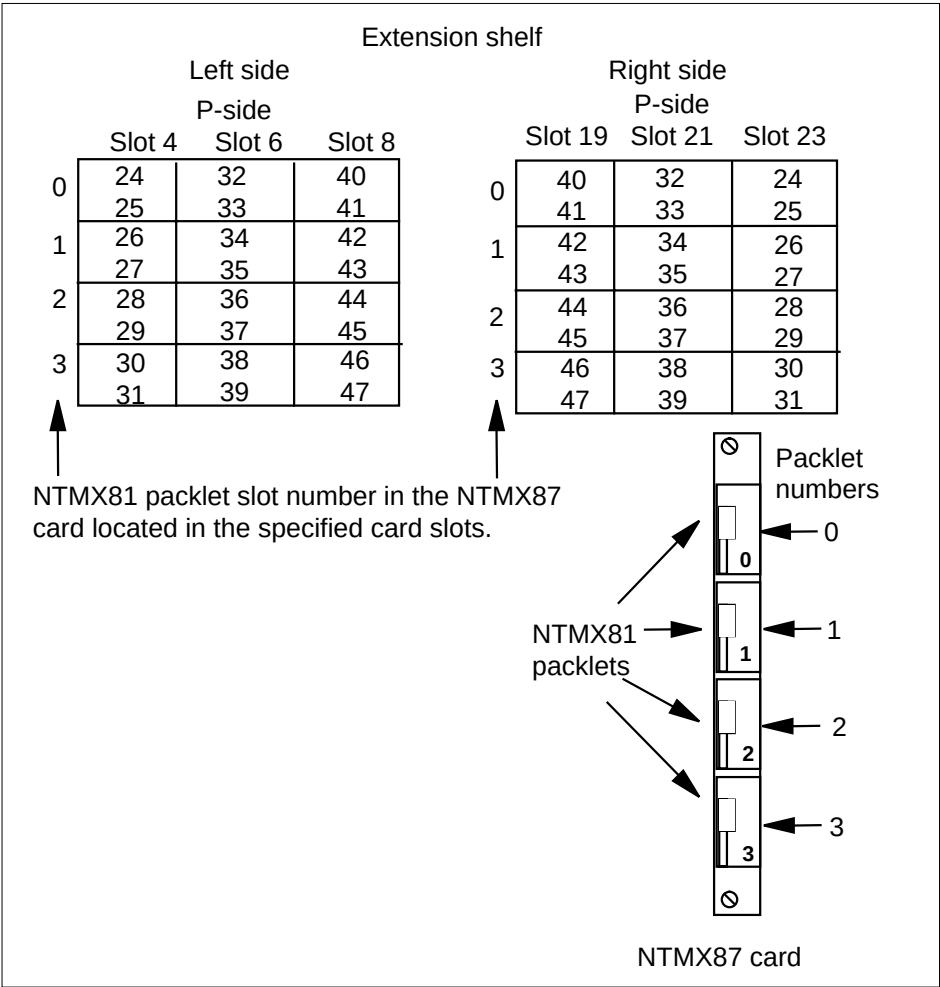

39



**WARNING**  
**Static electricity damage**  
Before you remove any cards, put on a wrist strap and connect the wrist strap to the wrist strap grounding point. This point is on the left side of the modular supervisory panel (MSP) of the RCC2. This action protects the equipment against damage from static electricity.

- Remove the NTMX81 packet as described in the following steps:
- a** Locate the NTMX81 packet you want to remove on the correct NTMX87 carrier card slot.

**NTMX87****in an RSC-S (DS-1) Model B RCC2** (continued)

- b Open the locking lever on the NTMX81 packet. Carefully pull the packet toward you until the packet clears the shelf.
  - c Make sure the NTMX81 packets are stored in an electrostatic discharge (ESD) container. This container protects the circuit card until you reinstall the packet in the NTMX87 carrier card.
  - d Go to step 42.
- 40** To translate the dual RCC2s IRLINKS, type  
**>TRNSL**  
 and press the Enter key.  
*Example of a MAP response*

| CM         | MS     | IOD | Net        | PM           | CCS   | LNS  | Trks  | Ext     | Appl |
|------------|--------|-----|------------|--------------|-------|------|-------|---------|------|
| .          | .      | .   | .          | <b>1RCC2</b> | .     | .    | .     | .       | .    |
| IRLINK     |        |     | SysB       | ManB         | OffL  | CBsy | ISTb  | InSv    |      |
| 0 Quit     | PM     |     | 0          | 0            | 2     | 0    | 2     | 25      |      |
| 2          | RCC2   |     | 0          | 0            | 0     | 0    | 1     | 1       |      |
| 3          |        |     |            |              |       |      |       |         |      |
| 4          | RCC2   | 0   | ISTb       | Links_00S:   | CSide | 1,   | PSide | 1       |      |
| 5 TRNSL    | Unit0: |     | Inact      | InSv         |       |      |       |         |      |
| 6 TST_     | Unit1: |     | Act        | InSv         |       |      |       |         |      |
| 7 BSY_     |        |     |            |              |       |      |       |         |      |
| 8 RTS_     |        |     |            |              |       |      |       |         |      |
| 9          |        |     |            |              |       |      |       |         |      |
| 10         |        | IR  | From       | To           |       | CAP  | STATE | MSGCOND |      |
| 11         |        | 0   | RCC2 0, 0  | RCC2 1, 0    |       | MS   | OK    | OPN     |      |
| 12         |        | 1   | RCC2 0, 8  | Rcc2 1, 8    |       | MS   | OK    | OPN     |      |
| 13         |        | 2   | RCC2 0, 12 | RCC2 1, 12   |       | S    | OK    |         |      |
| 14 QueryIR |        | 3   | RCC2 0, 13 | RCC2 1, 13   |       | S    | OK    |         |      |
| 15         |        |     |            |              |       |      |       |         |      |
| 16         |        |     |            |              |       |      |       |         |      |
| 17         |        |     |            |              |       |      |       |         |      |
| 18         |        |     |            |              |       |      |       |         |      |

- 41** To busy IRLINKS in the NTMX87 circuit card that has faults, type  
**>BSY irlink\_no**  
 and press the Enter key.  
*where*

**irlink\_no**

is the number of the irlink that must be busied

**Note 1:** You must perform this step for each provisioned link in the slot position.

**Note 2:** For link-to-slot assignments, refer to step 36 for the main shelf, and step 38 for the extension shelf.

---

**NTMX87**

**in an RSC-S (DS-1) Model B RCC2** (continued)

---

*At the RCE frame*

42



**WARNING**

**Static electricity damage**

Before you remove any cards, put on a wrist strap and connect the wrist strap to the wrist strap grounding point. This point is on the left side of the modular supervisory panel (MSP) of the RCC2. This action protects the equipment against damage from static electricity.



**DANGER**

**Equipment damage**

Take the following precautions when you remove or insert a card:

1. Do not apply direct pressure to the components
2. Do not force the cards in the slots.

Put on a wrist strap.


43

Use the T9908 wrist grounding strap and a T1324 screwdriver to remove the NTMX87 frame carrier circuit card. Insert the new carrier card and secure the card.

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

---

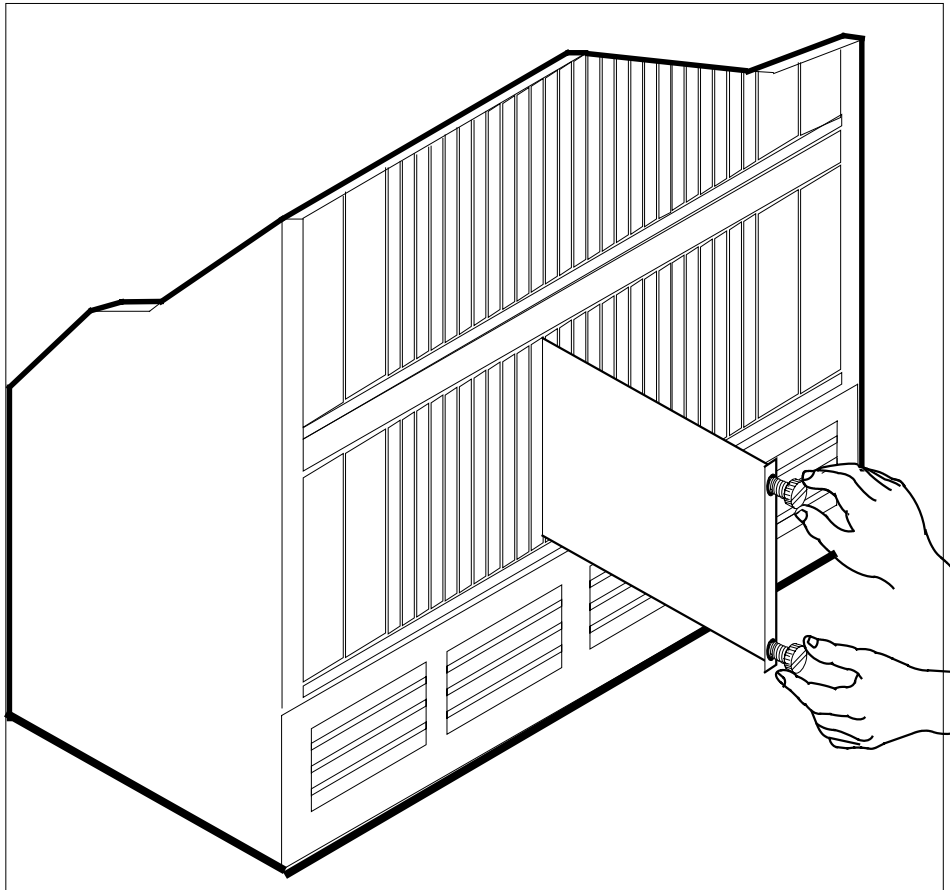

- 44** Replace the NTMX81 packlets you removed. Align the packlet with the slots in the shelf. Carefully slide the packlet in the circuit card slot in the NTMX87 circuit card.
- 45** Seat and lock the packlet.
- a** Use your fingers or thumbs to push on the upper and lower edges of the faceplate of the packlet. This method makes sure the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 46** Use the following information to determine the next step in this procedure.

| If                                                        | Do      |
|-----------------------------------------------------------|---------|
| you entered this procedure from alarm clearing procedures | step 63 |
| you entered this procedure from another point             | step 47 |

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

- 47 Use the following information to determine the next step in this procedure.

| If                                                                                         | Do      |
|--------------------------------------------------------------------------------------------|---------|
| you entered this procedure from step 15 for a single RCC2 with C-side links affected       | step 48 |
| you entered this procedure from step 37 or 39 for an RCC2 with P-side trunks affected      | step 56 |
| you entered this procedure from step 37 or 39 for a single RCC2 with P-side links affected | step 52 |
| you entered this procedure from step 41 for a DRCC2 with irlinks affected                  | step 54 |

#### *At the MAP terminal*

- 48 To test the busied network links from step 13, type

**>TST LINK link\_no**

**and press the Enter key.**

*where*

**link\_no**

is the number of the link associated with the new NTMX87

carrier card

**Note 1:** You must perform this step for each manually busied link.

**Note 2:** Test the other links associated with the RCC2. Perform this step for each link until the system tested all links.

| If TST | Do      |
|--------|---------|
| passes | step 49 |
| fails  | step 64 |

- 49 To return to service the P-side links, type

**>RTS LINK link\_no**

**and press the Enter key.**

*where*

**link\_no**

is the number of the link manually busied in step 13

**Note 1:** You must perform this step for each link that is manually busied.

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

---

**Note 2:** RTS the other links associated with the RCC2. To RTS these links, perform the procedures in this step for each link until all links return to service.

| If RTS | Do      |
|--------|---------|
| passes | step 50 |
| fails  | step 64 |

- 50** To post the inactive RCC2 that contains the NTMX87 card, type  
**>POST RCC2 rcc2\_no**  
and press the Enter key.  
*where*  
**rcc2\_no**  
is the number of the RCC2 associated with the card that has faults

- 51** To return the inactive RCC2 unit to service, type  
**>RTS UNIT unit\_no**  
and press the Enter key.  
*where*  
**unit\_no**  
is the number of the RCC2 unit posted in step 50

| If RTS | Do      |
|--------|---------|
| passes | step 61 |
| fails  | step 64 |

**At the MAP terminal**

- 52** To test the busied links from step 28, type  
**>TST LINK link\_no**  
and press the Enter key.  
*where*  
**link\_no**  
is the number of the link associated with the new NTMX87

## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

carrier card

**Note 1:** You must perform this step for each manually busied link.

**Note 2:** To test the other links associated with the RCC2, perform this step for each link until you tested all links.

| If TST | Do      |
|--------|---------|
| passes | step 53 |
| fails  | step 64 |

**53** To return to service the P-side links, type

**>RTS LINK link\_no**

and press the Enter key.

where

**link\_no**

is the number of the link manually busied in step 13

**Note 1:** You must perform this step for each link that is manually busied.

**Note 2:** RTS the other links associated with the RCC2. To RTS these links, perform the procedures in this step for each link until all links return to service.

| If RTS | Do      |
|--------|---------|
| passes | step 61 |
| fails  | step 64 |

#### **At the MAP terminal**

**54** To test the IRLINKS, type

**>TST irlink\_no**

**and press the Enter key.**

where

**irlink\_no**

is the number of the link busied in step 41

**Note 1:** You must perform this step for each manually busied link.

**Note 2:** To test the other irlinks associated with the RCC2, perform this step for each irlink until you tested all links.

| If TST | Do      |
|--------|---------|
| passes | step 55 |
| fails  | step 64 |

**NTMX87****in an RSC-S (DS-1) Model B RCC2** (continued)

- 55 To return to service the IRLINKS, type

**>RTS irlink\_no**

and press the Enter key.

where

**irlink\_no**

is the number of the link manually busied in step 41

**Note 1:** You must perform this step for each irlink that is manually busied.

**Note 2:** RTS the other links associated with the RCC2. To RTS these links, perform this step for each link until all links return to service.

| If RTS | Do      |
|--------|---------|
| passes | step 61 |
| fails  | step 64 |

**At the MAP terminal**

- 56 To busy and return to service P-side carriers offlined in step 34, type

**>BSY carrier\_no; RTS carrier\_no**

and press the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

| If carrier RTS | Do      |
|----------------|---------|
| passes         | step 57 |
| fails          | step 64 |

- 57 To access the TTP MAP level to post the P-side links associated with the new NTMX87 circuit card, type

**>TTP;POST D RCC2 rcc2\_no carrier\_no**

and press the Enter key.

where

**rcc2\_no**

is the number of the RCC2 associated with the new NTMX87

circuit card

**carrier\_no**

is the number of the P-side link trunks assigned

*Example of a MAP response*



## NTMX87

### in an RSC-S (DS-1) Model B RCC2 (continued)

```

LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED

```

```

POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCC2 0 1 WADEOUT796 11 INB

```

- 58** To busy the trunks associated with the new NTMX87 circuit card, type

**>BSY ALL**

and press the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** Busy the other carriers associated with the NTMX87 circuit card that has faults. Refer to the link-to-slot assignment charts in steps 36 and 38.

- 59** To test the trunks associated with the new NTMX87 circuit card, type

**>TST;NEXT**

and press the Enter key.

**Note:** Perform this step for each carrier span associated with the new NTMX87 circuit card.

| If trunks TST | Do      |
|---------------|---------|
| passes        | step 60 |
| fails         | step 64 |

- 60** To return to service trunks assigned to links on the new NTMX87 circuit card, type

**>RTS ALL**

and press the Enter key.

| If RTS | Do      |
|--------|---------|
| passes | step 61 |
| fails  | step 64 |

- 61** Send any cards that have faults for repair according to local procedure.

- 62** Record the date card replaced, the serial number of the card, and the reason you performed card replacement. Go to step 65.

- 63** Return to *Alarm Clearing Procedures* or the procedure that directed you to this procedure. At the point where a list of card that have faults appeared,

**NTMX87**  
**in an RSC-S (DS-1) Model B RCC2 (end)**

---

identify the next card on the list. Refer to the correct card replacement procedure for that card in this manual.

- 64** To replace this card, contact the next level of maintenance for help.
- 65** This procedure is complete. Remove the sign from the active unit. Return to the maintenance procedure that directed you to this card replacement procedure. Continue as directed.

## **NTMX87 in an RSC-S (PCM-30) Model A RCO2**

---

### **Application**

Use this procedure to replace an NTMX87 card in an RSC-S RCO2.

| PEC    | Suffixes | Name               |
|--------|----------|--------------------|
| NTMX87 | AA       | Quad Frame Carrier |


### **Common procedures**

None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.

## NTMX87 in an RSC-S (PCM-30) Model A RCO2 (continued)

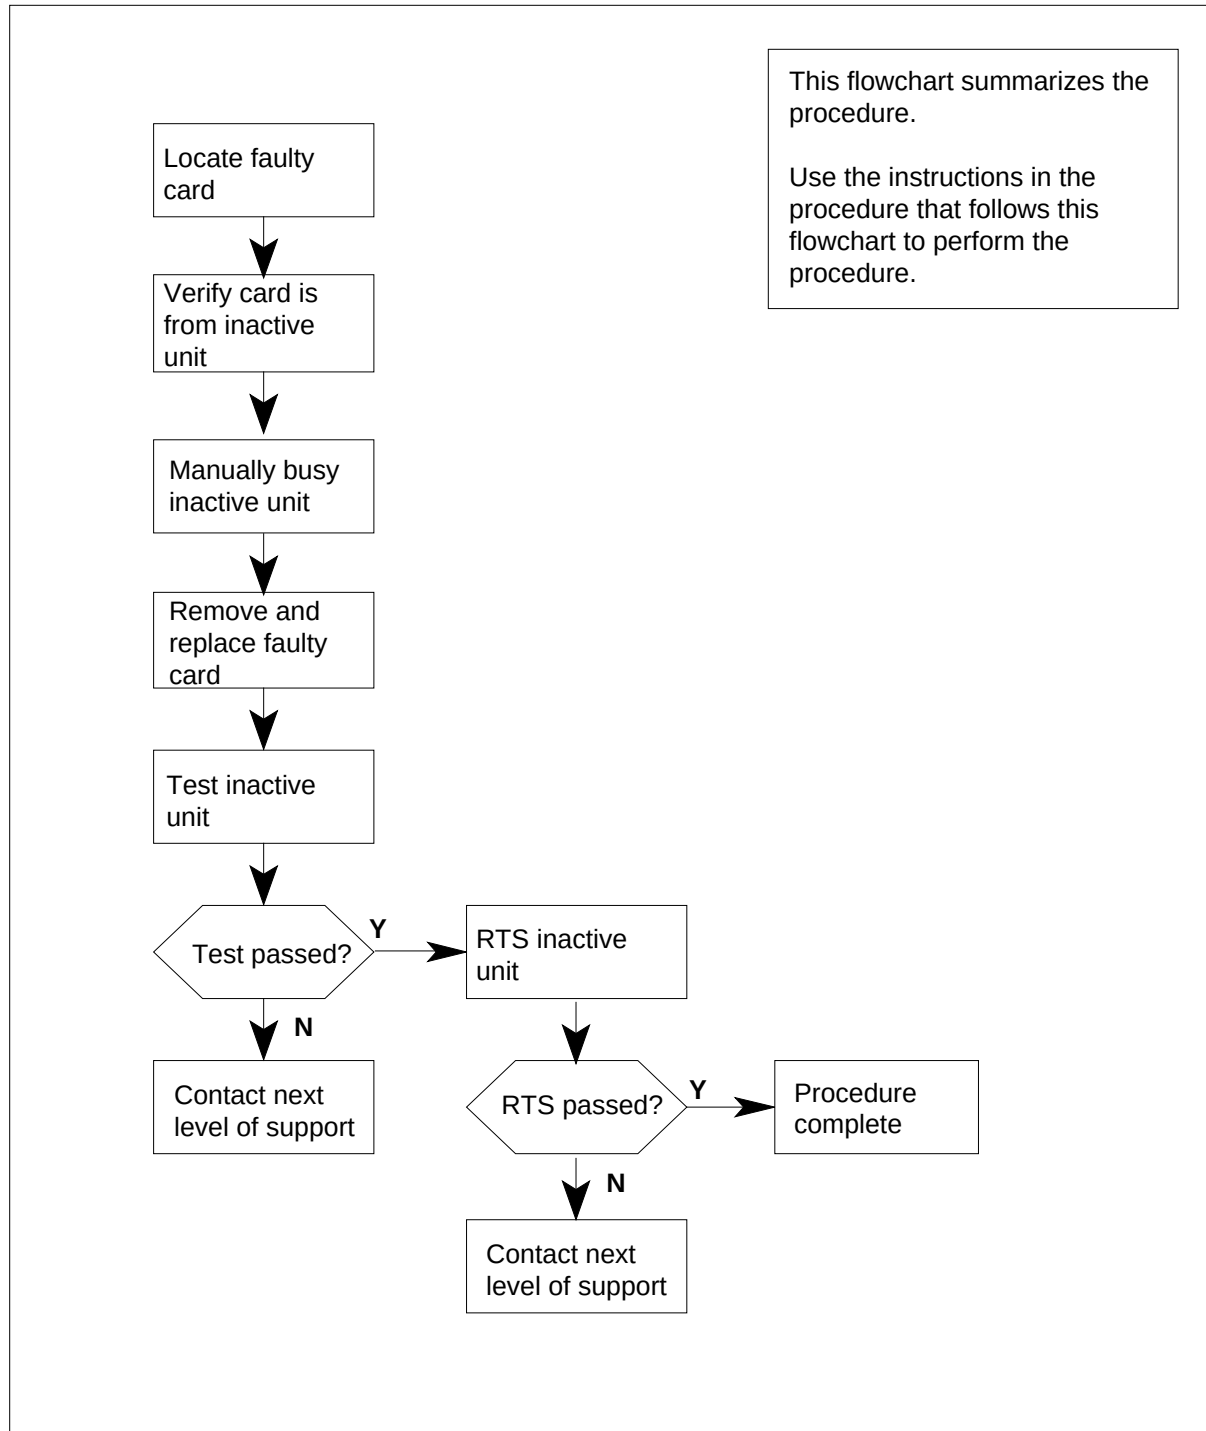

---

## NTMX87 in an RSC-S (PCM-30) Model A RCO2 (continued)

---

### Replacing an NTMX87 card in RSC-S RCO2

#### At your Current Location

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2

**CAUTION**

Several configurations of the NTMX87 quad frame carrier card are detailed in this procedure.

Be sure you are using the steps for the configuration of your RCO2, such as a single or dual RCO2 (DRCO2), main or extension shelf, or links versus carrier trunks.

**CAUTION****Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX87 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

**Note:** The dual RCO2 configuration for the international RSC-S will be available in a future release.

#### At the MAP terminal

- 3 Ensure the PM level of the MAP display is currently displayed by typing  
**>MAPCI;MTC;PM;POST RCO2 rco2\_no**  
and pressing the Enter key.  
*where*

**rco2\_no**

is the number of the RCO2 with the faulty card

*Example of a MAP display:*

NTMX87  
in an RSC-S (PCM-30) Model A RCO2 (continued)

| CM         | MS     | IOD   | Net  | PM         | CCS   | LNS  | Trks  | Ext | Appl |
|------------|--------|-------|------|------------|-------|------|-------|-----|------|
| .          | .      | .     | .    | 1RCO2      | .     | .    | .     | .   | .    |
| RCO2       |        | SysB  | ManB | OffL       | CBsy  | ISTb | InSv  |     |      |
| 0 Quit     | PM     | 0     | 0    | 2          | 0     | 2    | 25    |     |      |
| 2 Post_    | RCO2   | 0     | 0    | 0          | 0     | 1    | 1     |     |      |
| 3 ListSet  |        |       |      |            |       |      |       |     |      |
| 4          | RCO2   | 0     | ISTb | Links_00S: | CSide | 1,   | PSide | 1   |      |
| 5 TRNSL    | Unit0: | Inact | InSv |            |       |      |       |     |      |
| 6 TST      | Unit1: | Act   | InSv |            |       |      |       |     |      |
| 7 BSY      |        |       |      |            |       |      |       |     |      |
| 8 RTS      |        |       |      |            |       |      |       |     |      |
| 9 OffL     |        |       |      |            |       |      |       |     |      |
| 10 LoadPM_ |        |       |      |            |       |      |       |     |      |
| 11 Disp_   |        |       |      |            |       |      |       |     |      |
| 12 Next_   |        |       |      |            |       |      |       |     |      |
| 13         |        |       |      |            |       |      |       |     |      |
| 14 QueryPM |        |       |      |            |       |      |       |     |      |
| 15         |        |       |      |            |       |      |       |     |      |
| 16         |        |       |      |            |       |      |       |     |      |
| 17         |        |       |      |            |       |      |       |     |      |
| 18         |        |       |      |            |       |      |       |     |      |

- 4 Display and record the C-side link status of the posted RCO2 associated with the faulty NTMX87 quad carrier card by typing

>TRNSL C

and pressing the Enter key.

Example of a MAP response

```
LINK 0 PLGC 0 0;CAP MS: STATUS SysB MSGCOND CLS RESTRICT
LINK 1 PLGC 0 1;CAP S: STATUS SysB
LINK 2 PLGC 0 2;CAP MS: STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 PLGC 0 3;CAP S: STATUS OK
LINK 4 PLGC 0 4;CAP S: STATUS SysB
LINK 5 PLGC 0 5;CAP S: STATUS SysB
```

- 5 Display and record the P-side link status of the posted RCO2 associated with the faulty NTMX87 quad carrier card by typing

>TRNSL P

and pressing the Enter key.

Example of a MAP response

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

```

LINK 1 Carrier of Class - Trunk ;Status;OK
LINK 2 Carrier of Class - Trunk ;Status;OK
LINK 3 Carrier of Class - Trunk ;Status;OK
LINK 10 DCH 6; Status :OK
LINK 13 DCH 7; Status :OK
LINK 17 DCH 4; Status :OK
LINK 22 RMM 6 0;CAP MS;Status OK MSGCOND OPN
LINK 24 LCME RSCS 00 0 0;CAP MS;Status OK MSGCOND OPN
LINK 25 LCME RSCS 00 0 1;CAP MS;Status OK MSGCOND OPN
LINK 26 LCME RSCS 00 0 2;CAP S;Status OK

```

- 6 By observing the MAP display, be sure the card that is to be removed is in the inactive unit.

| If faulty card is in the | Do     |
|--------------------------|--------|
| active unit              | step 7 |
| inactive unit            | step 9 |

- 7 Switch the processing activity (SWACT) to the inactive unit by typing  
**>SWACT**  
 and pressing the Enter key.
- Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 8 Confirm the system prompt by typing  
**>YES**  
 and pressing the Enter key.
- After both units are in-service, proceed to the next step.

#### **At the RCE frame**

- 9 Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

| If faulty card is | Do      |
|-------------------|---------|
| C-side of RCO2    | step 10 |
| P-side faulty     | step 16 |

#### **At the MAP terminal**

- 10 Busy the inactive PM unit by typing  
**>bsy unit unit\_no**  
 and pressing the Enter key.
- where*

**NTMX87****in an RSC-S (PCM-30) Model A RCO2** (continued)**unit\_no**

is the number of the inactive RCO2 unit (unit 0 or 1)

- 11** Post the host PM by typing  
**>POST host\_pm host\_pm\_no**  
 and pressing the Enter key.

*where***host\_pm**

is a PCM-30 line group controller (PLGC)

**host\_pm\_no**

is the number of a PLGC

*Example of a MAP display:*

| CM         | MS     | IOD   | Net  | PM         | CCS   | Lns      | Trks | Ext  | Appl |
|------------|--------|-------|------|------------|-------|----------|------|------|------|
| .          | .      | .     | .    | 1RCO2      | .     | .        | .    | .    | .    |
| PLGC       |        |       | SysB | ManB       | OffL  | CBsy     | ISTb | InSv |      |
| 0 Quit     | PM     | 0     | 0    | 1          | 0     | 4        | 12   |      |      |
| 2 Post_    | PLGC   | 0     | 0    | 2          | 0     | 2        | 9    |      |      |
| 3 ListSet  |        |       |      |            |       |          |      |      |      |
| 4          | PLGC   | 1     | ISTb | Links_00S: | CSide | 0, PSide | 1    |      |      |
| 5 Trnsl_   | Unit0: | Act   | InSv |            |       |          |      |      |      |
| 6 Tst_     | Unit1: | Inact | InSv |            |       |          |      |      |      |
| 7 Bsy_     |        |       |      |            |       |          |      |      |      |
| 8 RTS_     |        |       |      |            |       |          |      |      |      |
| 9 OffL     |        |       |      |            |       |          |      |      |      |
| 10 LoadPM_ |        |       |      |            |       |          |      |      |      |
| 11 Disp_   |        |       |      |            |       |          |      |      |      |
| 12 Next    |        |       |      |            |       |          |      |      |      |
| 13 SwAct   |        |       |      |            |       |          |      |      |      |
| 14 QueryPM |        |       |      |            |       |          |      |      |      |
| 15         |        |       |      |            |       |          |      |      |      |
| 16         |        |       |      |            |       |          |      |      |      |
| 17 Perform |        |       |      |            |       |          |      |      |      |
| 18         |        |       |      |            |       |          |      |      |      |

- 12** Display the host peripherals P-side links associated with the RCO2 by typing  
**>TRNSL P**  
 and pressing the Enter key.

*Example of a MAP response*

```
LINK 0 RCO2 0 0;CAP MS:STATUS SysB MSGCOND CLS RESTRICT
LINK 1 RCO2 0 1;CAP S:STATUS SBsy
LINK 2 RCO2 0 2;CAP MS:STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 RCO2 0 3;CAP S:STATUS OK
LINK 4 RCO2 0 4;CAP S:STATUS SysB
LINK 5 RCO2 0 5;CAP S:STATUS Sysb
```



## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

- 13** Manually busy the links connected to the faulty NTMX87 card by typing  
**>BSY LINK link\_no**  
 and pressing the Enter key.

where

**link\_no**


is the number of the link associated with the faulty NTMX87 card

**Note 1:** All provisioned links in the slot must be busied.

**Note 2:** Reference the chart in step 14 for the RCO2 C-side link-to-slot assignments.

#### At the RCE frame

- 14** Use the following charts to determine which NTMX87 card is to be removed by matching the provisioned link number with the slot number and the packet number to the left of each respective table.

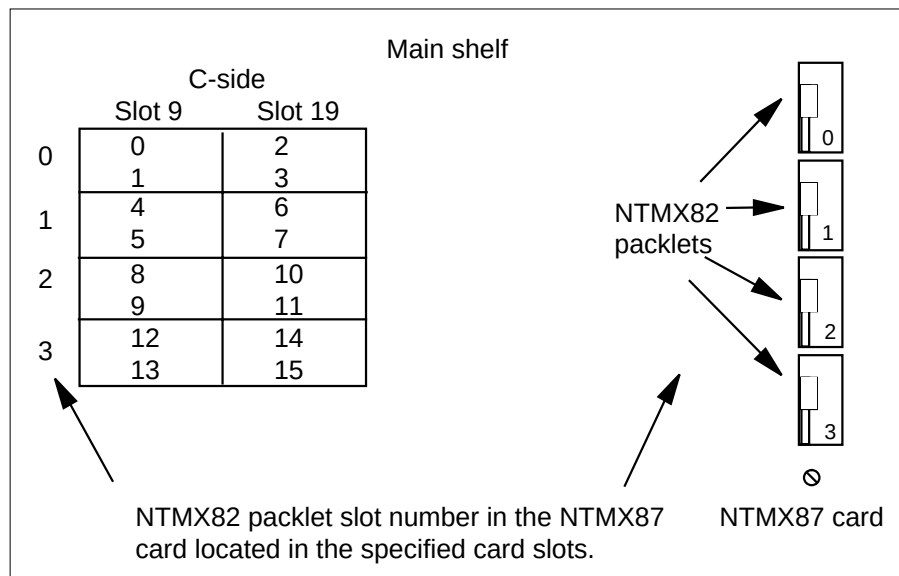

- 15**



#### **DANGER**

##### **Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Remove the NTMX82 packet as described in the following steps:

**NTMX87****in an RSC-S (PCM-30) Model A RCO2** (continued)

- a Locate the NTMX82 packet to be removed on the appropriate NTMX87 quad carrier card slot.
- b Open the locking lever on the NTMX82 packet and gently pull the packet toward you until it clears the shelf.
- c Ensure the NTMX82 packets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 quad carrier card.
- d Go to step 32.

**At the MAP terminal**

- 16** Determine if the RCO2 is in a single or dual configuration by typing

**>POST RCO2 rco2\_no ;IRLINK**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 associated with the faulty NTMX87 card

**Note:** If the posted RCO2 is in a single RCO2 configuration, the system will respond with the following message:  
NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

| If the RCO2 is in a  | Do      |
|----------------------|---------|
| single configuration | step 17 |
| dual configuration   | step 30 |

- 17** Determine if P-side ports are links or carrier trunks by observing the information obtained in step 5.

| If P-side port is | Do      |
|-------------------|---------|
| links             | step 18 |
| trunks            | step 20 |

- 18** Manually busy all provisioned links connected to the faulty NTMX87 circuit card by typing

**>bsy link link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link associated with the faulty NTMX87 circuit card

**Note 1:** Each NTMX82 card has two links, and each link must be manually busyed. Possible link pairs are 0 and 1, 2 and 3, 4 and 5, 6 and 7. This pair relationship continues throughout all 54 P-side links.

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

**Note 2:** Reference the charts in steps 26 and 28 for P-side link-to-slot assignments. All provisioned links in the slot must be busied.

- 19** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the faulty NTMX87 is on the | Do      |
|--------------------------------|---------|
| main shelf                     | step 26 |
| extension shelf                | step 28 |

- 20** Access the TRKS;TTP MAP display level, and busy the trunks assigned to the P-side carriers associated with the faulty NTMX87 by typing

**>TRKS;TTP;POST D RCO2 rco2\_no carrier\_no**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

*Example of a MAP response*

```
LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED
```

```
POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCO2 0 1 WADEOUT796 11 LO
```

- 21** Busy the trunks associated with the faulty NTMX87 circuit card by typing

**>BSY ALL**

and pressing the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** To busy other carriers associated with the faulty NTMX87 circuit card, reference the link-to-slot assignment charts in steps 26 and 28.

- 22** Installation busy all the trunks to prevent carrier alarms by typing

**>BSY INB ALL**

and pressing the Enter key.

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

---

- 23 Access the CARRIER level and post the P-side carriers associated with the faulty NTMX87 circuit card by typing  
**>CARRIER;POST RCO2 rco2\_no carrier\_no**  
and pressing the Enter key.

*where*

**rco2\_no**

is the number of the RCO2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.

- 24 Busy and offline the P-side carriers associated with the faulty NTMX87 circuit card by typing  
**>BSY carrier\_no ;OFFL carrier\_no**  
and pressing the Enter key.

*where*

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.

- 25 Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

---

| <b>If the faulty NTMX87 is on the</b> | <b>Do</b> |
|---------------------------------------|-----------|
| main shelf                            | step 26   |
| extension shelf                       | step 28   |


---

#### ***At the RCE frame***

- 26 Use the following figure to determine slot assignments on the P-side of the main shelf.

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

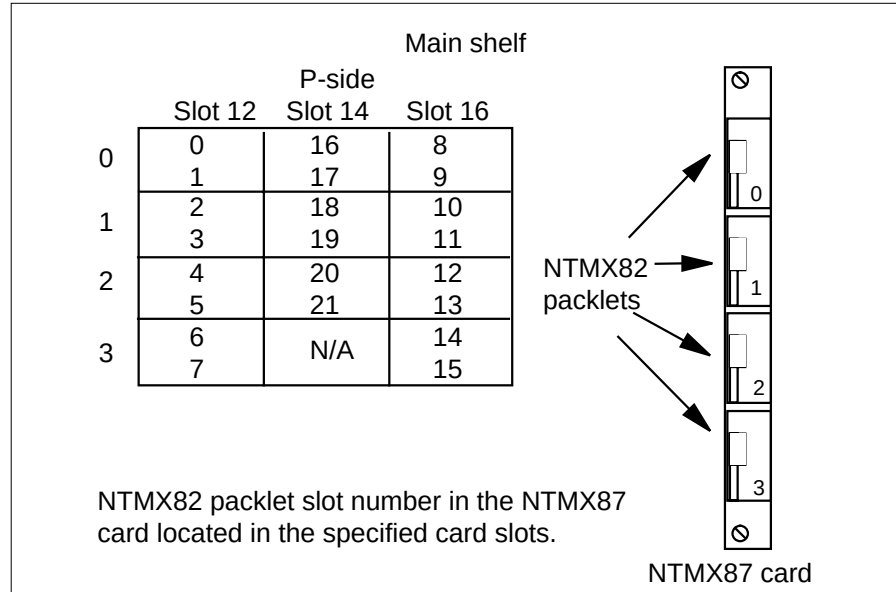

27

**DANGER****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Remove the NTMX82 packet as described in the following steps:


- a Locate the NTMX82 packet to be removed on the appropriate NTMX87 quad carrier card slot.
- b Open the locking lever on the NTMX82 packet and gently pull the packet toward you until it clears the shelf.
- c Ensure the NTMX82 packets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 quad carrier card.
- d Go to step 32.

**At the RCE frame**

- 28 Determine which side of the extension shelf the faulty NTMX87 circuit card is located by referencing field SIDE of table RCCINV.

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

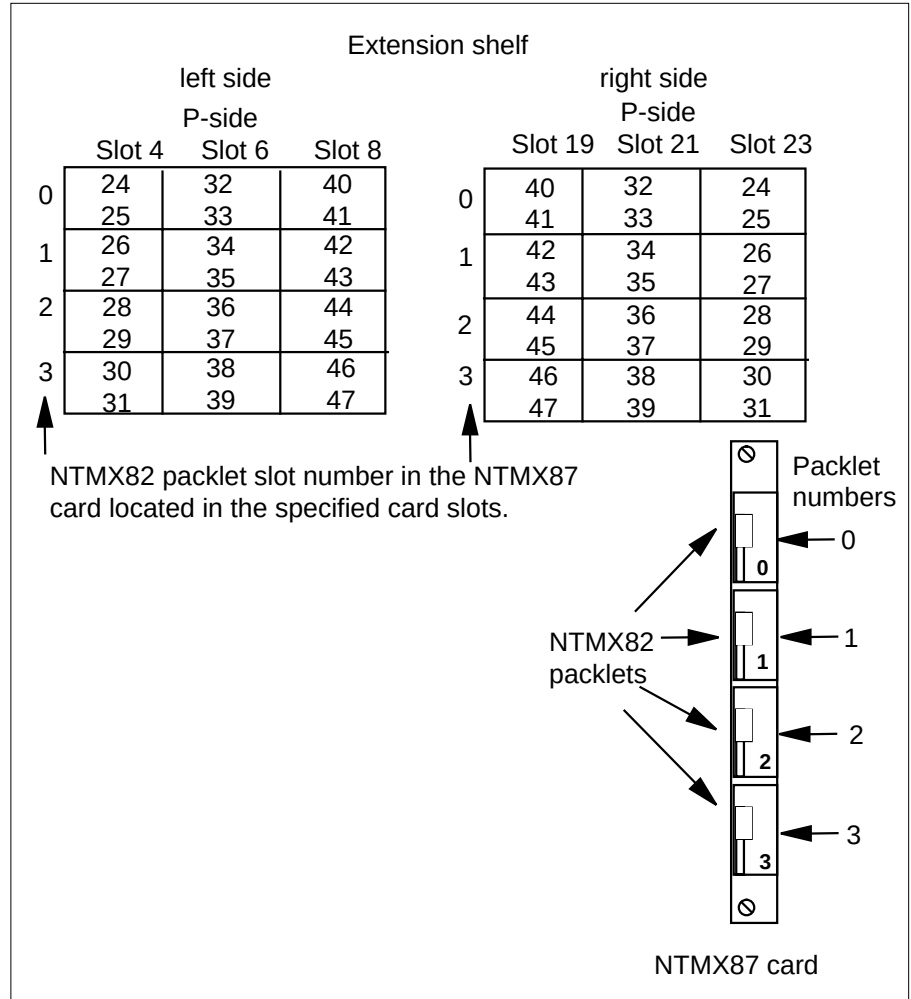

29



#### **DANGER**

##### **Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Remove the NTMX82 packet as described in the following steps:

- a** Locate the NTMX82 packet to be removed on the appropriate NTMX87 quad carrier card slot.

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

- b Open the locking lever on the NTMX82 packlet and gently pull the packlet toward you until it clears the shelf.
  - c Ensure the NTMX82 packlets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 quad carrier card.
  - d Go to step 32.
- 30** Translate the dual RCO2s IRLINKS by typing  
**>TRNSL**  
 and pressing the Enter key.  
*Example of a MAP response*

| CM         | MS     | IOD        | Net        | PM           | CCS  | LNS   | Trks    | Ext | Appl |
|------------|--------|------------|------------|--------------|------|-------|---------|-----|------|
| .          | .      | .          | .          | <b>1RCO2</b> | .    | .     | .       | .   | .    |
| IRLINK     |        | SysB       | ManB       | OffL         | CBsy | ISTb  | InSv    |     |      |
| 0 Quit     | PM     | 0          | 0          | 2            | 0    | 2     | 25      |     |      |
| 2          | RCO2   | 0          | 0          | 0            | 0    | 1     | 1       |     |      |
| 3          |        |            |            |              |      |       |         |     |      |
| 4          | RCO2   | 0 ISTb     | Links_00S: | CSide        | 1,   | PSide | 1       |     |      |
| 5 TRNSL    | Unit0: | Inact      | InSv       |              |      |       |         |     |      |
| 6 TST_     | Unit1: | Act        | InSv       |              |      |       |         |     |      |
| 7 BSY_     |        |            |            |              |      |       |         |     |      |
| 8 RTS_     |        |            |            |              |      |       |         |     |      |
| 9          |        |            |            |              |      |       |         |     |      |
| 10         |        | IR         | From       | To           | CAP  | STATE | MSGCOND |     |      |
| 11         |        | 0          | RCO2 0, 0  | RCO2 1, 0    | MS   | OK    | OPN     |     |      |
| 12         |        | 1          | RCO2 0, 8  | Rcc2 1, 8    | MS   | OK    | OPN     |     |      |
| 13         |        | 2          | RCO2 0, 12 | RCO2 1, 12   | S    | OK    |         |     |      |
| 14 QueryIR | 3      | RCO2 0, 13 | RCO2 1, 13 | S            | OK   |       |         |     |      |
| 15         |        |            |            |              |      |       |         |     |      |
| 16         |        |            |            |              |      |       |         |     |      |
| 17         |        |            |            |              |      |       |         |     |      |
| 18         |        |            |            |              |      |       |         |     |      |

- 31** Busy IRLINKS in the faulty NTMX87 circuit card by typing  
**>BSY irlink\_no**  
 and pressing the Enter key.  
*where*

**irlink\_no**

is the number of the irlink that must be busied

**Note 1:** This step must be performed for each provisioned link in the slot position.

**Note 2:** For link-to-slot assignments, reference step 26 for the main shelf, and step 28 for the extension shelf.

## NTMX87 in an RSC-S (PCM-30) Model A RCO2 (continued)

---

*At the RCE frame*

32



**DANGER**

**Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



**DANGER**

**Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

33

Using the T9908 wrist grounding strap and a T1324 screwdriver, remove the NTMX87 quad frame carrier circuit card. Insert the new quad frame carrier card and secure.



**NTMX87**  
**in an RSC-S (PCM-30) Model A RCO2 (continued)**

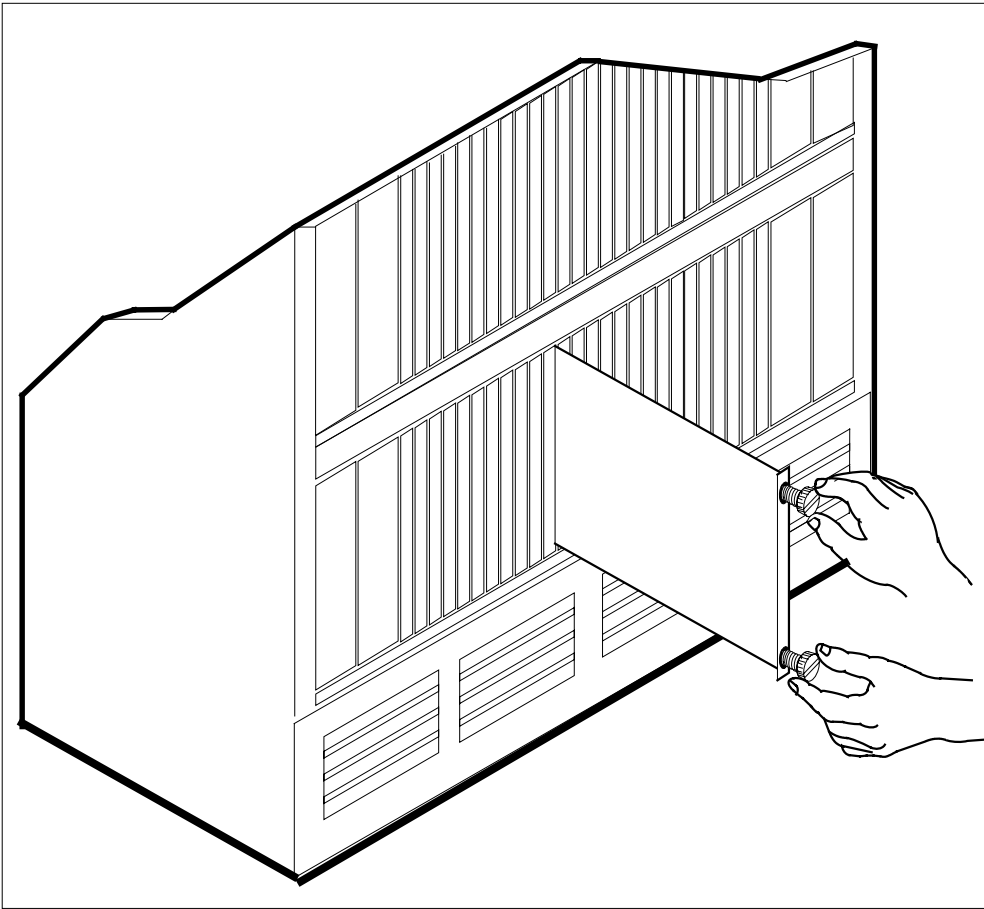

- 34** Replace the NTMX82 packlets previously removed. Align the packlet with the slots in the shelf and gently slide the packlet into the circuit card slot in the NTMX87 circuit card.
- 35** Seat and lock the packlet.
  - a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 36** Use the following information to determine what step to go to next in this procedure.

| If you entered this procedure from | Do      |
|------------------------------------|---------|
| alarm clearing procedures          | step 53 |
| other                              | step 37 |

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

---

- 37 Use the following information to determine what step to go to next in this procedure.

---

| If you entered this section of the procedure from           | Do      |
|-------------------------------------------------------------|---------|
| step 15 for a single RCO2 with C-side links affected        | step 38 |
| step 27 or 29 for an RCO2 with P-side trunks affected       | step 46 |
| step 27 or 29, for a single RCO2 with P-side links affected | step 42 |
| step 31 for a DRCO2 with irlinks affected                   | step 44 |

---

#### *At the MAP terminal*

- 38 Test the busied network links from step 13 by typing

**>TST LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link associated with the new NTMX87 quad frame carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCO2, execute this step for each link until all links are tested.

---

| If TST | Do      |
|--------|---------|
| passed | step 39 |
| failed | step 53 |

---

- 39 Return to service the P-side links by typing

**>RTS LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link manually busied in step 13

**Note 1:** This step must be performed for each link that is manually busied.

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

**Note 2:** To RTS the other links associated with the RCO2, execute the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 40 |
| failed | step 53 |

- 40** Post the inactive RCO2 in which the NTMX87 card is located by typing  
**>POST RCO2 rco2\_no**  
 and pressing the Enter key.  
*where*

**rco2\_no**  
 is the number of the RCO2 associated with the faulty card

- 41** Return the inactive RCO2 unit to service by typing  
**>RTS UNIT unit\_no**  
 and pressing the Enter key.  
*where*

**unit\_no**  
 is the number of the RCO2 unit posted in step 40

| If RTS | Do      |
|--------|---------|
| passes | step 51 |
| fails  | step 53 |

#### **At the MAP terminal**

- 42** Test the busied links from step 18 by typing  
**>TST LINK link\_no**  
 and pressing the Enter key.

*where*

**link\_no**  
 is the number of the link associated with the new NTMX87 quad frame carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCO2, execute this step for each link until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 43 |

## NTMX87 in an RSC-S (PCM-30) Model A RCO2 (continued)

|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                             | If TST | Do      |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------|
|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                             | failed | step 53 |
| 43 | Return to service the P-side links by typing<br><b>&gt;RTS LINK link_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>link_no</b><br>is the number of the link manually busied in step 13<br><br><b>Note 1:</b> This step must be performed for each link that is manually busied.<br><b>Note 2:</b> To RTS the other links associated with the RCO2, execute the procedures in this step for each link until all links are returned to service. |        |         |
|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                             | If RTS | Do      |
|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                             | passed | step 51 |
|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                             | failed | step 53 |

### **At the MAP terminal**

| 44 | Test the IRLINKS by typing<br><b>&gt;TST irlink_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>irlink_no</b><br>is the number of the link busied in step 31<br><br><b>Note 1:</b> This step must be performed for each manually busied link.<br><b>Note 2:</b> To test the other irlinks associated with the RCO2, execute this step for each irlink until all links are tested. |        |         |
|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------|
|    |                                                                                                                                                                                                                                                                                                                                                                                               | If TST | Do      |
|    |                                                                                                                                                                                                                                                                                                                                                                                               | passed | step 45 |
|    |                                                                                                                                                                                                                                                                                                                                                                                               | failed | step 53 |
| 45 | Return to service the IRLINKS by typing<br><b>&gt;RTS irlink_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>irlink_no</b><br>is the number of the link manually busied in step 31                                                                                                                                                                                                |        |         |

## NTMX87

### in an RSC-S (PCM-30) Model A RCO2 (continued)

**Note 1:** This step must be performed for each irlink that is manually busied.

**Note 2:** To RTS the other links associated with the RCO2, execute this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

#### **At the MAP terminal**

- 46** Busy and return to service P-side carriers that were offlined in step 24 by typing

**>BSY carrier\_no; RTS carrier\_no**

and pressing the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

| If carrier RTS | Do      |
|----------------|---------|
| passed         | step 47 |
| failed         | step 53 |

- 47** Access the TTP MAP level to post the P-side links associated with the new NTMX87 circuit card by typing

**>TTP;POST D RCO2 rco2\_no carrier\_no**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 associated with the new NTMX87 circuit card

**carrier\_no**

is the number of the P-side link trunks are assigned

*Example of a MAP response*

## NTMX87 in an RSC-S (PCM-30) Model A RCO2 (continued)

---

LAST CIRCUIT = 27  
POST CKT IDLED  
SHORT CLLI IS: 1125  
OK, CLLI POSTED

POST 18 DELQ BUSY Q DIG  
TTP 6-006  
CKT TYPE PM NO. COM LANG STA S R DOT TE R  
OG RCO2 0 1 WADEOUT796 11 INB

- 48** Busy the trunks associated with the new NTMX87 circuit card by typing  
**>BSY ALL**

and pressing the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** Busy the other carriers associated with the faulty NTMX87 circuit card. Reference the link-to-slot assignment charts in steps 26 and 28 .

- 49** Test the trunks associated with the new NTMX87 circuit card by typing  
**>TST ;NEXT**

and pressing the Enter key.

**Note:** Perform this step for each carrier span associated with the new NTMX87 circuit card.

---

| If trunks TST | Do      |
|---------------|---------|
| passed        | step 50 |
| failed        | step 53 |

---

- 50** Return-to-service trunks assigned to links on the new NTMX87 circuit card by typing

**>RTS ALL**

and pressing the Enter key.

---

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

---

- 51** Send any faulty cards for repair according to local procedure.
- 52** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 55.
- 53** Return to *Alarm Clearing Procedures* or the other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify

**NTMX87**

**in an RSC-S (PCM-30) Model A RCO2 (end)**

---

the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 54** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.
- 55** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTMX87 in an RSC-S (PCM-30) Model B RCO2**

---

### **Application**

Use this procedure to replace an NTMX87 card in an RSC-S RCO2.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>        |
|------------|-----------------|--------------------|
| NTMX87     | AA              | Quad Frame Carrier |

### **Common procedures**

None


### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the procedure that follows the flowchart.



## NTMX87 in an RSC-S (PCM-30) Model B RCO2 (continued)

### Summary of card replacement procedure for an NTMX87 card in RSC-S RCO2

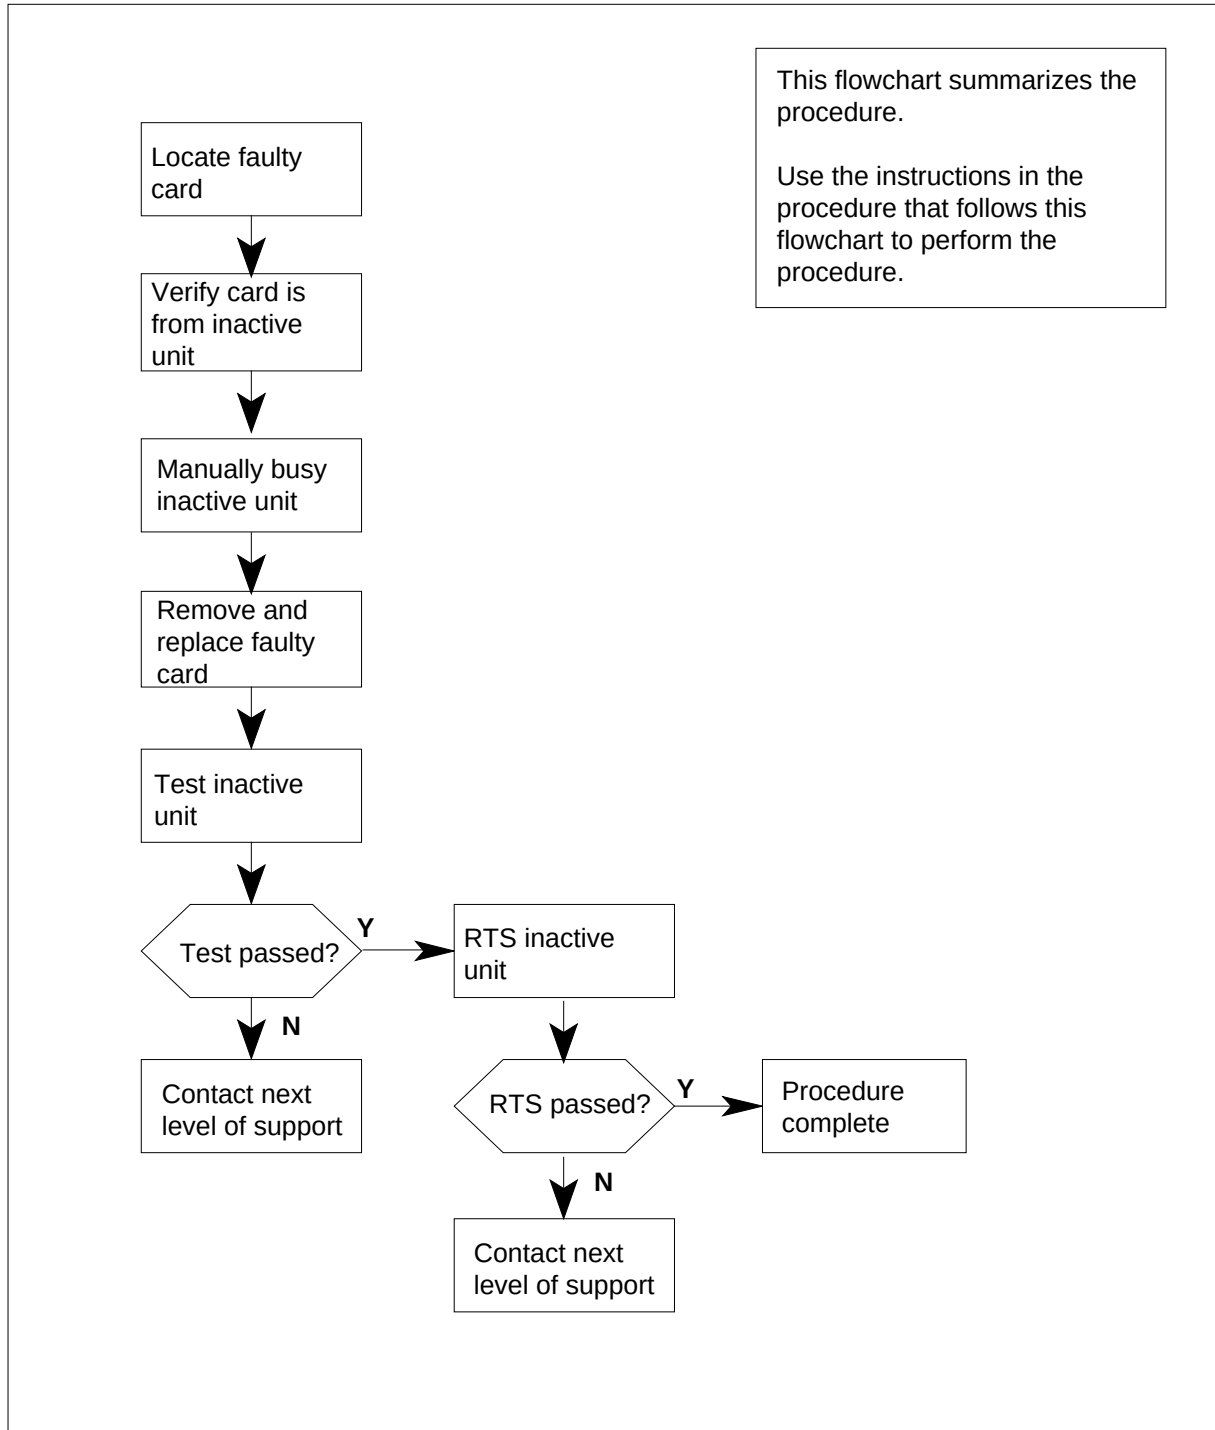

## NTMX87 in an RSC-S (PCM-30) Model B RCO2 (continued)

---

### Replacing an NTMX87 card in RSC-S RCO2

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2



#### **CAUTION**

Several configurations of the NTMX87 quad frame carrier card are detailed in this procedure.

Be sure you are using the steps for the configuration of your RCO2, such as a single or dual RCO2 (DRCO2), main or extension shelf, or links versus carrier trunks.



#### **CAUTION**

##### **Loss of service**

When replacing a card in the RCO2, ensure that the unit in which you are replacing the card is *inactive* and that the mate unit is *active*.

Obtain an NTMX87 replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

**Note:** The dual RCO2 configuration for the international RSC-S will be available in a future release.

#### *At the MAP terminal*

- 3 Ensure the PM level of the MAP display is currently displayed by typing  
**>MAPCI;MTC;PM;POST RCO2 rco2\_no**  
and pressing the Enter key.  
*where*

**rco2\_no**

is the number of the RCO2 with the faulty card

*Example of a MAP display:*

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

| CM         | MS     | IOD   | Net  | PM         | CCS   | LNS      | Trks | Ext | Appl |
|------------|--------|-------|------|------------|-------|----------|------|-----|------|
| .          | .      | .     | .    | 1RCO2      | .     | .        | .    | .   | .    |
| RCO2       |        | SysB  | ManB | OffL       | CBsy  | ISTb     | InSv |     |      |
| 0 Quit     | PM     | 0     | 0    | 2          | 0     | 2        | 25   |     |      |
| 2 Post_    | RCO2   | 0     | 0    | 0          | 0     | 1        | 1    |     |      |
| 3 ListSet  |        |       |      |            |       |          |      |     |      |
| 4          | RCO2   | 0     | ISTb | Links_00S: | CSide | 1, PSide | 1    |     |      |
| 5 TRNSL    | Unit0: | Inact | InSv |            |       |          |      |     |      |
| 6 TST      | Unit1: | Act   | InSv |            |       |          |      |     |      |
| 7 BSY      |        |       |      |            |       |          |      |     |      |
| 8 RTS      |        |       |      |            |       |          |      |     |      |
| 9 OffL     |        |       |      |            |       |          |      |     |      |
| 10 LoadPM_ |        |       |      |            |       |          |      |     |      |
| 11 Disp_   |        |       |      |            |       |          |      |     |      |
| 12 Next_   |        |       |      |            |       |          |      |     |      |
| 13         |        |       |      |            |       |          |      |     |      |
| 14 QueryPM |        |       |      |            |       |          |      |     |      |
| 15         |        |       |      |            |       |          |      |     |      |
| 16         |        |       |      |            |       |          |      |     |      |
| 17         |        |       |      |            |       |          |      |     |      |
| 18         |        |       |      |            |       |          |      |     |      |

- 4 Display and record the C-side link status of the posted RCO2 associated with the faulty NTMX87 quad carrier card by typing

**>TRNSL C**

and pressing the Enter key.

*Example of a MAP response*

```
LINK 0 PLGC 0 0;CAP MS: STATUS SysB MSGCOND CLS RESTRICT
LINK 1 PLGC 0 1;CAP S: STATUS SysB
LINK 2 PLGC 0 2;CAP MS: STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 PLGC 0 3;CAP S: STATUS OK
LINK 4 PLGC 0 4;CAP S: STATUS SysB
LINK 5 PLGC 0 5;CAP S: STATUS SysB
```

- 5 Display and record the P-side link status of the posted RCO2 associated with the faulty NTMX87 quad carrier card by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

**NTMX87****in an RSC-S (PCM-30) Model B RCO2** (continued)

```

LINK 1 Carrier of Class - Trunk ;Status;OK
LINK 2 Carrier of Class - Trunk ;Status;OK
LINK 3 Carrier of Class - Trunk ;Status;OK
LINK 10 DCH 6; Status :OK
LINK 13 DCH 7; Status :OK
LINK 17 DCH 4; Status :OK
LINK 22 RMM 6 0;CAP MS;Status OK MSGCOND OPN
LINK 24 LCME RSCS 00 0 0;CAP MS;Status OK MSGCOND OPN
LINK 25 LCME RSCS 00 0 1;CAP MS;Status OK MSGCOND OPN
LINK 26 LCME RSCS 00 0 2;CAP S;Status OK

```

- 6 By observing the MAP display, be sure the card that is to be removed is in the inactive unit.

| If faulty card is in the | Do     |
|--------------------------|--------|
| active unit              | step 7 |
| inactive unit            | step 9 |

- 7 Switch the processing activity (SWACT) to the inactive unit by typing

**>SWACT**

and pressing the Enter key.

**Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.

- 8 Confirm the system prompt by typing

**>YES**

and pressing the Enter key.

After both units are in-service, proceed to the next step.

**At the RCE frame**

- 9 Place a sign on the active unit bearing the words "Active unit—Do not touch." This sign should not be attached by magnets or tape.

| If faulty card is | Do      |
|-------------------|---------|
| C-side of RCO2    | step 10 |
| P-side faulty     | step 16 |

**At the MAP terminal**

- 10 Busy the inactive PM unit by typing

**>bsy unit unit\_no**

and pressing the Enter key.

*where*

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

**unit\_no**

is the number of the inactive RCO2 unit (unit 0 or 1)

- 11** Post the host PM by typing  
**>POST host\_pm host\_pm\_no**  
 and pressing the Enter key.

*where***host\_pm**

is a PCM-30 line group controller (PLGC)

**host\_pm\_no**

is the number of a PLGC

*Example of a MAP display:*

| CM         | MS     | IOD   | Net  | PM         | CCS   | Lns      | Trks | Ext  | Appl |
|------------|--------|-------|------|------------|-------|----------|------|------|------|
| .          | .      | .     | .    | 1RCO2      | .     | .        | .    | .    | .    |
| PLGC       |        |       | SysB | ManB       | OffL  | CBsy     | ISTb | InSv |      |
| 0 Quit     | PM     | 0     | 0    | 1          | 0     | 4        | 12   |      |      |
| 2 Post_    | PLGC   | 0     | 0    | 2          | 0     | 2        | 9    |      |      |
| 3 ListSet  |        |       |      |            |       |          |      |      |      |
| 4          | PLGC   | 1     | ISTb | Links_00S: | CSide | 0, PSide | 1    |      |      |
| 5 Trnsl_   | Unit0: | Act   | InSv |            |       |          |      |      |      |
| 6 Tst_     | Unit1: | Inact | InSv |            |       |          |      |      |      |
| 7 Bsy_     |        |       |      |            |       |          |      |      |      |
| 8 RTS_     |        |       |      |            |       |          |      |      |      |
| 9 OffL     |        |       |      |            |       |          |      |      |      |
| 10 LoadPM_ |        |       |      |            |       |          |      |      |      |
| 11 Disp_   |        |       |      |            |       |          |      |      |      |
| 12 Next    |        |       |      |            |       |          |      |      |      |
| 13 SwAct   |        |       |      |            |       |          |      |      |      |
| 14 QueryPM |        |       |      |            |       |          |      |      |      |
| 15         |        |       |      |            |       |          |      |      |      |
| 16         |        |       |      |            |       |          |      |      |      |
| 17 Perform |        |       |      |            |       |          |      |      |      |
| 18         |        |       |      |            |       |          |      |      |      |

- 12** Display the host peripherals P-side links associated with the RCO2 by typing  
**>TRNSL P**  
 and pressing the Enter key.

*Example of a MAP response*

```

LINK 0 RCO2 0 0;CAP MS:STATUS SysB MSGCOND CLS RESTRICT
LINK 1 RCO2 0 1;CAP S:STATUS SBsy
LINK 2 RCO2 0 2;CAP MS:STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 RCO2 0 3;CAP S:STATUS OK
LINK 4 RCO2 0 4;CAP S:STATUS SysB
LINK 5 RCO2 0 5;CAP S:STATUS Sysb

```

## NTMX87 in an RSC-S (PCM-30) Model B RCO2 (continued)

- 13 Manually busy the links connected to the faulty NTMX87 card by typing  
**>BSY LINK link\_no**  
 and pressing the Enter key.

where

**link\_no**


is the number of the link associated with the faulty NTMX87 card

**Note 1:** All provisioned links in the slot must be busied.

**Note 2:** Reference the chart in step 14 for the RCO2 C-side link-to-slot assignments.

### At the RCE frame

- 14 Use the following charts to determine which NTMX87 card is to be removed by matching the provisioned link number with the slot number and the packet number to the left of each respective table.

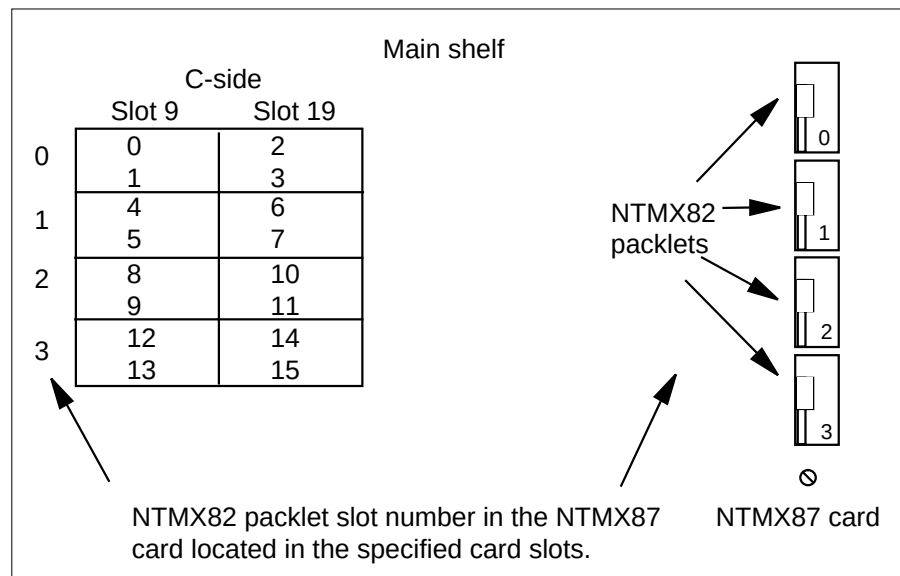

- 15



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Remove the NTMX82 packet as described in the following steps:

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

- a Locate the NTMX82 packet to be removed on the appropriate NTMX87 quad carrier card slot.
- b Open the locking lever on the NTMX82 packet and gently pull the packet toward you until it clears the shelf.
- c Ensure the NTMX82 packets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 quad carrier card.
- d Go to step 32.

#### **At the MAP terminal**

- 16** Determine if the RCO2 is in a single or dual configuration by typing

**>POST RCO2 rco2\_no ;IRLINK**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 associated with the faulty NTMX87 card

**Note:** If the posted RCO2 is in a single RCO2 configuration, the system will respond with the following message:

NO IRLINKS DATAFILLED, IRLINK LEVEL CANNOT BE ENTERED.

| If the RCO2 is in a  | Do      |
|----------------------|---------|
| single configuration | step 17 |
| dual configuration   | step 30 |

- 17** Determine if P-side ports are links or carrier trunks by observing the information obtained in step 5.

| If P-side port is | Do      |
|-------------------|---------|
| links             | step 18 |
| trunks            | step 20 |

- 18** Manually busy all provisioned links connected to the faulty NTMX87 circuit card by typing

**>bsy link link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link associated with the faulty NTMX87 circuit card

**Note 1:** Each NTMX82 card has two links, and each link must be manually busied. Possible link pairs are 0 and 1, 2 and 3, 4 and 5, 6 and 7. This pair relationship continues throughout all 54 P-side links.

## NTMX87 in an RSC-S (PCM-30) Model B RCO2 (continued)

**Note 2:** Reference the charts in steps 26 and 28 for P-side link-to-slot assignments. All provisioned links in the slot must be busied.

- 19** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| If the faulty NTMX87 is on the | Do      |
|--------------------------------|---------|
| main shelf                     | step 26 |
| extension shelf                | step 28 |

- 20** Access the TRKS;TTP MAP display level, and busy the trunks assigned to the P-side carriers associated with the faulty NTMX87 by typing

**>TRKS;TTP;POST D RCO2 rco2\_no carrier\_no**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

*Example of a MAP response*

```
LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED
```

```
POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCO2 0 1 WADEOUT796 11 L0
```

- 21** Busy the trunks associated with the faulty NTMX87 circuit card by typing

**>BSY ALL**

and pressing the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** To busy other carriers associated with the faulty NTMX87 circuit card, reference the link-to-slot assignment charts in steps 26 and 28.

- 22** Installation busy all the trunks to prevent carrier alarms by typing

**>BSY INB ALL**

and pressing the Enter key.



## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

- 23** Access the CARRIER level and post the P-side carriers associated with the faulty NTMX87 circuit card by typing  
**>CARRIER;POST RCO2 rco2\_no carrier\_no**  
 and pressing the Enter key.

*where*

**rco2\_no**

is the number of the RCO2 associated with the faulty NTMX87

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.

- 24** Busy and offline the P-side carriers associated with the faulty NTMX87 circuit card by typing  
**>BSY carrier\_no ;OFFL carrier\_no**  
 and pressing the Enter key.

*where*

**carrier\_no**

is the number of the P-side carrier assigned

**Note:** Perform this step for each carrier span in the faulty NTMX87 circuit card.


- 25** Determine if the faulty NTMX87 circuit card is on the main or extension shelf. P-side ports 0 to 23, and 48 to 54 are on the main shelf. Ports 24 to 47 are on the extension shelf.

| <b>If the faulty NTMX87 is on the</b> | <b>Do</b> |
|---------------------------------------|-----------|
| main shelf                            | step 26   |
| extension shelf                       | step 28   |

#### **At the RCE frame**

- 26** Use the following figure to determine slot assignments on the P-side of the main shelf.

## NTMX87 in an RSC-S (PCM-30) Model B RCO2 (continued)

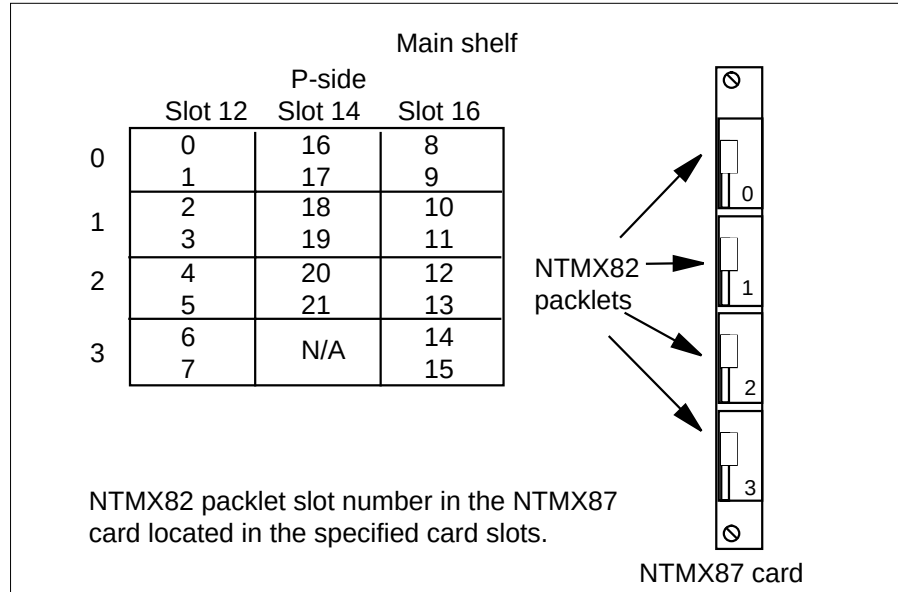

27



### DANGER

#### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Remove the NTMX82 packlet as described in the following steps:


- a Locate the NTMX82 packlet to be removed on the appropriate NTMX87 quad carrier card slot.
- b Open the locking lever on the NTMX82 packlet and gently pull the packlet toward you until it clears the shelf.
- c Ensure the NTMX82 packlets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 quad carrier card.
- d Go to step 32.

### At the RCE frame

- 28 Determine which side of the extension shelf the faulty NTMX87 circuit card is located by referencing field SIDE of table RCCINV.

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

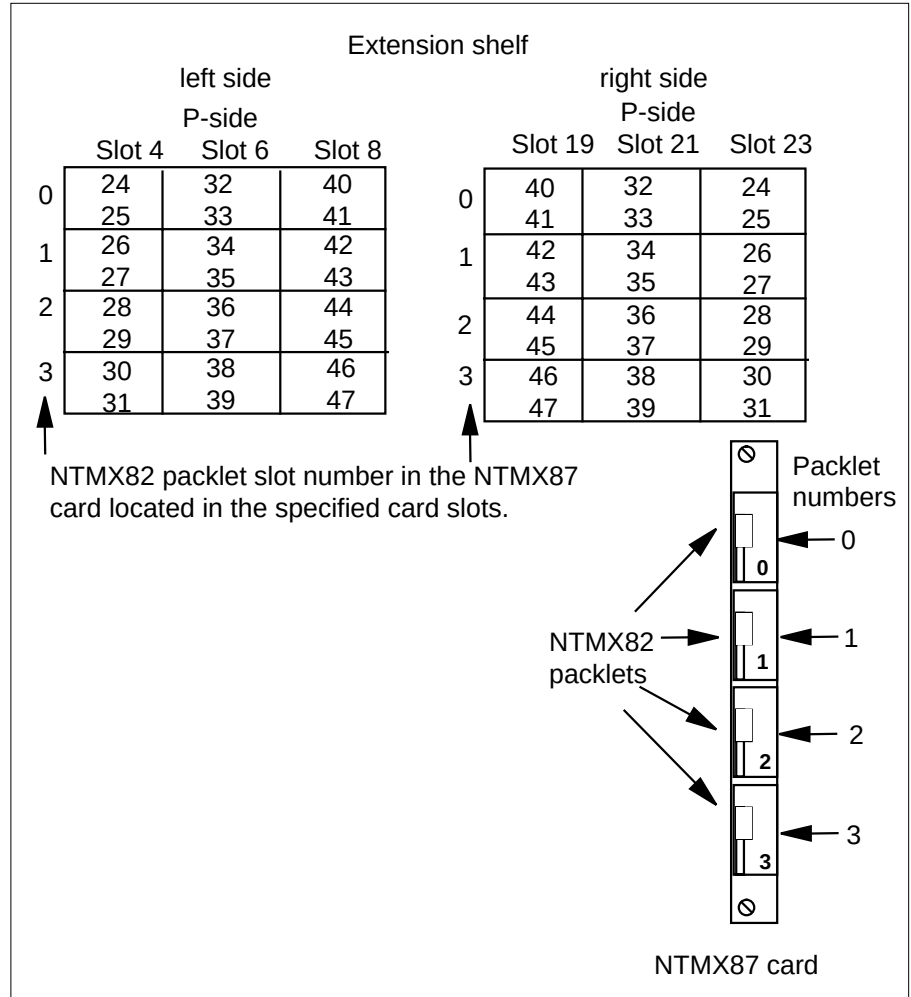

29

**DANGER****Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.

Remove the NTMX82 packet as described in the following steps:

- a Locate the NTMX82 packet to be removed on the appropriate NTMX87 quad carrier card slot.

**NTMX87****in an RSC-S (PCM-30) Model B RCO2** (continued)

- b Open the locking lever on the NTMX82 packet and gently pull the packet toward you until it clears the shelf.
  - c Ensure the NTMX82 packets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until it is reinstalled in the NTMX87 quad carrier card.
  - d Go to step 32.
- 30** Translate the dual RCO2s IRLINKS by typing  
**>TRNSL**  
 and pressing the Enter key.  
*Example of a MAP response*

| CM         | MS     | IOD        | Net        | PM           | CCS      | LNS   | Trks    | Ext | Appl |
|------------|--------|------------|------------|--------------|----------|-------|---------|-----|------|
| .          | .      | .          | .          | <b>1RCO2</b> | .        | .     | .       | .   | .    |
| IRLINK     |        | SysB       | ManB       | OffL         | CBsy     | ISTb  | InSv    |     |      |
| 0 Quit     | PM     | 0          | 0          | 2            | 0        | 2     | 25      |     |      |
| 2          | RCO2   | 0          | 0          | 0            | 0        | 1     | 1       |     |      |
| 3          |        |            |            |              |          |       |         |     |      |
| 4          | RCO2   | 0 ISTb     | Links_00S: | CSide        | 1, PSide | 1     |         |     |      |
| 5 TRNSL    | Unit0: | Inact      | InSv       |              |          |       |         |     |      |
| 6 TST_     | Unit1: | Act        | InSv       |              |          |       |         |     |      |
| 7 BSY_     |        |            |            |              |          |       |         |     |      |
| 8 RTS_     |        |            |            |              |          |       |         |     |      |
| 9          |        |            |            |              |          |       |         |     |      |
| 10         |        | IR         | From       | To           | CAP      | STATE | MSGCOND |     |      |
| 11         |        | 0          | RCO2 0, 0  | RCO2 1, 0    | MS       | OK    | OPN     |     |      |
| 12         |        | 1          | RCO2 0, 8  | Rcc2 1, 8    | MS       | OK    | OPN     |     |      |
| 13         |        | 2          | RCO2 0, 12 | RCO2 1, 12   | S        | OK    |         |     |      |
| 14 QueryIR | 3      | RCO2 0, 13 | RCO2 1, 13 | S            | OK       |       |         |     |      |
| 15         |        |            |            |              |          |       |         |     |      |
| 16         |        |            |            |              |          |       |         |     |      |
| 17         |        |            |            |              |          |       |         |     |      |
| 18         |        |            |            |              |          |       |         |     |      |

- 31** Busy IRLINKS in the faulty NTMX87 circuit card by typing  
**>BSY irlink\_no**  
 and pressing the Enter key.  
*where*

**irlink\_no**

is the number of the irlink that must be busied

**Note 1:** This step must be performed for each provisioned link in the slot position.

**Note 2:** For link-to-slot assignments, reference step 26 for the main shelf, and step 28 for the extension shelf.

---

**NTMX87**

**in an RSC-S (PCM-30) Model B RCO2** (continued)

---

*At the RCE frame*

32



**DANGER**

**Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP) of the RCO2. This protects the equipment against damage caused by static electricity.



**DANGER**

**Equipment damage**

Take the following precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

33

Using the T9908 wrist grounding strap and a T1324 screwdriver, remove the NTMX87 quad frame carrier circuit card. Insert the new quad frame carrier card and secure.

**NTMX87**  
**in an RSC-S (PCM-30) Model B RCO2** (continued)

---

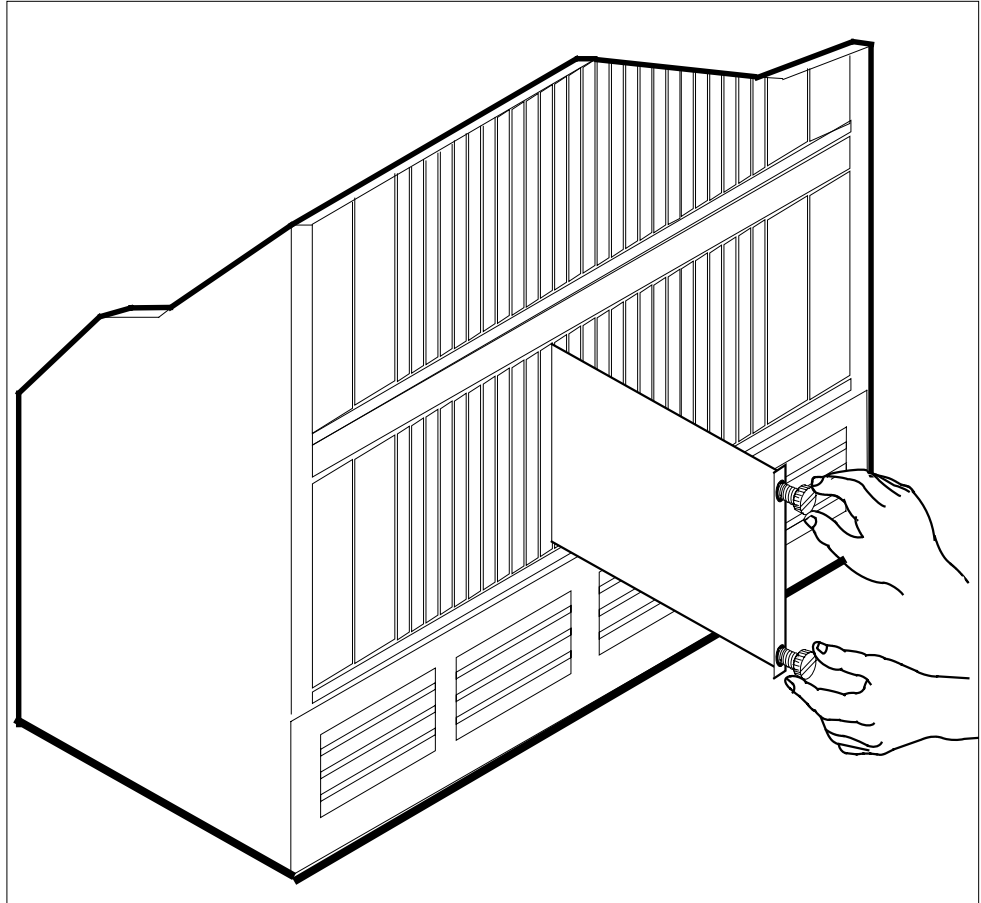

- 34** Replace the NTMX82 packlets previously removed. Align the packlet with the slots in the shelf and gently slide the packlet into the circuit card slot in the NTMX87 circuit card.
- 35** Seat and lock the packlet.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure that the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 36** Use the following information to determine what step to go to next in this procedure.

---

| <b>If you entered this procedure from</b> | <b>Do</b> |
|-------------------------------------------|-----------|
| alarm clearing procedures                 | step 53   |
| other                                     | step 37   |

---

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

- 37** Use the following information to determine what step to go to next in this procedure.

| If you entered this section of the procedure from           | Do      |
|-------------------------------------------------------------|---------|
| step 15 for a single RCO2 with C-side links affected        | step 38 |
| step 27 or 29 for an RCO2 with P-side trunks affected       | step 46 |
| step 27 or 29, for a single RCO2 with P-side links affected | step 42 |
| step 31 for a DRCO2 with irlinks affected                   | step 44 |

#### **At the MAP terminal**

- 38** Test the busied network links from step 13 by typing

**>TST LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link associated with the new NTMX87 quad frame carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCO2, execute this step for each link until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 39 |
| failed | step 53 |

- 39** Return to service the P-side links by typing

**>RTS LINK link\_no**

**and pressing the Enter key.**

*where*

**link\_no**

is the number of the link manually busied in step 13

**Note 1:** This step must be performed for each link that is manually busied.

## NTMX87 in an RSC-S (PCM-30) Model B RCO2 (continued)

**Note 2:** To RTS the other links associated with the RCO2, execute the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 40 |
| failed | step 53 |

- 40** Post the inactive RCO2 in which the NTMX87 card is located by typing  
**>POST RCO2 rco2\_no**  
 and pressing the Enter key.  
*where*

**rco2\_no**  
 is the number of the RCO2 associated with the faulty card

- 41** Return the inactive RCO2 unit to service by typing  
**>RTS UNIT unit\_no**  
 and pressing the Enter key.  
*where*

**unit\_no**  
 is the number of the RCO2 unit posted in step 40

| If RTS | Do      |
|--------|---------|
| passes | step 51 |
| fails  | step 53 |

### **At the MAP terminal**

- 42** Test the busied links from step 18 by typing  
**>TST LINK link\_no**  
 and pressing the Enter key.  
*where*

**link\_no**  
 is the number of the link associated with the new NTMX87 quad frame carrier card

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links associated with the RCO2, execute this step for each link until all links are tested.

| If TST | Do      |
|--------|---------|
| passed | step 43 |



## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

43

| If TST | Do      |
|--------|---------|
| failed | step 53 |

Return to service the P-side links by typing

**>RTS LINK link\_no**

and pressing the Enter key.

*where*

**link\_no**  
is the number of the link manually busied in step 13

**Note 1:** This step must be performed for each link that is manually busied.

**Note 2:** To RTS the other links associated with the RCO2, execute the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

**At the MAP terminal**

- 44 Test the IRLINKS by typing
- >TST irlink\_no**
- and pressing the Enter key.**
- where*
- irlink\_no**  
is the number of the link busied in step 31
- Note 1:** This step must be performed for each manually busied link.
- Note 2:** To test the other irlinks associated with the RCO2, execute this step for each irlink until all links are tested.

|    |                                         | If TST                                               | Do      |
|----|-----------------------------------------|------------------------------------------------------|---------|
|    |                                         | passed                                               | step 45 |
|    |                                         | failed                                               | step 53 |
| 45 | Return to service the IRLINKS by typing |                                                      |         |
|    | <b>&gt;RTS irlink_no</b>                |                                                      |         |
|    | and pressing the Enter key.             |                                                      |         |
|    | <i>where</i>                            |                                                      |         |
|    | <b>irlink_no</b>                        | is the number of the link manually busied in step 31 |         |

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

---

**Note 1:** This step must be performed for each irlink that is manually busied.

**Note 2:** To RTS the other links associated with the RCO2, execute this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

#### *At the MAP terminal*

- 46** Busy and return to service P-side carriers that were offlined in step 24 by typing

**>BSY carrier\_no; RTS carrier\_no**

and pressing the Enter key.

where

**carrier\_no**

is the number of the P-side carrier assigned

| If carrier RTS | Do      |
|----------------|---------|
| passed         | step 47 |
| failed         | step 53 |

- 47** Access the TTP MAP level to post the P-side links associated with the new NTMX87 circuit card by typing

**>TTP;POST D RCO2 rco2\_no carrier\_no**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 associated with the new NTMX87 circuit card

**carrier\_no**

is the number of the P-side link trunks are assigned

*Example of a MAP response*

## NTMX87

### in an RSC-S (PCM-30) Model B RCO2 (continued)

```

LAST CIRCUIT = 27
POST CKT IDLED
SHORT CLLI IS: 1125
OK, CLLI POSTED

```

```

POST 18 DELQ BUSY Q DIG
TTP 6-006
CKT TYPE PM NO. COM LANG STA S R DOT TE R
OG RCO2 0 1 WADEOUT796 11 INB

```

- 48** Busy the trunks associated with the new NTMX87 circuit card by typing

**>BSY ALL**

and pressing the Enter key.

**Note 1:** Wait for the busy queue to clear.

**Note 2:** Busy the other carriers associated with the faulty NTMX87 circuit card. Reference the link-to-slot assignment charts in steps 26 and 28 .

- 49** Test the trunks associated with the new NTMX87 circuit card by typing

**>TST;NEXT**

and pressing the Enter key.

**Note:** Perform this step for each carrier span associated with the new NTMX87 circuit card.

| If trunks TST | Do      |
|---------------|---------|
| passed        | step 50 |
| failed        | step 53 |

- 50** Return-to-service trunks assigned to links on the new NTMX87 circuit card by typing

**>RTS ALL**

and pressing the Enter key.

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 53 |

- 51** Send any faulty cards for repair according to local procedure.

- 52** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 55.

- 53** Return to *Alarm and Performance Monitoring Procedures* or the other procedure that directed you to this procedure. At the point where a faulty card

**NTMX87**  
**in an RSC-S (PCM-30) Model B RCO2 (end)**

---

list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.

- 54** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.
- 55** You have successfully completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

**NTMX87  
in an SMA2**

---

**Common procedures**

The following procedures are referenced in this procedure:

- “Locating a faulty card in an SMA2”
- returning a card


Do not go to a common procedure unless directed to do so in the step-action procedure.

**Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.


## NTMX87 in an SMA2 (continued)

### Summary of card replacement procedure for an NTMX87 card in an SMA2

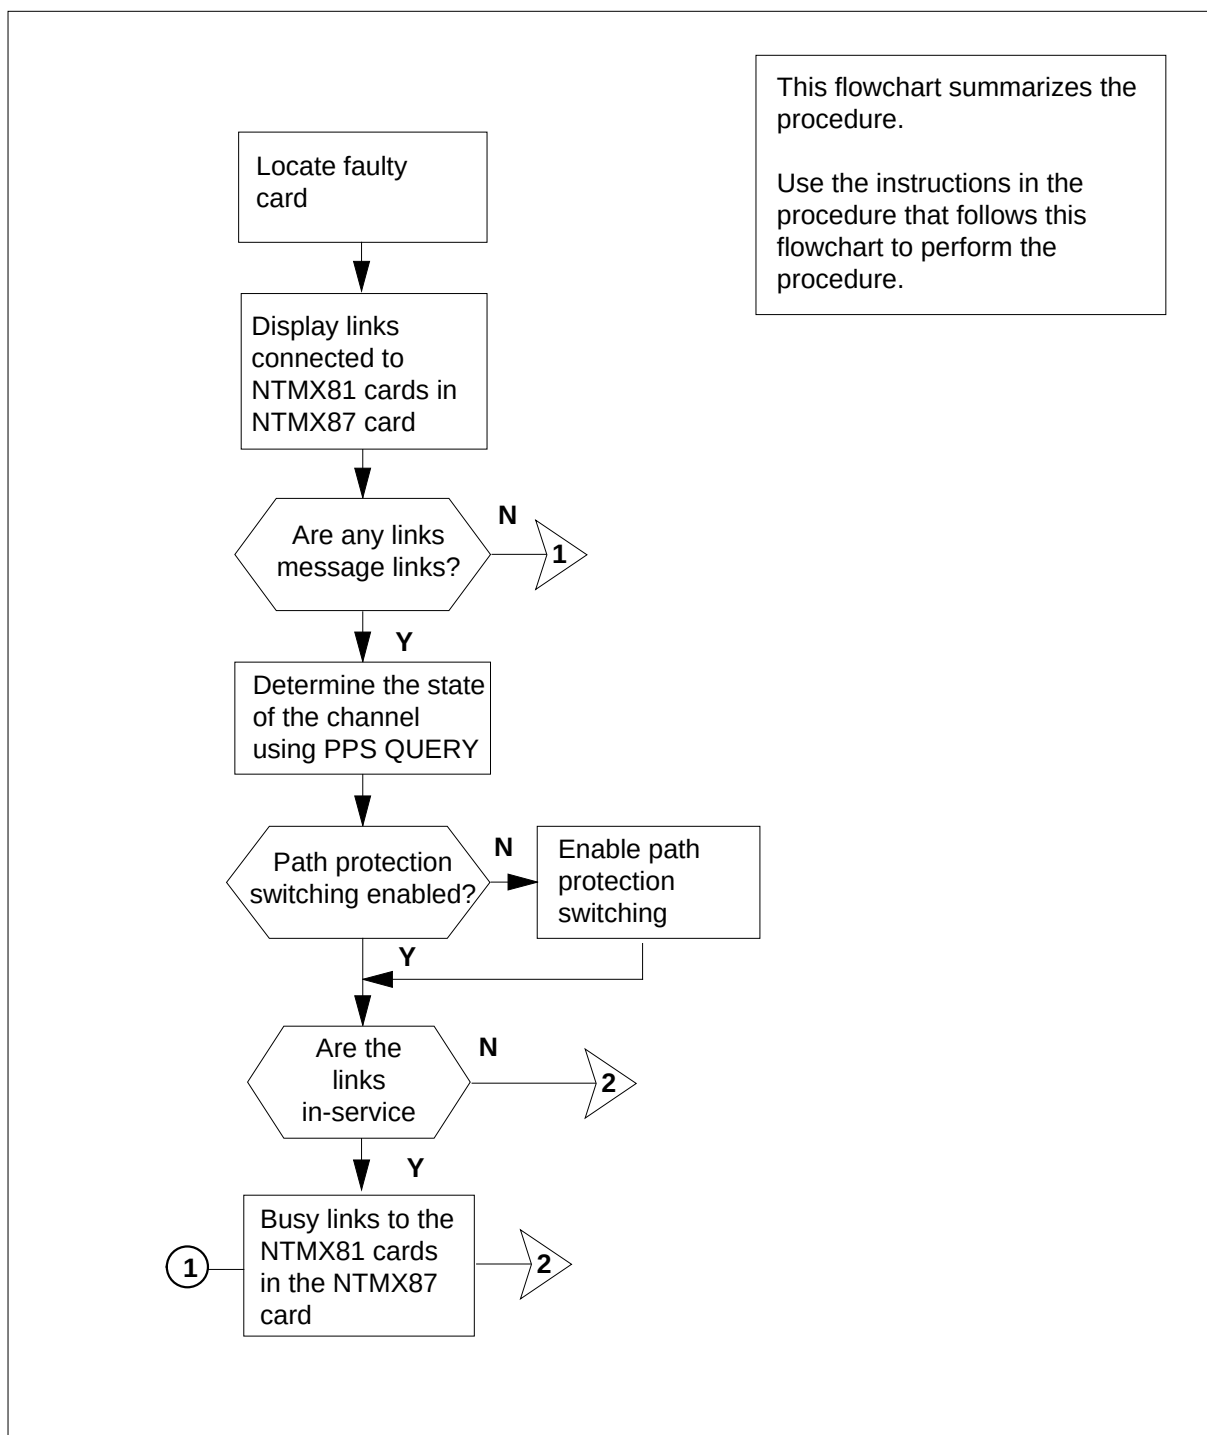

## NTMX87 in an SMA2 (continued)

### Summary of card replacement procedure for an NTMX87 card in an SMA2 (continued)

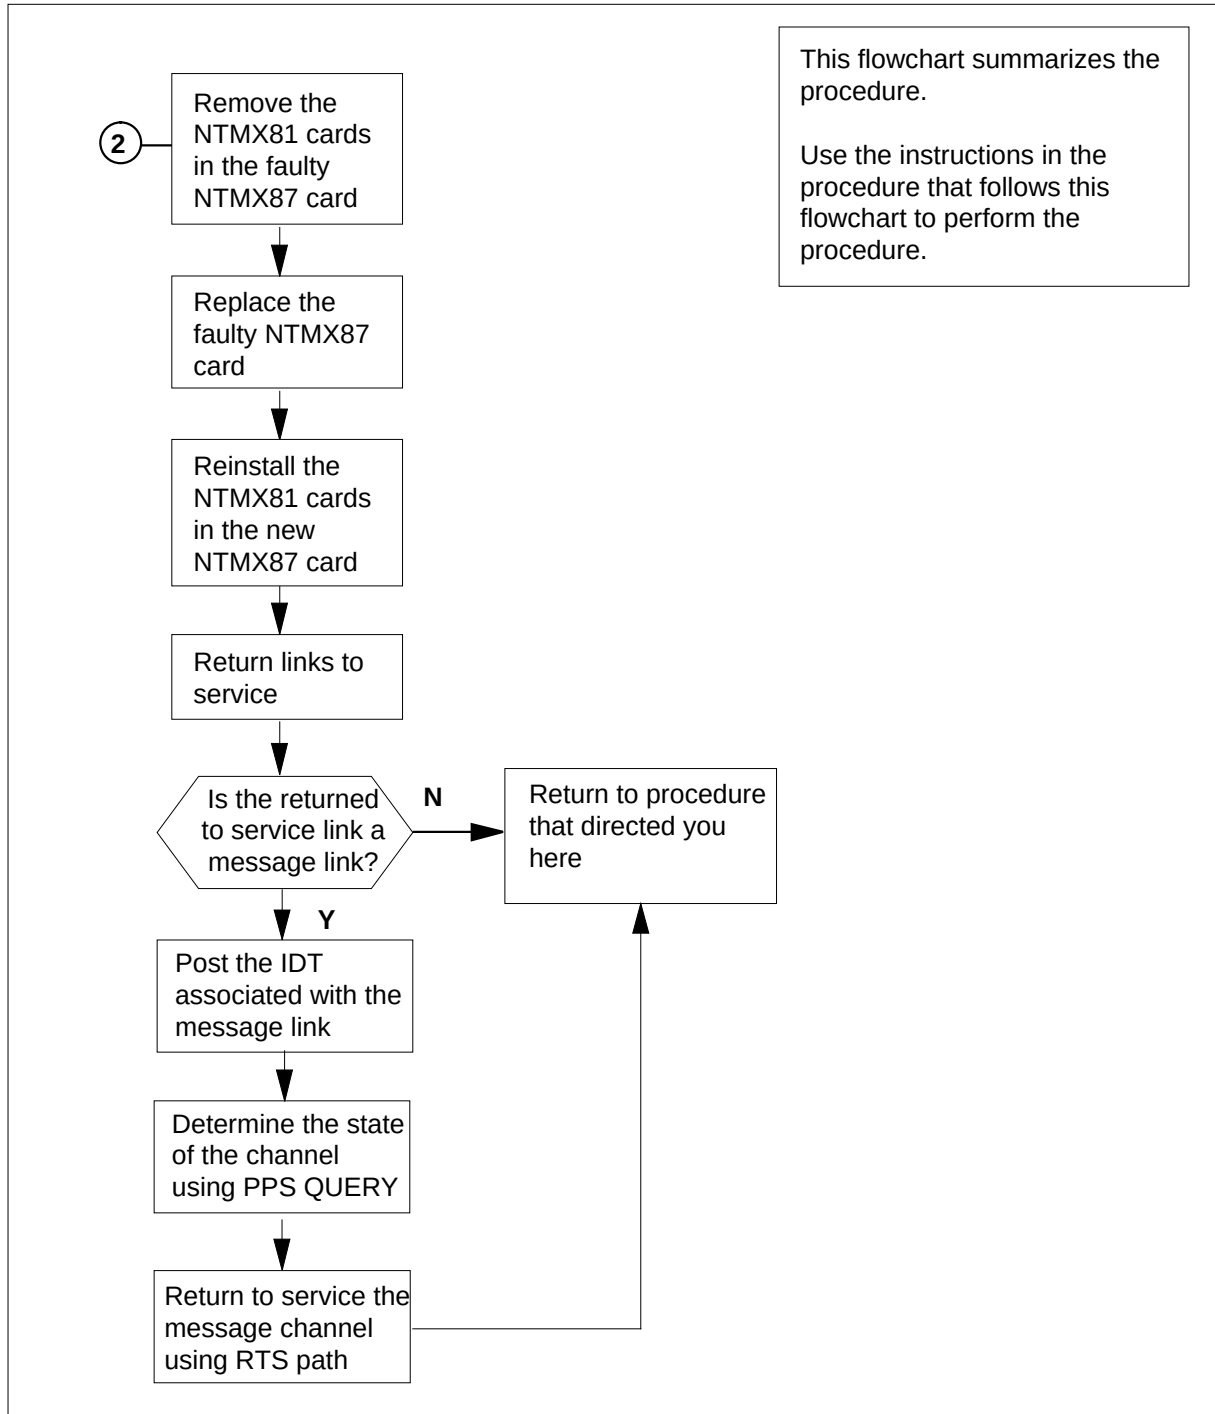

## NTMX87 in an SMA2 (continued)

---

### Replacing an NTMX87 card in an SMA2



#### CAUTION

##### Service disruption: calls may be dropped!

Perform this card replacement activity only during a period of low traffic. All calls being handled by the links connected to the DS-1 interface cards housed in the NTMX87 card being replaced will be dropped.

#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Ensure you know the physical location of the faulty card. If card location is known continue to step 3, if card location is unknown refer to "Locating a faulty card in an SMA2".
- 3



#### CAUTION

##### Loss of service

Ensure that you replace the card in the inactive unit and verify the mate unit is active.

Obtain an NTMX87 replacement card. Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

#### *At the MAP terminal*

- 4 Ensure the PM level of the MAP display is currently displayed by typing  
**>MAPCI;MTC;PM;POST SMA2 sma2\_no**  
and pressing the Enter key.

*where*

**sma2\_no**

is the number of the SMA2 with the faulty card

*Example of a MAP display:*



## NTMX87 in an SMA2 (continued)

|      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|
| SMA2 | SysB | ManB | OffL | CBsy | ISTb | InSv |
| PM   | 3    | 0    | 1    | 0    | 2    | 13   |
| SMA2 | 0    | 0    | 0    | 0    | 1    | 7    |

SMA2 0 ISTb Links\_00S: CSide 0, PSide 0  
Unit0: Act InSv  
Unit1: InAct IsTb

- 5 Observe the MAP display and determine if the faulty card is in the active or the inactive unit.

| If the faulty card is in the | Do      |
|------------------------------|---------|
| active unit                  | step 6  |
| inactive unit                | step 10 |

- 6 SWACT the units by typing

**>SWACT**

and pressing the Enter key.

A confirmation prompt for the SWACT command is displayed at the MAP terminal.

| If SWACT                     | Do     |
|------------------------------|--------|
| cannot continue at this time | step 7 |
| can continue at this time    | step 8 |

- 7 Reject the prompt to SWACT the units by typing

**>NO**

and pressing the Enter key.

The system discontinues the SWACT. Go to step 47.

- 8 Confirm the system prompt by typing

**>YES**

and pressing the Enter key.

The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

**Note:** A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.

| If the message is | Do      |
|-------------------|---------|
| SWACT passed      | step 10 |

## NTMX87 in an SMA2 (continued)

|   | If the message is                                                                                                                                                                                                                                                         | Do     |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|   | SWACT failed<br>Reason: XPM SWACTback                                                                                                                                                                                                                                     | step 9 |
|   | SWACT refused by SWACT Controller                                                                                                                                                                                                                                         | step 9 |
| 9 | The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on the inactive unit before attempting to clear the alarm condition on the active unit.<br><br>Go to step 47. |        |

### At the equipment frame

- 10 Hang a sign on the active unit bearing the words: *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

### At the MAP terminal

- 11 Display and record the P-side link status of the posted SMA2 associated with the faulty NTMX87 quad carrier card by typing

**>TRNSL P**

and pressing the Enter key.

*Example of a MAP response*

```
LINK1: IDT 1 3;CAP: MS; STATUS:OK; MSGCOND OPN
LINK2: IDT 1 4;CAP: MS; STATUS:OK; MSGCOND OPN
LINK3: IDT 1 Carrier of CLASS - Trunk;Status:OK
LINK4: IDT 1 Carrier of CLASS - Trunk;Status:SysB
```


The first line indicates that DS-1 link 1 is connected to IDT1 at C-side link 0.

Record the link numbers, IDT number, and capability (CAP) of the links connected to the NTMX81 cards housed in the NTMX87 card to be replaced.

**Note:** Each NTMX81 card has two links associated with it. Therefore, each link must be manually busied. Possible link number pairs are as follows: 0,1; 2,3; 4,5; 6,7; and so forth.

- 12 After identifying the links connected to NTMX81s in the faulty NTMX87, use the following figure to determine which NTMX81s are to be removed in the main or extension shelf. Match the link number with the slot number and the packet number to the left of the table. Each NTMX81 packet is connected to two DS-1 links.

NTMX87  
in an SMA2 (continued)

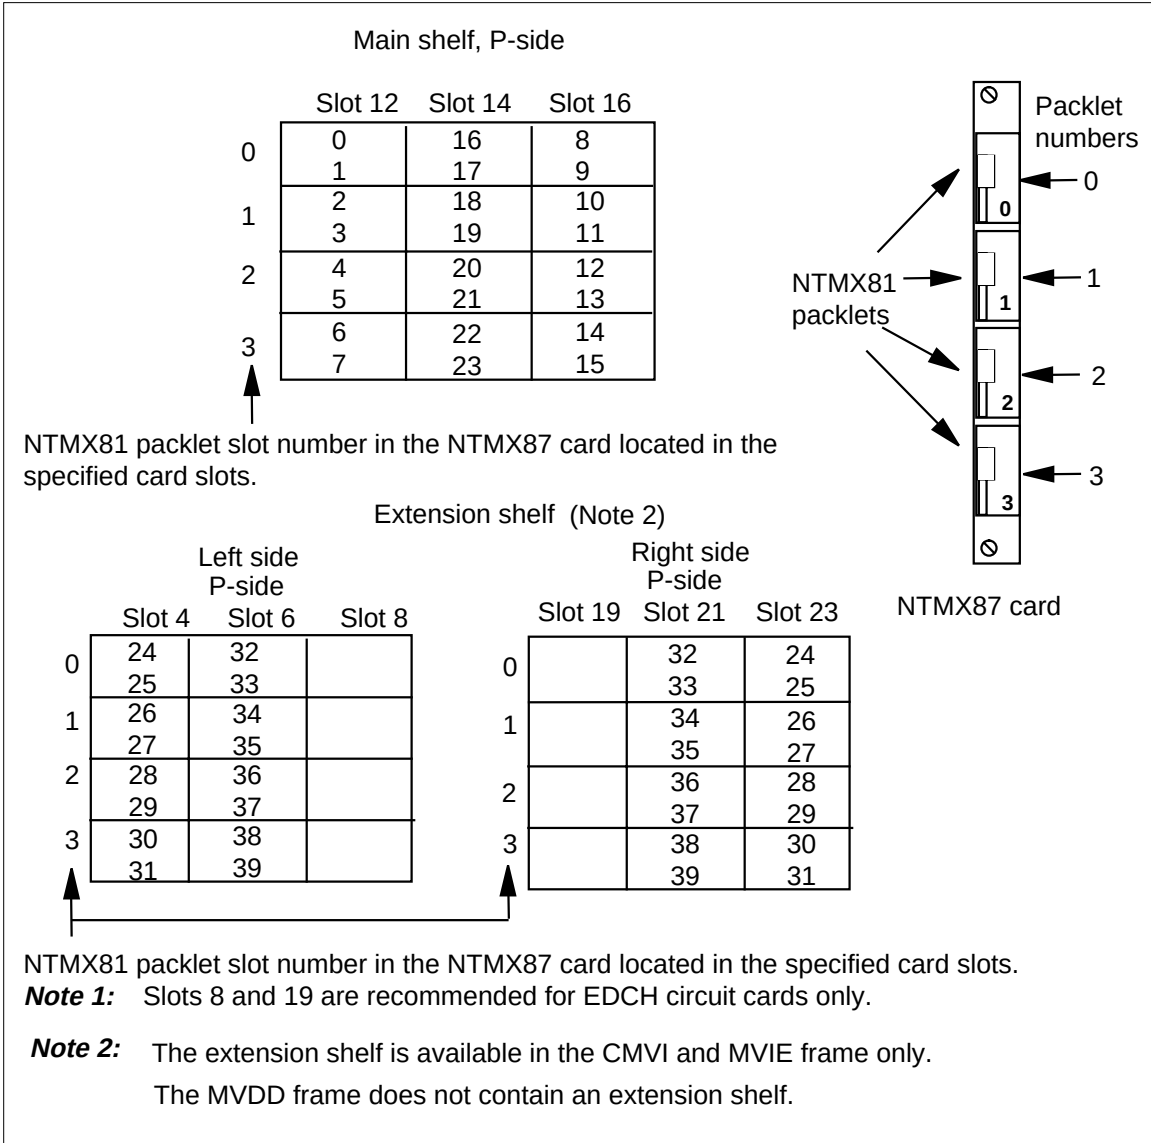

**13** If any NTMX81s in an NTMX87 to be replaced are connected to IDT message links, then the appropriate message channels (TMC or CSC and EOC) must be busied.

| If the link has a CAP of     | Do      |
|------------------------------|---------|
| MS, as identified in step 11 | step 14 |
| S, as identified in step 11  | step 22 |

## NTMX87

### in an SMA2 (continued)

- 14** Post the IDT associated with the DS-1 link to be taken out of service, as recorded in step 11, by typing

**>POST IDT idt\_no**

and pressing the Enter key.

where

**idt\_no**

is the number of the IDT being posted

*Example of a MAP response:*

|     |      |      |      |      |      |      |
|-----|------|------|------|------|------|------|
| IDT | SysB | ManB | Offl | CBsy | ISTb | InSv |
| PM  | 3    | 0    | 1    | 0    | 2    | 13   |
| IDT | 0    | 0    | 0    | 0    | 1    | 7    |

IDT 2 ISTb Links\_00S:1

- 15** Display information about the state of the channels between the IDT and the RDT by typing

**>PPS QUERY**

and pressing the Enter key

*Example of a MAP response:*

TMC1: SMA2 7 7 24; 00S;Standby;Enable  
 EOC1: SMA2 7 7 12; 00S;Standby ;Enable  
 TMC2: SMA2 7 8 24;InSv;Active;Enable  
 EOC2: SMA2 7 8 12;InSv;Active;Enable

Determine if path protection is enabled for all channels.

---

|                                                     |           |
|-----------------------------------------------------|-----------|
| <b>If one or both TMC, CSC, or EOC channels are</b> | <b>Do</b> |
|-----------------------------------------------------|-----------|

---

|           |         |
|-----------|---------|
| inhibited | step 16 |
|-----------|---------|

|         |         |
|---------|---------|
| enabled | step 18 |
|---------|---------|

---

- 16** Enable path protection on an inhibited TMC, CSC, or EOC message channel by typing

**>PPS ENA path**

and pressing the Enter key.

where

**path**

is the inhibited TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2

## NTMX87 in an SMA2 (continued)

- |           |                                                                                                                                                                                                           |           |  |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--|
| <b>17</b> | Determine if path protection switching must be enabled on additional TMC, CSC, or EOC message channels.                                                                                                   |           |  |
|           | <b>If</b>                                                                                                                                                                                                 | <b>Do</b> |  |
|           | additional channels must be enabled                                                                                                                                                                       | step 16   |  |
|           | all channels are enabled                                                                                                                                                                                  | step 18   |  |
| <b>18</b> | Determine if the TMC, CSC, or EOC message channels for the link to be taken out of service are in-service.                                                                                                |           |  |
|           | <b>If TMC, CSC, or EOC channels are</b>                                                                                                                                                                   | <b>Do</b> |  |
|           | in-service                                                                                                                                                                                                | step 19   |  |
|           | out-of-service (OOS)                                                                                                                                                                                      | step 21   |  |
| <b>19</b> | Busy the TMC, CSC, or EOC message channel associated with the link to be taken out of service by typing<br><b>&gt;BSY path</b><br><i>where</i><br><b>path</b><br>is TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2 |           |  |
| <b>20</b> | Determine if there are additional TMC, CSC, or EOC message channels to be taken out of service.                                                                                                           |           |  |
|           | <b>If</b>                                                                                                                                                                                                 | <b>Do</b> |  |
|           | more channels must be taken out of service                                                                                                                                                                | step 19   |  |
|           | no more channels are to be taken out of service                                                                                                                                                           | step 21   |  |
| <b>21</b> | Determine if an additional link, as recorded in step 11, must be taken out of service associated with the NTMX81 to be replaced.                                                                          |           |  |
|           | <b>If</b>                                                                                                                                                                                                 | <b>Do</b> |  |
|           | an additional link must be taken out of service                                                                                                                                                           | step 13   |  |
|           | no more links are to be taken out of service                                                                                                                                                              | step 22   |  |

## NTMX87

### in an SMA2 (continued)

- 22 Post the SMA2 identified in step 4 by typing

**>POST SMA2 sma2\_no**

and pressing the Enter key.

where

**sma2\_no**

is the number of the SMA2 being posted

*Example of a MAP response:*

|      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|
| SMA2 | SysB | ManB | Offl | CBsy | ISTb | InSv |
| PM   | 3    | 0    | 1    | 0    | 2    | 13   |
| SMA2 | 0    | 0    | 0    | 0    | 1    | 7    |

SMA2 7 ISTb Links\_OOS: CSide 0, PSide 1  
 Unit0: Act InSv  
 Unit1: Inact InSv

- 23



#### CAUTION

**Service disruption: calls may be dropped!**

If you are prompted to confirm a BSY LINK command, perform this activity only during a period of low traffic. All calls being handled by the busied link will be dropped.

Busy one of the links connected to the faulty NTMX81, as recorded in step 11, by typing

**>BSY LINK link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link connected to the faulty NTMX81 card

A confirmation prompt for the BSY command is displayed at the MAP terminal

*Example of a MAP response:*

bsy link 0  
 Any active call may be lost  
 Please confirm ("Yes", "Y", "No", or "N"):

| If                           | Do      |
|------------------------------|---------|
| cannot continue at this time | step 24 |
| can continue at this time    | step 31 |

## NTMX87 in an SMA2 (continued)

- 24 Reject the prompt to BSY the link by typing

**>NO**

and pressing the Enter key.

The system discontinues the BSY command.

- 25 Determine if the link is a message link

| If the link has a CAP of | Do      |
|--------------------------|---------|
| MS                       | step 26 |
| S                        | step 47 |

- 26 Post the IDT associated with the link by typing

**>POST IDT idt\_no**

and pressing the Enter key.

where

**idt\_no**

is the number of the IDT being posted

*Example of a MAP response:*

|     |      |      |      |      |      |      |
|-----|------|------|------|------|------|------|
| IDT | SysB | ManB | Offl | CBsy | ISTb | InSv |
| PM  | 3    | 0    | 1    | 0    | 2    | 13   |
| IDT | 0    | 0    | 0    | 0    | 1    | 7    |

IDT 2 ISTb Links\_00S:1

- 27 Display information about the state of the channels between the IDT and the RDT by typing

**>PPS QUERY**

and pressing the Enter key

*Example of a MAP response:*

```
TMC1: SMA2 7 7 24; 00S;Standby;Enable
EOC1: SMA2 7 7 12; 00S;Active ;Enable
TMC2: SMA2 7 8 24;InSv;Standby;Enable
EOC2: SMA2 7 8 12;InSv;Standby;Enable
```

- 28 Determine if there are any TMC, CSC, or EOC message channels for the link to be returned to service.

| If TMC, CSC, or EOC channels are | Do      |
|----------------------------------|---------|
| all in-service                   | step 47 |

## NTMX87 in an SMA2 (continued)

|    | If TMC, CSC, or EOC channels are                                                                                                                                                       | Do      |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | out-of-service (OOS)                                                                                                                                                                   | step 29 |
| 29 | Return to service the message channels which were taken out of service in step 19 by typing<br><b>&gt;RTS path</b><br>where<br><b>path</b><br>is TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2 |         |
| 30 | Determine if there are additional TMC, CSC, or EOC message channels to be returned to service.                                                                                         |         |
|    | If there are                                                                                                                                                                           | Do      |
|    | more channels to be returned to service                                                                                                                                                | step 29 |
|    | no more channels to be returned to service                                                                                                                                             | step 47 |
| 31 | Confirm the system prompt by typing<br><b>&gt;YES</b><br>and pressing the Enter key.<br>Go to step 32.                                                                                 |         |
| 32 | Determine if there are additional links on the NTMX81 to be taken out of service.<br><br><b>Note:</b> Remember, all eight links on the NTMX87 need to be made manually busy.           |         |
|    | If                                                                                                                                                                                     | Do      |
|    | there is another link to be taken out of service with a CAP of S                                                                                                                       | step 23 |
|    | there is another link to be taken out of service with a CAP of MS and the associated IDT message channel has not been taken out of service                                             | step 14 |
|    | all links have been taken out of service                                                                                                                                               | step 33 |



**NTMX87**  
**in an SMA2 (continued)**

| If                                                                                                                                     | Do      |
|----------------------------------------------------------------------------------------------------------------------------------------|---------|
| there is another link to be taken out of service with a CAP of MS and the associated IDT message channel has been taken out of service | step 23 |

*At the frame or cabinet*

**33**



**WARNING**  
**Static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.


Remove the NTMX81 packlets from the NTMX87 quad frame carrier card as described in the following steps:

- a** Locate the packlets to be removed on the appropriate NTMX87 card slot.
- b** Open the locking lever on the packlet to be replaced and gently pull the card toward you until it clears the shelf.
- c** Ensure the replacement card has the same PEC, including suffix, as the card you just removed.
- d** Repeat these steps for all four NTMX81 packlets.
- e** Go to step 34.

**34** Using the T9908 wrist grounding strap and a T1324 screwdriver, remove the NTMX87 quad frame carrier circuit card. Insert the new quad frame carrier card and secure.

## NTMX87 in an SMA2 (continued)

---

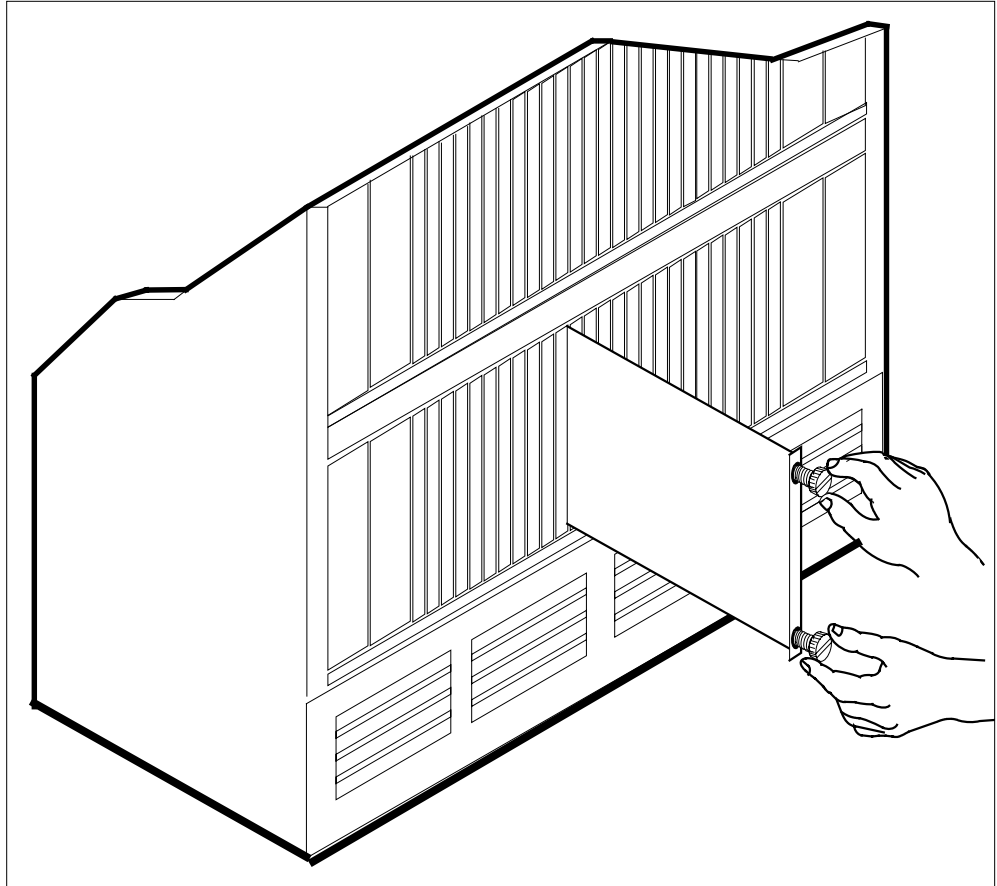

- 35** Replace the NTMX81 packlets removed in step 33 using the following steps:
- a** Open the locking lever on the NTMX81 packlets to be inserted in the new NTMX87 card.
  - b** Align the packlet with the slots in the new NTMX87 card installed in step 34.
  - c** Gently slide the packlet into the card slot in the new NTMX87 card.
  - d** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure the packlet is fully seated in the slot.
  - e** Close the locking lever.
  - f** Repeat these steps for all four NTMX81 packlets.

## NTMX87 in an SMA2 (continued)

### At the MAP terminal

- 36** Post the SMA2 identified in step 4 by typing

**>POST SMA2 sma2\_no**

and pressing the Enter key.

where

**sma2\_no**

is the number of the SMA2 being posted

Example of a MAP response:

|      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|
| SMA2 | SysB | ManB | Offl | CBsy | ISTb | InSv |
| PM   | 3    | 0    | 1    | 0    | 2    | 13   |
| SMA2 | 0    | 0    | 0    | 0    | 1    | 7    |

SMA2 0 ISTb Links\_00S: CSide 0, PSide 0  
Unit0: Act InSv  
Unit1: Inact ISTb

- 37** Return to service the P-side links by typing

**>RTS LINK link\_no**

and pressing the Enter key.

where

**link\_no**

is the number of the link connected to the NTMX81 card

**Note:** To RTS the other links associated with the SMA2, execute this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passed | step 38 |
| failed | step 47 |

- 38** Determine if the link that was returned to service is a messaging link.

| If the link has a CAP of  | Do      |
|---------------------------|---------|
| MS, as identified in step | step 40 |
| S, as identified in step  | step 39 |

- 39** Determine if additional links are to be returned to service

| If                                             | Do      |
|------------------------------------------------|---------|
| an additional link must be returned to service | step 37 |

## NTMX87

### in an SMA2 (continued)

|     | If                                                                                                                                                                                                                                                                 | Do                                                                                                                                                                                                                                                                                                             |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|----|---|---|---|---|---|----|-----|---|---|---|---|---|---|
|     | no more links are to be returned to service                                                                                                                                                                                                                        | step 45                                                                                                                                                                                                                                                                                                        |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
| 40  | Post the IDT associated with the DS-1 link that has been returned to service by typing<br><b>&gt;POST IDT idt_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>idt_no</b><br>is the number of the IDT being posted<br><i>Example of a MAP response:</i> | <table><tr><td>IDT</td><td>SysB</td><td>ManB</td><td>Offl</td><td>CBsy</td><td>ISTb</td><td>InSv</td></tr><tr><td>PM</td><td>3</td><td>0</td><td>1</td><td>0</td><td>2</td><td>13</td></tr><tr><td>IDT</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>7</td></tr></table><br>IDT 1 SysB Links_00S:0 | IDT  | SysB | ManB | Offl | CBsy | ISTb | InSv | PM | 3 | 0 | 1 | 0 | 2 | 13 | IDT | 0 | 0 | 0 | 0 | 1 | 7 |
| IDT | SysB                                                                                                                                                                                                                                                               | ManB                                                                                                                                                                                                                                                                                                           | Offl | CBsy | ISTb | InSv |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
| PM  | 3                                                                                                                                                                                                                                                                  | 0                                                                                                                                                                                                                                                                                                              | 1    | 0    | 2    | 13   |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
| IDT | 0                                                                                                                                                                                                                                                                  | 0                                                                                                                                                                                                                                                                                                              | 0    | 0    | 1    | 7    |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
| 41  | Display information about the state of the channels between the IDT and the RDT by typing<br><b>&gt;PPS QUERY</b><br>and pressing the Enter key<br><i>Example of a MAP response:</i>                                                                               | TMC1: SMA2 7 7 24; 00S;Standby;Enable<br>EOC1: SMA2 7 7 12;InSv;Active ;Enable<br>TMC2: SMA2 7 8 24; 00S;Standby;Enable<br>EOC2: SMA2 7 8 12; 00S;Standby;Enable                                                                                                                                               |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
| 42  | Return to service the message channels which were taken out of service in step 19 by typing<br><b>&gt;RTS path</b><br><i>where</i><br><b>path</b><br>is TMC1, TMC2, CSC1, CSC2, EOC1, or EOC2                                                                      |                                                                                                                                                                                                                                                                                                                |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
| 43  | Determine if there are additional TMC, CSC, or EOC message channels to be returned to service.                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
|     | <b>If there are</b>                                                                                                                                                                                                                                                | <b>Do</b>                                                                                                                                                                                                                                                                                                      |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |
|     | more channels to be returned to service                                                                                                                                                                                                                            | step 42                                                                                                                                                                                                                                                                                                        |      |      |      |      |      |      |      |    |   |   |   |   |   |    |     |   |   |   |   |   |   |

---

## NTMX87 in an SMA2 (end)

---

|           | <b>If there are</b>                                                                                                                                                | <b>Do</b> |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|           | no more channels to be returned to service                                                                                                                         | step 44   |
| <b>44</b> | Determine if there are additional links on the NTMX81 to be returned service.<br><b>Note:</b> Remember, all eight links on the NTMX87 need to returned to service. |           |
|           | <b>If</b>                                                                                                                                                          | <b>Do</b> |
|           | there is another link to be returned to service                                                                                                                    | step 36   |
|           | all links have been returned to service                                                                                                                            | step 45   |

### ***At the equipment frame***

- 45** Remove the sign from the active SMA2 unit.
- 46** Go to the common returning a card procedure in this document.  
Go to step 48.
- 47** Obtain further assistance in replacing this card by contacting the personnel responsible for higher level support.
- 48** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX41 in an IOPAC MSP**

---

### **Application**

Use this procedure to replace the following card in an IOPAC MSP.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>  |
|------------|-----------------|--------------|
| NTRX41     | AA              | Alarm Module |

### **Common procedures**

None


### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

**NTRX41**  
**in an IOPAC MSP** (continued)**Summary of card replacement procedure for an NTRX41 card in MSP**

This flowchart summarizes the procedure.

Use the instructions in the procedure that follows this flowchart to perform the procedure.

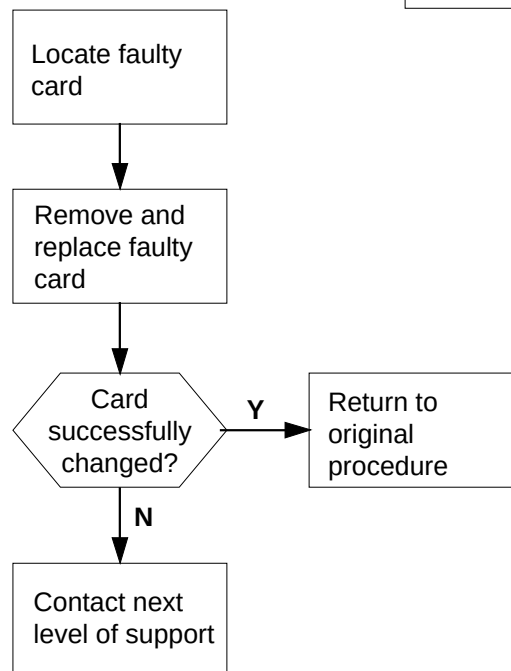

## NTRX41 in an IOPAC MSP (continued)


### Replacing an NTRX41 in MSP

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At Row A Bay 1 of the IOPAC:*

- 3 Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.

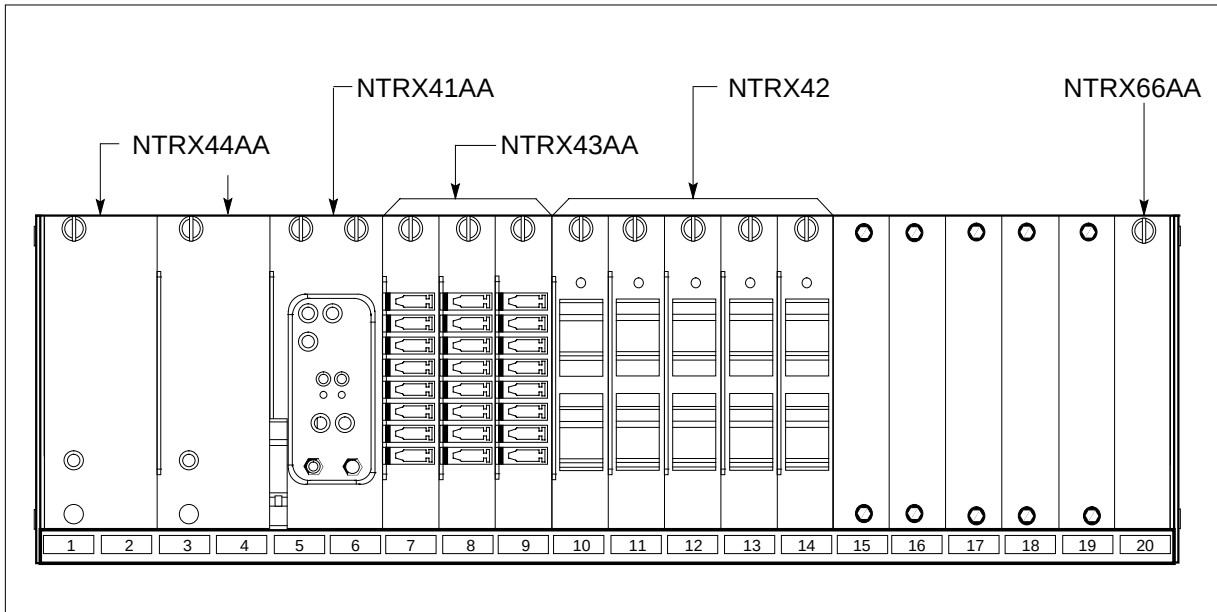

4



#### **DANGER**

##### **Static electricity damage**

Wear a wrist strap connected to a wrist strap grounding point while handling circuit cards. This protects the cards against damage caused by static electricity.




## NTRX41 in an IOPAC MSP (continued)

**DANGER**

**Risk of injury from high energy levels, equipment damage**  
When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.


Put on a wrist strap.

- 5 Remove the NTRX41 circuit card as shown in the following figures.
  - a Locate the circuit card. It will be in slots 05 and 06.

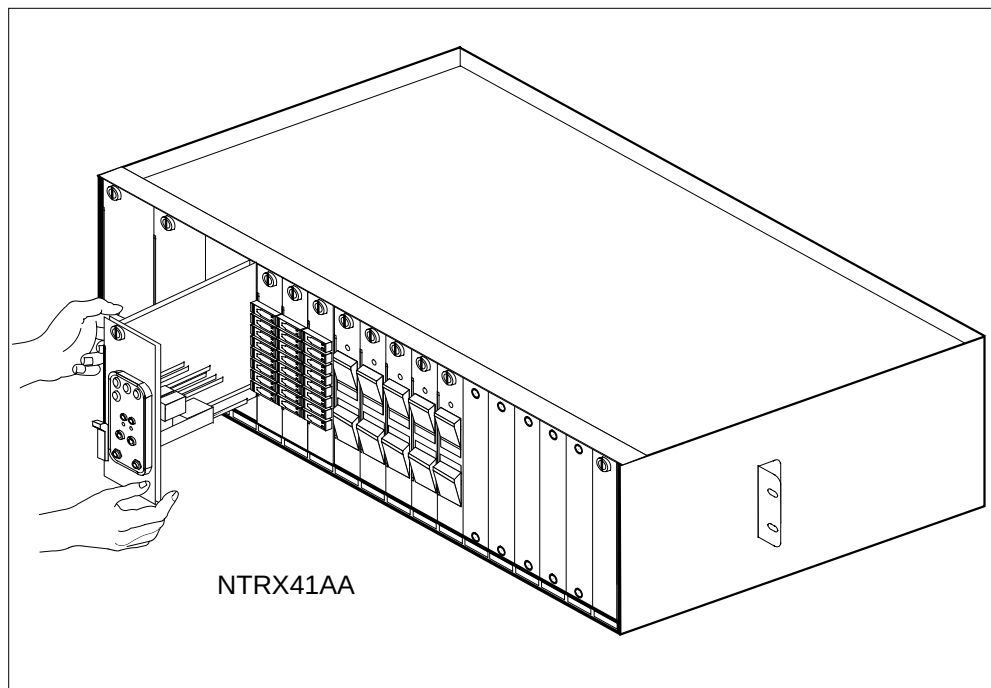

- b At the front of the MSP, disengage the captive screw at the top of the circuit card.
    - c Pull out the lever on the lower left side of the alarm module.
    - d Gently pull the circuit card toward you until it clears the shelf.
- 6 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.

## NTRX41 in an IOPAC MSP (end)

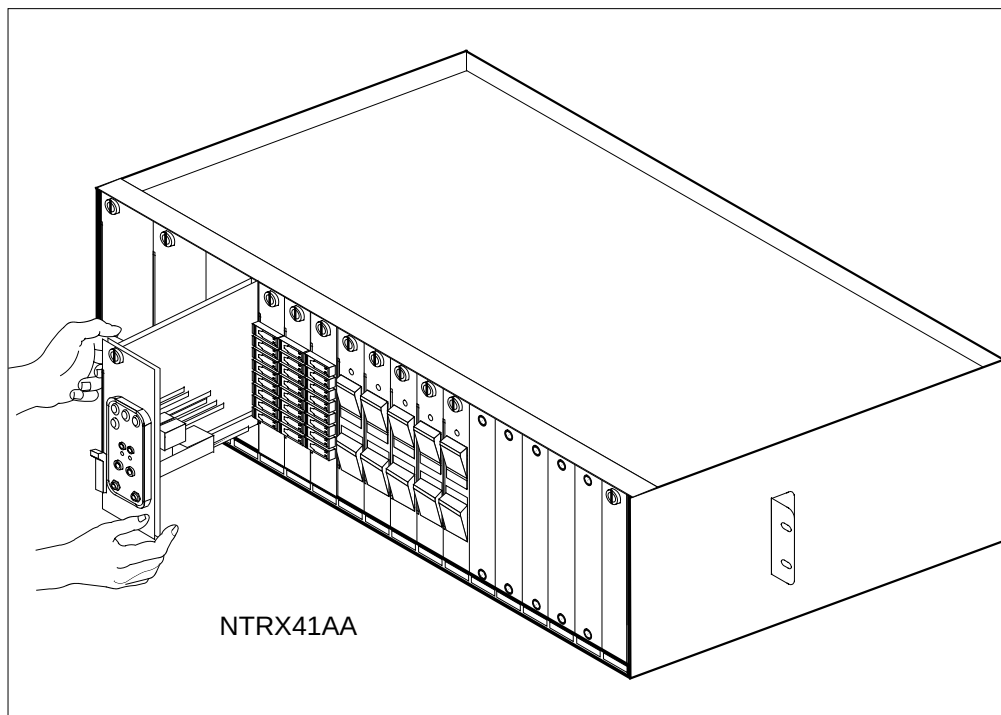

- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
- b Gently but firmly seat the circuit card.
- c Push in lever on the lower left side of alarm module.
- d Tighten the captive screw at the top of the circuit card.

| If alarm lights | Do     |
|-----------------|--------|
| remain off      | step 7 |
| light up        | step 9 |

- 7 Send any faulty cards for repair according to local procedure.
- 8 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 10.
- 9 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 10 You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX41 in an OPAC MSP**

---

### **Application**

Use this procedure to replace an NTRX41 card in an MSP.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>  |
|------------|-----------------|--------------|
| NTRX41     | AA              | Alarm Module |

### **Common procedures**

None


### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX41 in an OPAC MSP (continued)

---

### Summary of card replacement procedure for an NTRX41 card in an MSP

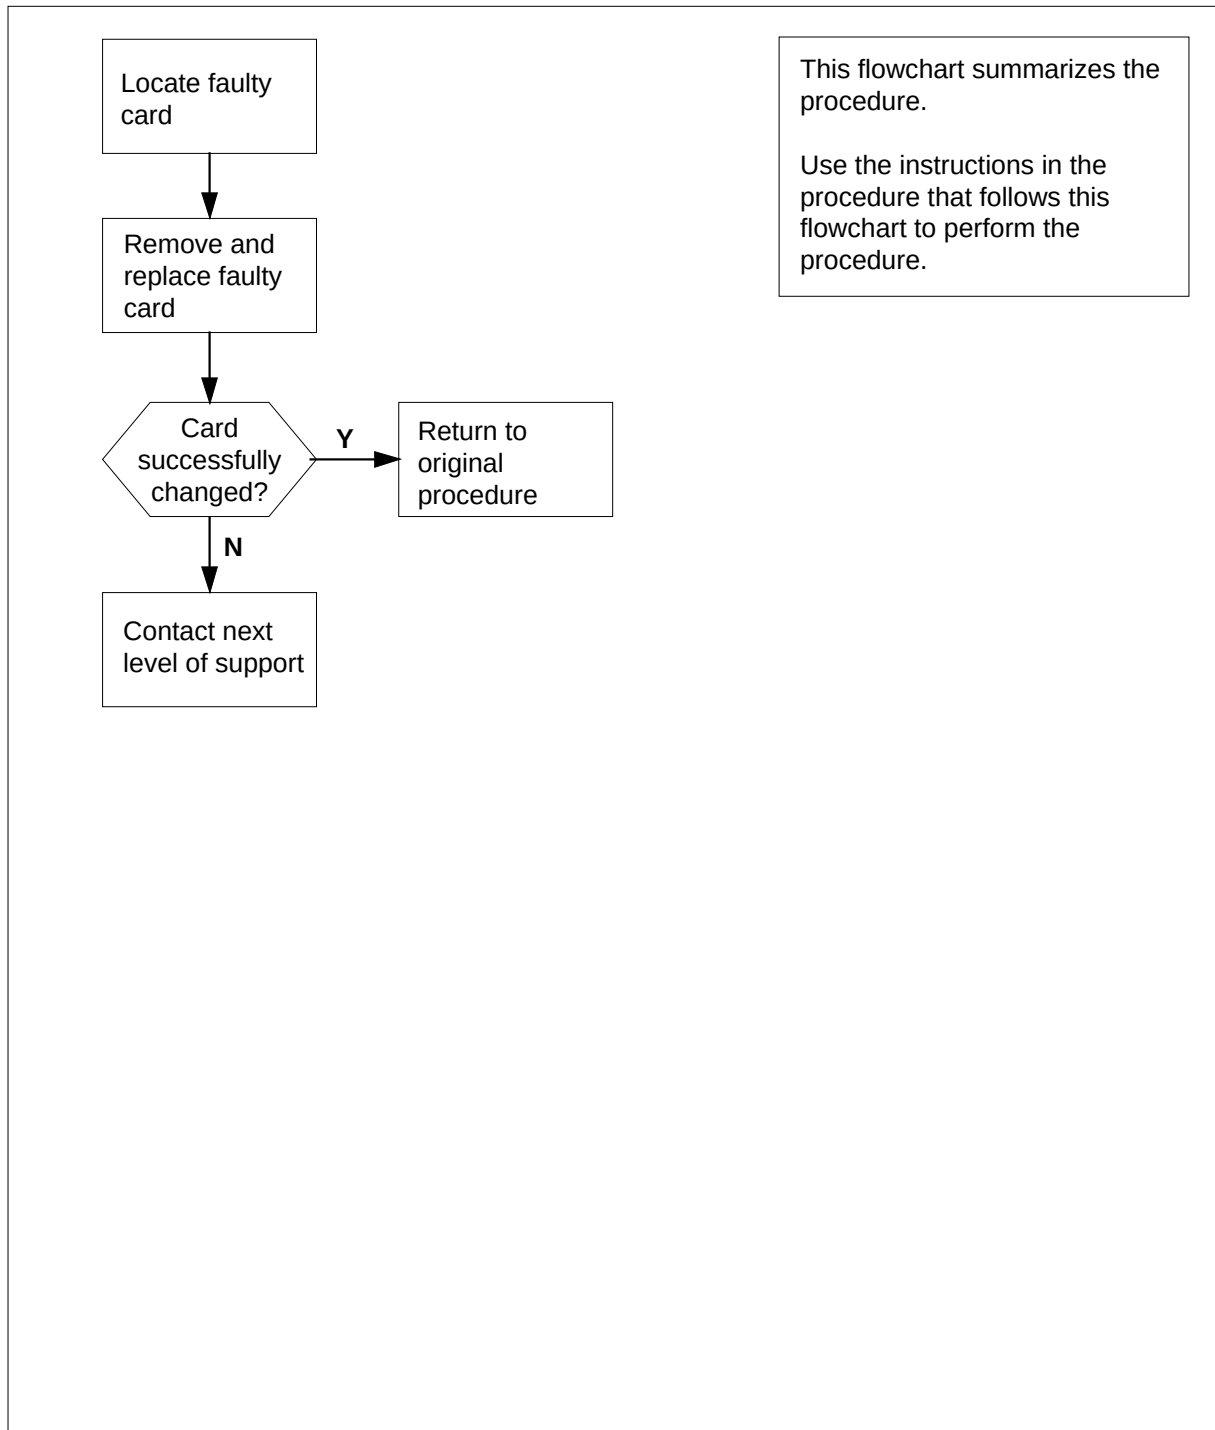

## NTRX41 in an OPAC MSP (continued)


### Replacing an NTRX41 in an MSP

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At Bay 1 of the OPAC:*

- 3 Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.

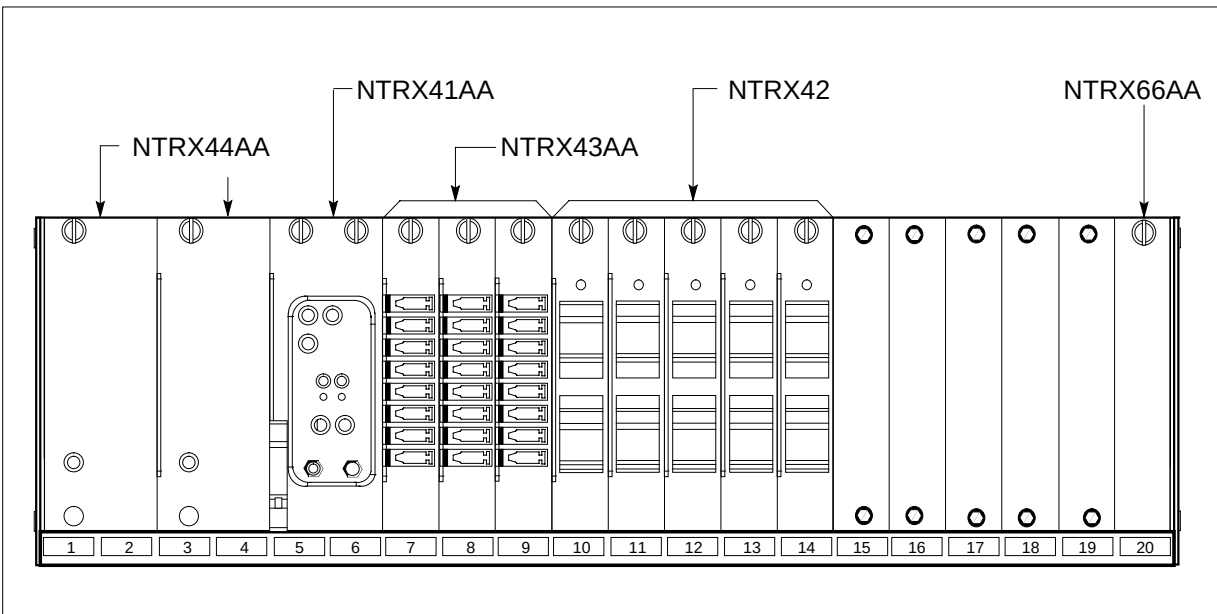

4



#### **DANGER**

##### **Static electricity damage**

Wear a wrist strap connected to a wrist strap grounding point while handling circuit cards. This protects the cards against damage caused by static electricity.

## NTRX41 in an OPAC MSP (continued)

---




### **DANGER**

**Risk of injury from high energy levels, equipment damage**  
When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.


Put on a wrist strap.

- 5 Remove the NTRX41 circuit card as shown in the following figures.
  - a Locate the circuit card. It will be in slots 05 and 06.

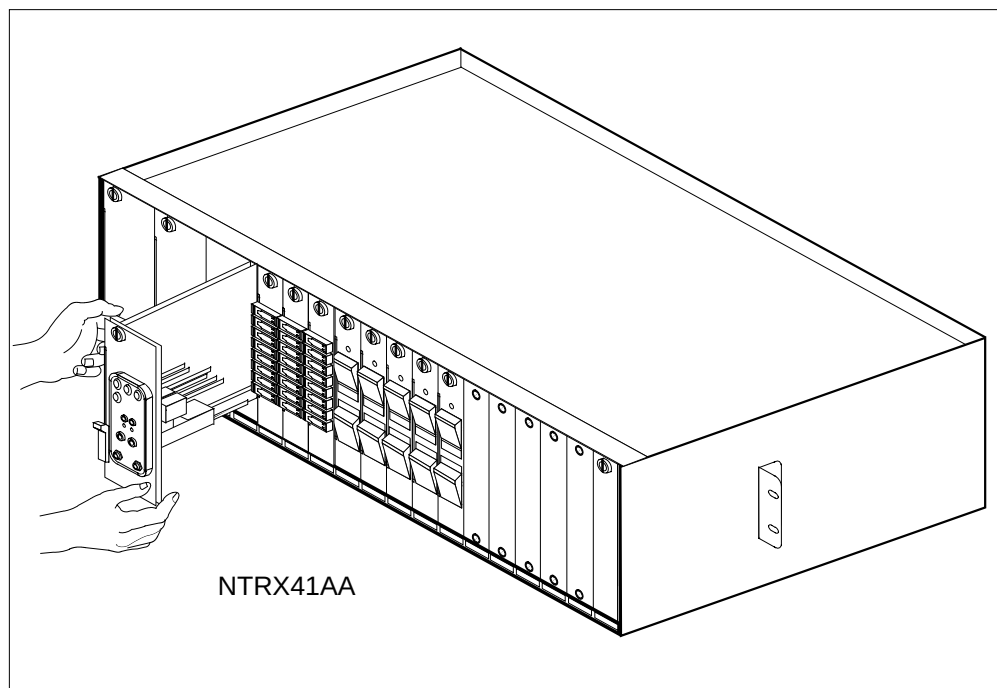

- b At the front of the MSP, disengage the captive screw at the top of the circuit card.
    - c Pull out the lever on the lower left side of the alarm module.
    - d Gently pull the circuit card toward you until it clears the shelf.
- 6 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.

**NTRX41**  
**in an OPAC MSP (end)**

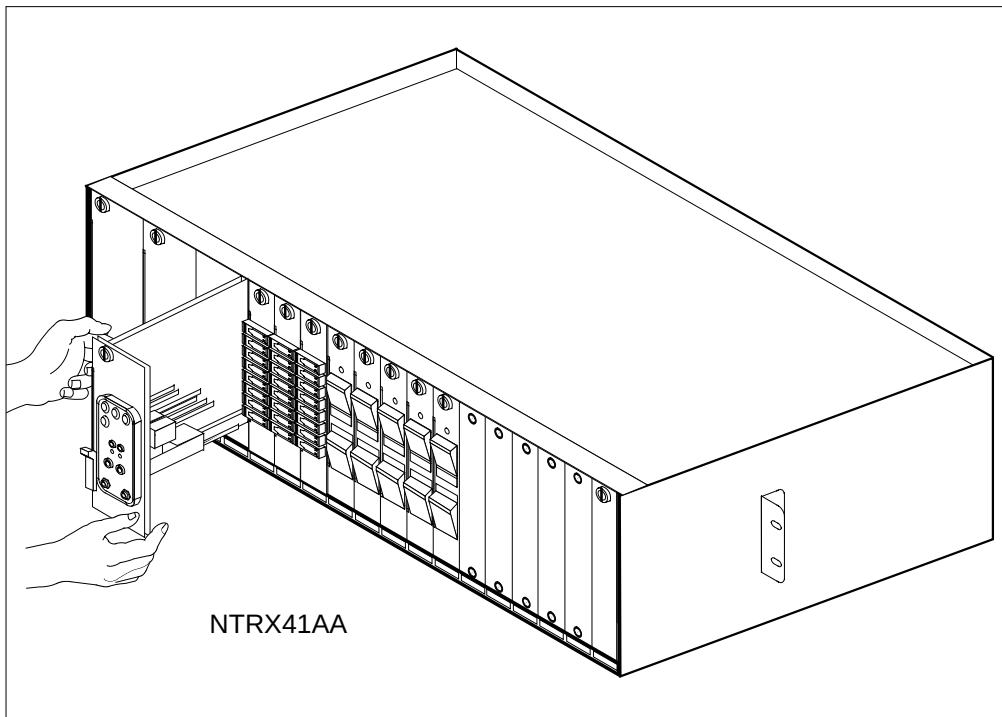

- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
- b Gently but firmly seat the circuit card.
- c Push in lever on the lower left side of alarm module.
- d Tighten the captive screw at the top of the circuit card.

| If alarm lights | Do     |
|-----------------|--------|
| remain off      | step 7 |
| light up        | step 9 |

- 7 Send any faulty cards for repair according to local procedure.
- 8 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 10.
- 9 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 10 You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## NTRX41 in an RSC-M/MSP

---

### Application

Use this procedure to replace an NTRX41 card in a modular supervisory panel (MSP) that supports a Remote Switching Center Multi-Access (RSC-M) cabinet.

**Note:** In this section, examples refer to RSC-M as RCO2 . When software outputs messages to the MAP terminal, software does not differentiate between the two types of RCO2.

| PEC    | Suffixes      | Name         |
|--------|---------------|--------------|
| NTRX41 | AA, BA,<br>CA | Alarm module |

### Common procedures

The common returning a card procedure is referenced in this procedure.

### Action

This card replacement procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.




## NTRX41 in an RSC-M/MSP (continued)

### Summary of Replacing an NTRX41 in an RSC-M/MSP

This flowchart summarizes the procedure.

Use the instructions that follow this flowchart to perform the procedure.

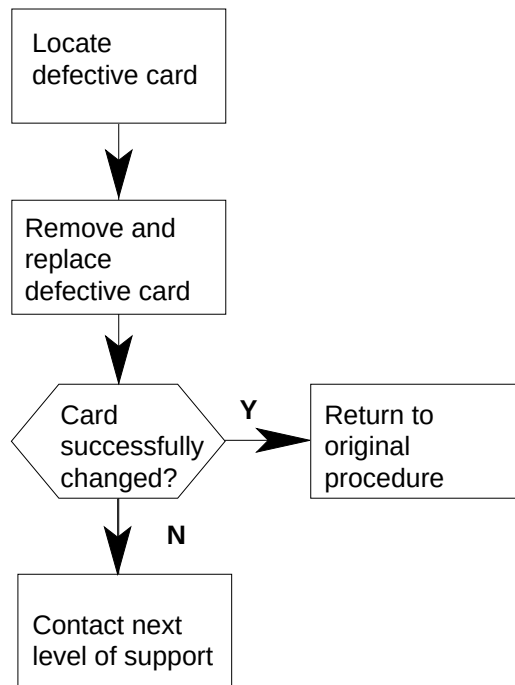

## NTRX41 in an RSC-M/MSP (continued)

### Replacing an NTRX41 in an RSC-M/MSP


#### *At the MAP display:*

- 1 Proceed if the next level of support or a step in a maintenance procedure directed you to this card replacement procedure. Use this procedure to verify or accept cards.
- 2 Obtain an NTRX41 replacement circuit card. Make sure the replacement circuit card has the same PEC and suffix as the circuit card to remove.

#### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

### MSP

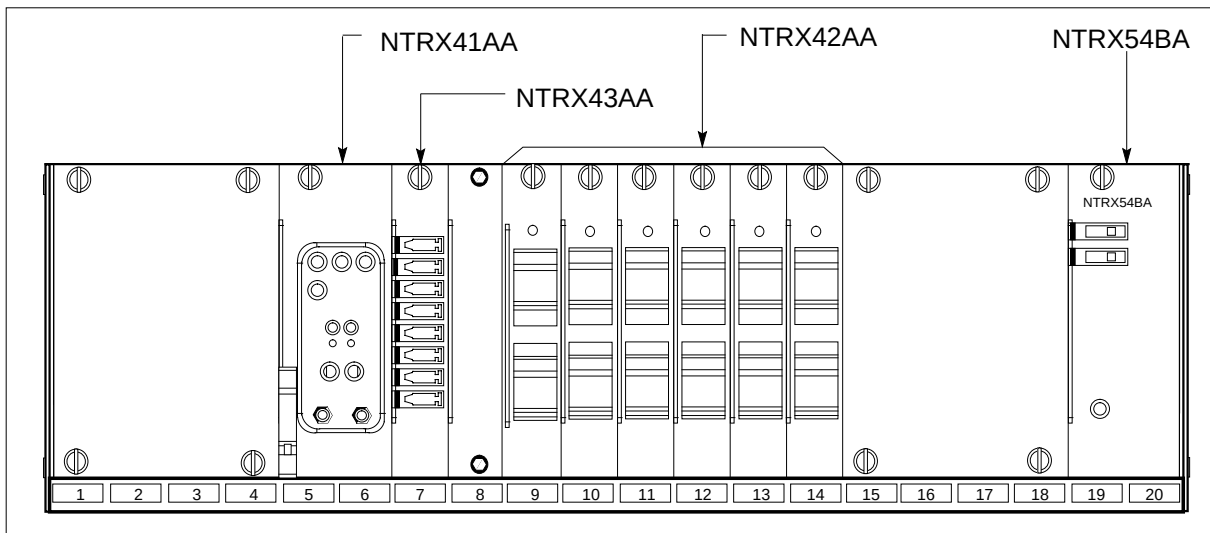

4



#### **WARNING**

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap that connects to the wrist-strap grounding point on the left side of the modular supervisory panel (MSP) to remove cards. The wrist strap protects the equipment against static electricity damage.

## NTRX41 in an RSC-M/MSP (continued)

**DANGER**

Risk of injury from high energy levels, equipment damage  
Take these precautions when you remove or insert a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards in the slots.

Wear a wrist strap.

- 5** Locate and remove the NTRX41 circuit card that appears in the following figure.

The circuit card is in slots 05 and 06.

- a** At the front of the MSP, disengage the knurled thumbscrew at the top of the circuit card.
  - b** Pull out the lever on the upper left side of the alarm module.
  - c** Carefully pull the circuit card toward you until the circuit card clears the shelf.
- 6** Make sure the replacement circuit card has the same PEC and suffix as the last circuit card removed.

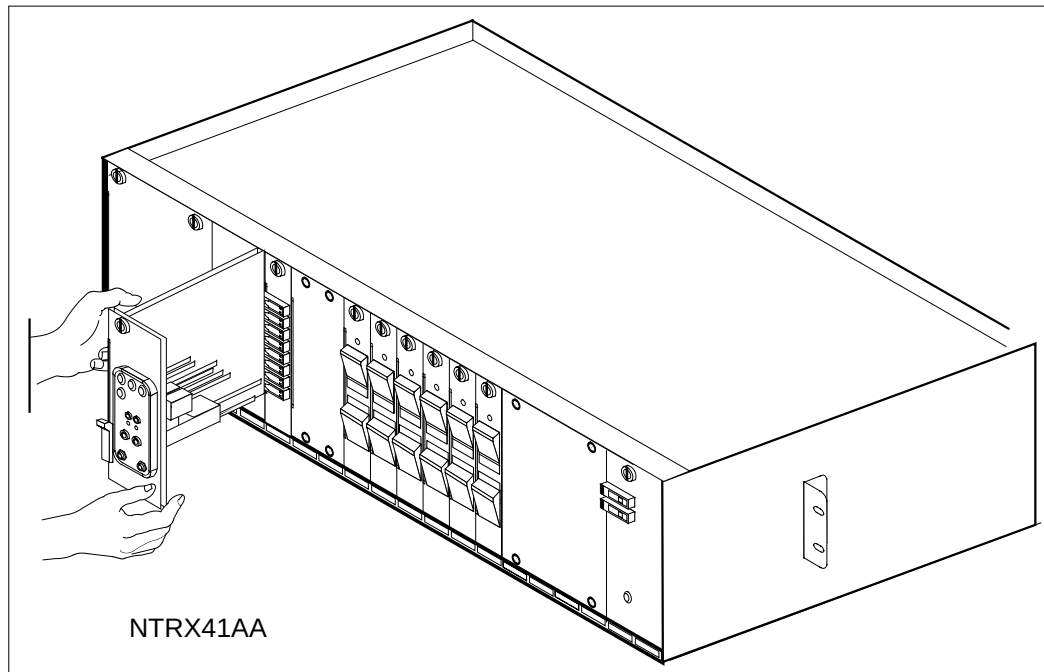

- a** Align the circuit card with the slots in the shelf. Carefully slide the circuit card in the shelf.
- b** Seat the circuit card carefully and tight.

## **NTRX41**

### **in an RSC-M/MSP (end)**

---

- c** Push in lever on the upper left side of alarm module.
- d** Tighten the knurled thumbscrew at the top of the circuit card.

---

| <b>If the alarm light</b> | <b>Do</b> |
|---------------------------|-----------|
|---------------------------|-----------|

---

|                                         |        |
|-----------------------------------------|--------|
| remains off (or light for a short time) | step 7 |
|-----------------------------------------|--------|

|          |        |
|----------|--------|
| turns on | step 9 |
|----------|--------|

- 
- 7** Go to the common returning a card procedure in this document.
  - 8** This procedure is complete. Return to the maintenance procedure that directed you to this card replacement procedure. Continue as directed.
  - 9** For additional help with this card replacement, contact the next level of support.

**NTRX41  
in an RSC MSP**

---

**Application**

Use this procedure to replace an NTRX41 card in a modular supervisory panel (MSP) located in a:

- cabinetized extension module (CEXT)
- cabinetized line concentrating equipment (CLCE)
- cabinetized line module ISDN (CLMI)
- cabinetized power distribution center (CPDC)
- cabinetized remote switching center (CRSC)
- cabinetized miscellaneous equipment (CMIS)
- cabinetized remote miscellaneous equipment (CRME)

| PEC    | Suffixes   | Name         |
|--------|------------|--------------|
| NTRX41 | AA, BA, CA | Alarm Module |

**Common procedures**

None


**Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX41 in an RSC MSP (continued)

---

### Summary of card replacement procedure for an NTRX41 card in RSC MSP

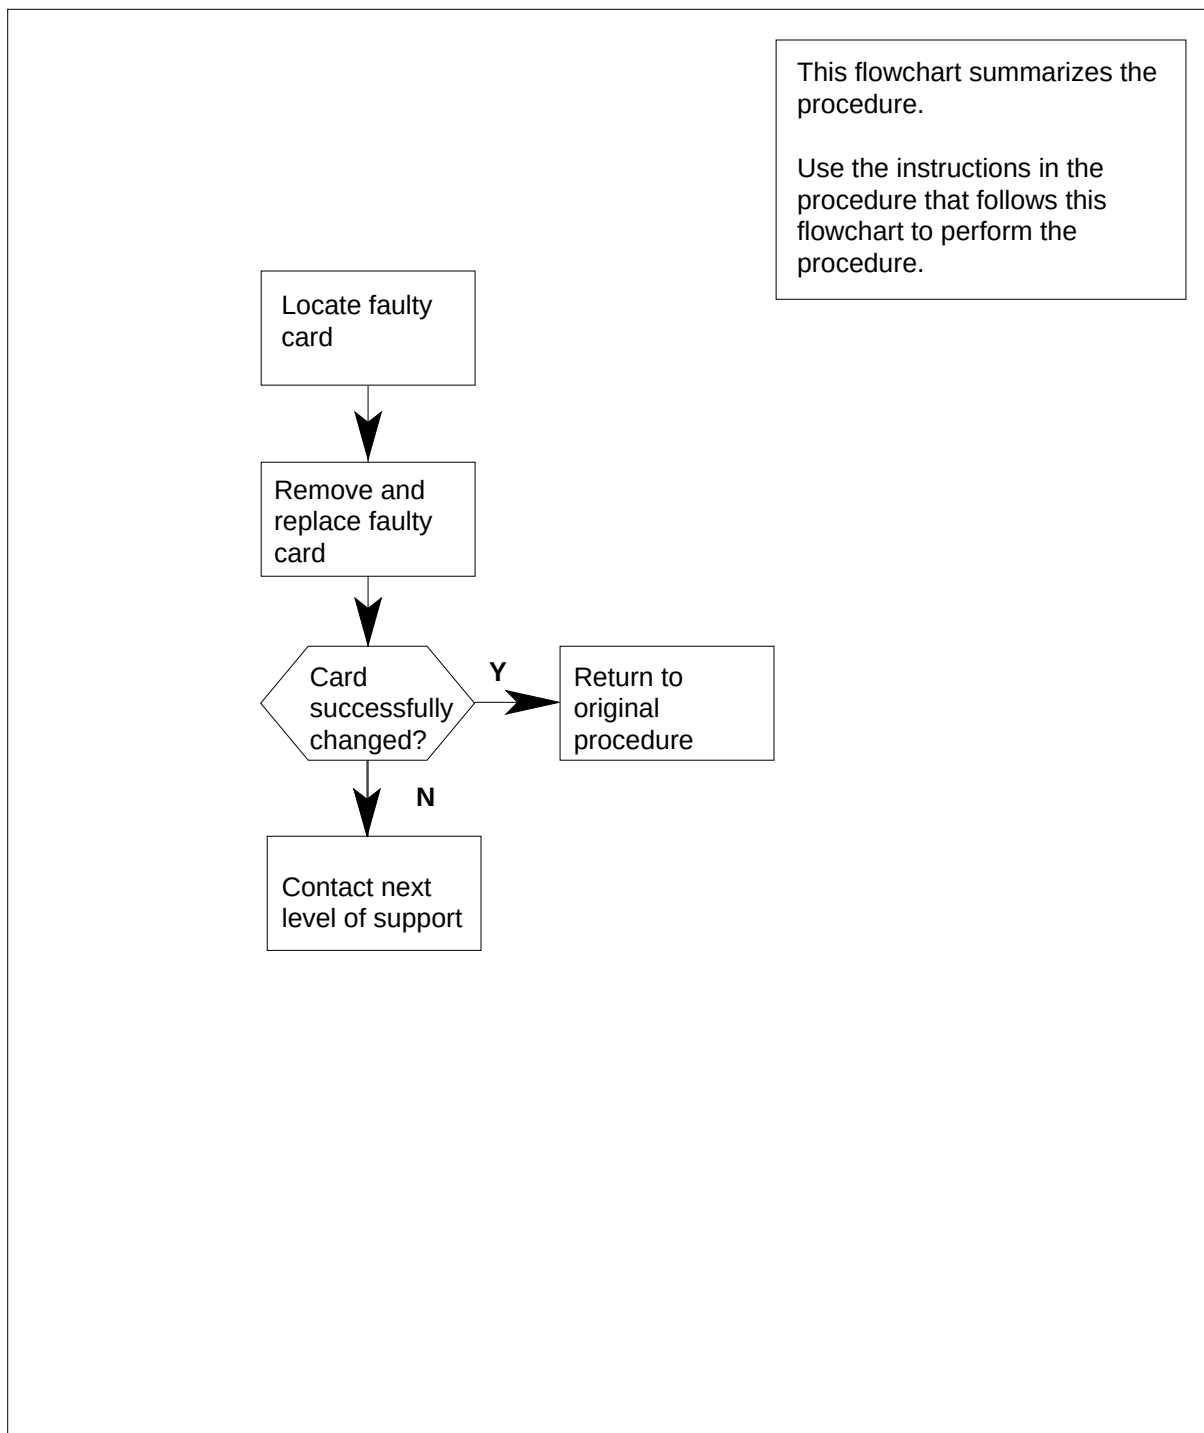


## NTRX41 in an RSC MSP (continued)

### Replacing an NTRX41 card in RSCE MSP

#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.
- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an RSCE or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

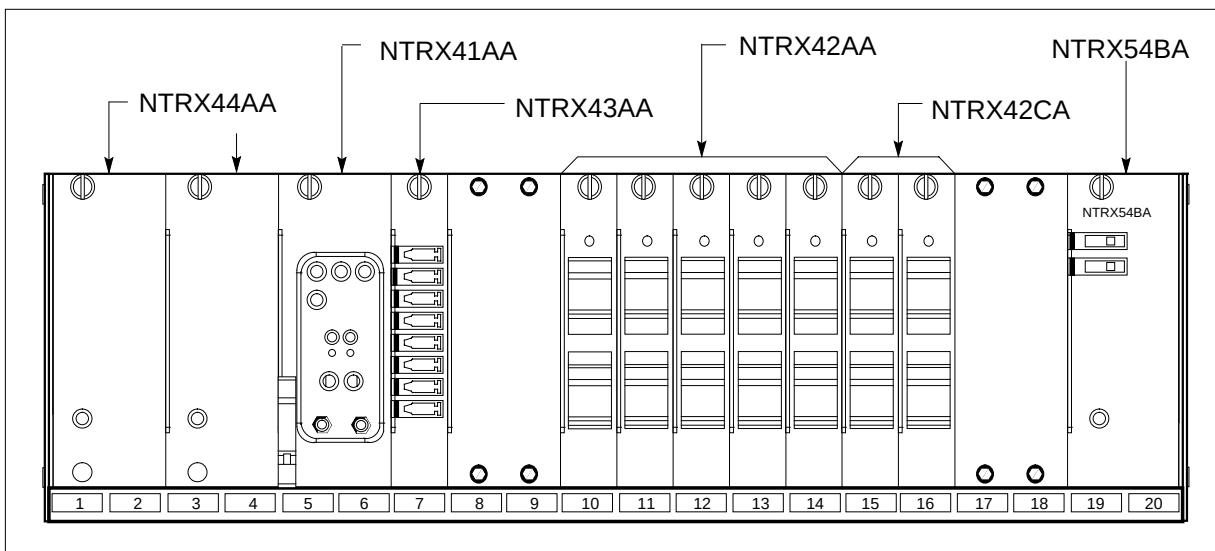

4



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

## NTRX41 in an RSC MSP (continued)




### DANGER

Risk of injury from high energy levels, equipment damage  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

- 5 Remove the NTRX41 circuit card as shown in the following figure.
  - a Open the front doors of the cabinet and locate the circuit card, it will be in slots 05 and 06.
  - b At the front of the MSP, disengage the knurled thumbscrew at the top of the circuit card.
  - c Pull out the lever on the upper left side of the alarm module.
  - d Gently pull the circuit card toward you until it clears the shelf.
- 6 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.

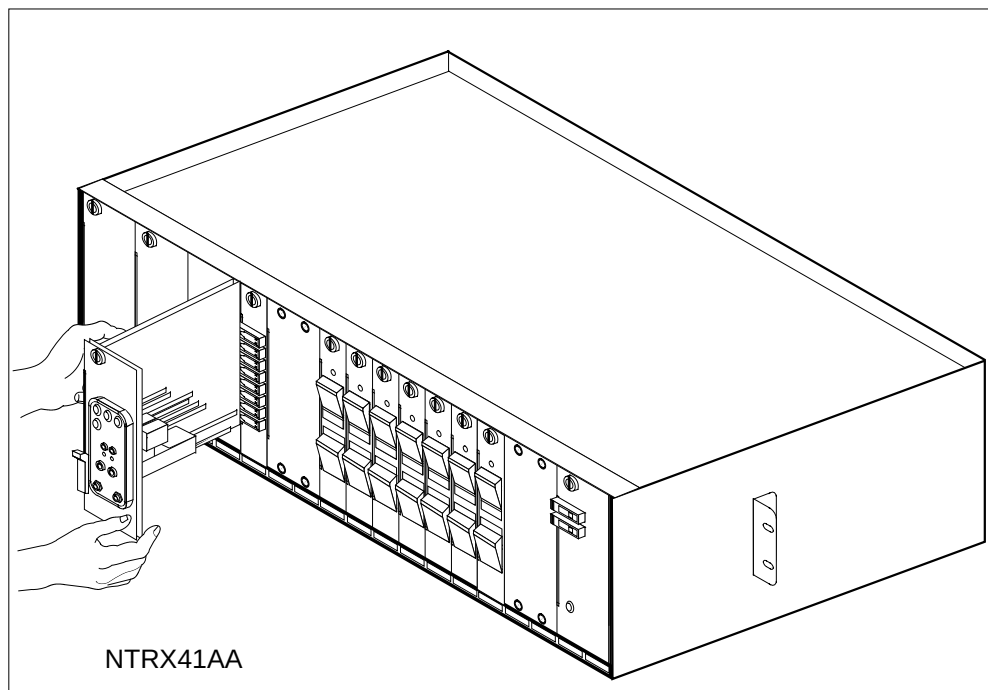

- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
- b Gently but firmly seat the circuit card.
- c Push in lever on the upper left side of alarm module.



---

**NTRX41**  
**in an RSC MSP (end)**

---

**d** Tighten the knurled thumbscrew at the top of the circuit card.

---

**If alarm lights**

---

**Do**

---

remain off

---

step 7

---

light up

---

step 9

- 
- 7** Send any faulty cards for repair according to local procedure.
- 8** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 10.
- 9** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 10** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX41 in an RSC-S (DS-1) Model B MSP**

---

### **Application**

Use this procedure to replace an NTRX41 card in a modular supervisory panel (MSP) located in a

- cabinetized extension module (CEXT)
- cabinetized line concentrating equipment (CLCE)
- cabinetized line module ISDN (CLMI)
- cabinetized power distribution center (CPDC)
- cabinetized remote switching center (CRSC)
- cabinetized miscellaneous equipment (CMIS)
- cabinetized remote miscellaneous equipment (CRME)

| PEC    | Suffixes   | Name         |
|--------|------------|--------------|
| NTRX41 | AA, BA, CA | Alarm Module |

### **Common procedures**


None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX41 in an RSC-S (DS-1) Model B MSP (continued)

### Summary of card replacement procedure for an NTRX41 card in RSC-S MSP

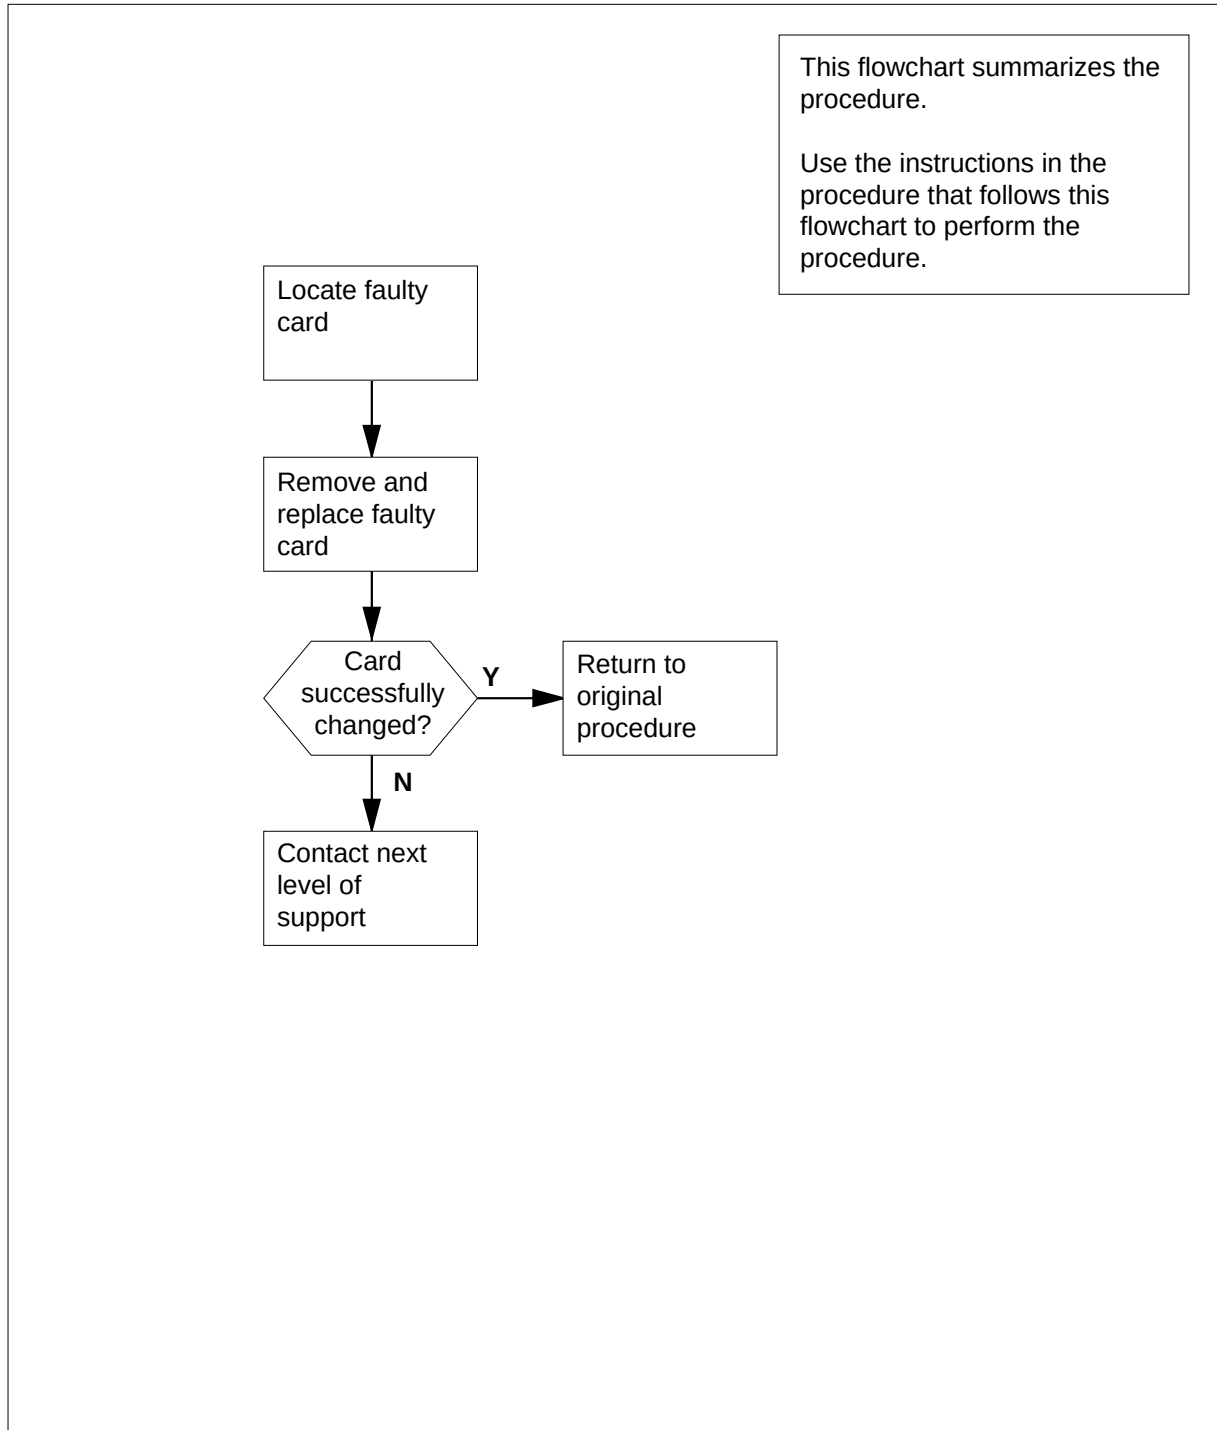

## NTRX41 in an RSC-S (DS-1) Model B MSP (continued)

### Replacing an NTRX41 card in RSC-S MSP


#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

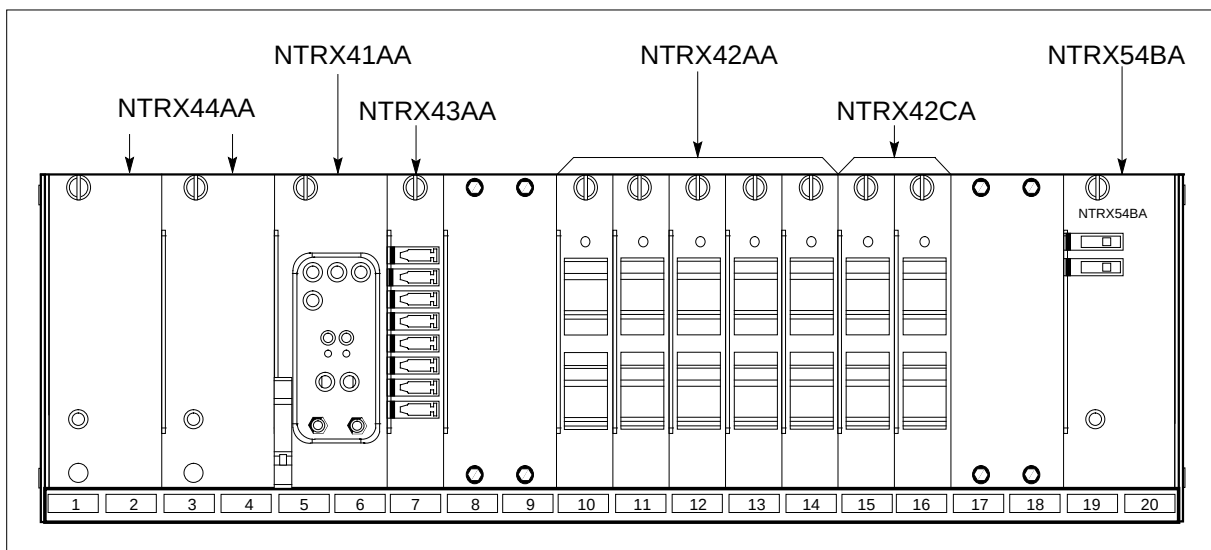

4



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

## NTRX41

### in an RSC-S (DS-1) Model B MSP (continued)




**DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.


- 5 Remove the NTRX41 circuit card as shown in the following figure.
  - a Open the front doors of the cabinet and locate the circuit card, it will be in slots 05 and 06.

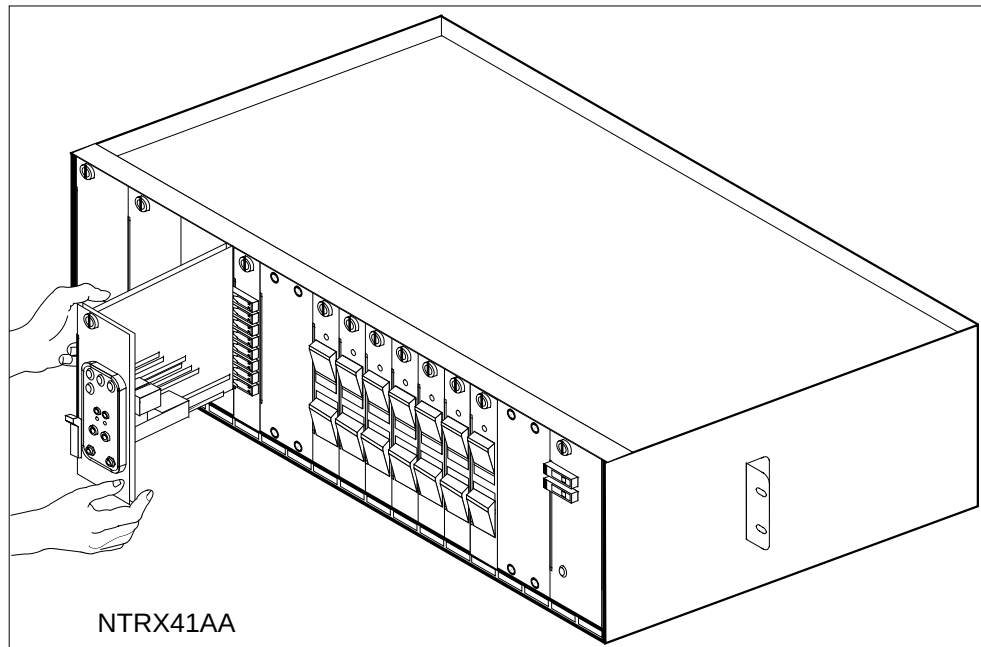

- b At the front of the MSP, disengage the knurled thumbscrew at the top of the circuit card.
  - c Pull out the lever on the upper left side of the alarm module.
  - d Gently pull the circuit card toward you until it clears the shelf.
- 6 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.

## NTRX41 in an RSC-S (DS-1) Model B MSP (end)

---

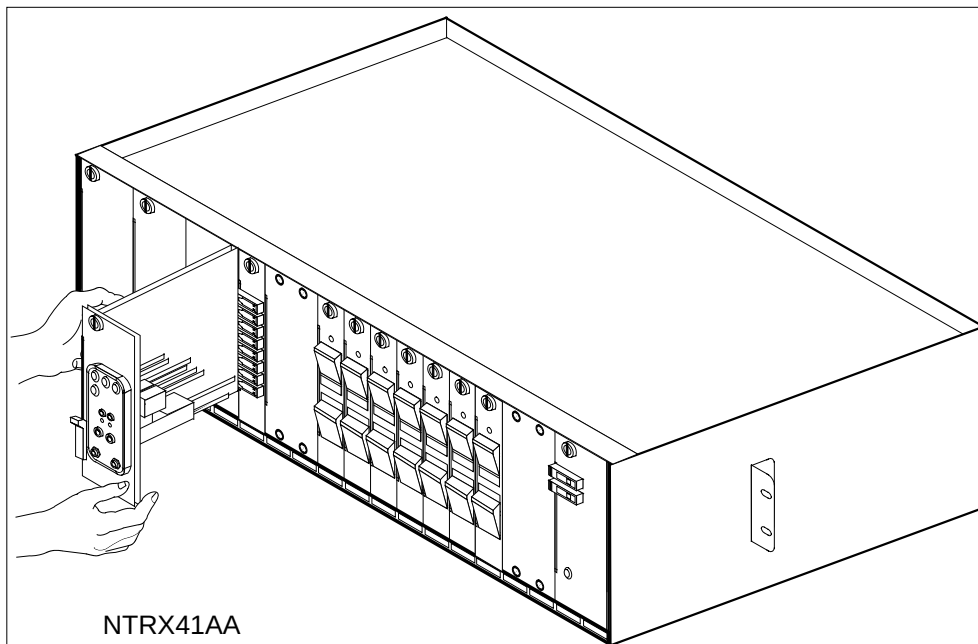

- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
- b Gently but firmly seat the circuit card.
- c Push in lever on the upper left side of alarm module.
- d Tighten the knurled thumbscrew at the top of the circuit card.

---

| If alarm lights | Do     |
|-----------------|--------|
| remain off      | step 7 |
| light up        | step 9 |

---

- 7 Send any faulty cards for repair according to local procedure.
- 8 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 10.
- 9 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 10 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX41 in an SMA2 MSP**

---

### **Application**

Use this procedure to replace an NTRX41 card in a modular supervisory panel (MSP) located in a:

- cabinetized multi-vendor interface (CMVI)
- multi-vendor interface equipment frame (MVIE)
- multi-vendor double density frame (MVDD)

| PEC    | Suffixes | Name         |
|--------|----------|--------------|
| NTRX41 | AA       | Alarm Module |

### **Common procedures**

The common returning a card procedure is referenced in this procedure.

Do not go to a common procedure unless directed to do so in the step-action procedure.


### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX41 in an SMA2 MSP (continued)

---

### Summary of card replacement procedure for an NTRX41 card in an SMA2 MSP

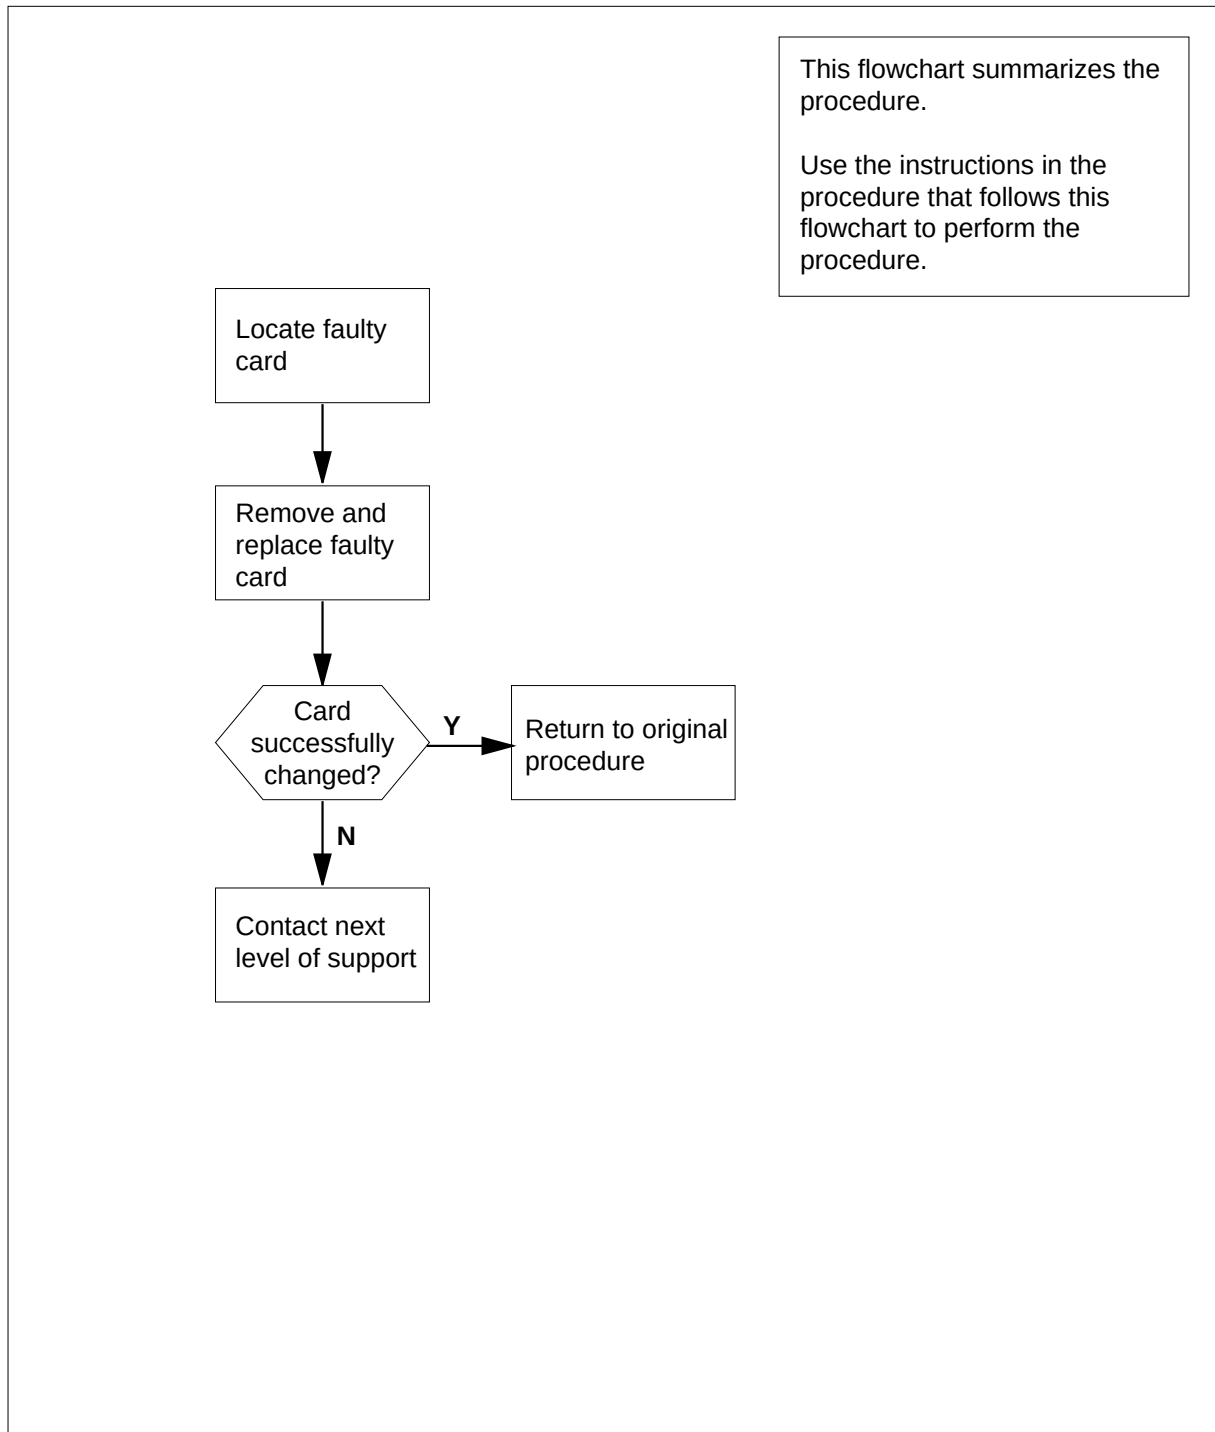



## NTRX41 in an SMA2 MSP (continued)

### Replacing an NTRX41 card in an SMA2 MSP


#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

#### *At the front panel of the cabinet or frame*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

#### MSP

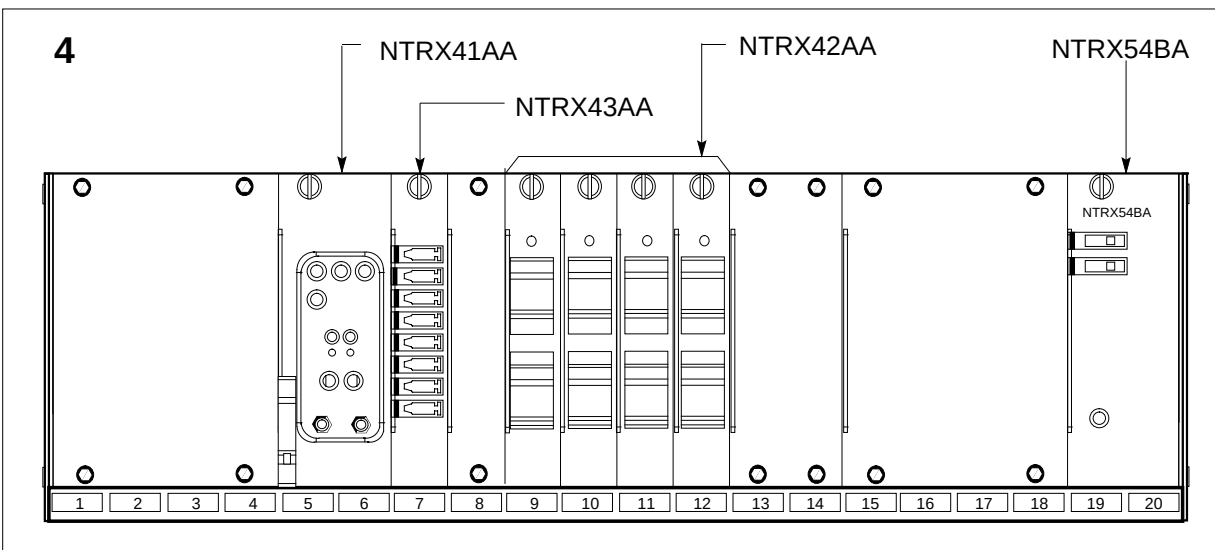

4



#### **DANGER**

##### **Risk of injury from high energy levels, static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

## NTRX41 in an SMA2 MSP (continued)

---




### **DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.


Put on a wrist strap.

- 5 Remove the NTRX41 circuit card as shown in the following figure.
  - a Open the front doors of the cabinet and locate the circuit card, it will be in slots 05 and 06.

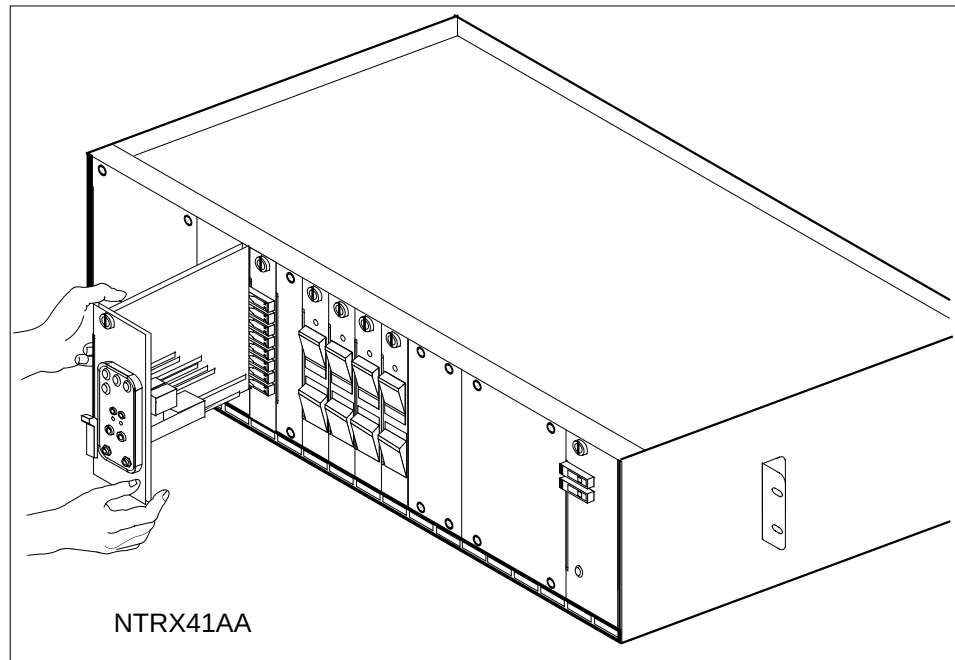

- b At the front of the MSP, disengage the knurled thumbscrew at the top of the circuit card.
    - c Pull out the lever on the lower left side of the alarm module.
    - d Gently pull the circuit card toward you until it clears the shelf.
- 6 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.

**NTRX41**  
**in an SMA2 MSP (end)**

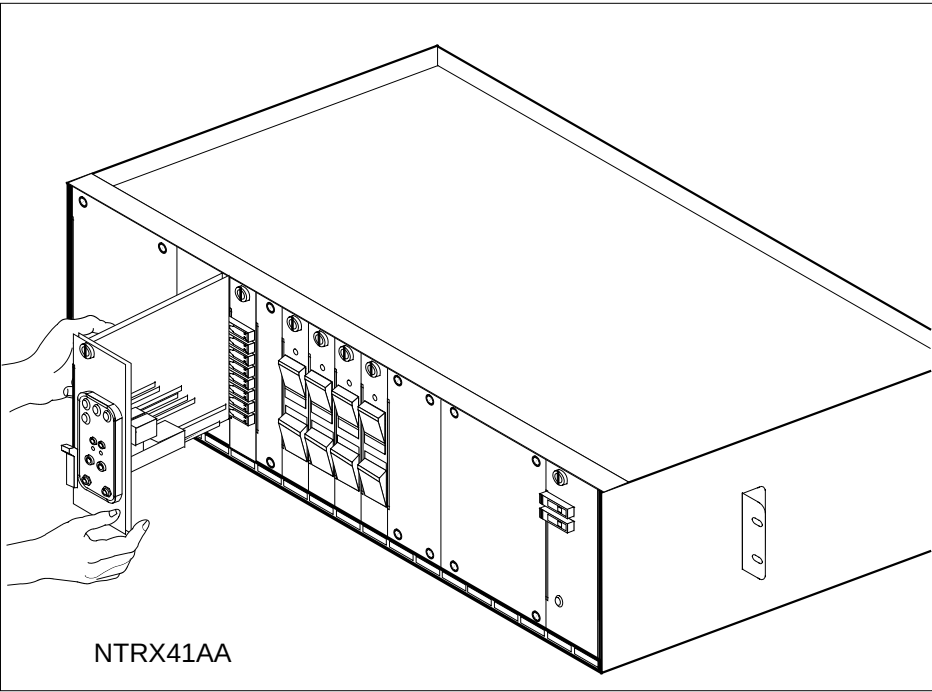

- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
- b Gently but firmly seat the circuit card.
- c Push in lever on the upper left side of alarm module.
- d Tighten the knurled thumbscrew at the top of the circuit card.

7 Proceed as shown in the following table.

| If alarm lights | Do     |
|-----------------|--------|
| remain off      | step 8 |
| light up        | step 9 |

- 8 Go to the common returning a card procedure in this document.  
Go to step 10.
- 9 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 10 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX42 in an IOPAC MSP**

---

### **Application**

Use this procedure to replace the following card in an IOPAC MSP.

| <b>PEC</b> | <b>Suffixes</b>    | <b>Name</b>    |
|------------|--------------------|----------------|
| NTRX42     | AA, BA, CA, DA, EA | Breaker Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.


The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

The following is an illustration of the connector removal tool.

## **NTRX42** **in an IOPAC MSP (continued)**


### **Connector removal tool**

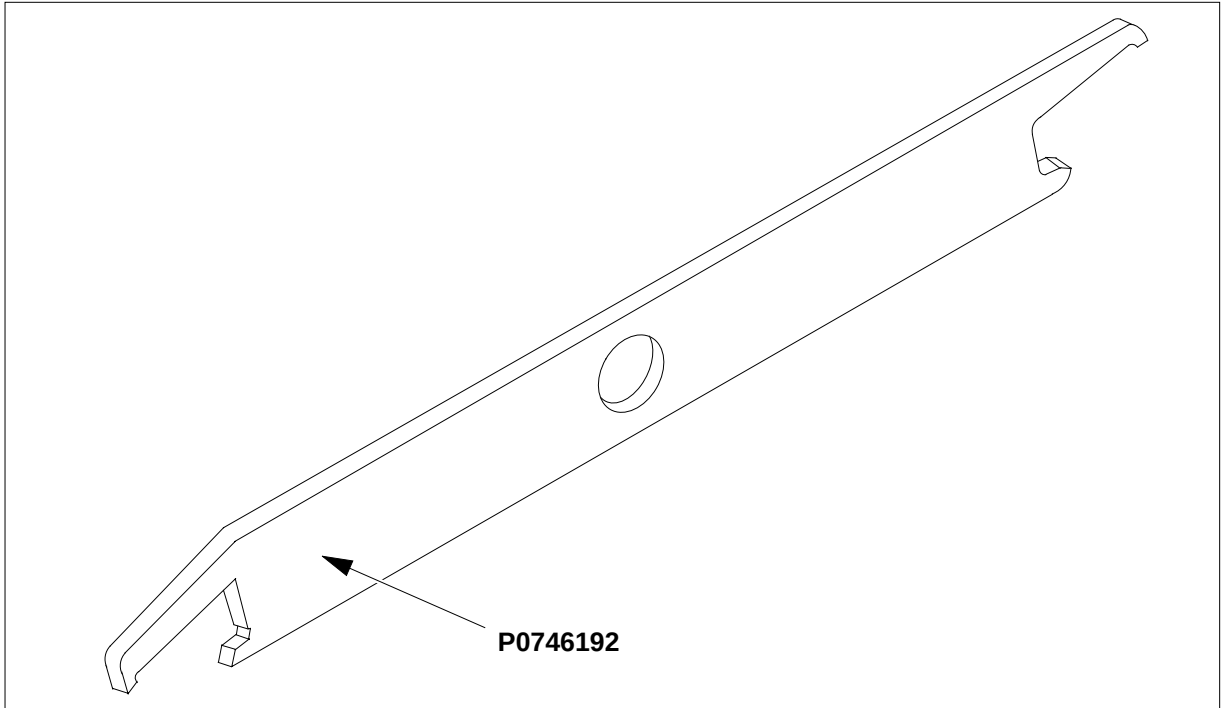

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart. The detailed procedure depends on which circuit cards are served by the breaker module circuit card (NTRX42). You will be directed to the appropriate steps depending on your configuration.

## NTRX42 in an IOPAC MSP (continued)

### Summary of card replacement procedure for an NTRX42 card in MSP

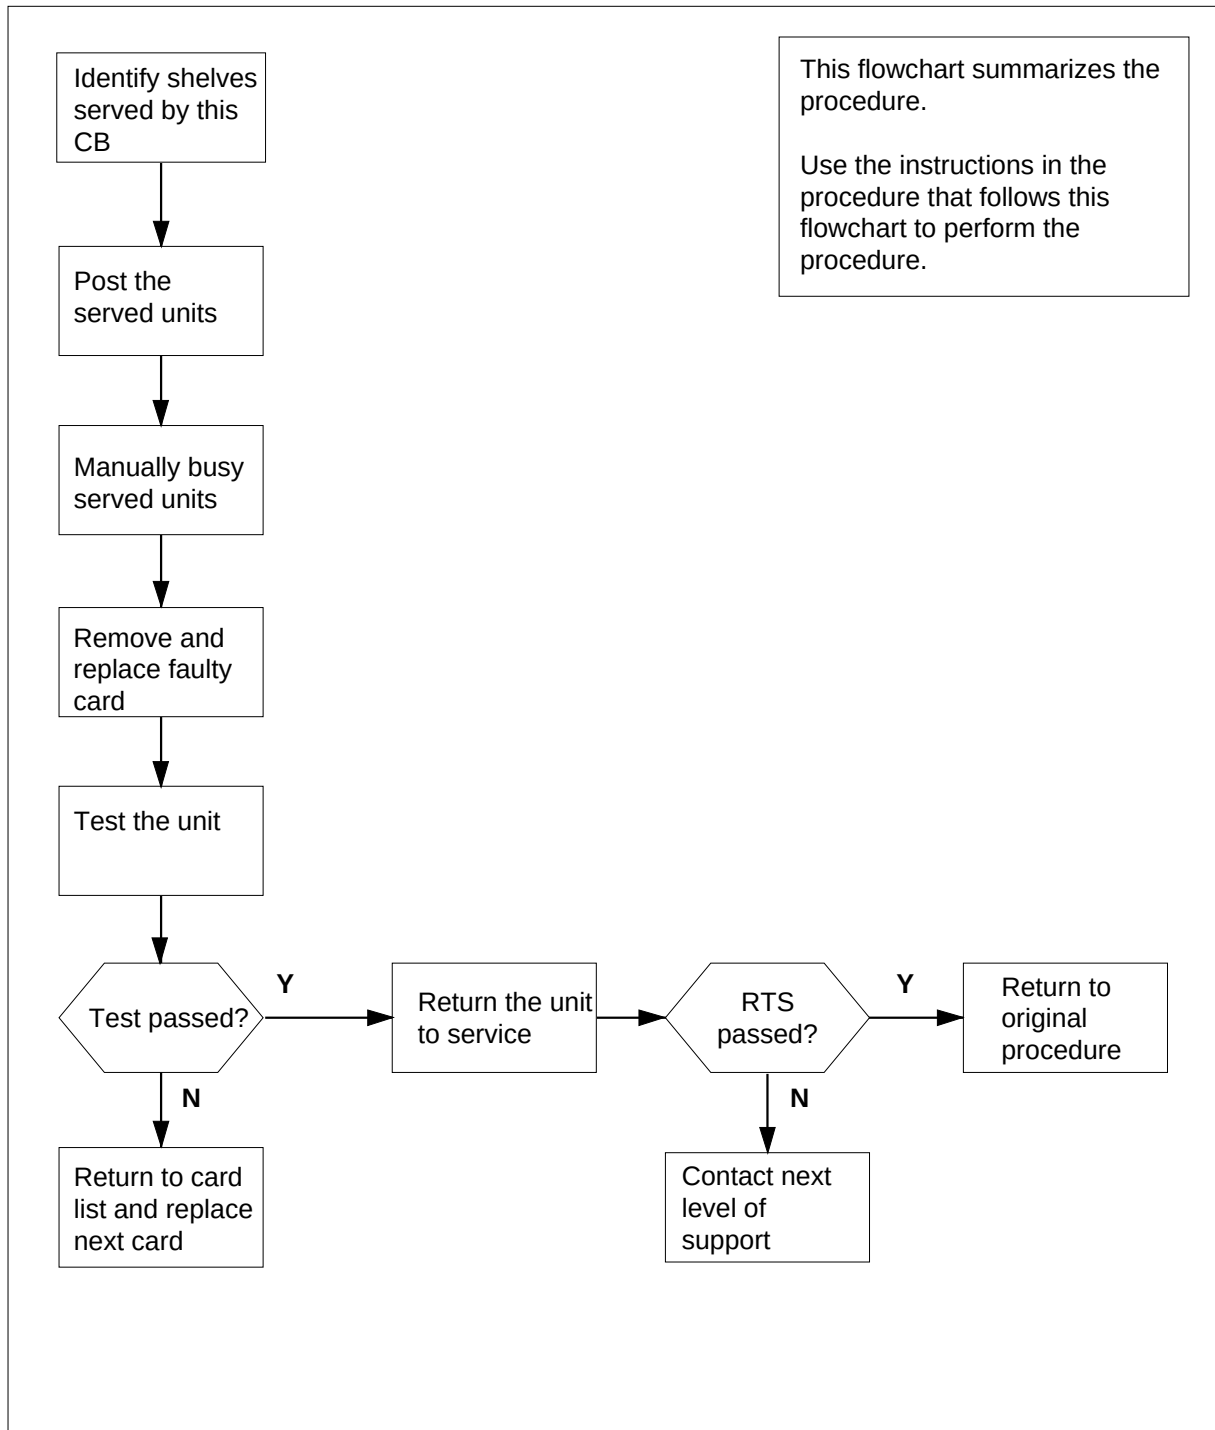

**NTRX42**  
**in an IOPAC MSP (continued)**


**Replacing an NTRX42 in MSP**

***At your Current Location***

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Verify that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

***At Row A Bay 1 of the IOPAC cabinet***

- 3 Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.

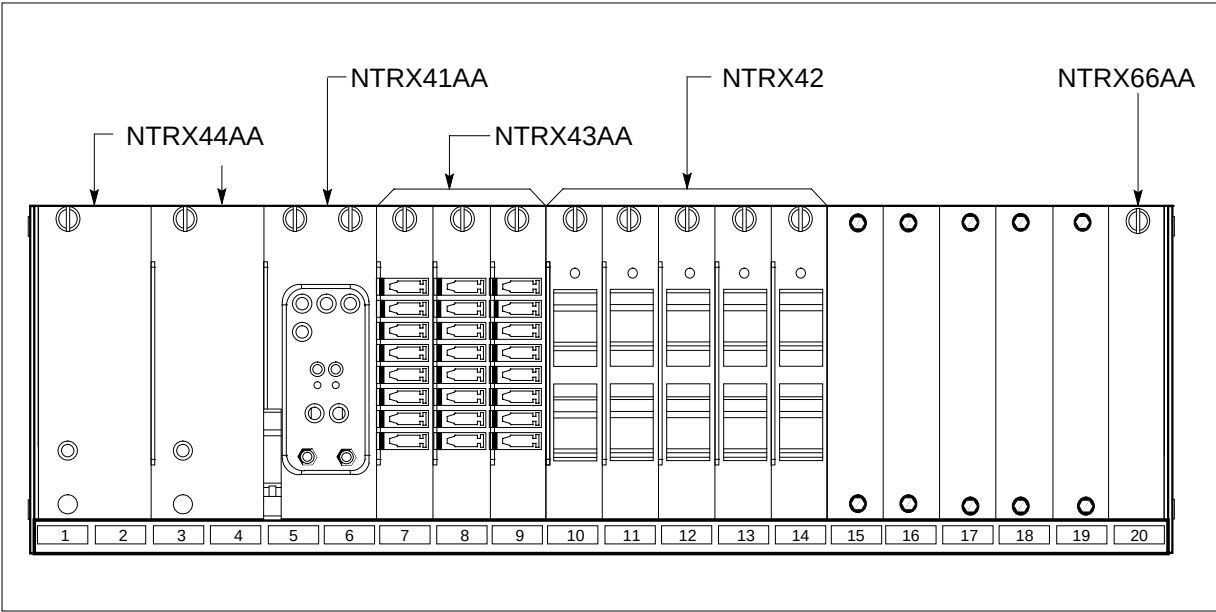

- 4 Use the breaker designation label to identify which cards are serviced by each circuit breaker (CB). For example, the label CB01-0/18-01 identifies circuit breaker 01 as controlling circuit card position 01 on shelf location 18 in bay 0. Many RX42 modules service two separate devices or units; both units must be powered down prior to removal of the associated RX42 circuit card.

| If CB powers | DoGo to |
|--------------|---------|
| RMM shelf    | step 5  |
| ILCM         | step 9  |

## NTRX42

### in an IOPAC MSP (continued)

#### At the MAP display

- 5 Set the MAP display to the PM level and post the RMM by typing the following string:

**>MAPCI;MTC;PM;POST RMM rmm\_no**

and pressing the Enter key.

where

**rmm\_no**

is the number of the RMM unit from which the card is to be removed

*Example of a MAP display:*

| CM  | MS      | IOD | Net  | PM   | CCS  | LNS | Trks | Ext  | Appl |
|-----|---------|-----|------|------|------|-----|------|------|------|
| .   | .       | .   | .    | .    | .    | .   | .    | .    | .    |
| RMM |         |     | SysB | ManB | OffL |     | CBsy | ISTb | InSv |
| 0   | Quit    | PM  | 4    | 0    | 10   |     | 3    | 3    | 130  |
| 2   | Post_   | RMM | 0    | 1    | 1    |     | 0    | 0    | 2    |
| 3   |         |     |      |      |      |     |      |      |      |
| 4   |         | RMM | 5    | INSV |      |     |      |      |      |
| 5   | Trnsl   |     |      |      |      |     |      |      |      |
| 6   | Tst     |     |      |      |      |     |      |      |      |
| 7   | Bsy     |     |      |      |      |     |      |      |      |
| 8   | RTS     |     |      |      |      |     |      |      |      |
| 9   | OffL    |     |      |      |      |     |      |      |      |
| 10  | LoadPM  |     |      |      |      |     |      |      |      |
| 11  | Disp_   |     |      |      |      |     |      |      |      |
| 12  | Next    |     |      |      |      |     |      |      |      |
| 13  |         |     |      |      |      |     |      |      |      |
| 14  | QueryPM |     |      |      |      |     |      |      |      |
| 15  |         |     |      |      |      |     |      |      |      |
| 16  |         |     |      |      |      |     |      |      |      |
| 17  |         |     |      |      |      |     |      |      |      |
| 18  |         |     |      |      |      |     |      |      |      |

- 6 Busy the RMM by typing the following string:

**>BSY**

and pressing the Enter key.

*Example of a MAP display:*



## NTRX42 in an IOPAC MSP (continued)

| CM         | MS         | IOD | Net  | PM    | CCS  | LNS  | Trks | Ext  | Appl |
|------------|------------|-----|------|-------|------|------|------|------|------|
| .          | .          | .   | .    | 1ManB | .    | .    | .    | .    | .    |
| <b>RMM</b> |            |     | SysB | ManB  | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     | PM         |     | 4    | 0     | 10   | 0    | 0    | 130  |      |
| 2 Post_    | <b>RMM</b> |     | 0    | 1     | 0    | 0    | 0    | 0    |      |
| 3          |            |     |      |       |      |      |      |      |      |
| 4          | RMM        | 5   | ManB |       |      |      |      |      |      |
| 5 Trnsl    |            |     |      |       |      |      |      |      |      |
| 6 Tst      |            |     |      |       |      |      |      |      |      |
| 7 Bsy      |            |     |      |       |      |      |      |      |      |
| 8 RTS      |            |     |      |       |      |      |      |      |      |
| 9 OffL     |            |     |      |       |      |      |      |      |      |
| 10 LoadPM  |            |     |      |       |      |      |      |      |      |
| 11 Disp_   |            |     |      |       |      |      |      |      |      |
| 12 Next    |            |     |      |       |      |      |      |      |      |
| 13         |            |     |      |       |      |      |      |      |      |
| 14 QueryPM |            |     |      |       |      |      |      |      |      |
| 15         |            |     |      |       |      |      |      |      |      |
| 16         |            |     |      |       |      |      |      |      |      |
| 17         |            |     |      |       |      |      |      |      |      |
| 18         |            |     |      |       |      |      |      |      |      |

### **At the RMM shelf**

- 7 Power down the unit by setting the ON/OFF switch on the power converter faceplate to the OFF position. Both the CONVERTER FAIL LED and FRAME FAIL LED on the MSP will be ON.
- 8 Go to step 11.

### **At the MAP terminal**

- 9 Set the MAP display to the PM level and post the ILCM powered by the circuit breaker by typing the following string:

**>MAPCI;MTC;PM;POST ILCM site frame lcm**

and pressing the Enter key.

*where*

#### **site**

is the name of the site at which the ILCM is located

#### **lframe**

is the number of the frame in which the ILCM is located

#### **lcm**

is the number of the ILCM the circuit breaker supplies power to

*Example of a MAP display:*

## NTRX42

### in an IOPAC MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
.
ILCM SysB ManB OffL CBsy ISTb InSv
0 Quit PM 4 0 10 3 3 130
2 Post_ ILCM 1 0 5 0 1 9
3
4 Swrg_ ILCM Rem1 00 0 ISTb Links_OOS: CSide 1
5 TrnsL_ Unit-0: InSv /RG: 0
6 Tst_ Unit-1: InSv /RG: 0
7 Bsy_ 11 11 11 11 11 RG:Pref:0 InSv
8 RTS_ Drwr: 01 23 45 67 89 01 23 45 67 89 Stby:1 InSv
9 OffL_
10 LoadPM_
11 Disp_
12 Next_
13
14 QueryPM
15
16
17
18

```

- 10** Busy the ILCM unit powered by the circuit breaker, by typing the following string:

```
>BSY UNIT lcm_unit_no
```

and pressing the Enter key.

where

**lcm\_unit\_no**

is the number of the ILCM unit with the circuit card powered from the circuit breaker

*Example of a MAP display:*

## NTRX42

### in an IOPAC MSP (continued)

| CM           | MS           | IOD            | Net            | PM             | CCS        | LNS     | Trks | Ext | Appl |
|--------------|--------------|----------------|----------------|----------------|------------|---------|------|-----|------|
| .            | .            | .              | .              | <b>1ILCM</b>   | .          | .       | .    | .   | .    |
| <b>ILCM.</b> |              | SysB           | ManB           | OffL           | CBsy       | ISTb    | InSv |     |      |
| 0 Quit       | PM           | 4              | 1              | 10             | 3          | 3       | 130  |     |      |
| 2 Post_      | <b>ILCM.</b> | 1              | 1              | 5              | 0          | 1       | 9    |     |      |
| 3            |              |                |                |                |            |         |      |     |      |
| 4 SwRg       | ILCM         | Rem1           | 00 0           | ISTb           | Links_00S: | CSide   | 1    |     |      |
| 5 Trnsl      | Unit-0:      | InSv           | Mtce           | TakeOver       | /RG:       | 0       |      |     |      |
| 6 Tst        | Unit-1:      | ManB           | Mtce           |                | /RG:       | 0       |      |     |      |
| 7 Bsy        |              |                |                | 11 11 11 11 11 | RG:Pref:0  | InSv    |      |     |      |
| 8 RTS        | Drwr:        | 01 23 45 67 89 | 01 23 45 67 89 |                | Stby:1     | InSv    |      |     |      |
| 9 OffL       |              | .. .. .        | .. .. .        | .. .. .        | .. .. .    | .. .. . |      |     |      |
| 10 LoadPM    |              |                |                |                |            |         |      |     |      |
| 11 Disp_     |              |                |                |                |            |         |      |     |      |
| 12 Next      |              |                |                |                |            |         |      |     |      |
| 13           |              |                |                |                |            |         |      |     |      |
| 14 QueryPM   |              |                |                |                |            |         |      |     |      |
| 15           |              |                |                |                |            |         |      |     |      |
| 16           |              |                |                |                |            |         |      |     |      |
| 17           |              |                |                |                |            |         |      |     |      |
| 18           |              |                |                |                |            |         |      |     |      |

#### ***At the front of the MSP***

- 11** Locate the faulty circuit breaker card on the MSP and switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.

## NTRX42 in an IOPAC MSP (continued)

*At the rear of the MSP*

12



### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap connected to a wrist strap grounding point.  
This protects the equipment against damage caused by static electricity.



### **DANGER**

**Risk of injury from high energy levels, equipment damage**  
When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.



### **DANGER**


**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage could result.

Put on a wrist strap.

13

Swing the frame out and locate the NTRX42 circuit card. Ensure the card location by checking the slot number stamped into the chassis.

**a** Note wire color and location to facilitate reconnection.

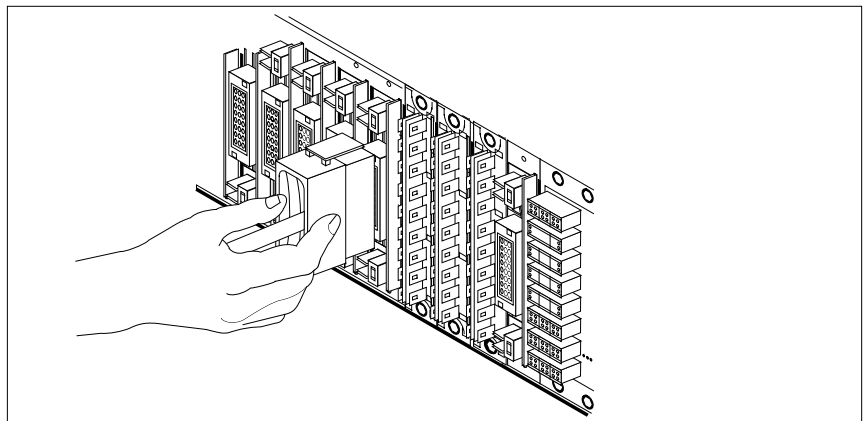

**b** Safety tag the front of the circuit breaker to indicate maintenance activity.

---

## NTRX42 in an IOPAC MSP (continued)

---

- c** Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect and tag the smaller black power connectors located below the larger blue power connector. Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors before removing the circuit card.
  - d** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 14** Disconnect and tag any jumper connectors and cables which may be present and set them aside for use on the replacement unit.

### *At the front of the MSP*

**15**



#### **DANGER**

**Risk of injury from high energy levels, equipment damage**


When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.

Remove the faulty circuit card.

- a** Disengage the spring-loaded captive screw at the top of the circuit card.
- b** Grasping the top and bottom of unit, gently pull the circuit card towards you until it clears the shelf.

## NTRX42 in an IOPAC MSP (continued)

---

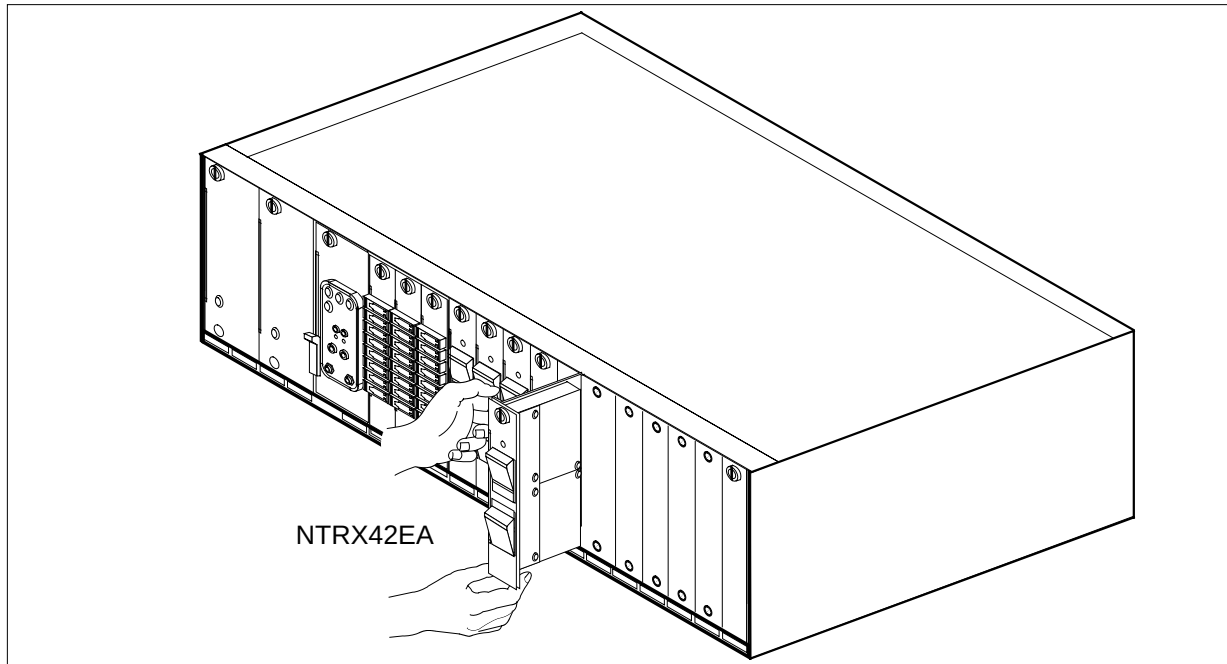


- 16** Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a** Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b** Gently but firmly seat the circuit card.
  - c** Tighten the captive screw at the top of the circuit card.

### ***At the rear of the MSP***

- 17** Locate the replaced circuit card and reattach the power connectors.
- 18** Replace any jumper connectors and cables removed in step 14. Reinsert the power connectors at the rear of the circuit card.

**NTRX42**  
**in an IOPAC MSP (continued)**

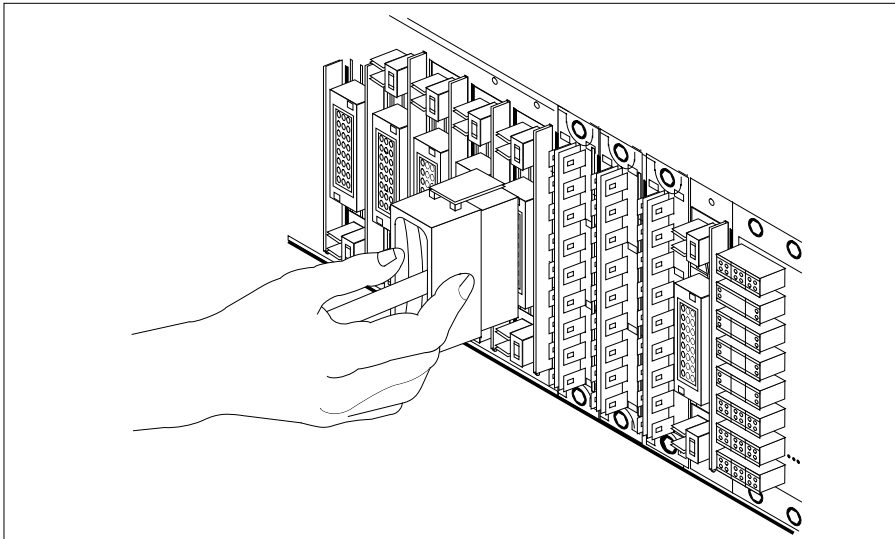

***At the front of the MSP***

- 19** Apply appropriate label from spare parts on replacement NTRX42 circuit card.
- 20** Switch on associated power converter.
- 21** Reset the circuit breakers to ON (upward). If any card controlled by this breaker includes a reset switch, hold the RESET button downward while setting the circuit breaker to the ON position.
- 22** Remove safety tag from front of circuit breaker.
- 23** Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.

| If CB powers | DoGo to |
|--------------|---------|
| ILCM         | step 24 |
| RMM          | step 44 |

***At the MAP terminal***

- 24** Load the ILCM unit by typing  
**>LOADPM UNIT lcm\_unit\_no CC**  
and pressing the Enter key.  
*where*

## NTRX42

### in an IOPAC MSP (continued)

#### lcm\_unit\_no

is the number of the ILCM unit to loaded (0 or 1)

|    | If                                                                                                                                                                                                                            | Do      |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | message "loadfile not found in directory" is not received                                                                                                                                                                     | step 25 |
|    | load passed                                                                                                                                                                                                                   | step 42 |
|    | load failed                                                                                                                                                                                                                   | step 51 |
| 25 | Determine the type of device on which the PM load files are located.                                                                                                                                                          |         |
|    | If load files are located on                                                                                                                                                                                                  | Do      |
|    | tape                                                                                                                                                                                                                          | step 26 |
|    | IOC disk                                                                                                                                                                                                                      | step 32 |
|    | SLM disk                                                                                                                                                                                                                      | step 37 |
| 26 | Locate the tape that contains the PM load files.                                                                                                                                                                              |         |
| 27 | Mount the tape on a magnetic tape drive.                                                                                                                                                                                      |         |
|    | <b>At the MAP display</b>                                                                                                                                                                                                     |         |
| 28 | Download the tape by typing<br><b>&gt;MOUNT tape_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>tape_no</b><br>is the number of the tape drive containing the PM load files                                      |         |
| 29 | List the contents of the tape in your user directory by typing<br><b>&gt;LIST T tape_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>tape_no</b><br>is the number of the tape drive containing the PM load files. |         |
| 30 | Demount the tape drive by typing<br><b>&gt;DEMOUNT T tape_no</b><br>and pressing the Enter key.<br><i>where</i>                                                                                                               |         |



---

## NTRX42 in an IOPAC MSP (continued)

---

**tape\_no**

is the number of the tape drive containing the PM load files

- 31** Go to step 41.
- 32** From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.
- 33** Access the disk utility level of the MAP by typing  
**>DSKUT**  
and pressing the Enter key.
- 34** List the IOC file names into your user directory by typing  
**>LISTVOL volume\_name ALL**  
and pressing the Enter key.  
*where*  
**volume\_name**  
is the name of the volume that contains the PM load files, obtained in step 32.
- 35** Leave the disk utility by typing  
**>QUIT**  
and pressing the Enter key.
- 36** Go to step 41.
- 37** From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 38** Access the disk utility level of the MAP by typing  
**>DISKUT**  
and pressing the Enter key.
- 39** List the SLM file names into your user directory by typing  
**>LV CM**  
and pressing the Enter key.  
**>LF load\_file\_name**  
and pressing the Enter key.  
*where*  
**load\_file\_name**  
is the name of the volume that contains the PM load files, obtained in step 37.
- 40** Leave the disk utility by typing  
**QUIT**  
and pressing the Enter key.

## NTRX42

### in an IOPAC MSP (continued)

---

- 41** LOAD the PM by typing  
**>LOADPM UNIT unit\_no CC**  
and pressing the Enter key.

---

| If LOADPM | Do      |
|-----------|---------|
| passed    | step 42 |
| failed    | step 51 |

---

- 42** Test the ILCM unit by typing  
**>TST UNIT lcm\_unit\_no**  
and pressing the Enter key.  
*where*  
**lcm\_unit\_no**  
is the number of the ILCM unit busied.

---

| If TST | Do      |
|--------|---------|
| passed | step 43 |
| failed | step 51 |

---

- 43** Return the ILCM unit to service by typing the following string:  
**>RTS UNIT lcm\_unit\_no**  
and pressing the Enter key.  
*where*  
**lcm\_unit\_no**  
is the number of the ILCM unit tested in step 42

---

| If RTS | Do      |
|--------|---------|
| passed | step 44 |
| failed | step 51 |

---

- 44** Access the PM level of the MAP display and post the RMM by typing  
**>MAPCI;MTC;PM;POST RMM rmm\_no**  
and pressing the Enter key.  
*where*  
**rmm\_no**  
is the number of the RMM unit from which the card is to be removed  
*Example of a MAP display:*

**NTRX42**  
**in an IOPAC MSP** (continued)

| CM  | MS      | IOD | Net  | PM   | CCS  | LNS  | Trks | Ext  | Appl |
|-----|---------|-----|------|------|------|------|------|------|------|
| RMM | .       | .   | SysB | ManB | OffL | CBsy | ISTb | InSv | .    |
| 0   | Quit    | PM  | 4    | 0    | 10   | 3    | 3    | 130  |      |
| 2   | Post_   | RMM | 0    | 1    | 1    | 0    | 0    | 2    |      |
| 3   |         |     |      |      |      |      |      |      |      |
| 4   |         | RMM | 5    | ManB |      |      |      |      |      |
| 5   | Trnsl   |     |      |      |      |      |      |      |      |
| 6   | Tst     |     |      |      |      |      |      |      |      |
| 7   | Bsy     |     |      |      |      |      |      |      |      |
| 8   | RTS     |     |      |      |      |      |      |      |      |
| 9   | OffL    |     |      |      |      |      |      |      |      |
| 10  | LoadPM  |     |      |      |      |      |      |      |      |
| 11  | Disp_   |     |      |      |      |      |      |      |      |
| 12  | Next    |     |      |      |      |      |      |      |      |
| 13  |         |     |      |      |      |      |      |      |      |
| 14  | QueryPM |     |      |      |      |      |      |      |      |
| 15  |         |     |      |      |      |      |      |      |      |
| 16  |         |     |      |      |      |      |      |      |      |
| 17  |         |     |      |      |      |      |      |      |      |
| 18  |         |     |      |      |      |      |      |      |      |

- 45 Load the RMM by typing  
**>LOADPM**  
and pressing the Enter key.

| If          | Do      |
|-------------|---------|
| load passed | step 46 |
| load failed | step 51 |

- 46 Test the RMM by typing  
**>TST**  
and pressing the Enter key.

| If TST | Do      |
|--------|---------|
| passed | step 47 |
| failed | step 51 |

- 47 Return the RMM to service by typing  
**>RTS**

## **NTRX42**

### **in an IOPAC MSP (end)**

---

and pressing the Enter key.

|           | <b>If RTS</b>                                                                                                                                         | <b>Do</b> |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|           | passed                                                                                                                                                | step 48   |
|           | failed                                                                                                                                                | step 51   |
| <b>48</b> | Send any faulty cards for repair according to local procedure.                                                                                        |           |
| <b>49</b> | Record the following items in office records:                                                                                                         |           |
|           | <b>a</b> date the card was replaced.                                                                                                                  |           |
|           | <b>b</b> serial number of the card.                                                                                                                   |           |
|           | <b>c</b> symptoms that prompted replacement of the card.                                                                                              |           |
| <b>50</b> | Go to step 52.                                                                                                                                        |           |
| <b>51</b> | Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.                        |           |
| <b>52</b> | You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed. |           |

---

## NTRX42 in an OPAC MSP

---

### Application

Use this procedure to replace an NTRX42 card in an MSP.

| PEC    | Suffixes           | Name           |
|--------|--------------------|----------------|
| NTRX42 | AA, BA, CA, DA, EA | Breaker Module |

### Common procedures

None

### Action

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

The following is an illustration of the connector removal tool.

## **NTRX42** **in an OPAC MSP (continued)**

---


### **Connector removal tool**

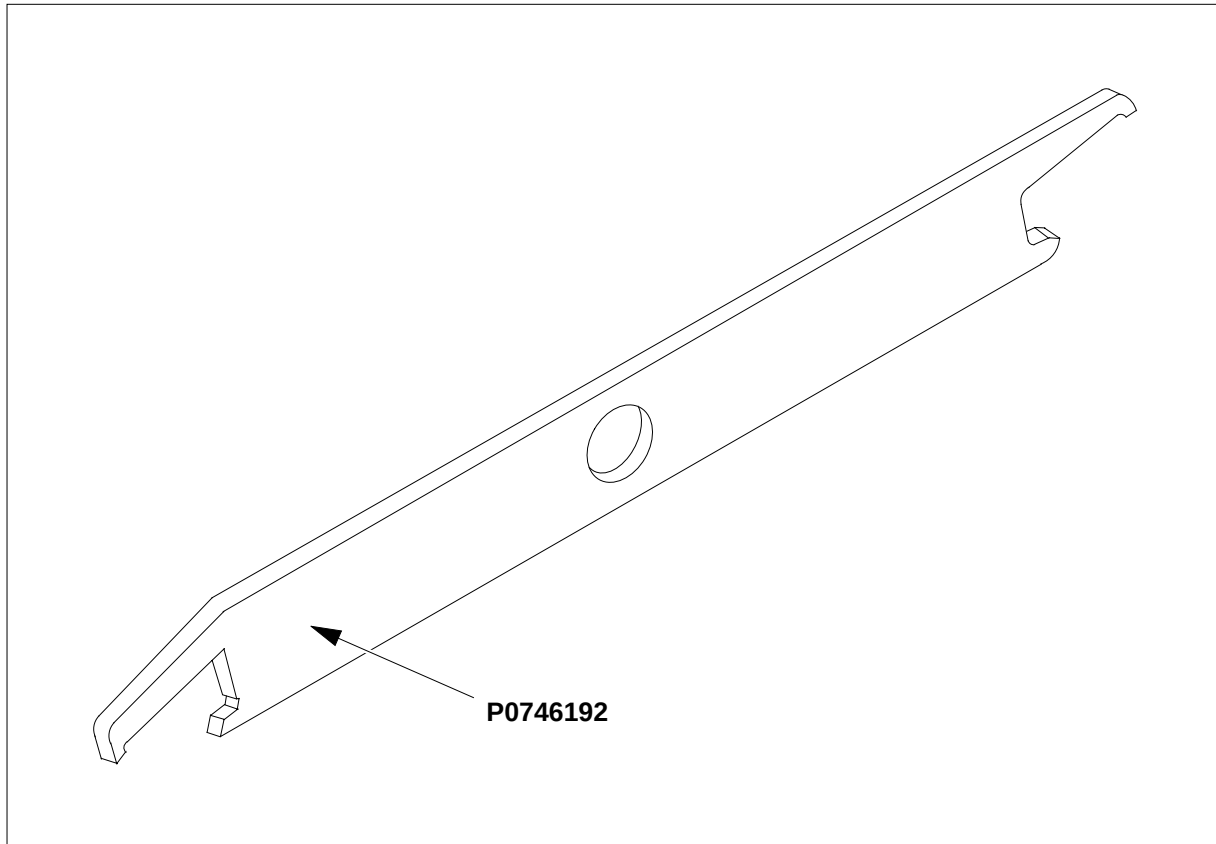

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart. The detailed procedure depends on which circuit cards are served by the breaker module circuit card (NTRX42). You will be directed to the appropriate steps depending on your configuration.

## NTRX42 in an OPAC MSP (continued)

### Summary of card replacement procedure for an NTRX42 card in an MSP

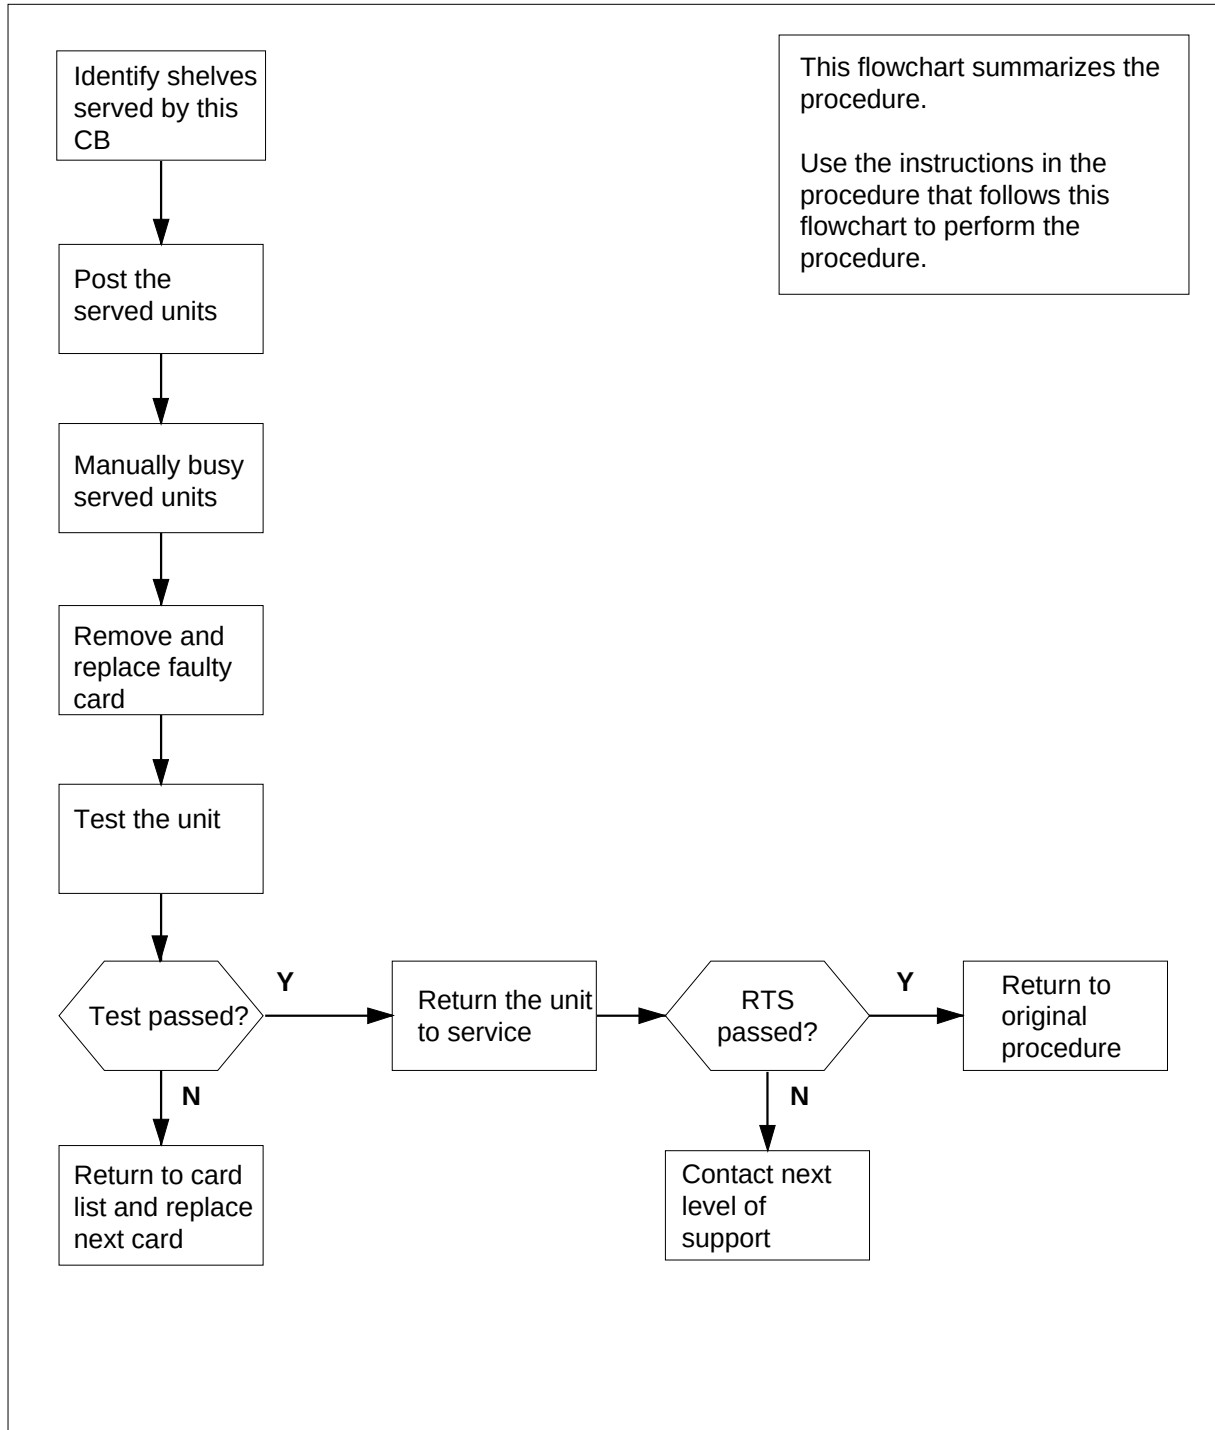

## NTRX42 in an OPAC MSP (continued)


### Replacing an NTRX42 in an MSP

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Verify that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At Bay 1 of the OPAC*

- 3 Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.

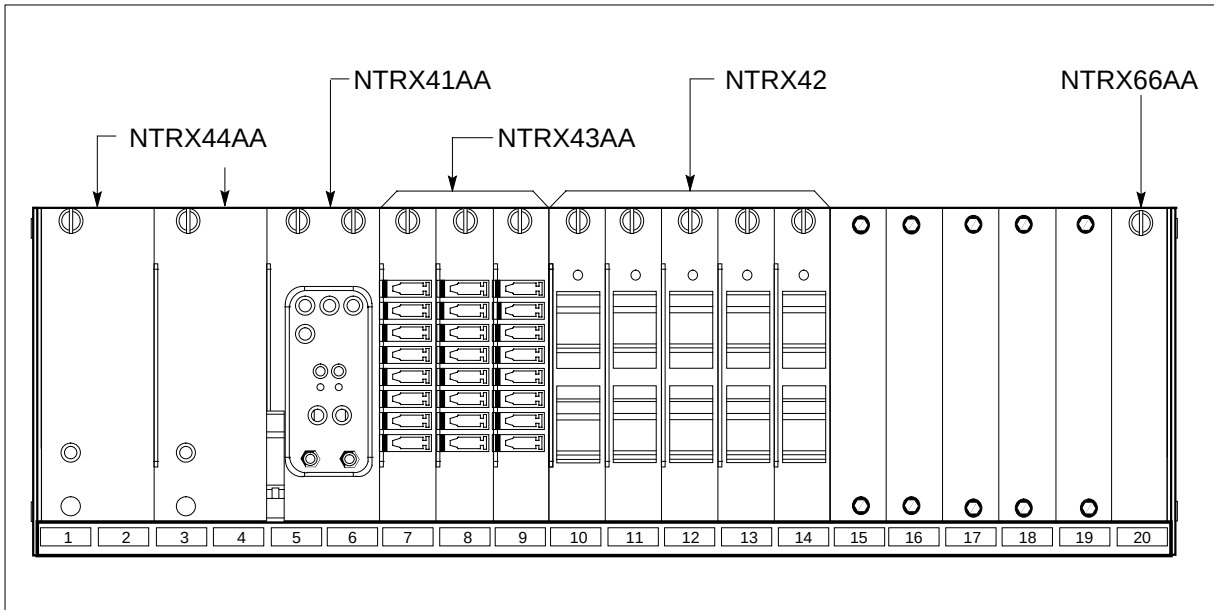

- 4 Use the breaker designation label to identify which cards are serviced by each circuit breaker (CB). For example, the label CB01-0/18-01 identifies circuit breaker 01 as controlling circuit card position 01 on shelf location 18 in bay 0. Many RX42 modules service two separate devices or units; both units must be powered down prior to removal of the associated RX42 circuit card.

| If CB powers | DoGo to |
|--------------|---------|
| RMM shelf    | step 5  |
| LCM          | step 9  |



**NTRX42**  
**in an OPAC MSP** (continued)

**At the MAP display**

- 5** Set the MAP display to the PM level and post the RMM by typing the following string:

**>MAPCI;MTC;PM;POST RMM rmm\_no**

and pressing the Enter key.

where

**rmm\_no**

is the number of the RMM unit from which the card is to be removed

*Example of a MAP display:*

| CM         | MS | IOD | Net  | PM   | CCS  | LNS  | Trks | Ext  | Appl |
|------------|----|-----|------|------|------|------|------|------|------|
| .          | .  | .   | .    | .    | .    | .    | .    | .    | .    |
| RMM        |    |     | SysB | ManB | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     |    | PM  | 0    | 0    | 10   | 0    | 3    | 130  |      |
| 2 Post_    |    | RMM | 0    | 0    | 1    | 0    | 0    | 2    |      |
| 3          |    |     |      |      |      |      |      |      |      |
| 4          |    | RMM | 5    | INSV |      |      |      |      |      |
| 5 TrnsL    |    |     |      |      |      |      |      |      |      |
| 6 Tst      |    |     |      |      |      |      |      |      |      |
| 7 Bsy      |    |     |      |      |      |      |      |      |      |
| 8 RTS      |    |     |      |      |      |      |      |      |      |
| 9 OffL     |    |     |      |      |      |      |      |      |      |
| 10 LoadPM  |    |     |      |      |      |      |      |      |      |
| 11 Disp_   |    |     |      |      |      |      |      |      |      |
| 12 Next    |    |     |      |      |      |      |      |      |      |
| 13         |    |     |      |      |      |      |      |      |      |
| 14 QueryPM |    |     |      |      |      |      |      |      |      |
| 15         |    |     |      |      |      |      |      |      |      |
| 16         |    |     |      |      |      |      |      |      |      |
| 17         |    |     |      |      |      |      |      |      |      |
| 18         |    |     |      |      |      |      |      |      |      |

- 6** Busy the RMM by typing the following string:

**>BSY**

and pressing the Enter key.

*Example of a MAP display:*

## NTRX42 in an OPAC MSP (continued)

| CM         | MS         | IOD | Net  | PM   | CCS  | LNS  | Trks | Ext  | Appl |
|------------|------------|-----|------|------|------|------|------|------|------|
| .          | .          | .   | .    | .    | .    | .    | .    | .    | .    |
| <b>RMM</b> |            |     | SysB | ManB | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     | PM         | 0   | 0    | 10   | 0    | 3    | 130  |      |      |
| 2 Post_    | <b>RMM</b> | 0   | 1    | 1    | 0    | 0    | 1    |      |      |
| 3          |            |     |      |      |      |      |      |      |      |
| 4          | RMM        | 5   | ManB |      |      |      |      |      |      |
| 5 TrnsL    |            |     |      |      |      |      |      |      |      |
| 6 Tst      |            |     |      |      |      |      |      |      |      |
| 7 Bsy      |            |     |      |      |      |      |      |      |      |
| 8 RTS      |            |     |      |      |      |      |      |      |      |
| 9 OffL     |            |     |      |      |      |      |      |      |      |
| 10 LoadPM  |            |     |      |      |      |      |      |      |      |
| 11 Disp_   |            |     |      |      |      |      |      |      |      |
| 12 Next    |            |     |      |      |      |      |      |      |      |
| 13         |            |     |      |      |      |      |      |      |      |
| 14 QueryPM |            |     |      |      |      |      |      |      |      |
| 15         |            |     |      |      |      |      |      |      |      |
| 16         |            |     |      |      |      |      |      |      |      |
| 17         |            |     |      |      |      |      |      |      |      |
| 18         |            |     |      |      |      |      |      |      |      |

### At the RMM shelf

- 7 Power down the unit by setting the ON/OFF switch on the power converter faceplate to the OFF position. Both the CONVERTER FAIL LED and FRAME FAIL LED on the MSP will be ON.
- 8 Go to step 11.

### At the MAP terminal

- 9 Set the MAP display to the PM level and post the LCM powered by the circuit breaker by typing the following string:

**>MAPCI;MTC;PM;POST LCM lcm\_site\_name lcm\_frame\_no lcm\_no**

and pressing the Enter key.

where

#### **lcm\_site\_name**

is the name of the site at which the LCM is located

#### **lcm\_frame\_no**

is the number of the frame in which the LCM is located

#### **lcm\_no**

is the number of the LCM the circuit breaker supplies power to

*Example of a MAP display:*

## NTRX42 in an OPAC MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
.
LCM
0 Quit PM 0 0 0 10 0 3 130
2 Post_ LCM 0 0 0 0 0 1 9
3
4 Swrg_ LCM REM1 14 0 ISTb Links_00S: CSide 1
5 TrnsL_ Unit-0: InSv /RG: 0
6 Tst_ Unit-1: InSv /RG: 0
7 Bsy_ Drwr: 01 23 45 67 89 01 23 45 67 89 RG:Pref:0 InSv
8 RTS_ Stby:1 InSv
9 OffL_
10 LoadPM_
11 Disp_
12 Next_
13
14 QueryPM
15
16
17
18

```

- 10** Busy the LCM unit powered by the circuit breaker, by typing the following string:

```
>BSY UNIT lcm_unit_no
```

and pressing the Enter key.

*where*

**lcm\_unit\_no**

is the number of the LCM unit with the circuit card powered from the circuit breaker

*Example of a MAP display:*

## NTRX42

### in an OPAC MSP (continued)

| CM         | MS      | IOD            | Net            | PM             | CCS        | LNS     | Trks | Ext | Appl |
|------------|---------|----------------|----------------|----------------|------------|---------|------|-----|------|
| .          | .       | .              | .              | 1LCM           | .          | .       | .    | .   | .    |
| LCM.       |         | SysB           | ManB           | OffL           | CBsy       | ISTb    | InSv |     |      |
| 0 Quit     | PM      | 4              | 1              | 10             | 3          | 3       | 130  |     |      |
| 2 Post_    | LCM.    | 1              | 1              | 5              | 0          | 1       | 9    |     |      |
| 3          |         |                |                |                |            |         |      |     |      |
| 4 SwRg     | LCM     | REM1           | 14 0           | ISTb           | Links_00S: | CSide   | 1    |     |      |
| 5 Trnsl    | Unit-0: | InSv           | Mtce           | TakeOver       | /RG:       | 0       |      |     |      |
| 6 Tst      | Unit-1: | ManB           | Mtce           |                | /RG:       | 0       |      |     |      |
| 7 Bsy      |         |                |                | 11 11 11 11 11 | RG:Pref:0  | InSv    |      |     |      |
| 8 RTS      | Drwr:   | 01 23 45 67 89 | 01 23 45 67 89 |                | Stby:1     | InSv    |      |     |      |
| 9 OffL     |         | .. .. .        | .. .. .        | .. .. .        | .. .. .    | .. .. . |      |     |      |
| 10 LoadPM  |         |                |                |                |            |         |      |     |      |
| 11 Disp_   |         |                |                |                |            |         |      |     |      |
| 12 Next    |         |                |                |                |            |         |      |     |      |
| 13         |         |                |                |                |            |         |      |     |      |
| 14 QueryPM |         |                |                |                |            |         |      |     |      |
| 15         |         |                |                |                |            |         |      |     |      |
| 16         |         |                |                |                |            |         |      |     |      |
| 17         |         |                |                |                |            |         |      |     |      |
| 18         |         |                |                |                |            |         |      |     |      |

#### *At the front of the MSP*

- 11 Locate the faulty circuit breaker card on the MSP and switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.

## NTRX42 in an OPAC MSP (continued)

### At the rear of the MSP

12



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**

Wear a wrist strap connected to a wrist strap grounding point. This protects the equipment against damage caused by static electricity.



#### **DANGER**

**Risk of injury from high energy levels, equipment damage**

When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.



#### **DANGER**

**Risk of injury from high energy levels, voltage present**


Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Put on a wrist strap.

13

Swing the frame out and locate the NTRX42 circuit card. Ensure the card location by checking the slot number stamped into the chassis.

- a Note wire color and location to facilitate reconnection.

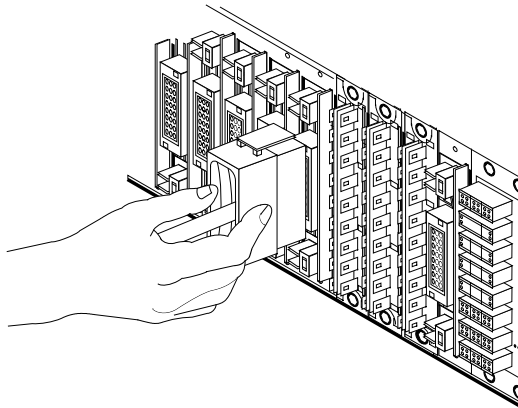

## NTRX42 in an OPAC MSP (continued)

---

- b** Safety tag the front of the circuit breaker to indicate maintenance activity.
  - c** Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect and tag the smaller black power connectors located below the larger blue power connector. Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors before removing the circuit card.
  - d** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 14** Disconnect and tag any jumper connectors and cables which may be present and set them aside for use on the replacement unit.

### *At the front of the MSP*

**15**



#### **DANGER**

##### **Risk of injury from high energy levels, equipment damage**

When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.


Remove the faulty circuit card.

- a** Disengage the spring-loaded captive screw at the top of the circuit card.
- b** Grasping the top and bottom of unit, gently pull the circuit card towards you until it clears the shelf.

---

**NTRX42**  
**in an OPAC MSP** (continued)

---

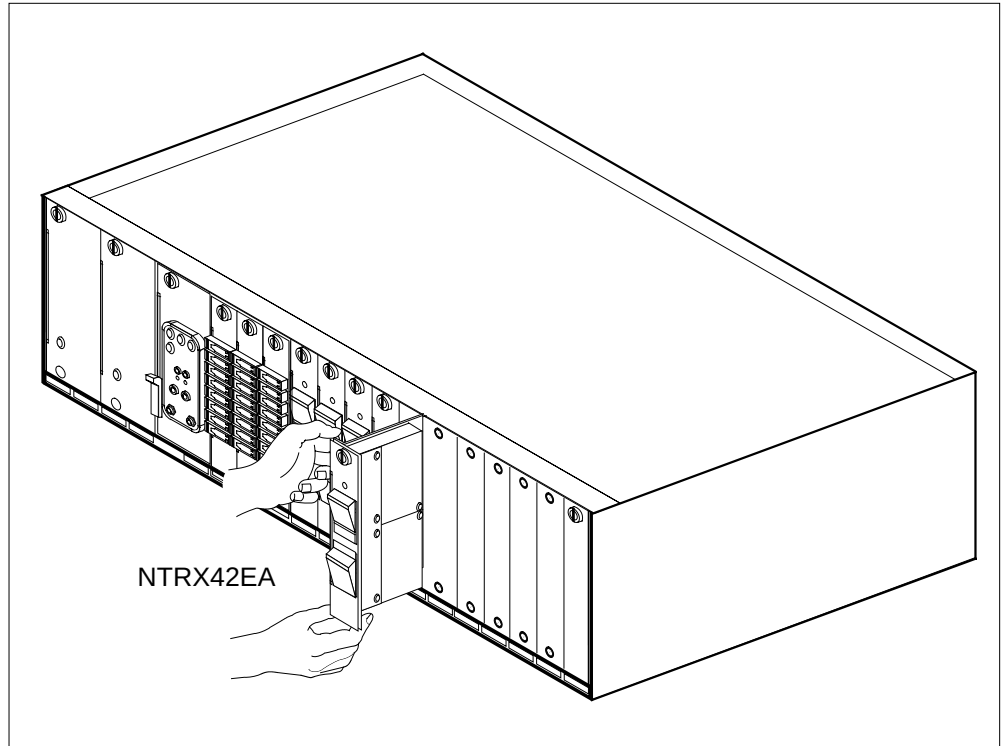


- 16** Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a** Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b** Gently but firmly seat the circuit card.
  - c** Tighten the captive screw at the top of the circuit card.

***At the rear of the MSP***

- 17** Locate the replaced circuit card and reattach the power connectors.
- 18** Replace any jumper connectors and cables removed in step 14. Reinsert the power connectors at the rear of the circuit card.

## NTRX42 in an OPAC MSP (continued)

---

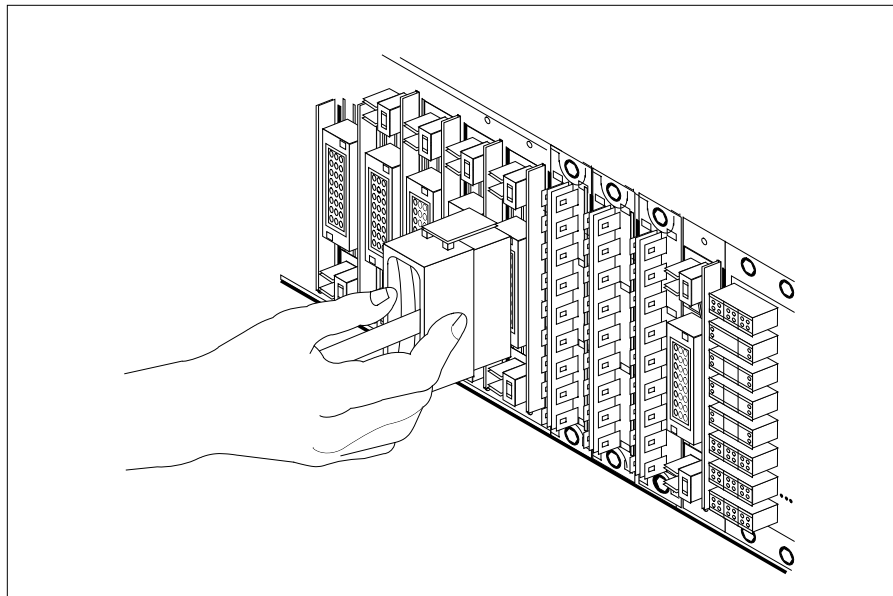

### ***At the front of the MSP***

- 19 Apply appropriate label from spare parts on replacement NTRX42 circuit card.
- 20 Switch on associated power converter.
- 21 Reset the circuit breakers to ON (upward). If any card controlled by this breaker includes a reset switch, hold the RESET button downward while setting the circuit breaker to the ON position.
- 22 Remove safety tag from front of circuit breaker.
- 23 Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.

---

| If CB powers | DoGo to |
|--------------|---------|
| LCM          | step 24 |
| RMM          | step 47 |

---

### ***At the MAP terminal***

- 24 Load the LCM unit by typing  
**>LOADPM UNIT lcm\_unit\_no CC**  
and pressing the Enter key.  
*where*



## NTRX42

### in an OPAC MSP (continued)

**lcm\_unit\_no**

is the number of the LCM unit to loaded (0 or 1)

|           | <b>If</b>                                                                                                                                                                                                                     | <b>Do</b> |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|           | message "loadfile not found in directory" is not received                                                                                                                                                                     | step 25   |
|           | load passes                                                                                                                                                                                                                   | step 42   |
|           | load fails                                                                                                                                                                                                                    | step 70   |
| <b>25</b> | Determine the type of device on which the PM load files are located.                                                                                                                                                          |           |
|           | <b>If load files are located on</b>                                                                                                                                                                                           | <b>Do</b> |
|           | tape                                                                                                                                                                                                                          | step 49   |
|           | IOC disk                                                                                                                                                                                                                      | step 55   |
|           | SLM disk                                                                                                                                                                                                                      | step 60   |
| <b>26</b> | Locate the tape that contains the PM load files.                                                                                                                                                                              |           |
| <b>27</b> | Mount the tape on a magnetic tape drive.                                                                                                                                                                                      |           |
|           | <b>At the MAP display</b>                                                                                                                                                                                                     |           |
| <b>28</b> | Download the tape by typing<br><b>&gt;MOUNT tape_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>tape_no</b><br>is the number of the tape drive containing the PM load files                                      |           |
| <b>29</b> | List the contents of the tape in your user directory by typing<br><b>&gt;LIST T tape_no</b><br>and pressing the Enter key.<br><i>where</i><br><b>tape_no</b><br>is the number of the tape drive containing the PM load files. |           |
| <b>30</b> | Demount the tape drive by typing<br><b>&gt;DEMOUNT T tape_no</b><br>and pressing the Enter key.<br><i>where</i>                                                                                                               |           |

## NTRX42

### in an OPAC MSP (continued)

---

- tape\_no**  
is the number of the tape drive containing the PM load files
- 31 Go to step 64.
- 32 From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.
- 33 Access the disk utility level of the MAP by typing  
**>DSKUT**  
and pressing the Enter key.
- 34 List the IOC file names into your user directory by typing  
**>LISTVOL volume\_name ALL**  
and pressing the Enter key.  
*where*  
**volume\_name**  
is the name of the volume that contains the PM load files, obtained in step 32.
- 35 Leave the disk utility by typing  
**>QUIT**  
and pressing the Enter key.
- 36 Go to step 64.
- 37 From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 38 Access the disk utility level of the MAP by typing  
**>DISKUT**  
and pressing the Enter key.
- 39 List the SLM file names into your user directory by typing  
**>LV CM**  
and pressing the Enter key.  
**>LF load\_file\_name**  
and pressing the Enter key.  
*where*  
**load\_file\_name**  
is the name of the volume that contains the PM load files, obtained in step 37.
- 40 Leave the disk utility by typing  
**QUIT**  
and pressing the Enter key.

## NTRX42

### in an OPAC MSP (continued)

- 
- 41**    LOAD the PM by typing  
          **>LOADPM UNIT unit\_no CC**  
          and pressing the Enter key.
- | If LOADPM | Do      |
|-----------|---------|
| passed    | step 42 |
| failed    | step 70 |
- 
- 42**    Test the LCM unit by typing  
          **>TST UNIT lcm\_unit\_no**  
          and pressing the Enter key.  
          where  
              **lcm\_unit\_no**  
              is the number of the LCM unit busied.
- | If TST | Do      |
|--------|---------|
| passed | step 43 |
| failed | step 70 |
- 
- 43**    Return the LCM unit to service by typing the following string:  
          **>RTS UNIT lcm\_unit\_no**  
          and pressing the Enter key.  
          where  
              **lcm\_unit\_no**  
              is the number of the LCM unit tested in step 42
- | If RTS | Do      |
|--------|---------|
| passed | step 44 |
| failed | step 70 |
- 
- 44**    Send any faulty cards for repair according to local procedure.
- 45**    Record the following items in office records:
- a**    date the card was replaced.
  - b**    serial number of the card.
  - c**    symptoms that prompted replacement of the card.
- 46**    Go to step 71.
- 47**    Load the RMM by typing  
          **>LOADPM**
-

## NTRX42

### in an OPAC MSP (continued)

and pressing the Enter key.

|           | If                                                                   | Do      |
|-----------|----------------------------------------------------------------------|---------|
|           | message "loadfile not found in directory" is not received            | step 48 |
|           | load passes                                                          | step 65 |
|           | load fails                                                           | step 70 |
| <b>48</b> | Determine the type of device on which the PM load files are located. |         |
|           | If load files are located on                                         | Do      |
|           | tape                                                                 | step 49 |
|           | IOC disk                                                             | step 55 |
|           | SLM disk                                                             | step 60 |
| <b>49</b> | Locate the tape that contains the PM load files.                     |         |
| <b>50</b> | Mount the tape on a magnetic tape drive.                             |         |

#### *At the MAP display*

- 51** Download the tape by typing  
**>MOUNT tape\_no**  
 and pressing the Enter key.  
*where*  
     **tape\_no**  
     is the number of the tape drive containing the PM load files
- 52** List the contents of the tape in your user directory by typing  
**>LIST T tape\_no**  
 and pressing the Enter key.  
*where*  
     **tape\_no**  
     is the number of the tape drive containing the PM load files.
- 53** Demount the tape drive by typing  
**>DEMOUNT T tape\_no**  
 and pressing the Enter key.  
*where*  
     **tape\_no**  
     is the number of the tape drive containing the PM load files
- 54** Go to step 64.

---

**NTRX42**  
**in an OPAC MSP (continued)**

---

- 55 From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.
- 56 Access the disk utility level of the MAP by typing  
**>DSKUT**  
and pressing the Enter key.
- 57 List the IOC file names into your user directory by typing  
**>LISTVOL volume\_name ALL**  
and pressing the Enter key.  
*where*  
**volume\_name**  
is the name of the volume that contains the PM load files, obtained in step 55.
- 58 Leave the disk utility by typing  
**>QUIT**  
and pressing the Enter key.
- 59 Go to step 64.
- 60 From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 61 Access the disk utility level of the MAP by typing  
**>DISKUT**  
and pressing the Enter key.
- 62 List the SLM file names into your user directory by typing  
**>LV CM**  
and pressing the Enter key.  
**>LF S00Dload\_file\_name**  
and pressing the Enter key.  
*where*  
**load\_file\_name**  
is the name of the volume that contains the PM load files, obtained in step 60.
- 63 Leave the disk utility by typing  
**QUIT**  
and pressing the Enter key.
- 64 Load the RMM by typing  
**>LOADPM**

**NTRX42**  
**in an OPAC MSP (end)**

---

and pressing the Enter key.

---

| If load | Do |
|---------|----|
|---------|----|

---

|        |         |
|--------|---------|
| passed | step 65 |
|--------|---------|

|        |         |
|--------|---------|
| failed | step 70 |
|--------|---------|

---

- 65** Test the RMM by typing  
**>TST**  
and pressing the Enter key.

---

| If TST | Do |
|--------|----|
|--------|----|

---

|        |         |
|--------|---------|
| passed | step 66 |
|--------|---------|

|        |         |
|--------|---------|
| failed | step 70 |
|--------|---------|

---

- 66** Return the RMM to service by typing  
**>RTS**  
and pressing the Enter key.

---

| If RTS | Do |
|--------|----|
|--------|----|

---

|        |         |
|--------|---------|
| passed | step 67 |
|--------|---------|

|        |         |
|--------|---------|
| failed | step 70 |
|--------|---------|

---

- 67** Send any faulty cards for repair according to local procedure.
- 68** Record the date card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 69** Go to step 71.
- 70** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 71** You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

---

## NTRX42 in an RSC-M/MSP

---

### Application

Use this procedure to replace an NTRX42 card in a modular supervisory panel (MSP) that supports a Remote Switching Center Multi-access (RSC-M) cabinet.

**Note:** In this section, RCO2 in the examples refers to RSC-M. When software outputs messages to the MAP terminal, software does not differentiate between the two types of RCO2.

| PEC    | Suffixes | Name                   |
|--------|----------|------------------------|
| NTRX42 | AA       | Circuit breaker module |

### Common procedures

None

### Action

A connector removal tool is available to facilitate removal of the AMP Faston receptacles. This tool facilitates removal of these receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in) and P0747552 254 mm (10 in). You can use the shorter tool when access to the rear of the MSP is limited. For example, limited access can be MSP modules located behind the cabinet bulkhead.

This tool is approximately 2 mm (0.090 in) thick and 17 mm (0.65 in) wide, with a jaw-like cutout at each end. The cutout profile conforms to the shape of the Faston receptacle. You can use the shorter tip of each profile to position the receptacle in the tool.

The first connection point of the tool serves as the pivot point. To engage the longer profile tip with the action-arm of the power connector, rotate the tool around the pivot point. The longer tip of the profile is the tip that has a hook on the end. As the tool presses the action-arm of the connector, the receptacle disengages from the connector tab. To remove the receptacle, pull the tool away from the connector with the receptacle trapped in the jaw of the tool. To disengage the tool from the receptacle, rotate the hook of the tool off the action-arm of the receptacle.


The cutout shape is the same on each tool end, but the orientation of the profile is off by 15 degrees. This difference enables the use of the tool at different

## NTRX42 in an RSC-M/MSP (continued)

---

angles. You can require the use of these angles because of limited access to the connectors.

### Connector removal tool

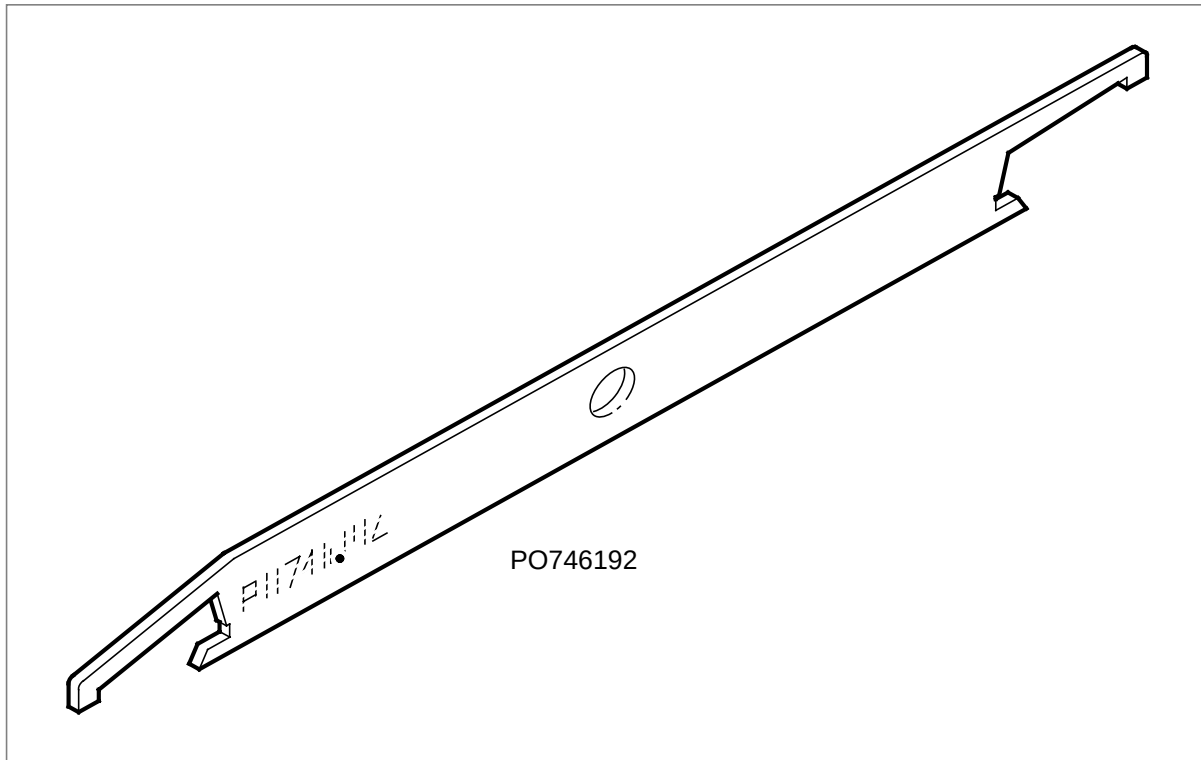


This procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure. The detailed procedure depends on which circuit cards the breaker module circuit card (NTRX42) serves. Instructions will direct you to the correct steps that depend on your configuration.



## NTRX42 in an RSC-M/MSP (continued)

### Summary of replacing an NTRX42 in an RSC-M/MSP

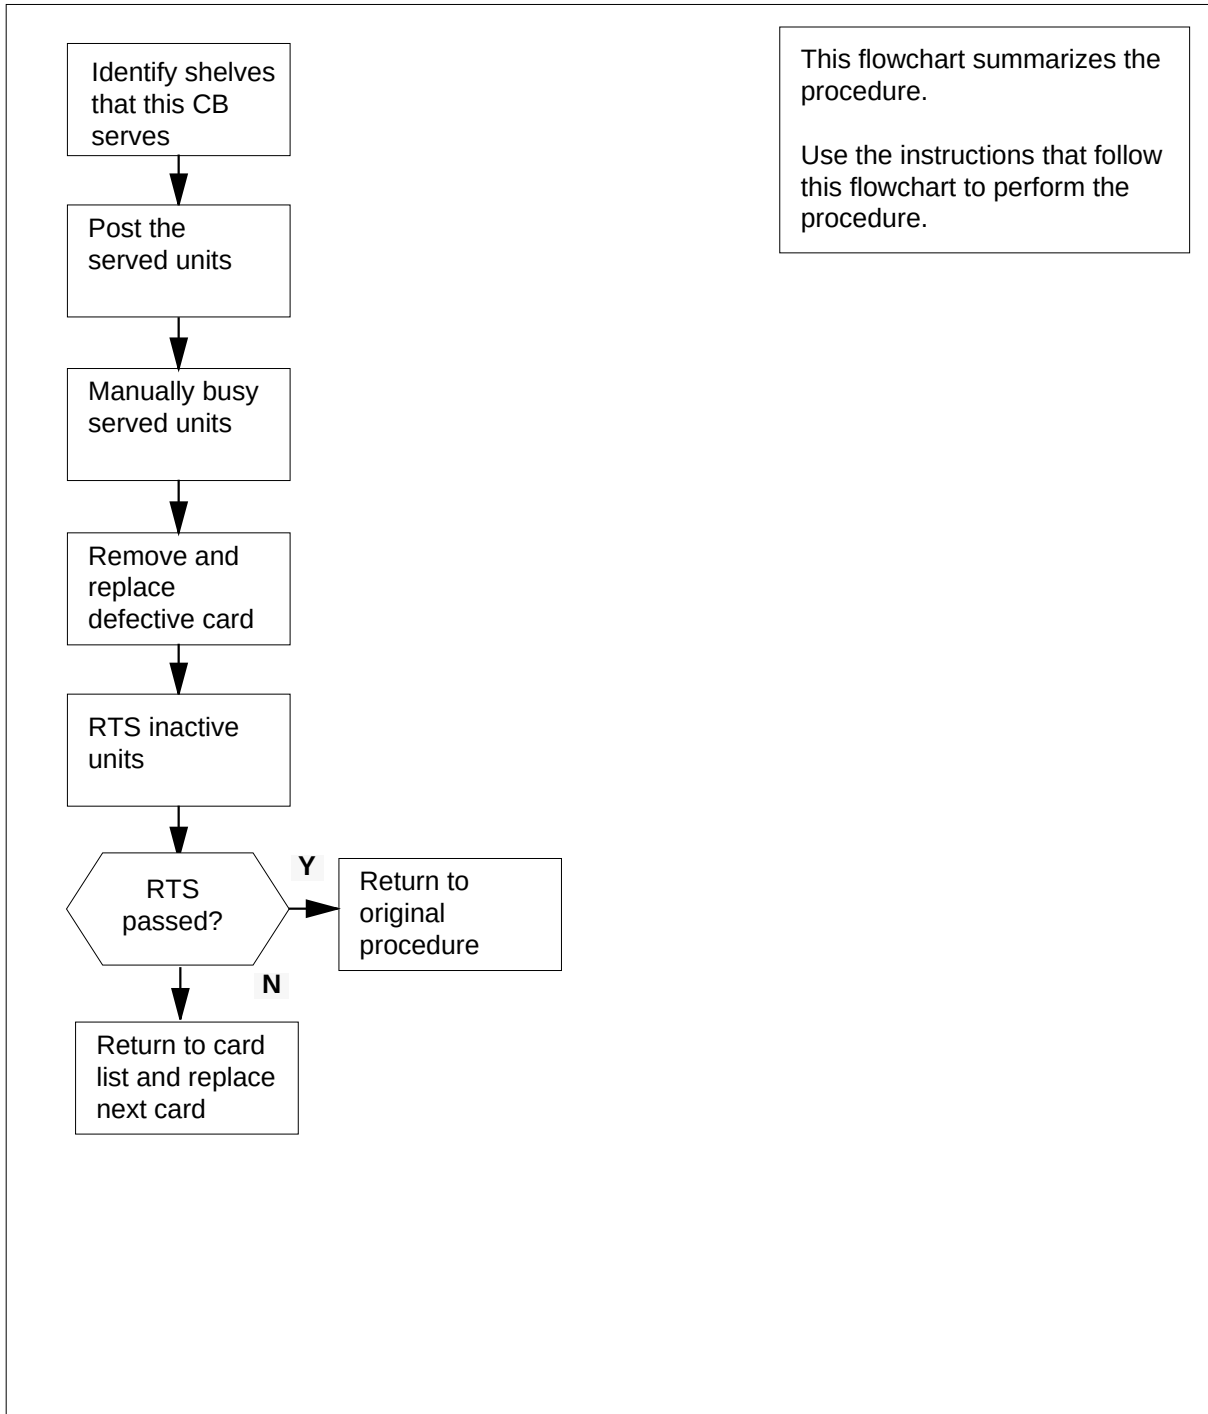

## NTRX42 in an RSC-M/MSP (continued)

### Replacing an NTRX42 in an RSC-M/MSP

#### At the MAP terminal

- 1 Proceed only if one of the following conditions applies. Your maintenance support group or a step in a maintenance procedure directed you to this card replacement procedure. You use the procedure to verify or accept cards.
- 2



#### WARNING

##### Loss of service


When you replace an NTRX42 card in the RSC-M, make sure the units associated with the NTRX42 card are *inactive*. Make sure the mate units are *active*.

Obtain an NTRX42 replacement circuit card. Make sure the replacement circuit card has the same product equipment code (PEC) and PEC suffix as the circuit card to remove.

#### At the front panel of the cabinet

- 3 Open the front cover of the MSP. Release the two cover latches. Swing the cover down to the open position.

#### MSP

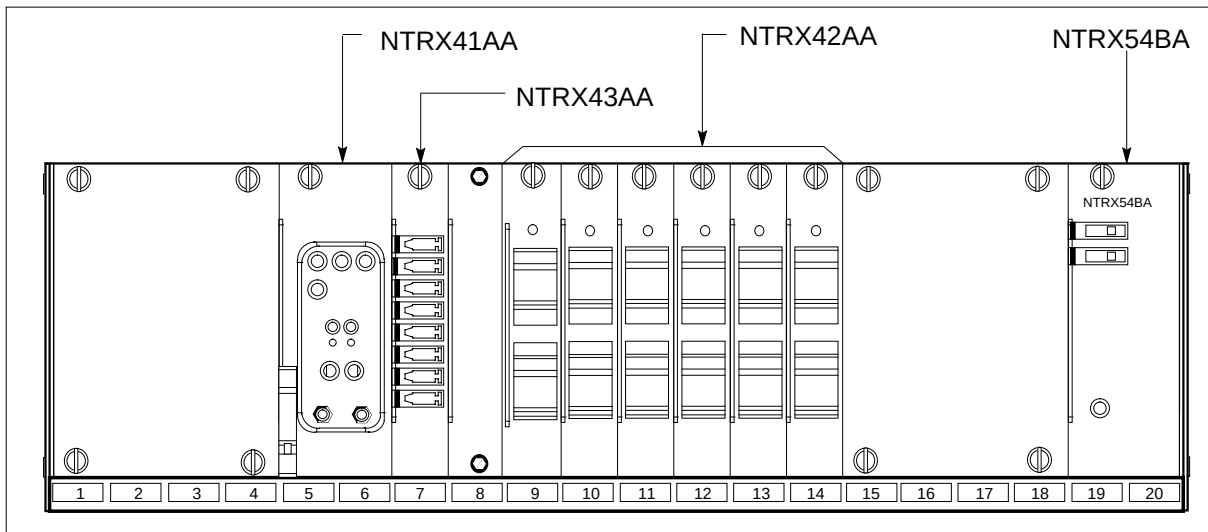

- 4 Use the breaker designation label to identify the circuit cards each circuit breaker (CB) services. Many modules of NTRX42 service two separate

## NTRX42 in an RSC-M/MSP (continued)

devices (or units). You must power down both units before removal of the associated NTRX42 circuit card.

### At the MAP terminal

- 5 Set the MAP display to the peripheral module (PM) level. To post the RSC-M/RCO2 that the NTRX42 circuit breaker card powers, type

**>MAPCI;MTC;PM;POST RCO2 rco2\_no**

and press the Enter key.

where

**rco2\_no**

is the number of the RCO2 that the NTRX42 card powers

*Example of a MAP response:*

| RCO2 |              | SysB  | ManB       | OffL  | CBSy | ISTb  | InSv |
|------|--------------|-------|------------|-------|------|-------|------|
| 0    | Quit PM      | 0     | 0          | 2     | 0    | 2     | 25   |
| 2    | Post_ RCO2   | 0     | 0          | 0     | 0    | 1     | 1    |
| 3    | ListSet      |       |            |       |      |       |      |
| 4    | RCO2 0       | ISTb  | Links_00S: | CSide | 1,   | PSide | 1    |
| 5    | TRNSL Unit0: | Inact | ISTb       |       |      |       |      |
| 6    | TST Unit1:   | Act   | InSv       |       |      |       |      |
| 7    | BSY          |       |            |       |      |       |      |
| 8    | RTS          |       |            |       |      |       |      |
| 9    | OffL         |       |            |       |      |       |      |
| 10   | LoadPM_      |       |            |       |      |       |      |
| 11   | Disp_        |       |            |       |      |       |      |
| 12   | Next_        |       |            |       |      |       |      |

- 6 To determine the location of the RSC-M units or extension (EXT) half shelves that the circuit card you replace powers, type

**>QUERYPM**

and press the Enter key.

*Example of a MAP response:*

```
PM Type: RCO2 PM No.: 0 PM Int. No.: 9 Node_No: 24
PMs Equipped: 53 Loadname:KRI07BI1 EEPROM Load:MX77NG03
WARM SWACT is supported and available
RCO2 0 is included in the REX schedule.
REX on RCO2 0 has not been performed.
Node Status: {OK, FALSE}
Unit 0 Act, Status: {OK, FALSE}
Unit 1 Inact, Status: {OK, FALSE}
Site Flr RPos Bay_id Shf Description Slot EqPEC
HOST 00 C02 LTEI 00 05 RCO2 000 MX85AA
HOST 00 C02 CEXT 00 47 EXT:LEFT 01:13 MX86AA
```

## NTRX42 in an RSC-M/MSP (continued)

- 7 Use the following table to determine the RSCM PM units or EXT half shelves associated with the NTRX42 card that you replace.

**Note:** You must busy all RCO2 units or EXT half shelves associated with the circuit breakers on the defective NTRX42 card before replacement. For example, replacement of the NTRX42 card with CB3 and CB4 affects unit 1 of the RSCM located in shelf 5. This replacement also affects unit 1 of the RSCM located in shelf 19.

### RSC-M shelves powered by NTRX42 circuit breakers

| CB1 and CB2                                                                                                                                                                                                                                                                                                                                                                      | CB3 and CB4            | CB5 and CB6            | CB7 and CB8            | CB9 and CB10                                                      | CB11 and CB12                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| CB1 shelf 5<br>unit 0                                                                                                                                                                                                                                                                                                                                                            | CB3 shelf 5<br>unit 1  | CB5 shelf 33<br>unit 0 | CB7 shelf 33<br>unit 1 | CB9 shelf 47<br>EXT left to unit<br>0 of RSCM in<br>shelf 5       | CB11 shelf 47<br>EXT left to unit<br>1 of RSCM in<br>shelf 5      |
| CB2 shelf 19<br>unit 0                                                                                                                                                                                                                                                                                                                                                           | CB4 shelf 19<br>unit 1 | Reserved               | Reserved               | CB10 shelf 47<br>EXT right to<br>unit 1 of<br>RSCM in shelf<br>19 | CB12 shelf 47<br>EXT right to<br>unit 0 of<br>RSCM in shelf<br>19 |
| <p><b>Note 1:</b> Before you remove the NTRX42 card with CB9 and CB10, you must busy specified units. BSY unit 0 of the RSCM in shelf 5 and BSY unit 1 of the RSCM in shelf 19.</p> <p><b>Note 2:</b> Before you remove the NTRX42 card with CB11 and CB12, you must busy specified units. BSY unit 1 of the RSCM in shelf 5 and BSY unit 0 of the RSCM located in shelf 19.</p> |                        |                        |                        |                                                                   |                                                                   |

- 8 Repeat steps 5 and 7 to determine the RSC-M unit(s) that will associate.
- 9 Determine the state of the RSC-M unit(s) associated with the NTRX42 card you want to replace.

| If the state of the RCO2 unit | Do      |
|-------------------------------|---------|
| is active                     | step 10 |
| is inactive                   | step 13 |

- 10 To switch activity of the units, type  
**>SWACT**  
 and press the Enter key.  
*Example of a MAP response:*

## NTRX42 in an RSC-M/MSP (continued)

RC02 0      A Warm SwAct will be performed after  
data sync of active terminals.  
Please confirm ("YES", "Y", "NO", or "N"):

| If the system                       | Do      |
|-------------------------------------|---------|
| prompts you to confirm a warm SWACT | step 11 |
| rejects the SWACT                   | step 32 |

**11** To confirm the command, type

**>YES**

and press the Enter key.

*Example of a MAP response:*

```
Unit0: Inact SysB Mtce
Unit1: Act ISTb
```

```
RC02 0 SwAct Passed
```

| If the MAP response       | Do      |
|---------------------------|---------|
| is SWACT passed           | step 12 |
| is other than listed here | step 31 |

### ***At the MAP terminal***

**12** To manually busy (ManB) the inactive unit, type

**>BSY UNIT INACTIVE**

and press the Enter key.

*Example of a MAP response:*

```
RC02 0 ISTb Links_00S: CSide 0 , PSide 1
Unit0: Inact ManB
Unit1: Act ISTb
Bsy INACTIVE
RC02 0 Unit 0 Bsy Passed
```

| If the BSY command | Do      |
|--------------------|---------|
| passed             | step 13 |
| failed             | step 31 |

## NTRX42 in an RSC-M/MSP (continued)

---

- 13 Repeat steps 9 to 12 until all units powered by the NTRX42 card are in the inactive state. Place a sign on the active units that bears the words *Active unit-Do not touch*. Do not attach this sign with magnets or tape.

### ***At the RCO2 shelf***

- 14 Power down the unit(s) and EXT shelves associated with the NTRX42 cards. To power down these units and shelves, set the ON/OFF switch on the power converter faceplate to the OFF position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will be ON. An audible alarm can sound. To silence an alarm, type

**>SIL**

and press the Enter key.

### ***At the front panel of the cabinet***

- 15 Determine the defective circuit breaker on the MSP. Switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.

- 16 An alarm can sound. To silence the alarm, type

**>SIL**

and press the Enter key.

### ***At the rear panel of the cabinet***

17



#### **WARNING**

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap that connects to the wrist-strap grounding point on the left side of the modular supervisory panel (MSP) to remove cards. The wrist strap protects the equipment from static electricity damage.



#### **DANGER**

**Risk of physical damage to cards**  
Take these precautions when you remove or insert a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.
3. Do not insert metallic objects into the black connectors. Voltage is present and equipment damage can result.

Wear a wrist strap.


- 18 Open the rear door and locate the NTRX42 circuit card. To verify the card location, check the slot number stamped in the chassis.

---

## NTRX42 in an RSC-M/MSP (continued)

---

- a Note the wire color and the location to facilitate connection again.

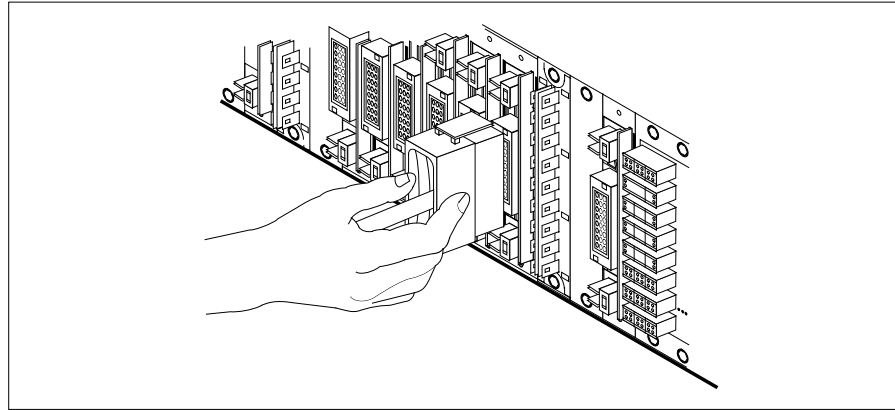


- b Safety tag the front of the circuit breaker to indicate maintenance activity.
- c Use the connector removal tool to disconnect the power connectors to the circuit card manually. Work from the bottom of the MSP shelf to the top of the MSP shelf. Manually disconnect and tag the smaller black power connectors located below the larger blue power connector. Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Make sure you disconnect the black connectors *before* you remove the circuit card.
- d The connectors have voltage present, but the connectors are insulated. Secure the connectors to the power-connector bundle with a line-tie until you connect the connectors again.
- 19 Jumper connectors and cables can be present. Disconnect and tag these jumper connectors and cables. Separate the jumper connectors and cables for use on the replacement unit.

### ***At the front panel of the cabinet***


- 20 Remove the NTRX42 circuit card.
- a Disengage the captive screw that has a spring and is at the top of the circuit card.
- b Grasp the top and bottom of unit. Carefully pull the circuit card toward you until the circuit card clears the shelf.
- c Replace the circuit card. Make sure the replacement circuit card has the same PEC and PEC suffix as the circuit card that you replace.
- d Tighten the spring-loaded captive screw at the top of the circuit card.

## NTRX42 in an RSC-M/MSP (continued)

---

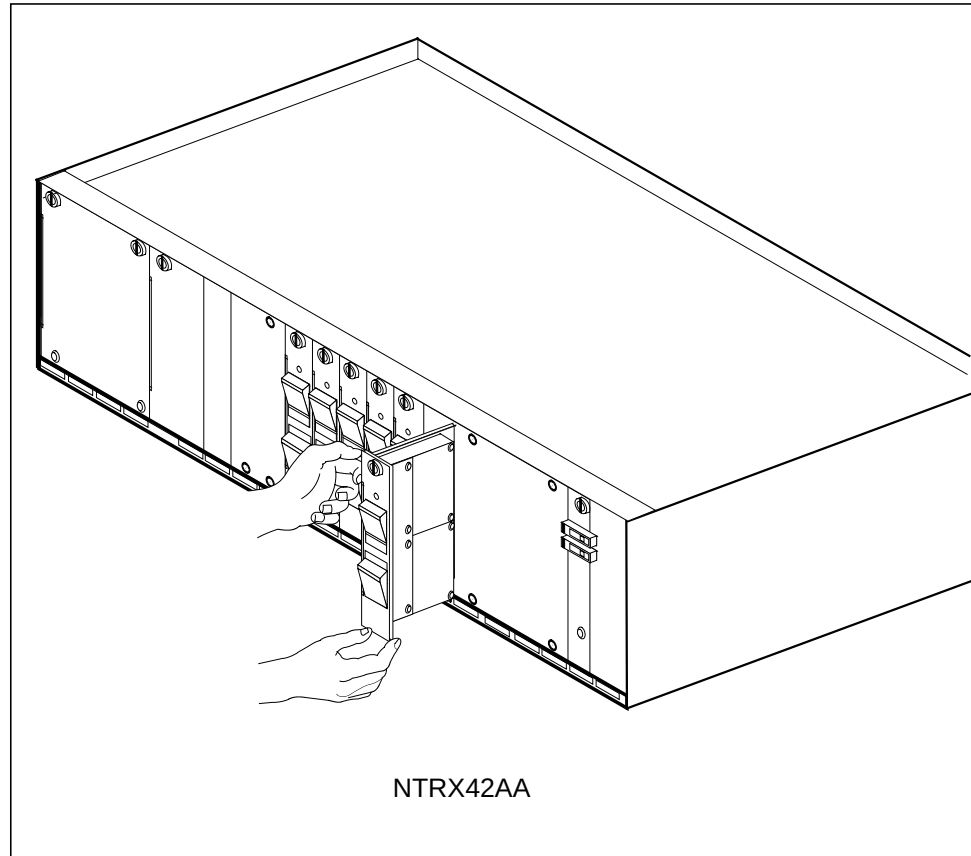

- 21 Replace any jumper connectors and cables removed in step 19. Insert the power connectors again at the rear of the circuit card.

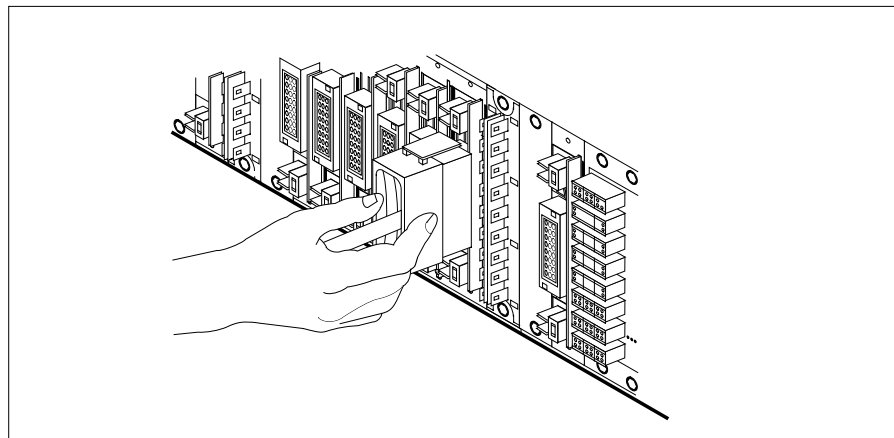

- 22 Apply the correct label from the spare parts on the replacement NTRX42 circuit breaker card.



## NTRX42 in an RSC-M/MSP (continued)

- 23** Switch on the associated power converter(s).
- 24** Reset the circuit breakers to ON (up). Cards that this breaker controls can include a reset switch. If this condition applies, hold the RESET button up while you set the circuit breaker to the ON position.
- 25** Observe the circuit breakers on the NTRX42 card.
- | If the circuit breaker(s)                                          | Do      |
|--------------------------------------------------------------------|---------|
| does not trip and power returns to the associated power converters | step 26 |
| trips or power does not return to the associated power converters  | step 31 |
- 26** To load the inactive units, type  
**>LOADPM UNIT INACTIVE**  
 and press the Enter key.  
*Note:* Repeat this step for each unit that you busied in step 12.
- | If the LOADPM command | Do      |
|-----------------------|---------|
| passed                | step 27 |
| failed                | step 31 |
- 27** To return the inactive unit(s) to service, type  
**>RTS INACTIVE**  
 and press the Enter key.
- | If the RTS command | Do      |
|--------------------|---------|
| passed             | step 28 |
| failed             | step 31 |
- 28** Remove the safety tag from the front of the circuit breaker and the signs from the active units.
- 29** Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.
- 30** This procedure is complete. Return to the maintenance procedure that directed you to this card replacement procedure. Continue as directed.
- 31** For additional help with this card replacement, contact the next level of support.

## NTRX42

### in an RSC-M/MSP (end)

---

- 32 For additional help with switch of activity, contact the next level of support.

**Note:** If the system recommends that you use the SWACT command with the FORCE option, consult office personnel. Office personnel can advise you to not use the FORCE option.

---

## NTRX42 in an RSC MSP

---

### Application

Use this procedure to replace an NTRX42 card in a modular supervisory panel (MSP) in the following cabinets.

- Cabinetized Extension Module (CEXT)
- Cabinetized Line Concentrating Equipment (CLCE)
- Cabinetized Power Distribution Center (CPDC)
- Cabinetized Remote Switching Center (CRSC)
- Cabinetized Miscellaneous Equipment (CMIS)
- Cabinetized Remote Miscellaneous Equipment (CRME)

| PEC    | Suffixes | Name                   |
|--------|----------|------------------------|
| NTRX42 | AA, CA   | Circuit Breaker Module |

### Common procedures

None

### Action

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (0.090 in.) thick and 17 mm (0.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw away from the connector. The tool is disengaged


## **NTRX42** **in an RSC MSP** (continued)

---


from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

### **Connector removal tool**

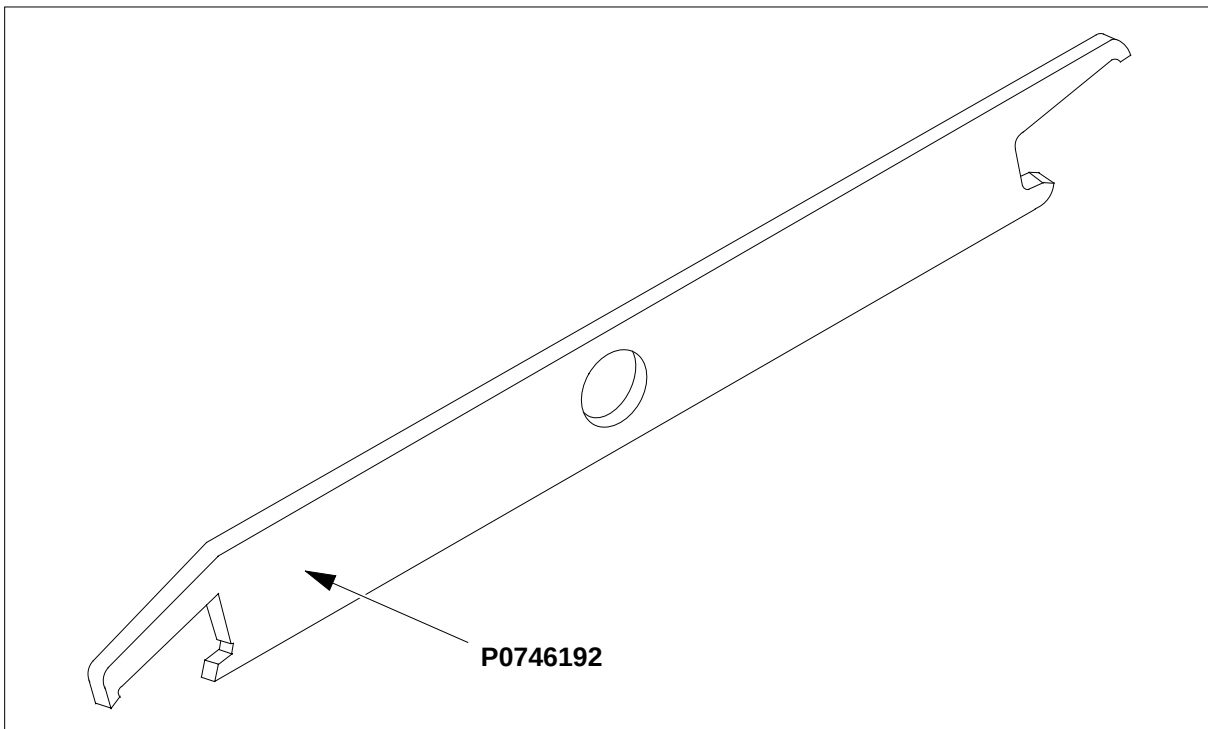

The following flowchart is a summary of this procedure. Use the instructions in the procedure that follows the flowchart to perform the procedure. The detailed procedure depends on which circuit cards are served by the breaker module circuit card (NTRX42). You will be directed to the appropriate steps depending on your configuration.

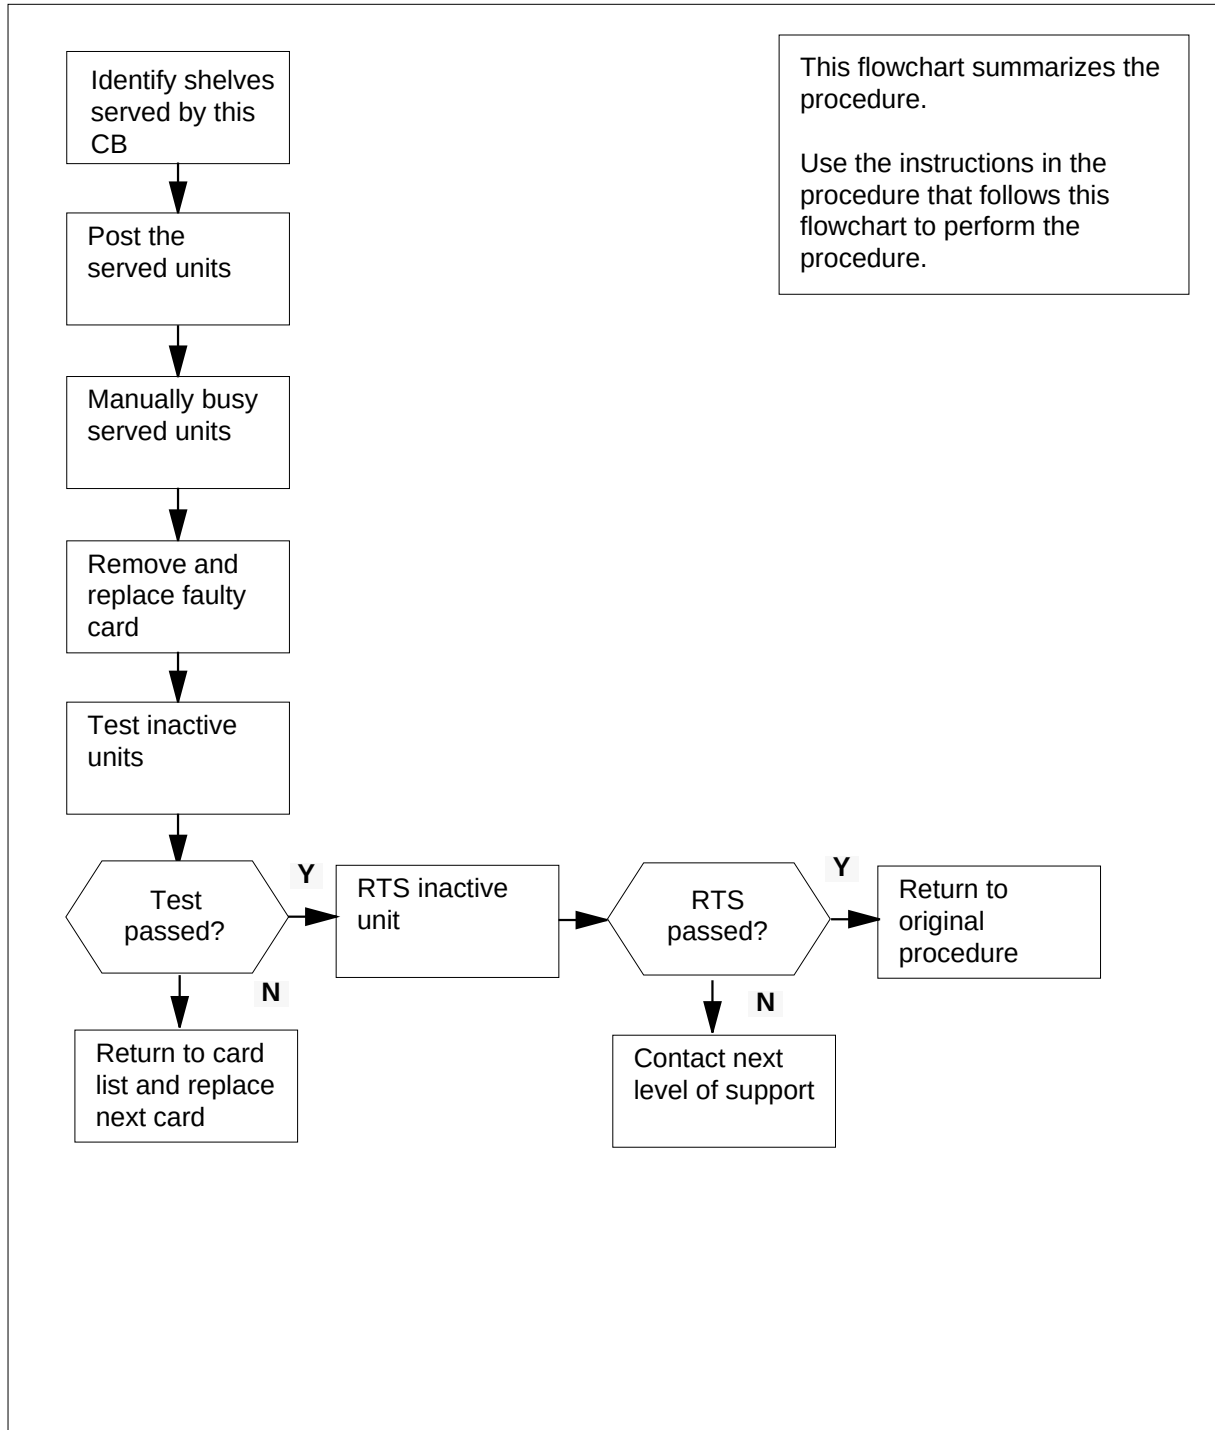**NTRX42**  
**in an RSC MSP** (continued)**Summary of card replacement procedure for an NTRX42 card in an RSC-S MSP**

## NTRX42 in an RSC MSP (continued)


### Replacing an NTRX42 card in RSCE MSP

#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.
- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

#### MSP

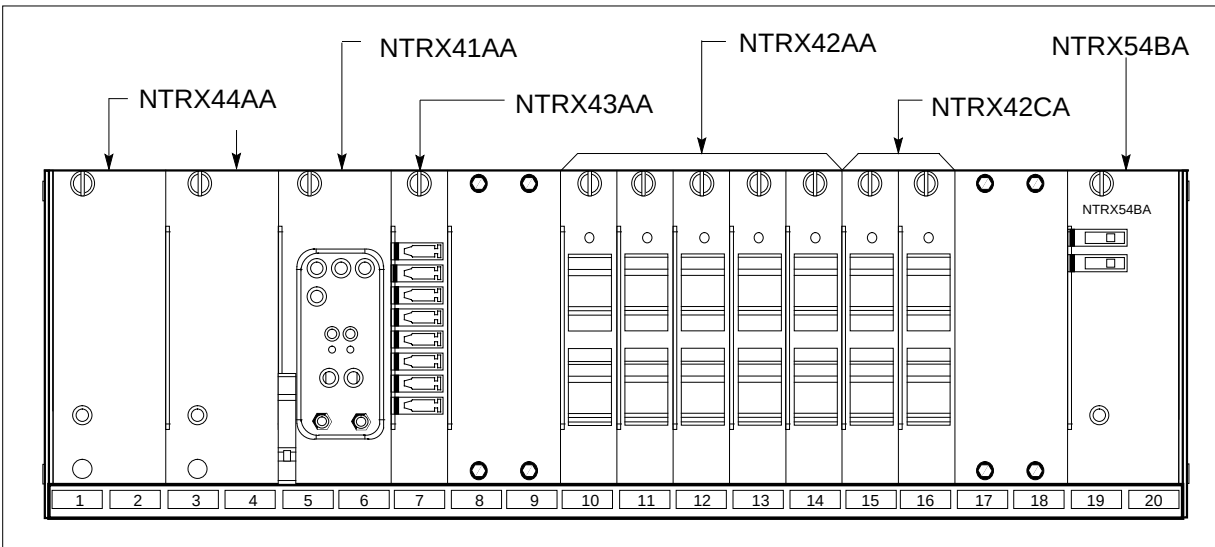

- 4 Use the breaker designation label to identify which cards are serviced by each circuit breaker (CB). For example, the label CB01-47-01 identifies circuit breaker 01 as controlling circuit card position 01 on shelf 47. Many RX42 modules service two separate devices (or units); both units must be powered down prior to removal of the associated RX42 circuit card.
- 5 Use the following table to determine which step to do next.

| If the CB powers the                    | Do     |
|-----------------------------------------|--------|
| RMM shelf containing 2X09 or 2X06 cards | step 6 |

**NTRX42**  
**in an RSC MSP** (continued)

| If the CB powers the                            | Do      |
|-------------------------------------------------|---------|
| RCC2 shelf containing MX72 card                 | step 9  |
| LCME shelf containing 6X30, 6X53, or BX72 cards | step 15 |

- 6 Set the MAP display to the PM level and post the RMM by typing  
**>MAPCI;MTC;PM;POST RMM rmm\_no**  
and pressing the Enter key.  
*where*  
**rmm\_no**  
is the number of the RMM unit from which the card is to be removed  
*Example of a MAP display:*

| CM         | MS  | IOD | Net  | PM   | CCS  | LNS  | Trks | Ext  | Appl |
|------------|-----|-----|------|------|------|------|------|------|------|
| RMM        | .   | .   | SysB | ManB | OffL | CBsy | ISTb | InSv | .    |
| 0 Quit     | PM  | 4   | 0    | 10   | 3    | 3    | 130  |      |      |
| 2 Post_    | RMM | 0   | 1    | 1    | 0    | 0    | 2    |      |      |
| 3          |     |     |      |      |      |      |      |      |      |
| 4          | RMM | 5   | INSV |      |      |      |      |      |      |
| 5 TrnsL    |     |     |      |      |      |      |      |      |      |
| 6 Tst      |     |     |      |      |      |      |      |      |      |
| 7 Bsy      |     |     |      |      |      |      |      |      |      |
| 8 RTS      |     |     |      |      |      |      |      |      |      |
| 9 OffL     |     |     |      |      |      |      |      |      |      |
| 10 LoadPM  |     |     |      |      |      |      |      |      |      |
| 11 Disp_   |     |     |      |      |      |      |      |      |      |
| 12 Next    |     |     |      |      |      |      |      |      |      |
| 13         |     |     |      |      |      |      |      |      |      |
| 14 QueryPM |     |     |      |      |      |      |      |      |      |
| 15         |     |     |      |      |      |      |      |      |      |
| 16         |     |     |      |      |      |      |      |      |      |
| 17         |     |     |      |      |      |      |      |      |      |
| 18         |     |     |      |      |      |      |      |      |      |

- 7 Busy the RMM by typing  
**>BSY**  
and pressing the Enter key.  
*Example of a MAP display:*

## NTRX42 in an RSC MSP (continued)

| CM         | MS  | IOD | Net  | PM    | CCS  | LNS  | Trks | Ext  | Appl |
|------------|-----|-----|------|-------|------|------|------|------|------|
| .          | .   | .   | .    | 1ManB | .    | .    | .    | .    | .    |
| RMM        |     |     | SysB | ManB  | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     | PM  | 4   | 0    | 10    | 0    | 0    | 130  |      |      |
| 2 Post_    | RMM | 0   | 1    | 0     | 0    | 0    | 0    |      |      |
| 3          |     |     |      |       |      |      |      |      |      |
| 4          | RMM | 5   | ManB |       |      |      |      |      |      |
| 5 TrnsL    |     |     |      |       |      |      |      |      |      |
| 6 Tst      |     |     |      |       |      |      |      |      |      |
| 7 Bsy      |     |     |      |       |      |      |      |      |      |
| 8 RTS      |     |     |      |       |      |      |      |      |      |
| 9 OffL     |     |     |      |       |      |      |      |      |      |
| 10 LoadPM  |     |     |      |       |      |      |      |      |      |
| 11 Disp_   |     |     |      |       |      |      |      |      |      |
| 12 Next    |     |     |      |       |      |      |      |      |      |
| 13         |     |     |      |       |      |      |      |      |      |
| 14 QueryPM |     |     |      |       |      |      |      |      |      |
| 15         |     |     |      |       |      |      |      |      |      |
| 16         |     |     |      |       |      |      |      |      |      |
| 17         |     |     |      |       |      |      |      |      |      |
| 18         |     |     |      |       |      |      |      |      |      |

### At the RMM shelf

- 8** Power down the unit by setting the ON/OFF switch on the power converter faceplate to the OFF position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will be ON. An audible alarm may sound. If an alarm does sound, silence it by typing

**>SIL**

and pressing the Enter key.

Go to step 28.

- 9** Access the PM level and post the RCC2 by typing

**>MAPCI;MTC;PM;POST rcc2\_no**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 unit that will be busied

*Example of a MAP display:*



**NTRX42**  
**in an RSC MSP** (continued)

| CM   | MS      | IOD    | Net   | PM    | CCS        | LNS   | Trks     | Ext  | Appl |
|------|---------|--------|-------|-------|------------|-------|----------|------|------|
| .    | .       | .      | .     | 1RCC2 | .          | .     | .        | .    | .    |
| RCC2 |         |        | SysB  | ManB  | OffL       | CBsy  | ISTb     | InSv |      |
| 0    | Quit    | PM     | 0     | 0     | 2          | 0     | 2        | 25   |      |
| 2    | Post_   | RCC2   | 0     | 0     | 0          | 0     | 1        | 1    |      |
| 3    | ListSet |        |       |       |            |       |          |      |      |
| 4    |         | RCC2   | 0     | ISTb  | Links_00S: | CSide | 1, PSide | 1    |      |
| 5    | TRNSL   | Unit0: | Inact | InSv  |            |       |          |      |      |
| 6    | TST     | Unit1: | Act   | InSv  |            |       |          |      |      |
| 7    | BSY     |        |       |       |            |       |          |      |      |
| 8    | RTS     |        |       |       |            |       |          |      |      |
| 9    | OffL    |        |       |       |            |       |          |      |      |
| 10   | LoadPM_ |        |       |       |            |       |          |      |      |
| 11   | Disp_   |        |       |       |            |       |          |      |      |
| 12   | Next_   |        |       |       |            |       |          |      |      |
| 13   |         |        |       |       |            |       |          |      |      |
| 14   | QueryPM |        |       |       |            |       |          |      |      |
| 15   |         |        |       |       |            |       |          |      |      |
| 16   |         |        |       |       |            |       |          |      |      |
| 17   |         |        |       |       |            |       |          |      |      |
| 18   |         |        |       |       |            |       |          |      |      |

**10** The NTRX42 you are replacing should be controlling the inactive side of the RCC2.

| If NTRX42 card is on the | Do      |
|--------------------------|---------|
| active unit              | step 11 |
| inactive unit            | step 13 |

**11**



**CAUTION**

**Loss of service**

All calls being handled by this PM could be lost, including data calls. Perform the next step during a period of low traffic only.

Switch the processing activity (SWACT) to the inactive unit by typing  
**>SWACT**  
and pressing the Enter key.

**12** Confirm the system prompt by typing  
**>YES**  
and pressing the Enter key.

## NTRX42 in an RSC MSP (continued)

---

After both units are in-service, proceed to the next step.

### *At the RCSE frame*

- 13** Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.

### *At the MAP terminal*

- 14** Busy the inactive PM unit by typing

**> *bsy unit unit\_no***

*where*

**unit\_no**

is the number of the inactive RCC2 unit that will be busied

Go to step 28.

- 15** Use the following information to determine where to proceed.

---

| <b>If top circuit breaker of NTRX42 powers</b> | <b>Do</b> |
|------------------------------------------------|-----------|
|------------------------------------------------|-----------|

---

|                 |         |
|-----------------|---------|
| NT6X53 or NTB72 | step 17 |
|-----------------|---------|

|        |         |
|--------|---------|
| NT6X30 | step 21 |
|--------|---------|

---

- 16** Use the following information to determine where to proceed.

---

| <b>If bottom circuit breaker of NTX42 powers</b> | <b>Do</b> |
|--------------------------------------------------|-----------|
|--------------------------------------------------|-----------|

---

|                 |         |
|-----------------|---------|
| NT6X53 or NTB72 | step 17 |
|-----------------|---------|

|        |         |
|--------|---------|
| NT6X30 | step 21 |
|--------|---------|

---

- 17** Set the MAP display to the PM level and post the LCME powered by the circuit breaker by typing

**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**

and pressing the Enter key.

*where*

**site**

is the name of the site at which the LCME is located

**lcme\_frame\_no**

is the number of the frame in which the LCME is located

**lcme\_no**

is the number of LCME the circuit breaker supplies power to

*Example of a MAP display:*

## NTRX42

### in an RSC MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
.
lcme . . SysB ManB OffL CBsy ISTb InSv
0 Quit PM 4 0 10 3 3 130
2 Post_ LCME 1 0 5 0 1 9
3
4 Swrg_ LCME RemL 00 0 ISTb Links_00S: CSide 1
5 TrnsL_ Unit-0: InSv /RG: 0
6 Tst_ Unit-1: InSv /RG: 0
7 Bsy_ 11 11 11 RG:Pref:0 InSv
8 RTS_ Drwr: 01 23 45 67 89 01 23 45 Stby:1 InSv
9 OffL_
10 LoadPM_
11 Disp_
12 Next_
13
14 QueryPM
15
16
17
18

```

- 18** Busy the LCME unit powered by the circuit breaker by typing

**>BSY UNIT lcme\_unit\_no**

and pressing the Enter key.

where

**lcme\_unit\_no**

is the unit number of the LCME to which the circuit breaker supplies power

*Example of a MAP display:*

## NTRX42 in an RSC MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
. . . . 1LCME
LCME
0 Quit PM 4 1 10 3 3 130
2 Post_ LCME 1 1 5 0 1 9
3
4 SwRg LCME RemL 00 0 ISTb Links_00S: CSide 1
5 TrnsL Unit-0: InSv Mtce TakeOver /RG: 0
6 Tst Unit-1: ManB Mtce /RG: 0
7 Bsy 11 11 11 RG:Pref:0 InSv
8 RTS Drwr: 01 23 45 67 89 01 23 45 Stby:1 InSv
9 OffL
10 LoadPM
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18

```

- 19 An alarm may sound. If this occurs, silence the alarm by typing

**>SIL**

and pressing the Enter key.

- 20 Use the following information to determine where to proceed.

| If                                                                                                    | Do      |
|-------------------------------------------------------------------------------------------------------|---------|
| circuits associated with bottom circuit breaker of NTRX42 have not been busied or otherwise addressed | step 16 |
| circuits associated with both circuit breakers of NTRX42 have been busied or otherwise addressed      | step 28 |

- 21 Set the MAP display to the PM level and post the LCME in the same frame as the circuit breaker by typing
- >MAPCI;MTC;PM;POST lcme site lcme\_frame\_no lcme\_no**
- and pressing the Enter key.
- where

NTRX42  
in an RSC MSP (continued)

- site is the name of the site at which the LCME is located
- lcme\_frame\_no is the number of the frame in which the LCME is located
- lcme\_no is the number of the LCME in the same frame as the circuit breaker

Example of a MAP display:

| CM   | MS      | IOD     | Net                     | PM   | CCS      | LNS        | Trks      | Ext  | Appl |
|------|---------|---------|-------------------------|------|----------|------------|-----------|------|------|
| LCME | .       | .       | SysB                    | ManB | .        | OffL       | CBsy      | ISTb | InSv |
| 0    | Quit    | PM      | 4                       | 0    |          | 10         | 3         | 3    | 130  |
| 2    | Post_   | LCME    | 1                       | 0    |          | 5          | 0         | 1    | 9    |
| 3    |         |         |                         |      |          |            |           |      |      |
| 4    | Swrg_   | LCME    | RemL                    | 00 0 | ISTb     | Links_00S: | CSide     | 1    |      |
| 5    | Trnsl_  | Unit-0: | InSv                    |      |          | /RG:       | 0         |      |      |
| 6    | Tst_    | Unit-1: | InSv                    |      |          | /RG:       | 0         |      |      |
| 7    | Bsy_    |         |                         |      | 11 11 11 |            | RG:Pref:0 | InSv |      |
| 8    | RTS_    | Drwr:   | 01 23 45 67 89 01 23 45 |      |          |            | Stby:1    | InSv |      |
| 9    | OffL_   |         | .. .. .                 |      |          |            |           |      |      |
| 10   | LoadPM_ |         |                         |      |          |            |           |      |      |
| 11   | Disp_   |         |                         |      |          |            |           |      |      |
| 12   | Next_   |         |                         |      |          |            |           |      |      |
| 13   |         |         |                         |      |          |            |           |      |      |
| 14   | QueryPM |         |                         |      |          |            |           |      |      |
| 15   |         |         |                         |      |          |            |           |      |      |
| 16   |         |         |                         |      |          |            |           |      |      |
| 17   |         |         |                         |      |          |            |           |      |      |
| 18   |         |         |                         |      |          |            |           |      |      |

- 22 Busy the LCME unit associated with the ringing generator by typing
- >**BSY UNIT lcme\_unit\_no**
- and pressing the Enter key.
- where
- lcme\_unit\_no is zero when the circuit breaker powers ringing generator zero, and is one when the circuit breaker powers ringing generator one

Example of a MAP display:

## NTRX42 in an RSC MSP (continued)

```
CM MS IOD Net PM CCS LNS Trks Ext Appl
. . . . 1LCME
LCME
0 Quit PM SysB ManB OffL CBsy ISTb InSv
2 Post_ LCME 1 1 5 3 3 130
3
4 SwRg LCME RemL 00 0 ISTb Links_00S: CSide 1
5 TrnsL Unit-0: InSv Mtce TakeOver /RG: 0
6 Tst Unit-1: ManB Mtce /RG: 0
7 Bsy 11 11 11 RG:Pref:0 InSv
8 RTS Drwr: 01 23 45 67 89 01 23 45 Stby:1 InSv
9 OffL
10 LoadPM
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18
```

- 23 An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
and pressing the Enter key.
- 24 If there is a second LCME in the same frame as the circuit breaker, post the other LCME by typing  
**>MAPCI;MTC;PM;POST lcme site lcme\_frame\_no lcme\_unit\_no**  
and pressing the Enter key.  
*where*  
**site**  
is the name of the site at which the LCME is located  
**lcme\_frame\_no**  
is the number of the frame in which the LCME is located  
**lcme\_unit\_no**  
is the number of the LCME in the same frame as the circuit breaker
- 25 Busy the LCME unit associated with the ringing generator by typing  
**>BSY UNIT lcme\_unit\_no**  
and pressing the Enter key.  
*where*  
**lcme\_unit\_no**  
is zero when the circuit breaker powers ringing generator zero, and is one when the circuit breaker powers ringing generator one

## NTRX42 in an RSC MSP (continued)

- 26 An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
and pressing the Enter key.
- 27 Use the following information to determine where to proceed.

| If                                                                                                    | Do      |
|-------------------------------------------------------------------------------------------------------|---------|
| circuits associated with bottom circuit breaker of NTRX42 have not been busied or otherwise addressed | step 16 |
| circuits associated with both circuit breakers of NTRX42 have been busied or otherwise addressed      | step 28 |

### ***At the front panel of the cabinet***

- 28 Verify and switch off the associated power converter.  
**Note:** This step does not apply to the CPDC and CRME.
- 29 Determine the faulty circuit breaker on the MSP and switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.
- 30 An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
and pressing the Enter key.
- 31 Power down and safety tag the ABS fuse in the power room.
- 32 Pull out the corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the connectors on the rear of the MSP.  
**Note:** This step does not apply to the CMIS, CPDC, and CRME.

## NTRX42 in an RSC MSP (continued)

*At the rear panel of the cabinet*

33



### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



### **DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.
3. Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Put on a wrist strap.

34

Open the rear door and locate the NTRX42 circuit card. Verify the card location by checking the slot number stamped into the chassis.

- a Note the wire color and the location to facilitate re-connection.

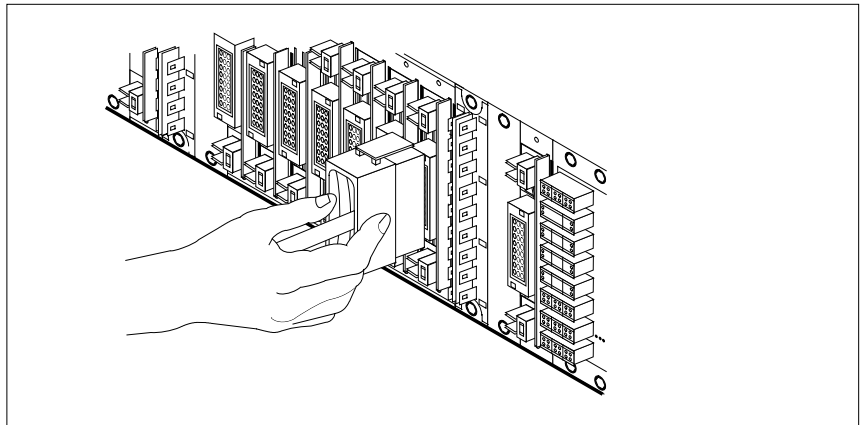

- b Safety tag the front of the circuit breaker to indicate maintenance activity.
- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect and tag the smaller black power connectors located below the larger blue power connector.



---

## NTRX42 in an RSC MSP (continued)


---

Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 35 Disconnect and tag any jumper connectors and cables that may be present and set them aside for use on the replacement unit.


### *At the front panel of the cabinet*

- 36 Remove the NTRX42 card.
- a Disengage the spring-loaded captive screw at the top of the circuit card.
  - b Grasping the top and bottom of unit, gently pull the circuit card toward you until it clears the shelf.
  - c Replace the circuit card. Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card being replaced.
  - d Tighten the spring-loaded captive screw at the top of the circuit card.

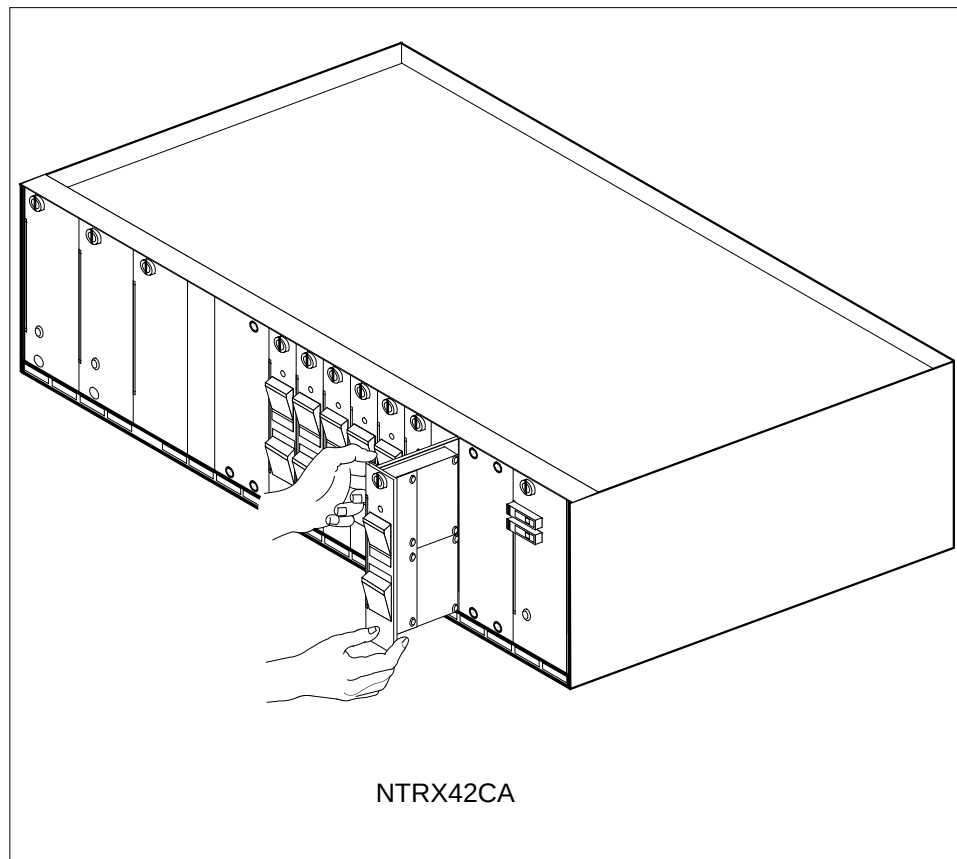


## NTRX42 in an RSC MSP (continued)

- 37 Replace any jumper connectors and cables removed in step 35. Reinsert the power connectors at the rear of the circuit card.

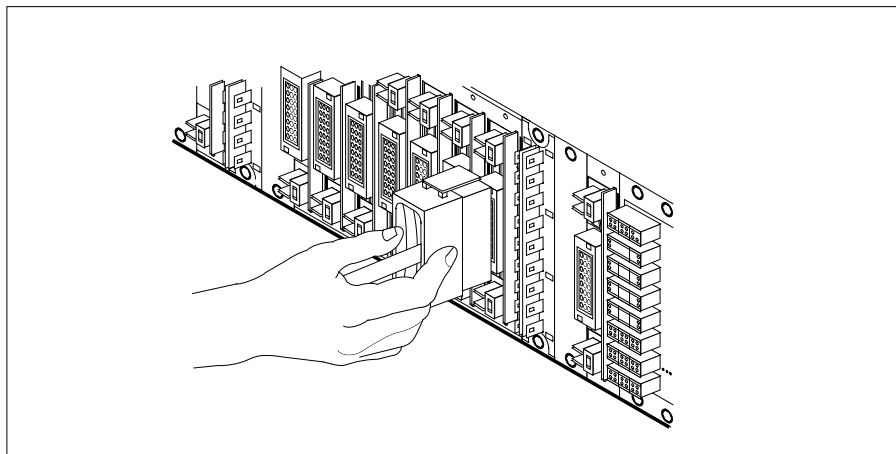

- 38 Push in the corresponding line shelf. This step does *not* apply to the CMIS, CPDC, and CRME.

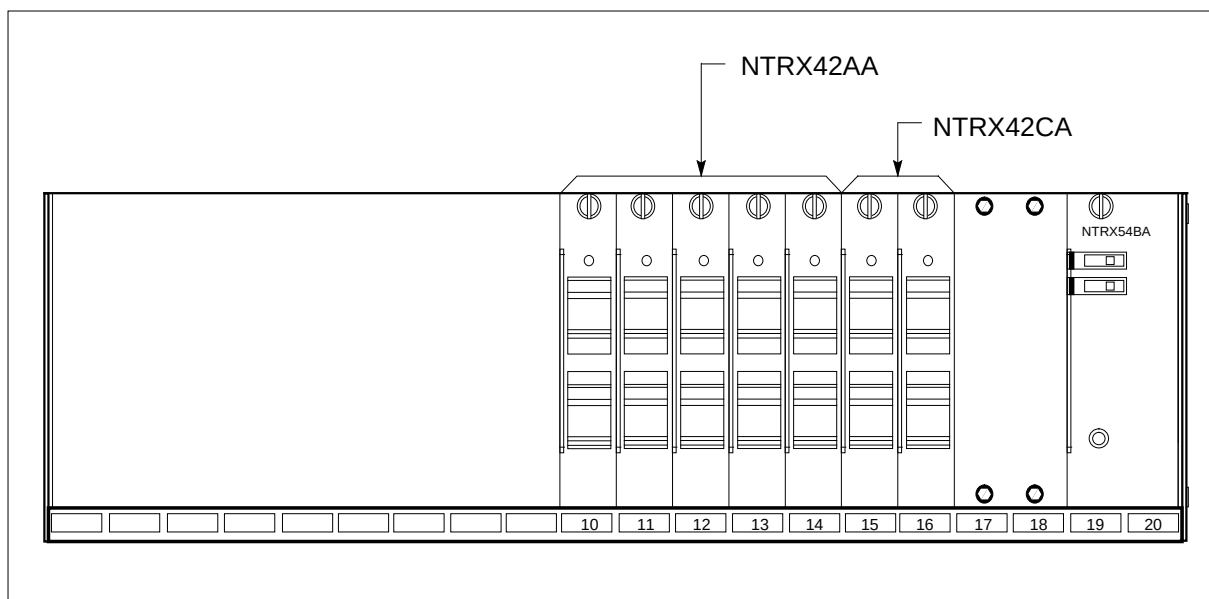

- 39 Apply the appropriate label from the spare parts on the replacement NTRX42 circuit card.
- 40 Power up the ABS fuse in the power room, and remove the safety tag from the ABS fuse.
- Note:** This step applies to the CPDC and CRME.
- 41 Switch on the associated power converter.
- Note:** This step does not apply to the CPDC and CRME.

## NTRX42 in an RSC MSP (continued)

- 42** Reset the circuit breakers to ON (upward). If any card controlled by this breaker includes a reset switch, hold the RESET button downward while setting the circuit breaker to the ON position.
- 43** Remove the safety tag from the front of the circuit breaker.
- 44** Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.
- 45** Read the following table to determine where to proceed.
- | If circuit breakers power the                   | Do      |
|-------------------------------------------------|---------|
| LCME shelf containing 6X30, 6X53, or BX72 cards | step 46 |
| RCC2 shelf containing MX72 card                 | step 50 |
| RMM shelf containing 2X09 or 2X06 cards         | step 54 |
- 46** Return the LCME unit to service by typing  
**>RTS UNIT lcme\_unit\_no**  
 and pressing the Enter key.  
*where*  
     **lcme\_unit\_no**  
     is the number of the inactive unit
- | If RTS | Do      |
|--------|---------|
| passed | step 47 |
| failed | step 59 |
- 47** Send any faulty cards for repair according to local procedure.
- 48** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 49** Go to step 60.
- 50** Return the RCC2 unit to service by typing  
**>RTS UNIT rcc2\_unit\_no**  
 and pressing the Enter key.  
*where*

## NTRX42

### in an RSC MSP (continued)

**rcc2\_unit\_no**  
is the number of the inactive RCC2 unit

| If RTS | Do      |
|--------|---------|
| passed | step 51 |
| failed | step 59 |

- 51** Send any faulty cards for repair according to local procedure.
- 52** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.
- 53** Go to step 60.

#### *At the MAP terminal*

- 54** Reload the RMM by entering  
**>LOADPM**  
and pressing the Enter key.

| If LOAD | Do      |
|---------|---------|
| passed  | step 55 |
| failed  | step 59 |

- 55** Test the RMM unit by typing  
**>TST UNIT rmm\_unit\_no**  
and pressing the Enter key.  
*where*

**rmm\_unit\_no**  
is the number of the RCC2 unit

| If RTS | Do      |
|--------|---------|
| passed | step 56 |
| failed | step 59 |

- 56** Return the RMM shelf to service by typing  
**>RTS UNIT rmm\_unit\_no**  
and pressing the Enter key.  
*where*

---

**NTRX42**  
**in an RSC MSP (end)**

---

**rmm\_unit\_no**

is the number of the RCC2 unit tested in step 55

---

**If RTS****Do**

---

passed

step 57

failed

step 59

---

- 57** Send any faulty cards for repair according to local procedure.
- 58** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 60.
- 59** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 60** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX42 in an RSC-S (DS-1) Model B MSP**

---

### **Application**

Use this procedure to replace an NTRX42 card in a modular supervisory panel (MSP) located in a

- cabinetized extension module (CEXT)
- cabinetized line concentrating equipment (CLCE)
- cabinetized line module ISDN (CLMI)
- cabinetized power distribution center (CPDC)
- cabinetized remote switching center (CRSC)
- cabinetized miscellaneous equipment (CMIS)
- cabinetized remote miscellaneous equipment (CRME)

| PEC    | Suffixes | Name                   |
|--------|----------|------------------------|
| NTRX42 | AA, CA   | Circuit Breaker Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged


---

**NTRX42**  
**in an RSC-S (DS-1) Model B MSP (continued)**

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

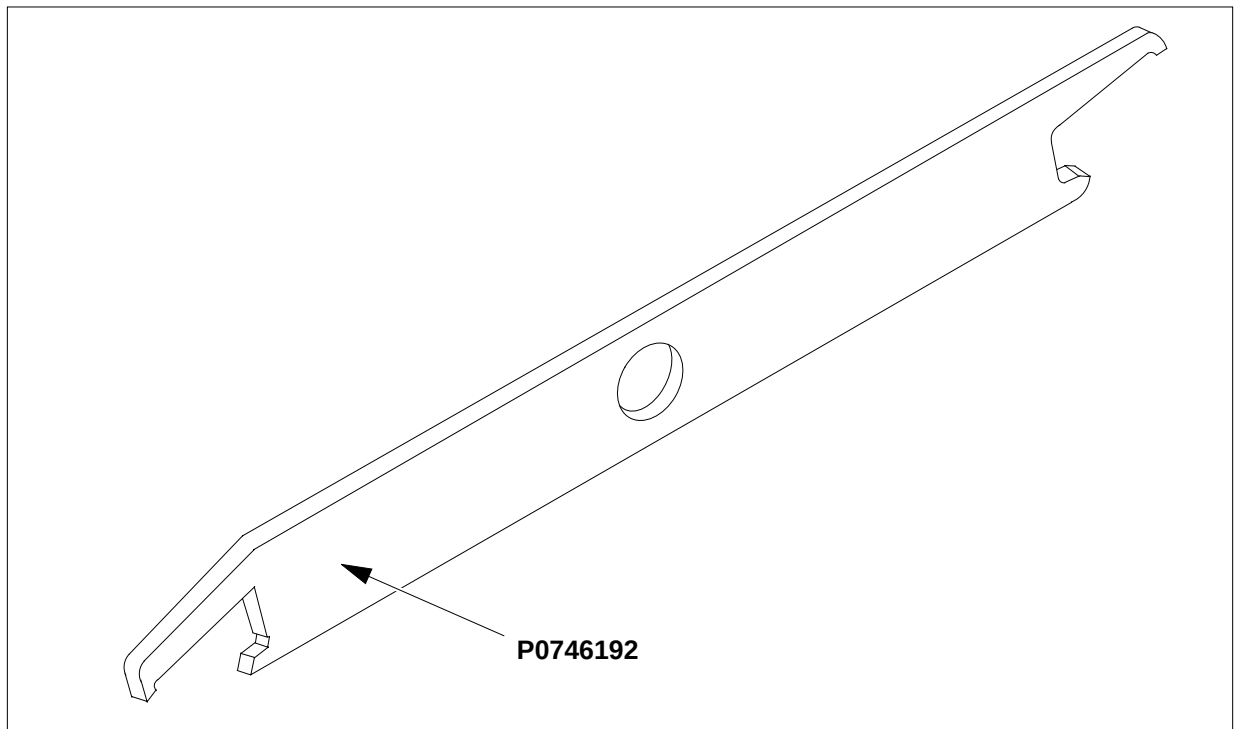**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure. The detailed procedure depends on which circuit cards are served by the breaker module circuit card (NTRX42). You will be directed to the appropriate steps depending on your configuration.

## NTRX42 in an RSC-S (DS-1) Model B MSP (continued)

### Summary of replacing an NTRX42 card in an RSC-S MSP

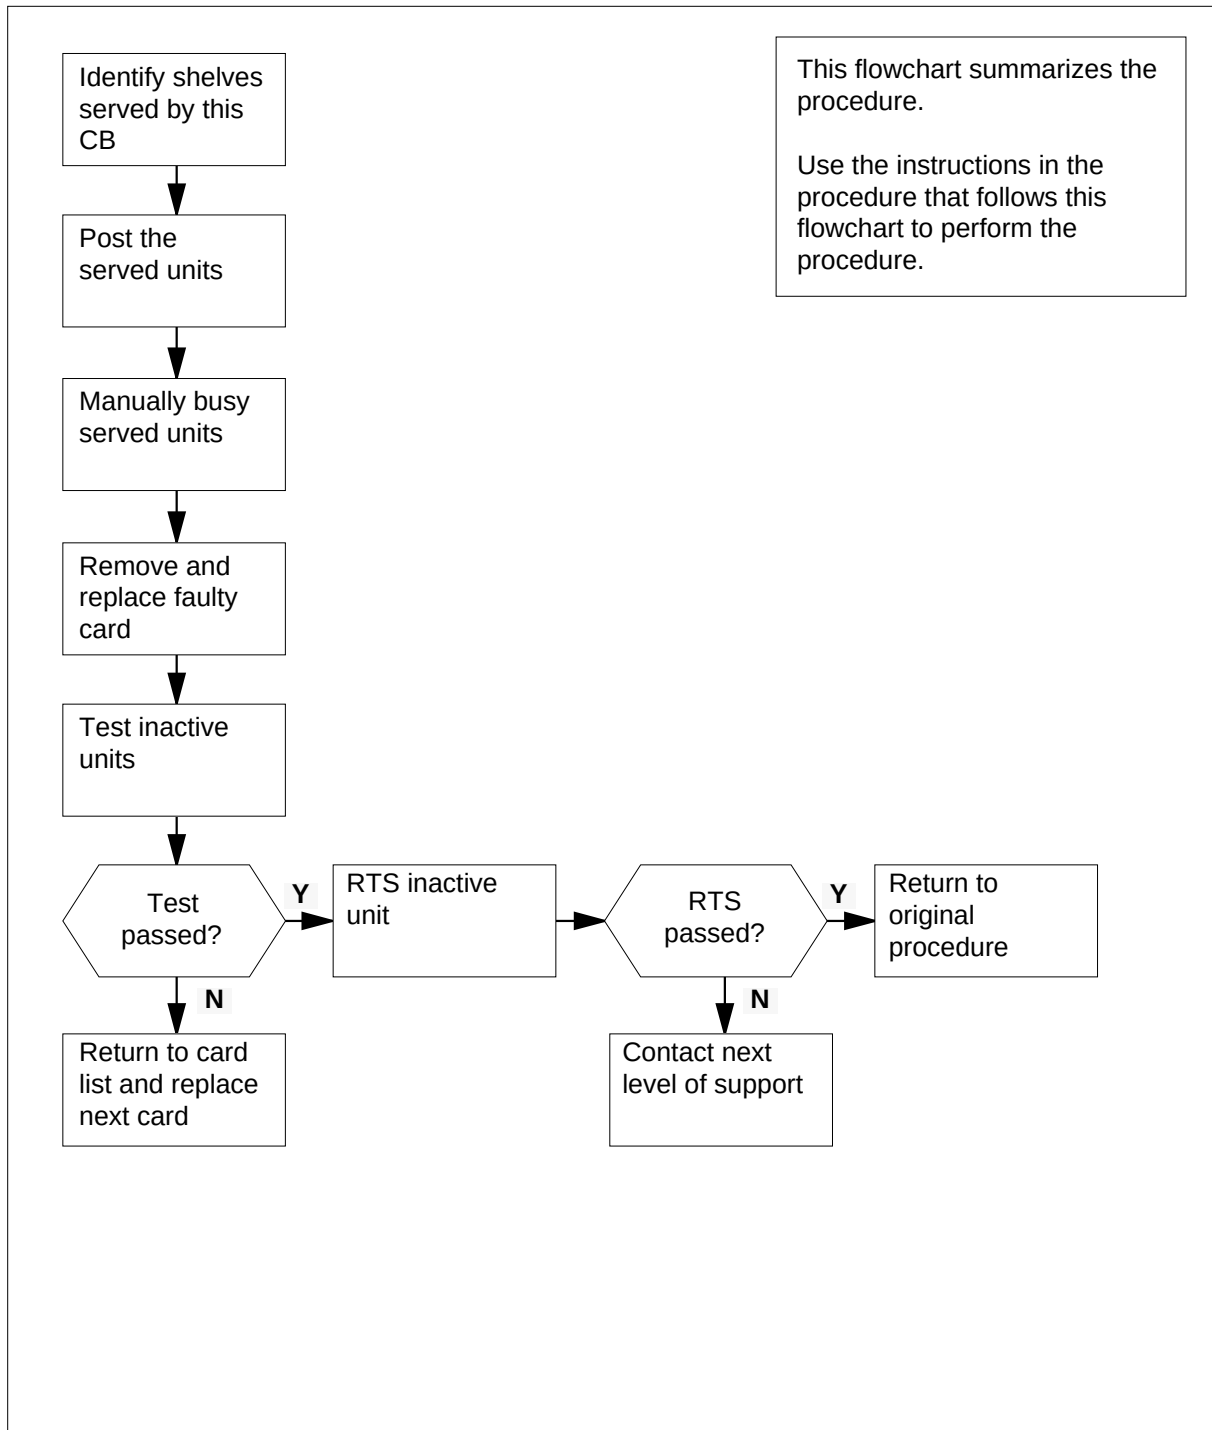



**NTRX42**  
**in an RSC-S (DS-1) Model B MSP** (continued)

**Replacing an NTRX42 card in RSC-S MSP**


**At your Current Location**

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

**At the front panel of the cabinet**

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.  
**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

**Modular supervisory panel**

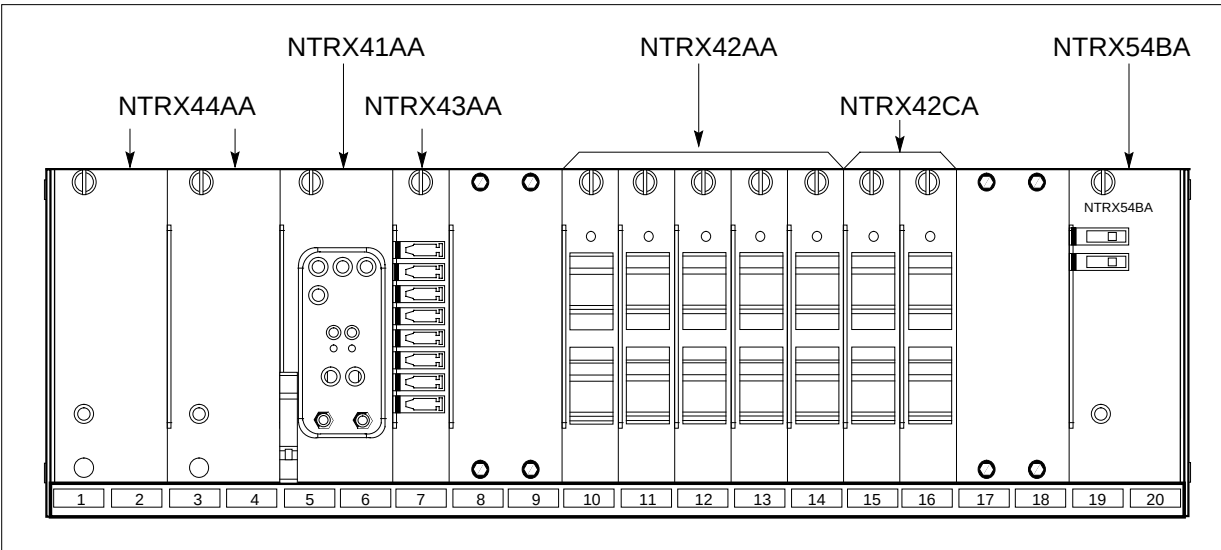

- 4 Use the breaker designation label to identify which cards are serviced by each circuit breaker (CB). For example, the label CB01-47-01 identifies circuit breaker 01 as controlling circuit card position 01 on shelf 47. Many RX42 modules service two separate devices (or units); both units must be powered down prior to removal of the associated RX42 circuit card.
- 5 Use the following table to determine which step to do next.

| If the CB powers the                    | Do     |
|-----------------------------------------|--------|
| RMM shelf containing 2X09 or 2X06 cards | step 6 |

NTRX42  
in an RSC-S (DS-1) Model B MSP (continued)

| If the CB powers the                           | Do      |
|------------------------------------------------|---------|
| RCC2 shelf containing MX72 card                | step 9  |
| LCME shelf containing 6X30, 6X53 or BX72 cards | step 15 |

At the MAP terminal

- 6 Set the MAP display to the PM level and post the RMM by typing  
**>MAPCI;MTC;PM;POST RMM rmm\_no**  
and pressing the Enter key.  
where  
**rmm\_no**  
is the number of the RMM unit from which the card is to be removed  
Example of a MAP display

| CM         | MS  | IOD | Net  | PM   | CCS  | LNS  | Trks | Ext  | Appl |
|------------|-----|-----|------|------|------|------|------|------|------|
| .          | .   | .   | .    | .    | .    | .    | .    | .    | .    |
| RMM        |     |     | SysB | ManB | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     | PM  |     | 4    | 0    | 10   | 3    | 3    | 130  |      |
| 2 Post_    | RMM |     | 0    | 1    | 1    | 0    | 0    | 2    |      |
| 3          |     |     |      |      |      |      |      |      |      |
| 4          | RMM | 5   | INSV |      |      |      |      |      |      |
| 5 Trnsl    |     |     |      |      |      |      |      |      |      |
| 6 Tst      |     |     |      |      |      |      |      |      |      |
| 7 Bsy      |     |     |      |      |      |      |      |      |      |
| 8 RTS      |     |     |      |      |      |      |      |      |      |
| 9 OffL     |     |     |      |      |      |      |      |      |      |
| 10 LoadPM  |     |     |      |      |      |      |      |      |      |
| 11 Disp_   |     |     |      |      |      |      |      |      |      |
| 12 Next    |     |     |      |      |      |      |      |      |      |
| 13         |     |     |      |      |      |      |      |      |      |
| 14 QueryPM |     |     |      |      |      |      |      |      |      |
| 15         |     |     |      |      |      |      |      |      |      |
| 16         |     |     |      |      |      |      |      |      |      |
| 17         |     |     |      |      |      |      |      |      |      |
| 18         |     |     |      |      |      |      |      |      |      |

- 7 Busy the RMM by typing  
**>BSY**  
and pressing the Enter key.  
Example of a MAP display

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

| CM         | MS  | IOD | Net  | PM    | CCS  | LNS  | Trks | Ext  | Appl |
|------------|-----|-----|------|-------|------|------|------|------|------|
| .          | .   | .   | .    | 1ManB | .    | .    | .    | .    | .    |
| RMM        |     |     | SysB | ManB  | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     | PM  |     | 4    | 0     | 10   | 0    | 0    | 130  |      |
| 2 Post_    | RMM |     | 0    | 1     | 0    | 0    | 0    | 0    |      |
| 3          |     |     |      |       |      |      |      |      |      |
| 4          | RMM | 5   | ManB |       |      |      |      |      |      |
| 5 TrnsL    |     |     |      |       |      |      |      |      |      |
| 6 Tst      |     |     |      |       |      |      |      |      |      |
| 7 Bsy      |     |     |      |       |      |      |      |      |      |
| 8 RTS      |     |     |      |       |      |      |      |      |      |
| 9 OffL     |     |     |      |       |      |      |      |      |      |
| 10 LoadPM  |     |     |      |       |      |      |      |      |      |
| 11 Disp_   |     |     |      |       |      |      |      |      |      |
| 12 Next    |     |     |      |       |      |      |      |      |      |
| 13         |     |     |      |       |      |      |      |      |      |
| 14 QueryPM |     |     |      |       |      |      |      |      |      |
| 15         |     |     |      |       |      |      |      |      |      |
| 16         |     |     |      |       |      |      |      |      |      |
| 17         |     |     |      |       |      |      |      |      |      |
| 18         |     |     |      |       |      |      |      |      |      |

#### **At the RMM shelf**

- 8** Power down the unit by setting the ON/OFF switch on the power converter faceplate to the OFF position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will be ON. An audible alarm may sound. If an alarm does sound, silence it by typing

**SIL**

and pressing the Enter key.

Go to step 28.

- 9** Access the PM level and post the RCC2 by typing

**>MAPCI;MTC;PM;POST rcc2\_no**

and pressing the Enter key.

where

**rcc2\_no**

is the number of the RCC2 unit that will be busied.

*Example of a MAP display*

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

| CM         | MS     | IOD | Net    | PM         | CCS   | LNS      | Trks | Ext  | Appl |
|------------|--------|-----|--------|------------|-------|----------|------|------|------|
| .          | .      | .   | .      | 1RCC2      | .     | .        | .    | .    | .    |
| RCC2       |        |     | SysB   | ManB       | OffL  | CBsy     | ISTb | InSv |      |
| 0 Quit     | PM     |     | 0      | 0          | 2     | 0        | 2    | 25   |      |
| 2 Post_    | RCC2   |     | 0      | 0          | 0     | 0        | 1    | 1    |      |
| 3 ListSet  |        |     |        |            |       |          |      |      |      |
| 4          | RCC2   |     | 0 ISTb | Links_00S: | CSide | 1, PSide | 1    |      |      |
| 5 TRNSL    | Unit0: |     | Inact  | InSv       |       |          |      |      |      |
| 6 TST      | Unit1: |     | Act    | InSv       |       |          |      |      |      |
| 7 BSY      |        |     |        |            |       |          |      |      |      |
| 8 RTS      |        |     |        |            |       |          |      |      |      |
| 9 OffL     |        |     |        |            |       |          |      |      |      |
| 10 LoadPM_ |        |     |        |            |       |          |      |      |      |
| 11 Disp_   |        |     |        |            |       |          |      |      |      |
| 12 Next_   |        |     |        |            |       |          |      |      |      |
| 13         |        |     |        |            |       |          |      |      |      |
| 14 QueryPM |        |     |        |            |       |          |      |      |      |
| 15         |        |     |        |            |       |          |      |      |      |
| 16         |        |     |        |            |       |          |      |      |      |
| 17         |        |     |        |            |       |          |      |      |      |
| 18         |        |     |        |            |       |          |      |      |      |

- 10** The NTRX42 you are replacing should be controlling the INACTIVE side of the RCC2.

| If NTRX42 card is on the | Do      |
|--------------------------|---------|
| active unit              | step 11 |
| inactive unit            | step 13 |

- 11** Switch the processing activity (SWACT) to the INACTIVE unit by typing **>SWACT** and pressing the Enter key.

- 12** Confirm the system prompt by typing **>YES** and pressing the Enter key.  
After both units are in-service proceed to the next step.

#### At the RCE frame

- 13** Place a sign on the active unit bearing the words: *Active unit. Do not touch.* This sign should not be attached by magnets or tape.

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

#### *At the MAP terminal*

- 14** Busy the inactive PM unit by typing

**> bsy unit unit\_no**

where

**unit\_no**

is the number of the INACTIVE RCC2 unit that will be busied.

Go to step 28.

- 15** Use the following information to determine where to proceed.

| If top circuit breaker of NTRX42 powers | Do      |
|-----------------------------------------|---------|
| NT6X53 or NTB72                         | step 17 |
| NT6X30                                  | step 21 |

- 16** Use the following information to determine where to proceed.

| If bottom circuit breaker of NTX42 powers | Do      |
|-------------------------------------------|---------|
| NT6X53 or NTB72                           | step 17 |
| NT6X30                                    | step 21 |

- 17** Set the MAP display to the PM level and post the LCME powered by the circuit breaker by typing

**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**

and pressing the Enter key.

where

**site**

is the name of the site at which the LCME is located

**lcme\_frame\_no**

is the number of the frame in which the LCME is located

**lcme\_no**

is the number of LCME the circuit breaker supplies power to

*Example of a MAP display*

NTRX42  
in an RSC-S (DS-1) Model B MSP (continued)

| CM         | MS      | IOD            | Net      | PM   | CCS        | LNS   | Trks      | Ext  | Appl |
|------------|---------|----------------|----------|------|------------|-------|-----------|------|------|
| .          | .       | .              | .        | .    | .          | .     | .         | .    | .    |
| LCME       |         |                | SysB     | ManB | OffL       | CBsy  | ISTb      | InSv |      |
| 0 Quit     | PM      |                | 4        | 0    | 10         | 3     | 3         | 130  |      |
| 2 Post_    | LCME    |                | 1        | 0    | 5          | 0     | 1         | 9    |      |
| 3          |         |                |          |      |            |       |           |      |      |
| 4 Swrg_    | LCME    | RemL           | 00 0     | ISTb | Links_OOS: | CSide | 1         |      |      |
| 5 TrnsL_   | Unit-0: | InSv           |          |      | /RG:       | 0     |           |      |      |
| 6 Tst_     | Unit-1: | InSv           |          |      | /RG:       | 0     |           |      |      |
| 7 Bsy_     |         |                |          |      | 11 11 11   |       | RG:Pref:0 | InSv |      |
| 8 RTS_     | Drwr:   | 01 23 45 67 89 | 01 23 45 |      |            |       | Stby:1    | InSv |      |
| 9 OffL_    |         | .. .. .        | .. .. .  |      |            |       |           |      |      |
| 10 LoadPM_ |         |                |          |      |            |       |           |      |      |
| 11 Disp_   |         |                |          |      |            |       |           |      |      |
| 12 Next_   |         |                |          |      |            |       |           |      |      |
| 13         |         |                |          |      |            |       |           |      |      |
| 14 QueryPM |         |                |          |      |            |       |           |      |      |
| 15         |         |                |          |      |            |       |           |      |      |
| 16         |         |                |          |      |            |       |           |      |      |
| 17         |         |                |          |      |            |       |           |      |      |
| 18         |         |                |          |      |            |       |           |      |      |

- 18
- Busy the LCME unit powered by the circuit breaker by typing

**>BSY UNIT lcme\_unit\_no**

and pressing the Enter key.

where

**lcme\_unit\_no**

is the unit number of LCME to which the circuit breaker supplies power.

Example of a MAP display

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
. . . . 1LCME

LCME
0 Quit PM 4 1 10 3 3 130
2 Post_ LCME 1 1 5 0 1 9
3
4 SwRg LCME RemL 00 0 ISTb Links_00S: CSide 1
5 TrnsL Unit-0: InSv Mtce TakeOver /RG: 0
6 Tst Unit-1: ManB Mtce /RG: 0
7 Bsy 11 11 11 RG:Pref:0 InSv
8 RTS Drwr: 01 23 45 67 89 01 23 45 Stby:1 InSv
9 OffL
10 LoadPM
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18

```

- 19 An alarm may sound. If this occurs, silence the alarm by typing

**>SIL**

and pressing the Enter key.

- 20 Use the following information to determine where to proceed.

| If                                                                                                    | Do      |
|-------------------------------------------------------------------------------------------------------|---------|
| Circuits associated with bottom circuit breaker of NTRX42 have not been busied or otherwise addressed | step 16 |
| Circuits associated with both circuit breakers of NTRX42 have been busied or otherwise addressed      | step 28 |

- 21 Set the MAP display to the PM level and post the LCME in the same frame as the circuit breaker by typing

**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**

and pressing the Enter key.

where

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

**site**

is the name of the site at which the LCME is located

**lcme\_frame\_no**

is the number of the frame in which the LCME is located

**lcme\_no**

is the number of the LCME in the same frame as the circuit breaker

*Example of a MAP display*

| CM         | MS      | IOD                     | Net  | PM   | CCS        | LNS   | Trks      | Ext  | Appl |
|------------|---------|-------------------------|------|------|------------|-------|-----------|------|------|
| .          | .       | .                       | .    | .    | .          | .     | .         | .    | .    |
| LCME       |         |                         | SysB | ManB | OffL       | CBsy  | ISTb      | InSv |      |
| 0 Quit     | PM      |                         | 4    | 0    | 10         | 3     | 3         | 130  |      |
| 2 Post_    | LCME    |                         | 1    | 0    | 5          | 0     | 1         | 9    |      |
| 3          |         |                         |      |      |            |       |           |      |      |
| 4 Swrg_    | LCME    | RemL                    | 00 0 | ISTb | Links_00S: | CSide | 1         |      |      |
| 5 Trnsl_   | Unit-0: | InSv                    |      |      |            | /RG:  | 0         |      |      |
| 6 Tst_     | Unit-1: | InSv                    |      |      |            | /RG:  | 0         |      |      |
| 7 Bsy_     |         |                         |      |      | 11 11 11   |       | RG:Pref:0 | InSv |      |
| 8 RTS_     | Drwr:   | 01 23 45 67 89 01 23 45 |      |      |            |       | Stby:1    | InSv |      |
| 9 OffL_    |         | .. .. .                 |      |      |            |       |           |      |      |
| 10 LoadPM_ |         |                         |      |      |            |       |           |      |      |
| 11 Disp_   |         |                         |      |      |            |       |           |      |      |
| 12 Next_   |         |                         |      |      |            |       |           |      |      |
| 13         |         |                         |      |      |            |       |           |      |      |
| 14 QueryPM |         |                         |      |      |            |       |           |      |      |
| 15         |         |                         |      |      |            |       |           |      |      |
| 16         |         |                         |      |      |            |       |           |      |      |
| 17         |         |                         |      |      |            |       |           |      |      |
| 18         |         |                         |      |      |            |       |           |      |      |

- 22** Busy the LCME unit associated with the ring generator by typing

**>BSY UNIT lcme\_unit\_no**

and pressing the Enter key.

*where*

**lcme\_unit\_no**

is zero when the circuit breaker powers ring generator zero

is one when the circuit breaker powers ring generator one

*Example of a MAP display*



## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
. . . . 1LCME

LCME
0 Quit PM 4 1 10 3 3 130
2 Post_ LCME 1 1 5 0 1 9
3
4 SwRg LCME RemL 00 0 ISTb Links_OOS: CSide 1
5 Trnsl Unit-0: InSv Mtce TakeOver /RG: 0
6 Tst Unit-1: ManB Mtce /RG: 0
7 Bsy 11 11 11 RG:Pref:0 InSv
8 RTS Drwr: 01 23 45 67 89 01 23 45 Stby:1 InSv
9 OffL
10 LoadPM
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18

```

- 23 An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
 and pressing the Enter key.
- 24 If there is a second LCME in the same frame as the circuit breaker, post the  
 other LCME by typing  
**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_unit\_no**  
 and pressing the Enter key.  
*where*  
**site**  
 is the name of the site at which the LCME is located  
**lcme\_frame\_no**  
 is the number of the frame in which the LCME is located  
**lcme\_unit\_no**  
 is the number of the LCME in the same frame as the circuit breaker
- 25 Busy the LCME unit associated with the ring generator by typing  
**>BSY UNIT lcme\_unit\_no**  
 and pressing the Enter key.  
*where*  
**lcme\_unit\_no**  
 is zero when the circuit breaker powers ring generator zero.  
 is one when the circuit breaker powers ring generator one

## NTRX42 in an RSC-S (DS-1) Model B MSP (continued)

---

- 26 An alarm may sound. If this occurs, silence the alarm by typing  
>**SIL**  
and pressing the Enter key.
- 27 Use the following information to determine where to proceed.

| If                                                                                                    | Do      |
|-------------------------------------------------------------------------------------------------------|---------|
| Circuits associated with bottom circuit breaker of NTRX42 have not been busied or otherwise addressed | step 16 |
| Circuits associated with both circuit breakers of NTRX42 have been busied or otherwise addressed      | step 28 |

### ***At the front panel of the cabinet***

- 28 Verify and switch off associated power converter.  
**Note:** Not applicable to the CPDC and CRME.
- 29 Determine faulty circuit breaker on MSP and switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.
- 30 An alarm may sound. If this occurs, silence the alarm by typing  
>**SIL**  
and pressing the Enter key.
- 31 Power down and safety tag the ABS fuse in the power room.  
**Note:** This step applies to the CPDC and CRME.
- 32 Pull out corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the connectors on the rear of the MSP.  
**Note:** This step does not apply to the CMIS, CPDC, and CRME.

## NTRX42 in an RSC-S (DS-1) Model B MSP (continued)

*At the rear panel of the cabinet*

33



### DANGER

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



### DANGER

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.
3. Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Put on a wrist strap.

34

Open the rear door and locate the NTRX42 circuit card. Verify the card location by checking the slot number stamped into the chassis.

- a Note wire color and location to facilitate re-connection.

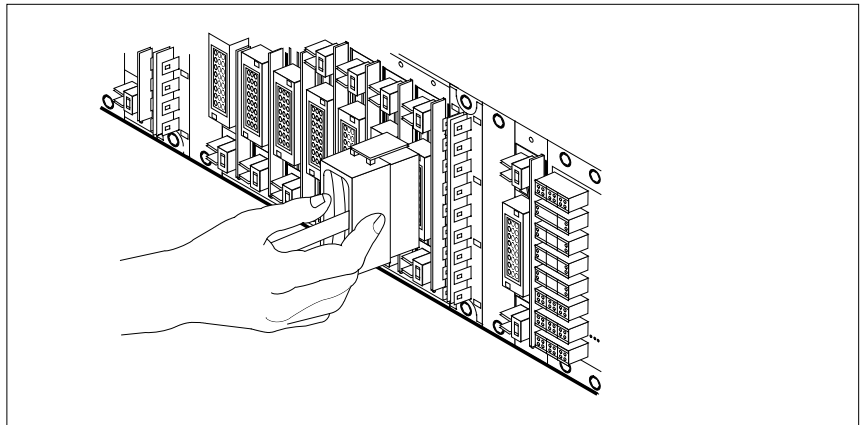

- b Safety tag the front of the circuit breaker to indicate maintenance activity.
- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect and tag the smaller black power connectors located below the larger blue power connector.

## **NTRX42**

### **in an RSC-S (DS-1) Model B MSP (continued)**


---

Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 35** Disconnect and tag any jumper connectors and cables which may be present and set them aside for use on the replacement unit.


#### ***At the front panel of the cabinet***

- 36** Remove the NTRX42 card.
  - a** Disengage the spring-loaded captive screw at the top of the circuit card.
  - b** Grasping the top and bottom of unit, gently pull the circuit card towards you until it clears the shelf.
  - c** Replace the circuit card. Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card being replaced.
  - d** Tighten the spring-loaded captive screw at the top of the circuit card.

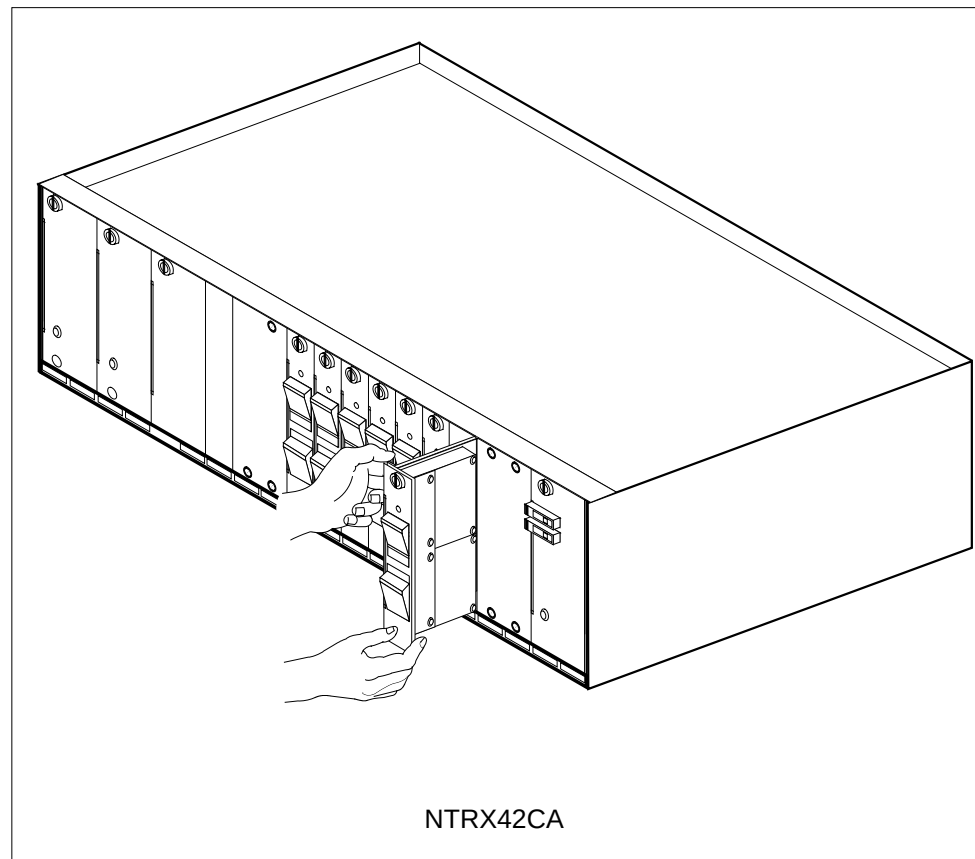


## NTRX42 in an RSC-S (DS-1) Model B MSP (continued)

- 37 Replace any jumper connectors and cables removed in step 35. Reinsert the power connectors at the rear of the circuit card.

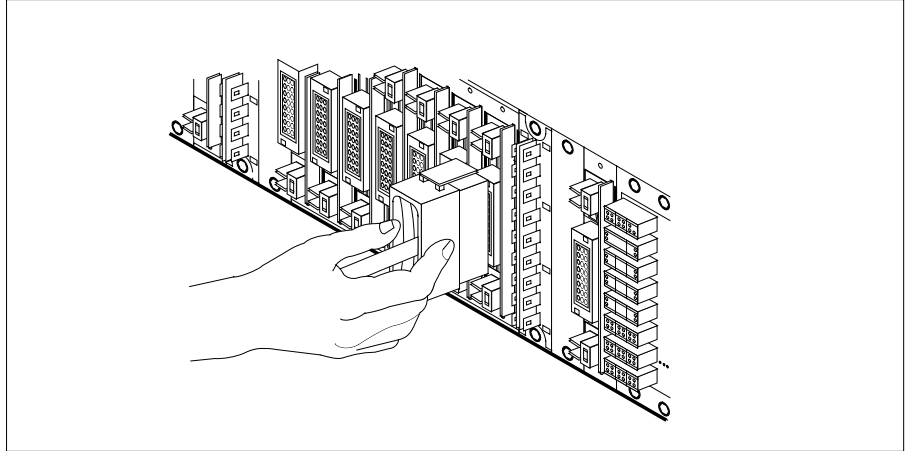

- 38 Push in corresponding line shelf. This step does *not* apply to the CMIS, CPDC, and CRME.

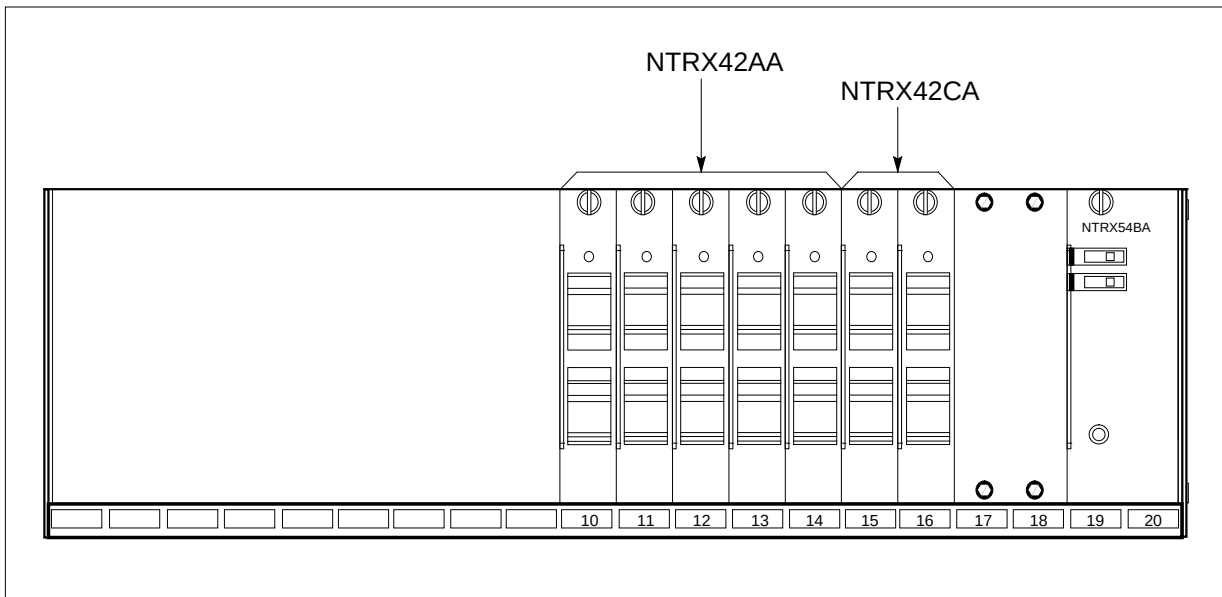

- 39 Apply appropriate label from spare parts on replacement NTRX42 circuit card.
- 40 Power up the ABS fuse in the power room, remove safety tag from ABS fuse.  
**Note:** This step applies to the CPDC and CRME.
- 41 Switch on associated power converter.  
**Note:** This step does not apply to the CPDC and CRME.

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

- 42 Reset the circuit breakers to ON (upward). If any card controlled by this breaker includes a reset switch, hold the RESET button downward while setting the circuit breaker to the ON position.
- 43 Remove safety tag from front of circuit breaker.
- 44 Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.
- 45 Proceed according to the following table.

| If circuit breakers power the                  | Do      |
|------------------------------------------------|---------|
| LCME shelf containing 6X30, 6X53 or BX72 cards | step 46 |
| RCC2 shelf containing MX72 card                | step 51 |
| RMM shelf containing 2X09 or 2X06 cards        | step 56 |

- 46 Test the LCME unit by typing  
**TST UNIT lcme\_unit\_no**  
and pressing the Enter key.

where

**lcme\_unit\_no**  
is the number of the LCME unit busied.

| If test | Do      |
|---------|---------|
| passed  | step 47 |
| failed  | step 65 |

- 47 Return the LCME unit to service by typing  
**RTS UNIT lcme\_unit\_no**  
and pressing the Enter key.

where

**lcme\_unit\_no**  
is the number of the LCME unit tested in step 46

| If RTS | Do      |
|--------|---------|
| passed | step 48 |
| failed | step 65 |

- 48 Send any faulty cards for repair according to local procedure.

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

**49** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.

**50** Go to step 66.

**51** Test the RCC2 unit by typing

**>TST UNIT rcc2\_unit\_no**

and pressing the Enter key.

where

**rcc2\_unit\_no**

is the number of the RCC2 unit

| If test | Do      |
|---------|---------|
| passed  | step 52 |
| failed  | step 65 |

**52** Return the RCC2 unit to service by typing

**>RTS UNIT RCC2\_unit\_no**

and pressing the Enter key.

where

**rcc2\_unit\_no**

is the number of the RCC2 unit tested in step 51

| If RTS | Do      |
|--------|---------|
| passed | step 53 |
| failed | step 65 |

**53** Send any faulty cards for repair according to local procedure.

**54** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.

**55** Go to step 66.

#### **At the MAP terminal**

**56** Determine the system load version.

| If                                 | Do      |
|------------------------------------|---------|
| System Load Module is<br>Version 1 | step 57 |
| System Load Module is<br>Version 2 | step 58 |

## NTRX42

### in an RSC-S (DS-1) Model B MSP (continued)

- 57 List the loadfile in the directory by typing  
`> DSKUT;listvol d000 all`  
or  
`> dskut;listvol d010 all`  
and pressing the Enter key.  
Local operating company policy determines which disk, D000 or D010, the loadfile will be on.  
Proceed to step 59.
- 58 List the loadfile in the directory by typing  
`>DISKUT;LV S00d`  
`>LF`  
or  
`> diskut;LV s01d`  
`>LF`  
and pressing the Enter key.
- 59 Leave the disk utility by typing  
`>QUIT`  
and pressing the Enter key.
- 60 Reload the RMM by typing  
`>LOADPM`  
and pressing the Enter key.
- | If          | Do      |
|-------------|---------|
| load passes | step 61 |
| load fails  | step 65 |
- 61 Test the RMM unit by typing  
`>TST UNIT rmm_unit_no`  
and pressing the Enter key.  
where  
**rmm\_unit\_no**  
is the number of the RCC2 unit
- | If RTS | Do      |
|--------|---------|
| passed | step 62 |
| failed | step 65 |



**NTRX42**  
**in an RSC-S (DS-1) Model B MSP (end)**

- 62      Return the RMM shelf to service by typing  
         **>RTS UNIT rmm\_unit\_no**  
         and pressing the Enter key.  
         where  
             **rmm\_unit\_no**  
             is the number of the RCC2 unit tested in step 61
- | If RTS | Do      |
|--------|---------|
| passes | step 63 |
| fails  | step 65 |
- 63      Send any faulty cards for repair according to local procedure.
- 64      Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 66.
- 65      Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 66      You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX42 in an RSC-S (PCM-30) Model B MSP**

---

### **Application**

Use this procedure to replace an NTRX42 card in a modular supervisory panel (MSP) located in the following cabinets:

- Cabinetized Extension Module (CEXT)
- Cabinetized Line Concentrating Equipment (CLCE)
- Cabinetized Line Module ISDN (CLMI)
- Cabinetized Power Distribution Center (CPDC)
- Cabinetized Remote Switching Center (CRSC)
- Cabinetized Miscellaneous Equipment (CMIS)
- Cabinetized Remote Miscellaneous Equipment (CRME)

| PEC    | Suffixes | Name                   |
|--------|----------|------------------------|
| NTRX42 | AA, CA   | Circuit Breaker Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (0.090 in.) thick and 17 mm (0.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw away from the connector. The tool is disengaged


---

**NTRX42**  
**in an RSC-S (PCM-30) Model B MSP (continued)**

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

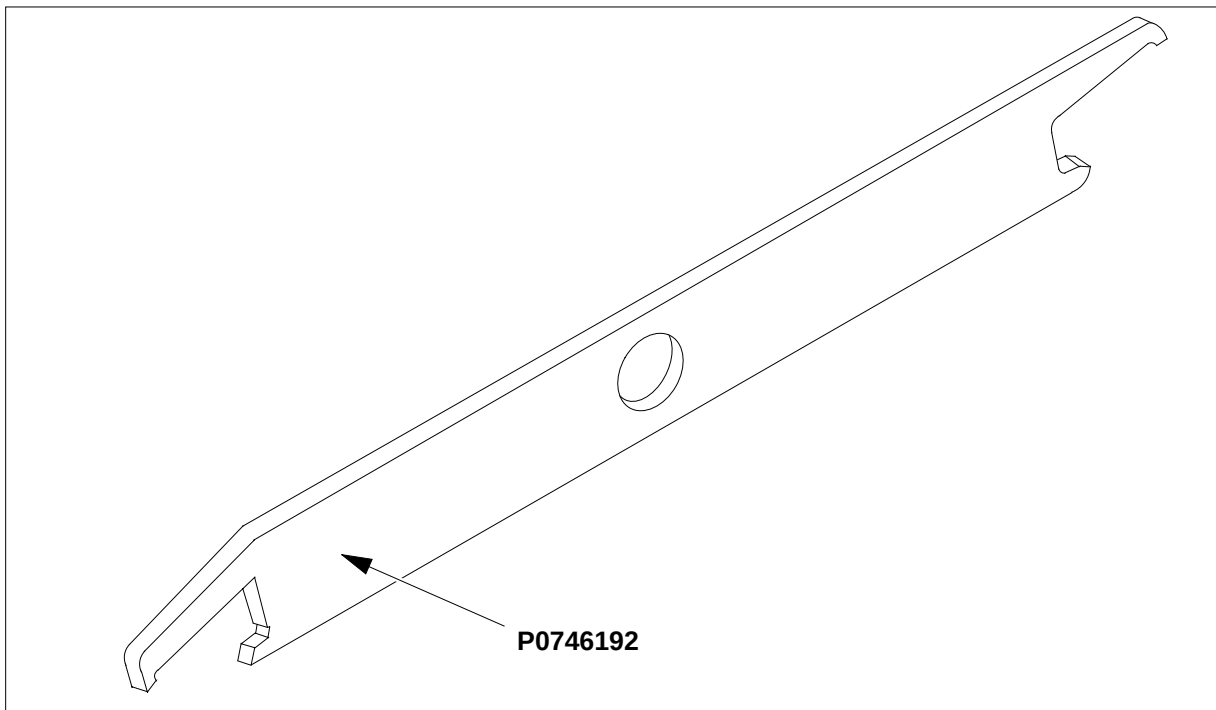**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the procedure that follows the flowchart to perform the procedure. The detailed procedure depends on which circuit cards are served by the breaker module circuit card (NTRX42). You will be directed to the appropriate steps depending on your configuration.

## NTRX42 in an RSC-S (PCM-30) Model B MSP (continued)

### Summary of card replacement procedure for an NTRX42 card in an RSC-S MSP

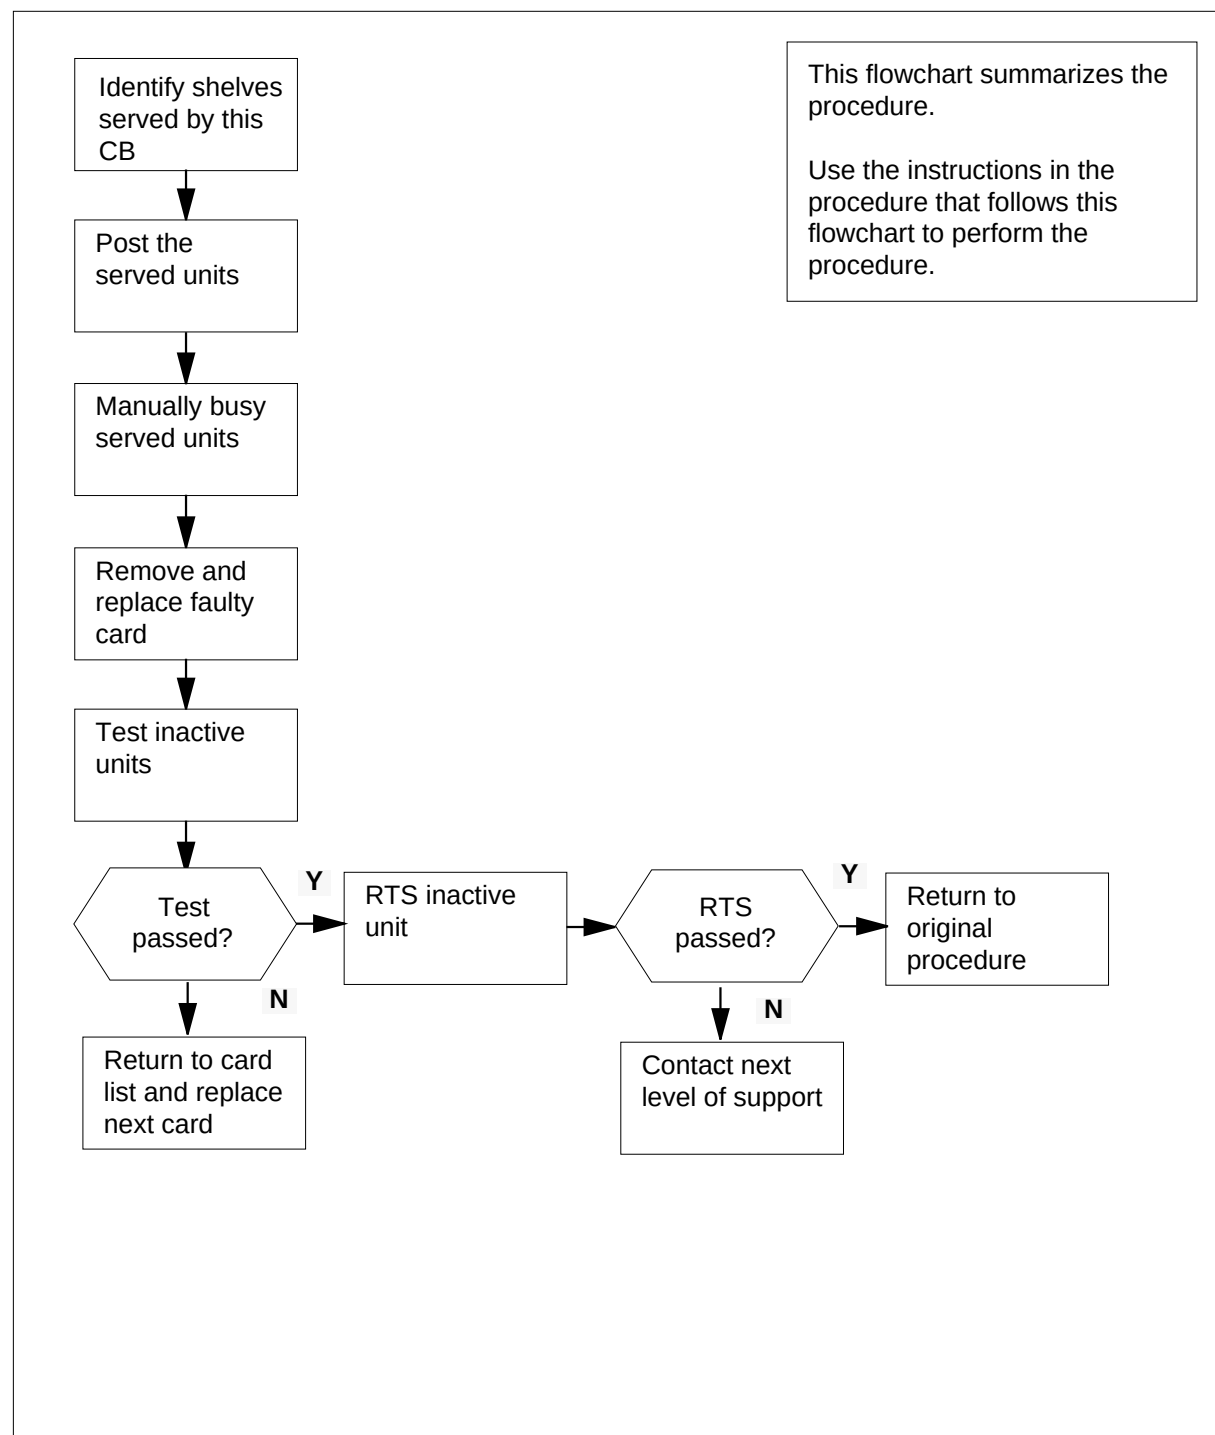

**NTRX42**  
**in an RSC-S (PCM-30) Model B MSP** (continued)

**Replacing an NTRX42 card in RSC-S MSP**

***At your Current Location***


- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

***At the front panel of the cabinet***

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

**MSP**

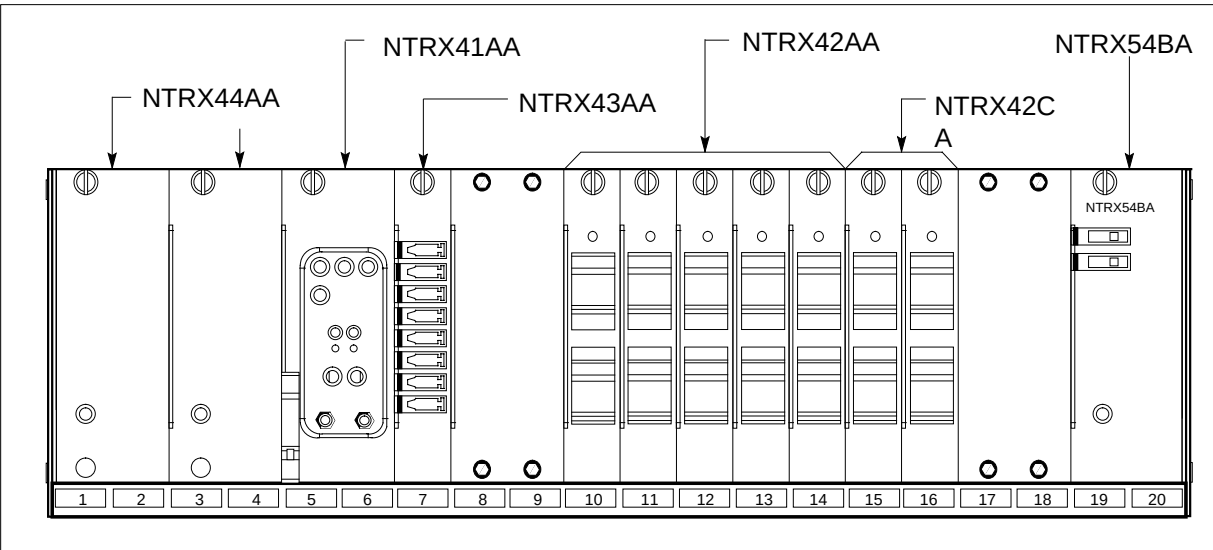

- 4 Use the breaker designation label to identify which cards are serviced by each circuit breaker (CB). For example, the label CB01-47-01 identifies circuit breaker 01 as controlling circuit card position 01 on shelf 47. Many RX42 modules service two separate devices (or units); both units must be powered down prior to removal of the associated RX42 circuit card.
- 5 Use the following table to determine which step to do next.

| If the CB powers the                    | Do     |
|-----------------------------------------|--------|
| RMM shelf containing 2X09 or 2X06 cards | step 6 |

NTRX42  
in an RSC-S (PCM-30) Model B MSP (continued)

| If the CB powers the                            | Do      |
|-------------------------------------------------|---------|
| RCO2 shelf containing MX72 card                 | step 9  |
| LCME shelf containing 6X30, 6X53, or BX72 cards | step 15 |

At the MAP terminal

- 6 Set the MAP display to the PM level and post the RMM by typing  
**>MAPCI;MTC;PM;POST RMM rmm\_no**  
and pressing the Enter key.  
where  
**rmm\_no**  
is the number of the RMM unit from which the card is to be removed  
Example of a MAP display:

| CM  | MS      | IOD | Net  | PM   | CCS  | LNS | Trks | Ext  | Appl |
|-----|---------|-----|------|------|------|-----|------|------|------|
| RMM | .       | .   | SysB | ManB | OffL | .   | CBsy | ISTb | InSv |
| 0   | Quit    | PM  | 4    | 0    | 10   | 3   | 3    | 130  |      |
| 2   | Post_   | RMM | 0    | 1    | 1    | 0   | 0    | 2    |      |
| 3   |         |     |      |      |      |     |      |      |      |
| 4   |         | RMM | 5    | INSV |      |     |      |      |      |
| 5   | TrnsL   |     |      |      |      |     |      |      |      |
| 6   | Tst     |     |      |      |      |     |      |      |      |
| 7   | Bsy     |     |      |      |      |     |      |      |      |
| 8   | RTS     |     |      |      |      |     |      |      |      |
| 9   | OffL    |     |      |      |      |     |      |      |      |
| 10  | LoadPM  |     |      |      |      |     |      |      |      |
| 11  | Disp_   |     |      |      |      |     |      |      |      |
| 12  | Next    |     |      |      |      |     |      |      |      |
| 13  |         |     |      |      |      |     |      |      |      |
| 14  | QueryPM |     |      |      |      |     |      |      |      |
| 15  |         |     |      |      |      |     |      |      |      |
| 16  |         |     |      |      |      |     |      |      |      |
| 17  |         |     |      |      |      |     |      |      |      |
| 18  |         |     |      |      |      |     |      |      |      |

- 7 Busy the RMM by typing  
**>BSY**  
and pressing the Enter key.  
Example of a MAP display:

## NTRX42

### in an RSC-S (PCM-30) Model B MSP (continued)

| CM         | MS  | IOD | Net  | PM    | CCS  | LNS  | Trks | Ext  | Appl |
|------------|-----|-----|------|-------|------|------|------|------|------|
| .          | .   | .   | .    | 1ManB | .    | .    | .    | .    | .    |
| RMM        |     |     | SysB | ManB  | OffL | CBsy | ISTb | InSv |      |
| 0 Quit     | PM  | 4   | 0    | 10    | 0    | 0    | 0    | 130  |      |
| 2 Post_    | RMM | 0   | 1    | 0     | 0    | 0    | 0    | 0    |      |
| 3          |     |     |      |       |      |      |      |      |      |
| 4          | RMM | 5   | ManB |       |      |      |      |      |      |
| 5 TrnsL    |     |     |      |       |      |      |      |      |      |
| 6 Tst      |     |     |      |       |      |      |      |      |      |
| 7 Bsy      |     |     |      |       |      |      |      |      |      |
| 8 RTS      |     |     |      |       |      |      |      |      |      |
| 9 OffL     |     |     |      |       |      |      |      |      |      |
| 10 LoadPM  |     |     |      |       |      |      |      |      |      |
| 11 Disp_   |     |     |      |       |      |      |      |      |      |
| 12 Next    |     |     |      |       |      |      |      |      |      |
| 13         |     |     |      |       |      |      |      |      |      |
| 14 QueryPM |     |     |      |       |      |      |      |      |      |
| 15         |     |     |      |       |      |      |      |      |      |
| 16         |     |     |      |       |      |      |      |      |      |
| 17         |     |     |      |       |      |      |      |      |      |
| 18         |     |     |      |       |      |      |      |      |      |

#### **At the RMM shelf**

- 8** Power down the unit by setting the ON/OFF switch on the power converter faceplate to the OFF position. Both the converter FAIL LED and FRAME FAIL lamp on the MSP will be ON. An audible alarm may sound. If an alarm does sound, silence it by typing

**>SIL**

and pressing the Enter key.

Go to step 28.

- 9** Access the PM level and post the RCO2 by typing

**>MAPCI;MTC;PM;POST rco2\_no**

and pressing the Enter key.

where

**rco2\_no**

is the number of the RCO2 unit that will be busied

*Example of a MAP display:*

**NTRX42****in an RSC-S (PCM-30) Model B MSP** (continued)

| CM         | MS     | IOD | Net    | PM         | CCS   | LNS | Trks  | Ext  | Appl |
|------------|--------|-----|--------|------------|-------|-----|-------|------|------|
| .          | .      | .   | .      | 1RC02      | .     | .   | .     | .    | .    |
| RC02       |        |     | SysB   | ManB       | OffL  |     | CBsy  | ISTb | InSv |
| 0 Quit     | PM     |     | 0      | 0          | 2     |     | 0     | 2    | 25   |
| 2 Post_    | RC02   |     | 0      | 0          | 0     |     | 0     | 1    | 1    |
| 3 ListSet  |        |     |        |            |       |     |       |      |      |
| 4          | RC02   |     | 0 ISTb | Links_00S: | CSide | 1,  | PSide | 1    |      |
| 5 TRNSL    | Unit0: |     | Inact  | InSv       |       |     |       |      |      |
| 6 TST      | Unit1: |     | Act    | InSv       |       |     |       |      |      |
| 7 BSY      |        |     |        |            |       |     |       |      |      |
| 8 RTS      |        |     |        |            |       |     |       |      |      |
| 9 OffL     |        |     |        |            |       |     |       |      |      |
| 10 LoadPM_ |        |     |        |            |       |     |       |      |      |
| 11 Disp_   |        |     |        |            |       |     |       |      |      |
| 12 Next_   |        |     |        |            |       |     |       |      |      |
| 13         |        |     |        |            |       |     |       |      |      |
| 14 QueryPM |        |     |        |            |       |     |       |      |      |
| 15         |        |     |        |            |       |     |       |      |      |
| 16         |        |     |        |            |       |     |       |      |      |
| 17         |        |     |        |            |       |     |       |      |      |
| 18         |        |     |        |            |       |     |       |      |      |

- 10** The NTRX42 you are replacing should be controlling the inactive side of the RCO2.

| If NTRX42 card is on the | Do      |
|--------------------------|---------|
| active unit              | step 11 |
| inactive unit            | step 13 |

- 11** Switch the processing activity (SWACT) to the inactive unit by typing  
**>SWACT**  
 and pressing the Enter key.  
**Note:** If the system recommends using the SWACT command with the FORCE option, consult office personnel to determine if use of the FORCE option is advisable.
- 12** Confirm the system prompt by typing  
**>YES**  
 and pressing the Enter key.  
 After both units are in-service, proceed to the next step.

**At the RCE frame**

- 13** Place a sign on the active unit bearing the words *Active unit—Do not touch*. This sign should not be attached by magnets or tape.



## NTRX42

### in an RSC-S (PCM-30) Model B MSP (continued)

#### *At the MAP terminal*

- 14** Busy the inactive PM unit by typing

**> bsy unit unit\_no**

where

**unit\_no**

is the number of the inactive RCO2 unit that will be busied

Go to step 28.

- 15** Use the following information to determine where to proceed.

| If top circuit breaker of NTRX42 powers | Do      |
|-----------------------------------------|---------|
| NT6X53 or NTB72                         | step 17 |
| NT6X30                                  | step 21 |

- 16** Use the following information to determine where to proceed.

| If bottom circuit breaker of NTX42 powers | Do      |
|-------------------------------------------|---------|
| NT6X53 or NTB72                           | step 17 |
| NT6X30                                    | step 21 |

- 17** Set the MAP display to the PM level and post the LCME powered by the circuit breaker by typing

**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**

and pressing the Enter key.

where

**site**

is the name of the site at which the LCME is located

**lcme\_frame\_no**

is the number of the frame in which the LCME is located

**lcme\_no**

is the number of LCME the circuit breaker supplies power to

*Example of a MAP display:*



**NTRX42**  
**in an RSC-S (PCM-30) Model B MSP** (continued)

```
CM MS IOD Net PM CCS LNS Trks Ext Appl
. . . . 1LCME
LCME
0 Quit PM 4 1 10 3 3 130
2 Post_ LCME 1 1 5 0 1 9
3
4 SwRg LCME RemL 00 0 ISTb Links_00S: CSide 1
5 TrnsL Unit-0: InSv Mtce TakeOver /RG: 0
6 Tst Unit-1: ManB Mtce /RG: 0
7 Bsy 11 11 11 RG:Pref:0 InSv
8 RTS Drwr: 01 23 45 67 89 01 23 45 Stby:1 InSv
9 OffL
10 LoadPM
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18
```

- 19

An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
and pressing the Enter key.
- 20

Use the following information to determine where to proceed.

| If                                                                                                    | Do      |
|-------------------------------------------------------------------------------------------------------|---------|
| circuits associated with bottom circuit breaker of NTRX42 have not been busied or otherwise addressed | step 16 |
| circuits associated with both circuit breakers of NTRX42 have been busied or otherwise addressed      | step 28 |
- 21

Set the MAP display to the PM level and post the LCME in the same frame as the circuit breaker by typing  
**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**  
and pressing the Enter key.  
*where*

NTRX42  
in an RSC-S (PCM-30) Model B MSP (continued)

- site is the name of the site at which the LCME is located
- lcme\_frame\_no is the number of the frame in which the LCME is located
- lcme\_no is the number of the LCME in the same frame as the circuit breaker

Example of a MAP display:

| CM   | MS      | IOD     | Net                     | PM   | CCS      | LNS        | Trks     | Ext    | Appl |
|------|---------|---------|-------------------------|------|----------|------------|----------|--------|------|
| LCME | .       | .       | SysB                    | ManB | .        | OffL       | CBsy     | ISTb   | InSv |
| 0    | Quit    | PM      | 4                       | 0    |          | 10         | 3        | 3      | 130  |
| 2    | Post_   | LCME    | 1                       | 0    |          | 5          | 0        | 1      | 9    |
| 3    |         |         |                         |      |          |            |          |        |      |
| 4    | Swrg_   | LCME    | RemL                    | 00 0 | ISTb     | Links_00S: | CSide    | 1      |      |
| 5    | Trnsl_  | Unit-0: | InSv                    |      |          |            | /RG:     | 0      |      |
| 6    | Tst_    | Unit-1: | InSv                    |      |          |            | /RG:     | 0      |      |
| 7    | Bsy_    |         |                         |      | 11 11 11 |            | RG:Pref: | 0 InSv |      |
| 8    | RTS_    | Drwr:   | 01 23 45 67 89 01 23 45 |      |          |            | Stby:    | 1 InSv |      |
| 9    | OffL_   |         | .. .. .                 |      |          |            |          |        |      |
| 10   | LoadPM_ |         |                         |      |          |            |          |        |      |
| 11   | Disp_   |         |                         |      |          |            |          |        |      |
| 12   | Next_   |         |                         |      |          |            |          |        |      |
| 13   |         |         |                         |      |          |            |          |        |      |
| 14   | QueryPM |         |                         |      |          |            |          |        |      |
| 15   |         |         |                         |      |          |            |          |        |      |
| 16   |         |         |                         |      |          |            |          |        |      |
| 17   |         |         |                         |      |          |            |          |        |      |
| 18   |         |         |                         |      |          |            |          |        |      |

- 22 Busy the LCME unit associated with the ringing generator by typing  
>**BSY UNIT lcme\_unit\_no**  
and pressing the Enter key.  
where  
lcme\_unit\_no is zero when the circuit breaker powers ringing generator zero, and is one when the circuit breaker powers ringing generator one  
Example of a MAP display:

## NTRX42

### in an RSC-S (PCM-30) Model B MSP (continued)

```

CM MS IOD Net PM CCS LNS Trks Ext Appl
. . . . 1LCME
LCME
0 Quit PM 4 1 10 3 3 130
2 Post_ LCME 1 1 5 0 1 9
3
4 SwRg LCME RemL 00 0 ISTb Links_00S: CSide 1
5 TrnsL Unit-0: InSv Mtce TakeOver /RG: 0
6 Tst Unit-1: ManB Mtce /RG: 0
7 Bsy
8 RTS Drwr: 01 23 45 67 89 01 23 45 RG:Pref:0 InSv
9 OffL
10 LoadPM
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18

```

- 23** An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
 and pressing the Enter key.
- 24** If there is a second LCME in the same frame as the circuit breaker, post the  
 other LCME by typing  
**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_unit\_no**  
 and pressing the Enter key.  
*where*  
**site**  
 is the name of the site at which the LCME is located  
**lcme\_frame\_no**  
 is the number of the frame in which the LCME is located  
**lcme\_unit\_no**  
 is the number of the LCME in the same frame as the circuit breaker
- 25** Busy the LCME unit associated with the ringing generator by typing  
**>BSY UNIT lcme\_unit\_no**  
 and pressing the Enter key.  
*where*  
**lcme\_unit\_no**  
 is zero when the circuit breaker powers ringing generator zero, and is  
 one when the circuit breaker powers ringing generator one

## NTRX42

### in an RSC-S (PCM-30) Model B MSP (continued)

---

- 26 An alarm may sound. If this occurs, silence the alarm by typing  
>**SIL**  
and pressing the Enter key.
- 27 Use the following information to determine where to proceed.

| If                                                                                                    | Do      |
|-------------------------------------------------------------------------------------------------------|---------|
| circuits associated with bottom circuit breaker of NTRX42 have not been busied or otherwise addressed | step 16 |
| circuits associated with both circuit breakers of NTRX42 have been busied or otherwise addressed      | step 28 |

#### ***At the front panel of the cabinet***

- 28 Verify and switch off the associated power converter.  
**Note:** This step does not apply to the CPDC and CRME.
- 29 Determine the faulty circuit breaker on the MSP and switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.
- 30 An alarm may sound. If this occurs, silence the alarm by typing  
>**SIL**  
and pressing the Enter key.
- 31 Power down and safety tag the ABS fuse in the power room.  
**Note:** This step applies to the CPDC and CRME.
- 32 Pull out the corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the connectors on the rear of the MSP.  
**Note:** This step does not apply to the CMIS, CPDC, and CRME.

## NTRX42 in an RSC-S (PCM-30) Model B MSP (continued)

*At the rear panel of the cabinet*

33



### DANGER

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



### DANGER

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.
3. Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Put on a wrist strap.

34

Open the rear door and locate the NTRX42 circuit card. Verify the card location by checking the slot number stamped into the chassis.

- a Note the wire color and the location to facilitate re-connection.

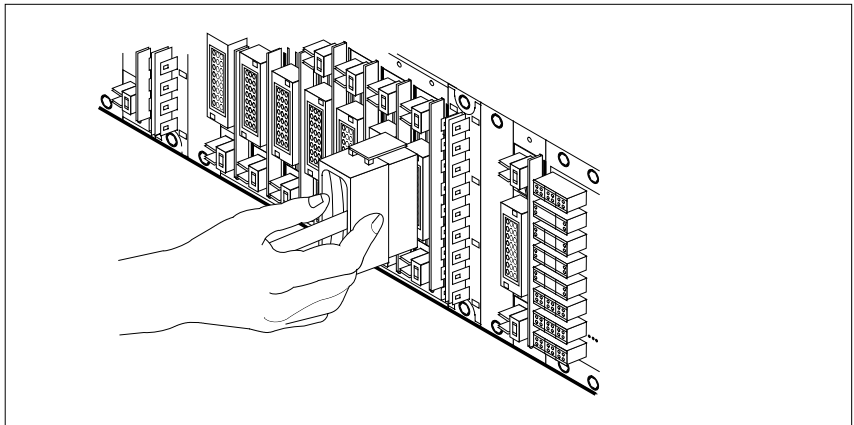

- b Safety tag the front of the circuit breaker to indicate maintenance activity.
- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect and tag the smaller black power connectors located below the larger blue power connector.

## **NTRX42**

### **in an RSC-S (PCM-30) Model B MSP (continued)**


---

Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 35** Disconnect and tag any jumper connectors and cables that may be present and set them aside for use on the replacement unit.

#### ***At the front panel of the cabinet***


- 36** Remove the NTRX42 card.
  - a** Disengage the spring-loaded captive screw at the top of the circuit card.
  - b** Grasping the top and bottom of unit, gently pull the circuit card toward you until it clears the shelf.
  - c** Replace the circuit card. Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card being replaced.
  - d** Tighten the spring-loaded captive screw at the top of the circuit card.

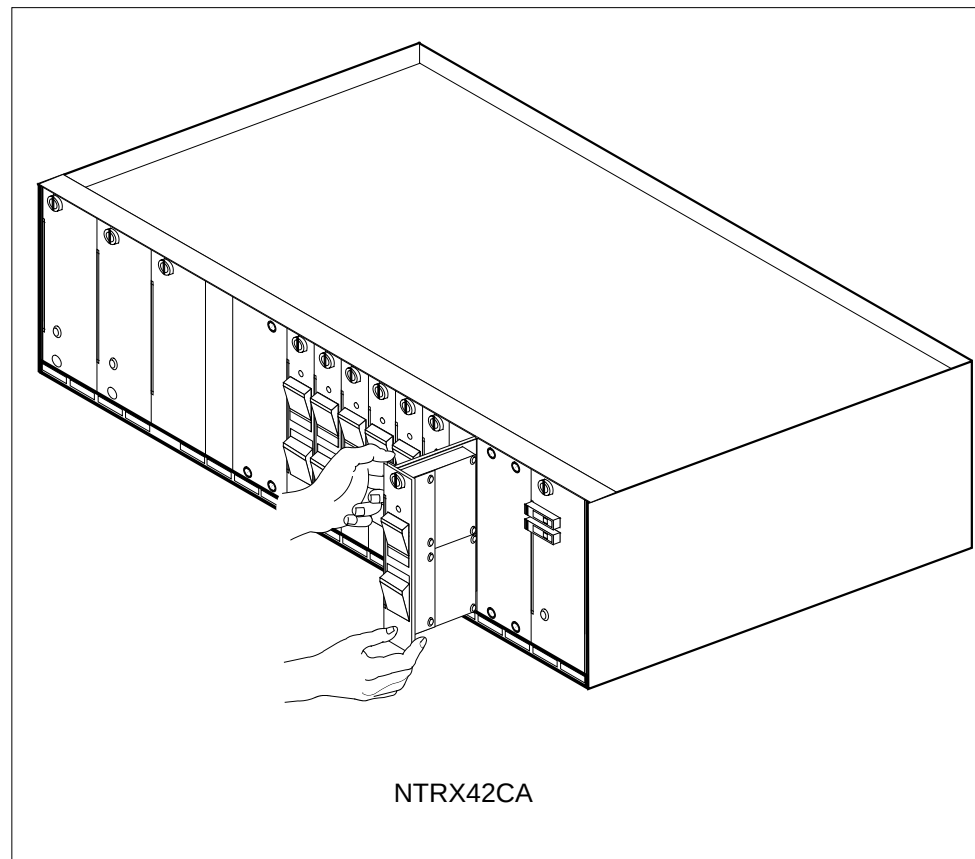




## NTRX42 in an RSC-S (PCM-30) Model B MSP (continued)

- 37 Replace any jumper connectors and cables removed in step 35. Reinsert the power connectors at the rear of the circuit card.

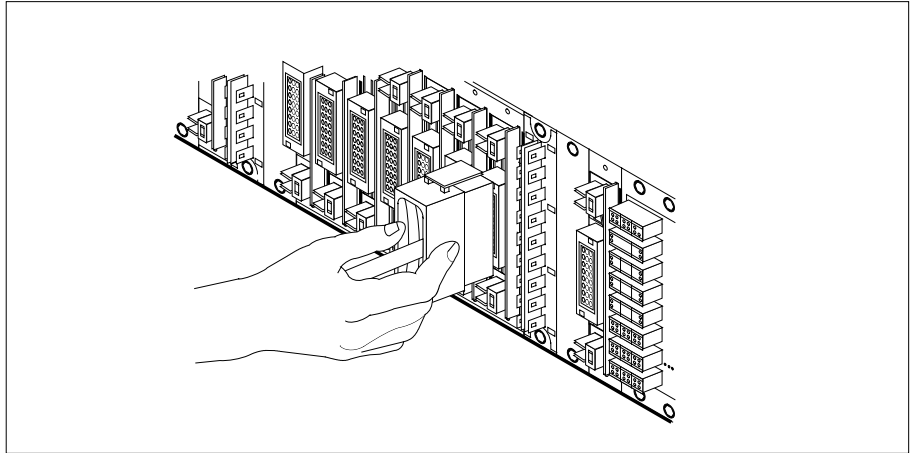

- 38 Push in the corresponding line shelf. This step does *not* apply to the CMIS, CPDC, and CRME.

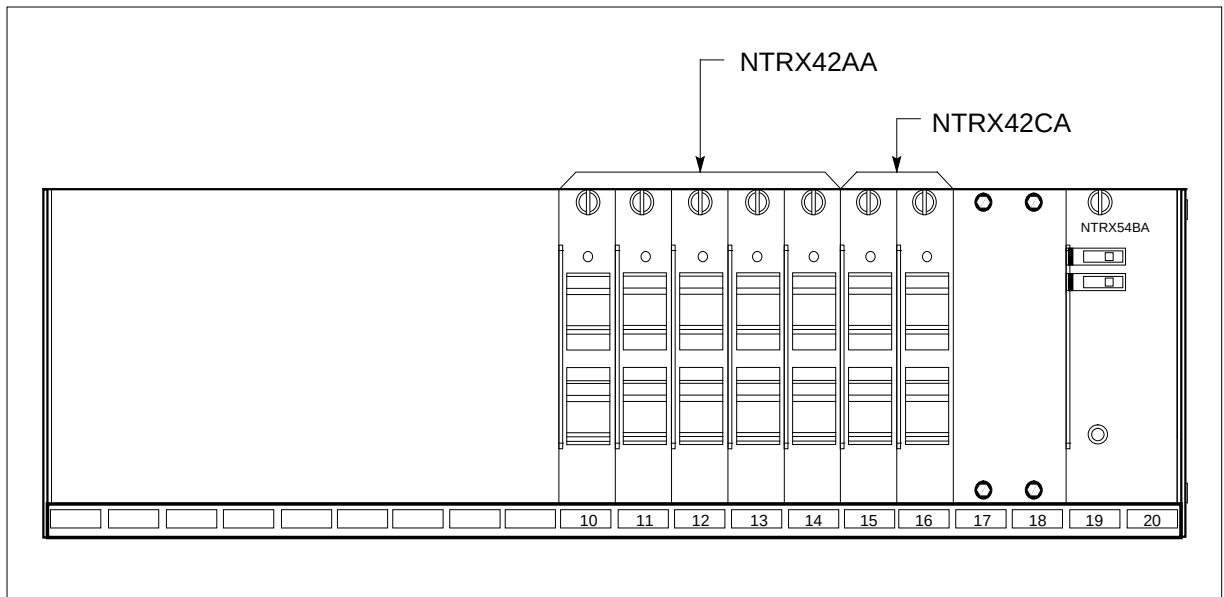

- 39 Apply the appropriate label from the spare parts on the replacement NTRX42 circuit card.
- 40 Power up the ABS fuse in the power room, and remove the safety tag from the ABS fuse.
- Note:** This step applies to the CPDC and CRME.
- 41 Switch on the associated power converter.
- Note:** This step does not apply to the CPDC and CRME.

## NTRX42

### in an RSC-S (PCM-30) Model B MSP (continued)

- 42 Reset the circuit breakers to ON (upward). If any card controlled by this breaker includes a reset switch, hold the RESET button downward while setting the circuit breaker to the ON position.
- 43 Remove the safety tag from the front of the circuit breaker.
- 44 Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.
- 45 Read the following table to determine where to proceed.
- | If circuit breakers power the                   | Do      |
|-------------------------------------------------|---------|
| LCME shelf containing 6X30, 6X53, or BX72 cards | step 46 |
| RCO2 shelf containing MX72 card                 | step 51 |
| RMM shelf containing 2X09 or 2X06 cards         | step 56 |
- 46 Test the LCME unit by typing  
**>TST UNIT lcme\_unit\_no**  
and pressing the Enter key.  
*where*  
**lcme\_unit\_no**  
is the number of the LCME unit busied
- | If TST | Do      |
|--------|---------|
| passed | step 47 |
| failed | step 65 |
- 47 Return the LCME unit to service by typing  
**>RTS UNIT lcme\_unit\_no**  
and pressing the Enter key.  
*where*  
**lcme\_unit\_no**  
is the number of the LCME unit tested in step 46
- | If RTS | Do      |
|--------|---------|
| passed | step 48 |
| failed | step 65 |
- 48 Send any faulty cards for repair according to local procedure.

## NTRX42

### in an RSC-S (PCM-30) Model B MSP (continued)

**49** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.

**50** Go to step 66.

**51** Test the RCO2 unit by typing  
**>TST UNIT rco2\_unit\_no**

and pressing the Enter key.

where

**rco2\_unit\_no**

is the number of the RCO2 unit

| If TST | Do      |
|--------|---------|
| passed | step 52 |
| failed | step 65 |

**52** Return the RCO2 unit to service by typing

**>RTS UNIT rco2\_unit\_no**

and pressing the Enter key.

where

**rco2\_unit\_no**

is the number of the RCO2 unit tested in step 51

| If RTS | Do      |
|--------|---------|
| passed | step 53 |
| failed | step 65 |

**53** Send any faulty cards for repair according to local procedure.

**54** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card.

**55** Go to step 66.

#### **At the MAP terminal**

**56** Determine the system load version.

| If system load module is | Do      |
|--------------------------|---------|
| version 1                | step 57 |
| version 2                | step 58 |

**57** List the loadfile in the directory by typing

**> DSKUT;listvol d000 all**

**NTRX42****in an RSC-S (PCM-30) Model B MSP** (continued)

and pressing the Enter key.

or

**> *diskut;listvol d010 all***

and pressing the Enter key.

Local operating company policy determines which disk, D000 or D010, the loadfile will be on.

Proceed to step 59.

- 58** List the loadfile in the directory by typing

**>DISKUT;LV S00d**

**>LF**

and pressing the Enter key.

or

**> *diskut;LV s01d***

**>LF**

and pressing the Enter key.

- 59** Leave the disk utility by entering

**>QUIT**

and pressing the Enter key.

- 60** Reload the RMM by entering

**>LOADPM**

and pressing the Enter key.

| If LOAD | Do      |
|---------|---------|
| passed  | step 61 |
| failed  | step 65 |

- 61** Test the RMM unit by typing

**>TST UNIT rmm\_unit\_no**

and pressing the Enter key.

where

**rmm\_unit\_no**

is the number of the RCO2 unit

| If RTS | Do      |
|--------|---------|
| passed | step 62 |
| failed | step 65 |

---

**NTRX42**  
**in an RSC-S (PCM-30) Model B MSP (end)**

---

- 62** Return the RMM shelf to service by typing

**>RTS UNIT rmm\_unit\_no**

and pressing the Enter key.

where

**rmm\_unit\_no**

is the number of the RCO2 unit tested in step 61

---

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 63   |
| failed        | step 65   |

---

- 63** Send any faulty cards for repair according to local procedure.

- 64** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 66.

- 65** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.

- 66** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX42 in an SMA2 MSP**

---

### **Application**

Use this procedure to replace an NTRX42 card in a modular supervisory panel (MSP) located in a:

- cabinetized multi-vendor interface (CMVI)
- multi-vendor interface equipment frame (MVIE)
- multi-vendor double density frame (MVDD)

| PEC    | Suffixes | Name                   |
|--------|----------|------------------------|
| NTRX42 | AA       | Circuit Breaker Module |

### **Common procedures**

The common returning a card procedure is referenced in this procedure.

Do not go to a common procedure unless directed to do so in the step-action procedure.

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.


The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

---

**NTRX42**  
**in an SMA2 MSP (continued)**

---


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

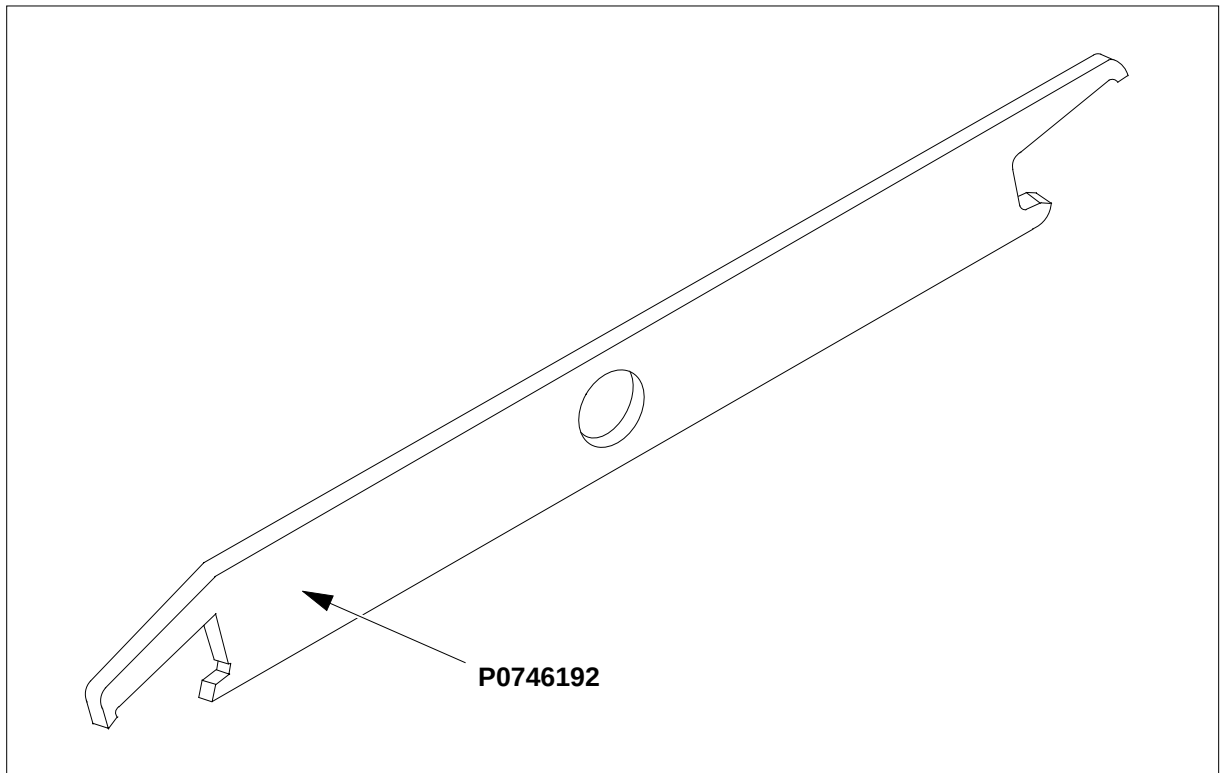**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure.

## NTRX42 in an SMA2 MSP (continued)

### Summary of replacing an NTRX42 card in an SMA2 MSP

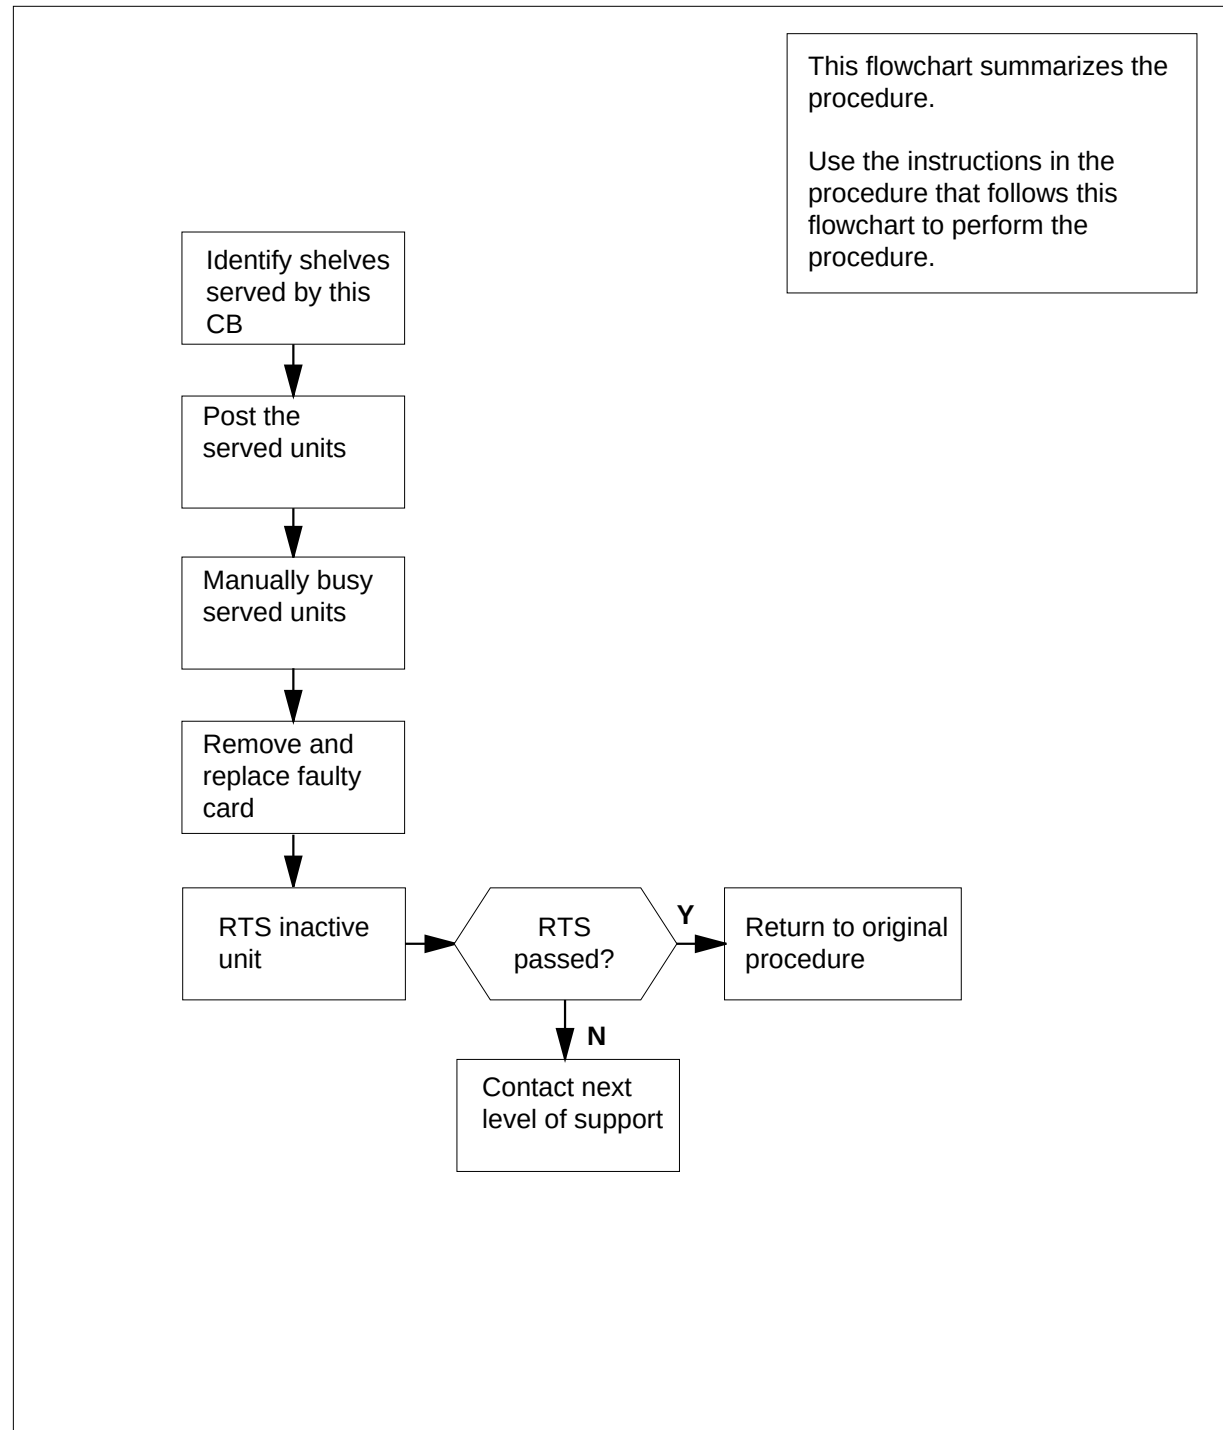



**NTRX42**  
**in an SMA2 MSP** (continued)

---

**Replacing an NTRX42 card in an SMA2 MSP**

***At your current location***


- 1** Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2** Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

***At the front panel of the frame or cabinet***

- 3** Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.


## NTRX42 in an SMA2 MSP (continued)

MSP in a CMVI cabinet or MVIE frame with an exrenction shelf

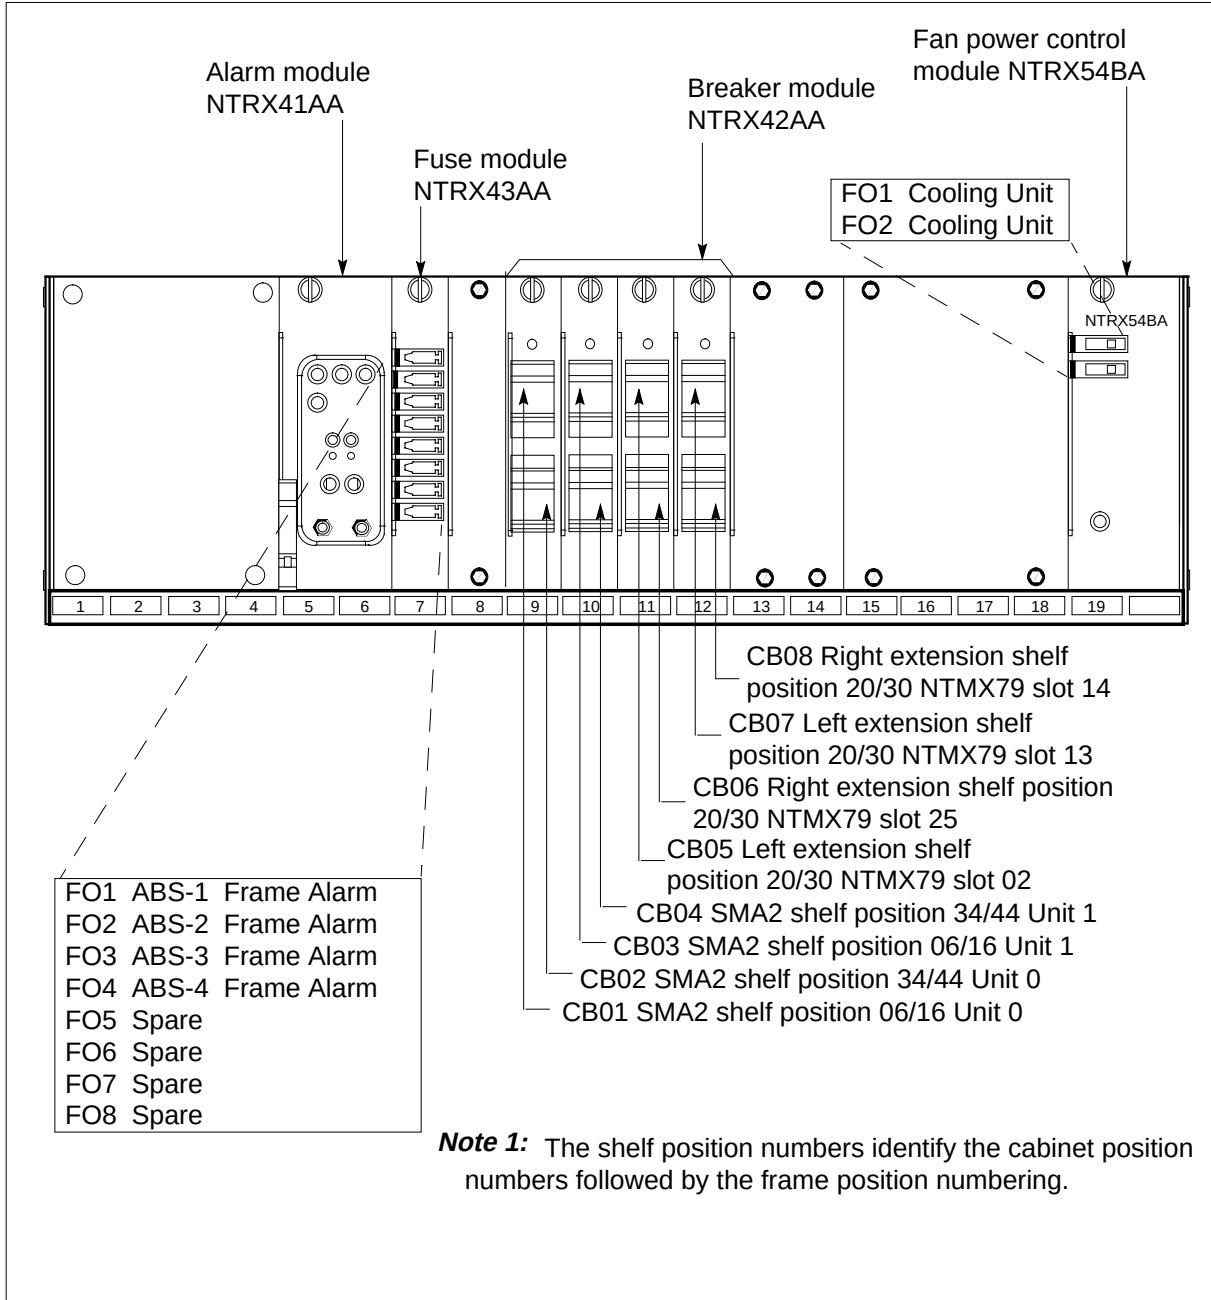

## NTRX42 in an SMA2 MSP (continued)

### MSP shelf for MVDD frame (without extension shelf)

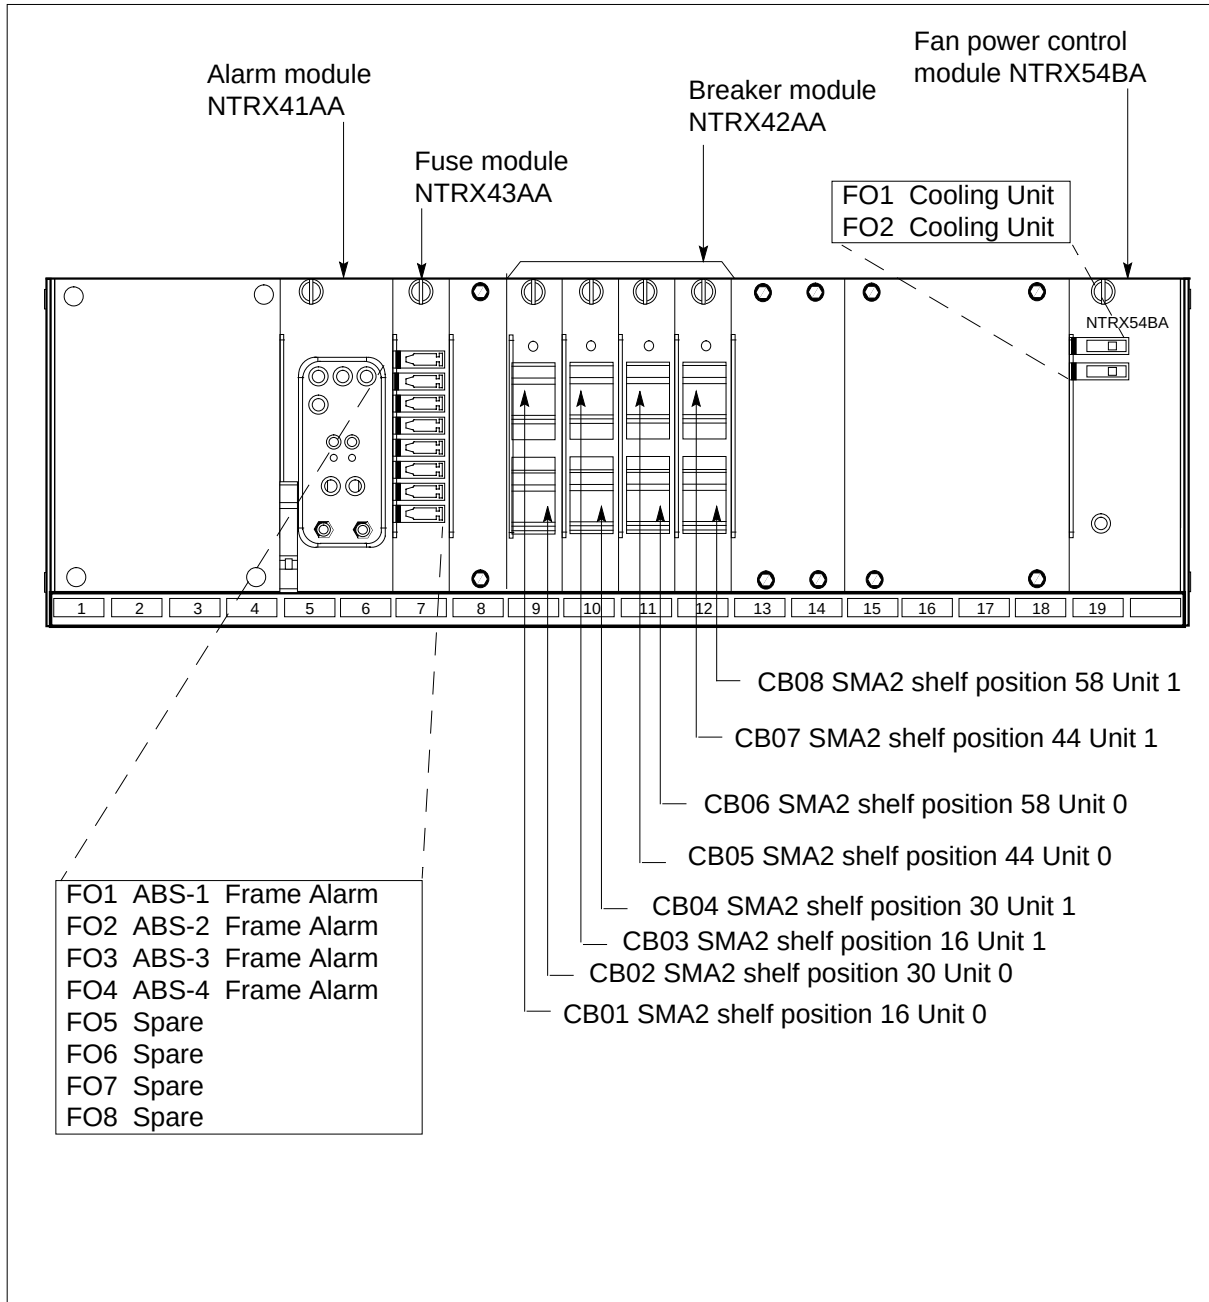

- 4** Use the previous MSP figures and the breaker designation label to identify which cards are serviced by each circuit breaker (CB). Many RX42 modules service two separate devices (or units); both units must be powered down prior to removal of the associated RX42 circuit card.

## NTRX42 in an SMA2 MSP (continued)

### *At the MAP terminal*

- 5 Access the PM level and post the SMA2 by typing

**>MAPCI;MTC;PM;POST sma2\_no**

and pressing the Enter key.

where

**sma2\_no**

is the number of the SMA2 unit that will be busied.

*Example of a MAP display*

|        |       |      |            |       |          |      |
|--------|-------|------|------------|-------|----------|------|
| SMA2   | SysB  | ManB | OffL       | CBsy  | ISTb     | InSv |
| PM     | 3     | 0    | 1          | 0     | 2        | 13   |
| SMA2   | 0     | 0    | 0          | 0     | 1        | 7    |
| SMA2   | 0     | ISTb | Links_00S: | CSide | 0, PSide | 0    |
| Unit0: | Act   | InSv |            |       |          |      |
| Unit1: | InAct | IsTb |            |       |          |      |

- 6 The NTRX42 you are replacing should be controlling the INACTIVE side of the SMA2.

| If NTRX42 card is on the | Do      |
|--------------------------|---------|
| active unit              | step 7  |
| inactive unit            | step 11 |

- 7 Switch the processing activity (SWACT) to the INACTIVE unit by typing

**>SWACT**

and pressing the Enter key.

A confirmation prompt for the SWACT command is displayed at the MAP terminal

| If prompt indicates          | Do     |
|------------------------------|--------|
| cannot continue at this time | step 8 |
| can continue at this time    | step 9 |

- 8 Reject the prompt to SWACT of the units by typing

**>NO**

and pressing the Enter key.

The system discontinues the SWACT.

- 9 Confirm the system prompt by typing

**>YES**

and pressing the Enter key.

## NTRX42 in an SMA2 MSP (continued)

The system runs a pre-SWACT audit to determine the ability of the inactive unit to accept activity reliably.

**Note:** A maintenance flag appears when maintenance tasks are in progress. Wait until the flag disappears before proceeding with the next maintenance action.

| If the message is                     | Do      |
|---------------------------------------|---------|
| SWACT passed                          | step 11 |
| SWACT failed<br>Reason: XPM SWACTback | step 10 |
| SWACT refused by<br>SWACT Controller  | step 10 |

- 10** The inactive unit could not establish two-way communication with CC and has switched activity back to the originally active unit. You must clear all faults on the inactive unit before attempting to clear the alarm condition on the active unit.

Go to step 30.

After both units are in-service proceed to the next step.

### ***At the frame or cabinet***

- 11** Place a sign on the active unit bearing the words: *Active unit-Do not touch*. This sign should not be attached by magnets or tape.

### ***At the MAP terminal***

- 12** Busy the inactive PM unit by typing

**> bsy unit unit\_no**

where

**unit\_no**

is the number of the INACTIVE SMA2 unit to be busied.

Go to step 13.

### ***At the front panel of the frame or cabinet***

- 13** Verify and switch off associated power converter.
- 14** Determine faulty circuit breaker on MSP and switch both breakers on that circuit card to the OFF position. Safety tag the front of the circuit breaker.
- 15** An alarm may sound. If this occurs, silence the alarm by typing  
**>SIL**  
and pressing the Enter key.
- 16** Power down and safety tag the ABS fuse in the power room.

## NTRX42 in an SMA2 MSP (continued)

---

*At the rear panel of the frame or cabinet*

17



### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



### **DANGER**


**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

- 1 Do not apply direct pressure to the components.
- 2 Do not force the cards into the slots.
- 3 Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Put on a wrist strap.

- 18 Open the rear door and locate the NTRX42 circuit card. Verify the card location by checking the slot number stamped into the chassis.

- a Note wire color and location to facilitate re-connection.

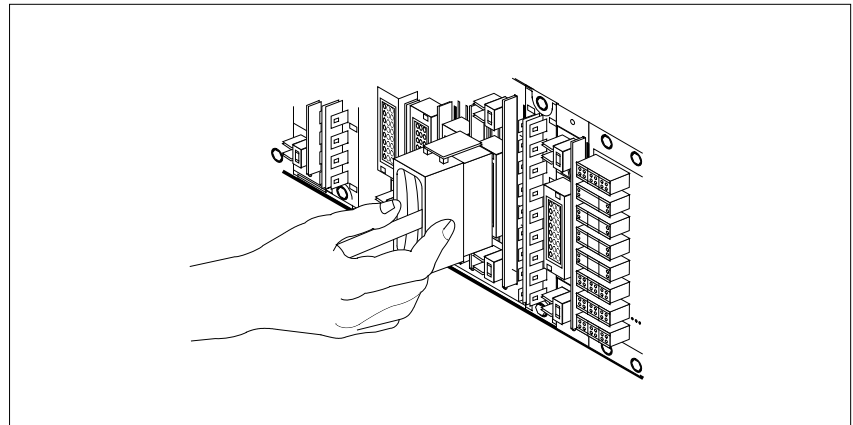

- b Safety tag the front of the circuit breaker to indicate maintenance activity.
- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect and tag the smaller black power connectors located below the larger blue power connector.


## NTRX42 in an SMA2 MSP (continued)

Manually disconnect and tag the large blue power connector. Disconnect and tag the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 19 Disconnect and tag any jumper connectors and cables which may be present and set them aside for use on the replacement unit.


### *At the front panel of the frame or cabinet*

- 20 Remove the NTRX42 card.
- a Disengage the spring-loaded captive screw at the top of the circuit card.
  - b Grasping the top and bottom of unit, gently pull the circuit card towards you until it clears the shelf.
  - c Replace the circuit card. Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card being replaced.
  - d Tighten the spring-loaded captive screw at the top of the circuit card.

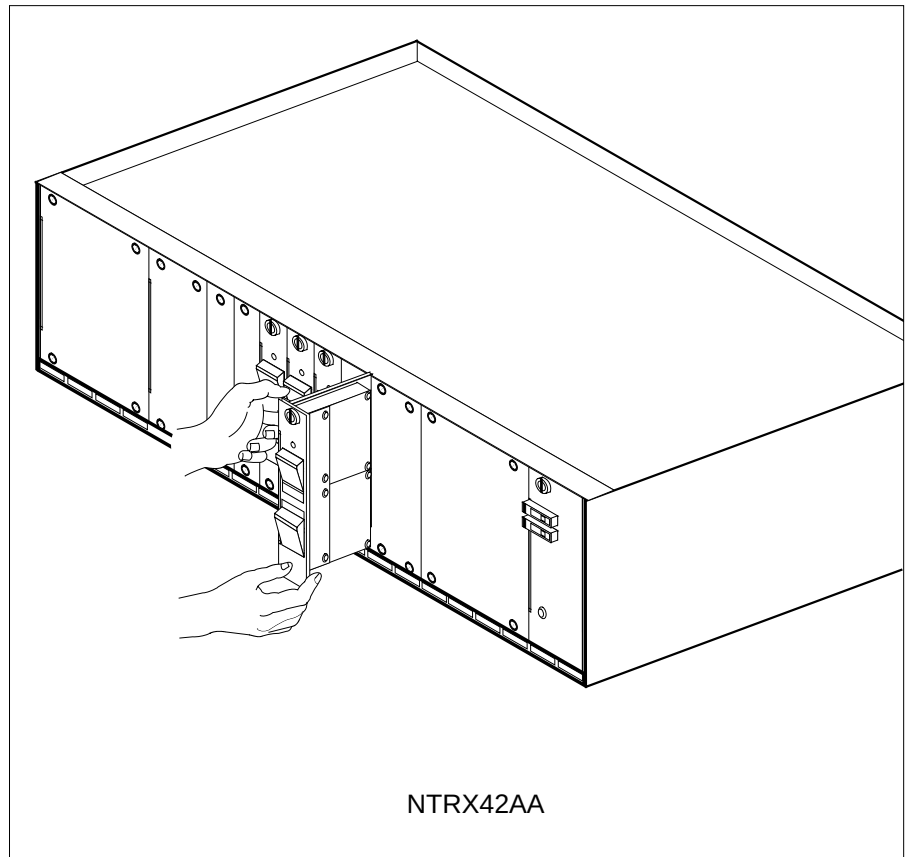


## NTRX42 in an SMA2 MSP (continued)

- 21 Replace any jumper connectors and cables removed in step 19. Reinsert the power connectors at the rear of the circuit card.

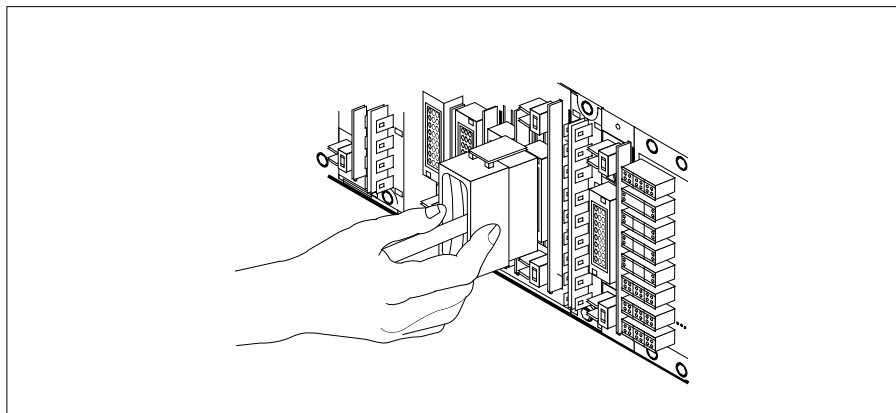

- 22 Apply appropriate label from spare parts on replacement NTRX42 circuit card.

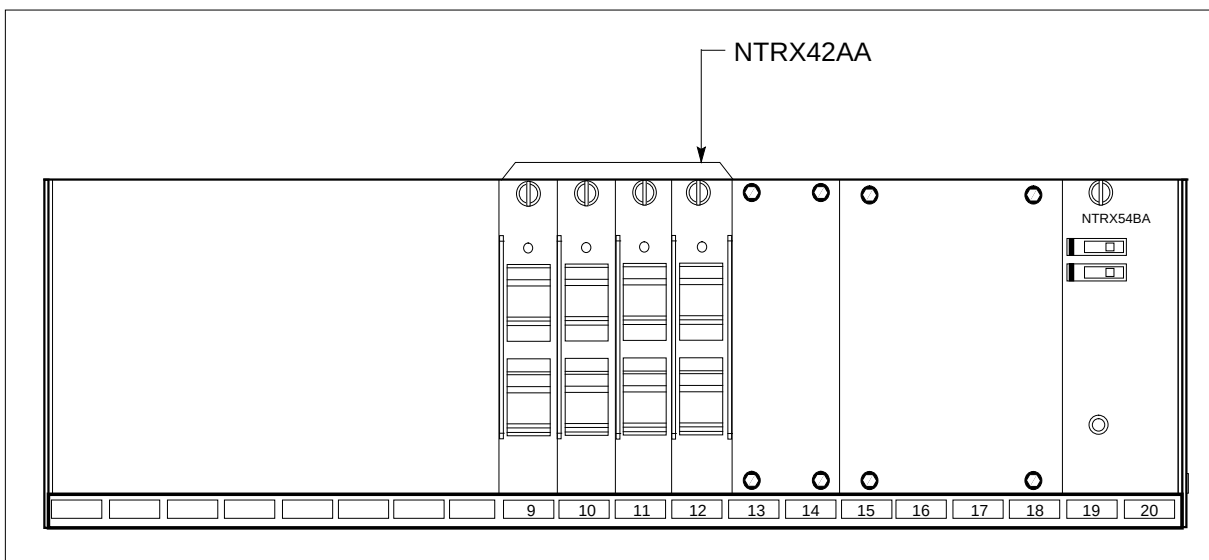

- 23 Power up the ABS fuse in the power room, remove safety tag from ABS fuse.
- 24 Switch on associated power converter.
- 25 Reset the circuit breakers to ON (upward). If any card controlled by this breaker includes a reset switch, hold the RESET button downward while setting the circuit breaker to the ON position.
- 26 Remove safety tag from front of circuit breaker.
- 27 Close the front cover of the MSP. Swing the cover up to the closed position and lock the two cover latches.



**NTRX42**  
**in an SMA2 MSP (end)**

- 28** Return the SMA2 unit to service by typing  
**>RTS UNIT sma2\_unit\_no**  
and pressing the Enter key.  
*where*  
**sma2\_unit\_no**  
is the number of the SMA2 unit busied in step 12
- | If RTS | Do      |
|--------|---------|
| passed | step 29 |
| failed | step 30 |
- 29** Go to the common returning a card procedure in this document.  
Go to step 31.
- 30** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 31** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX43 in an IOPAC MSP**

---

### **Application**

Use this procedure to replace the following card in an IOPAC MSP.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b> |
|------------|-----------------|-------------|
| NTRX43     | AA              | Fuse Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules.

This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector.


As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

The following is an illustration of the connector removal tool.

## **NTRX43** **in an IOPAC MSP** (continued)

### **Connector removal tool**

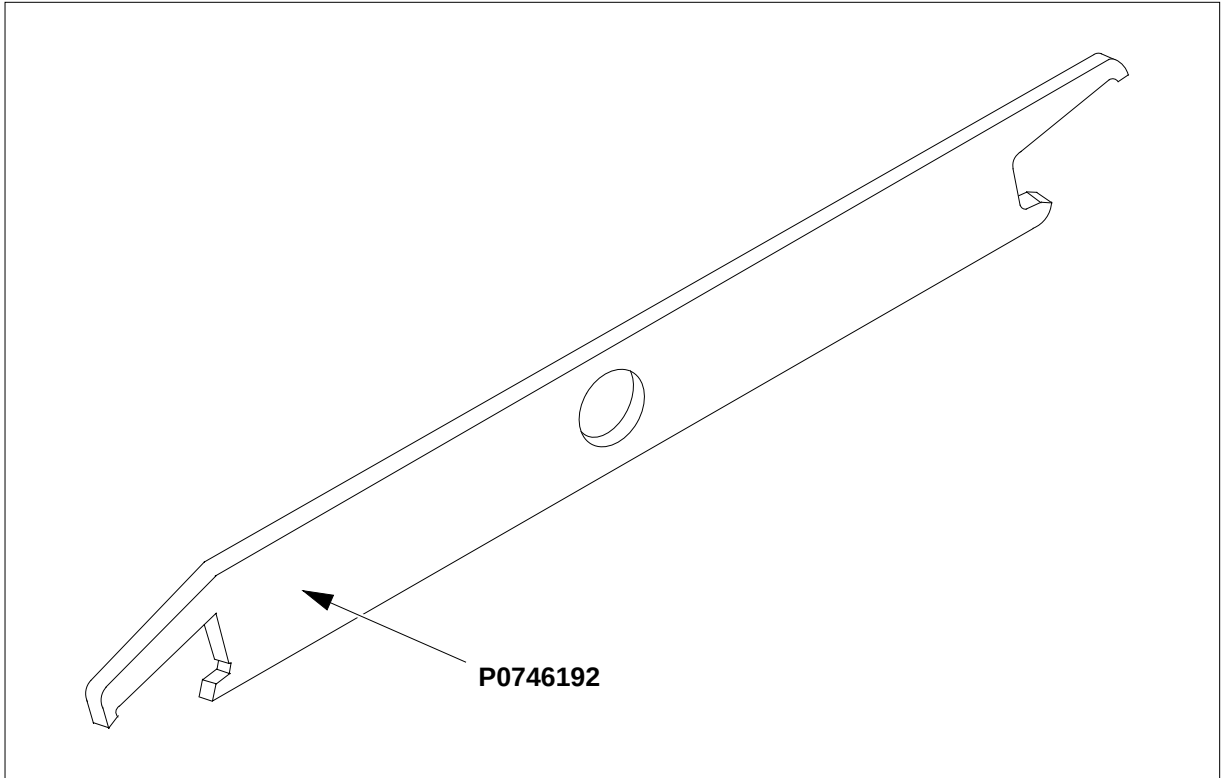


The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX43 in an IOPAC MSP (continued)

---

### Summary of card replacement procedure for an NTRX43 card in MSP

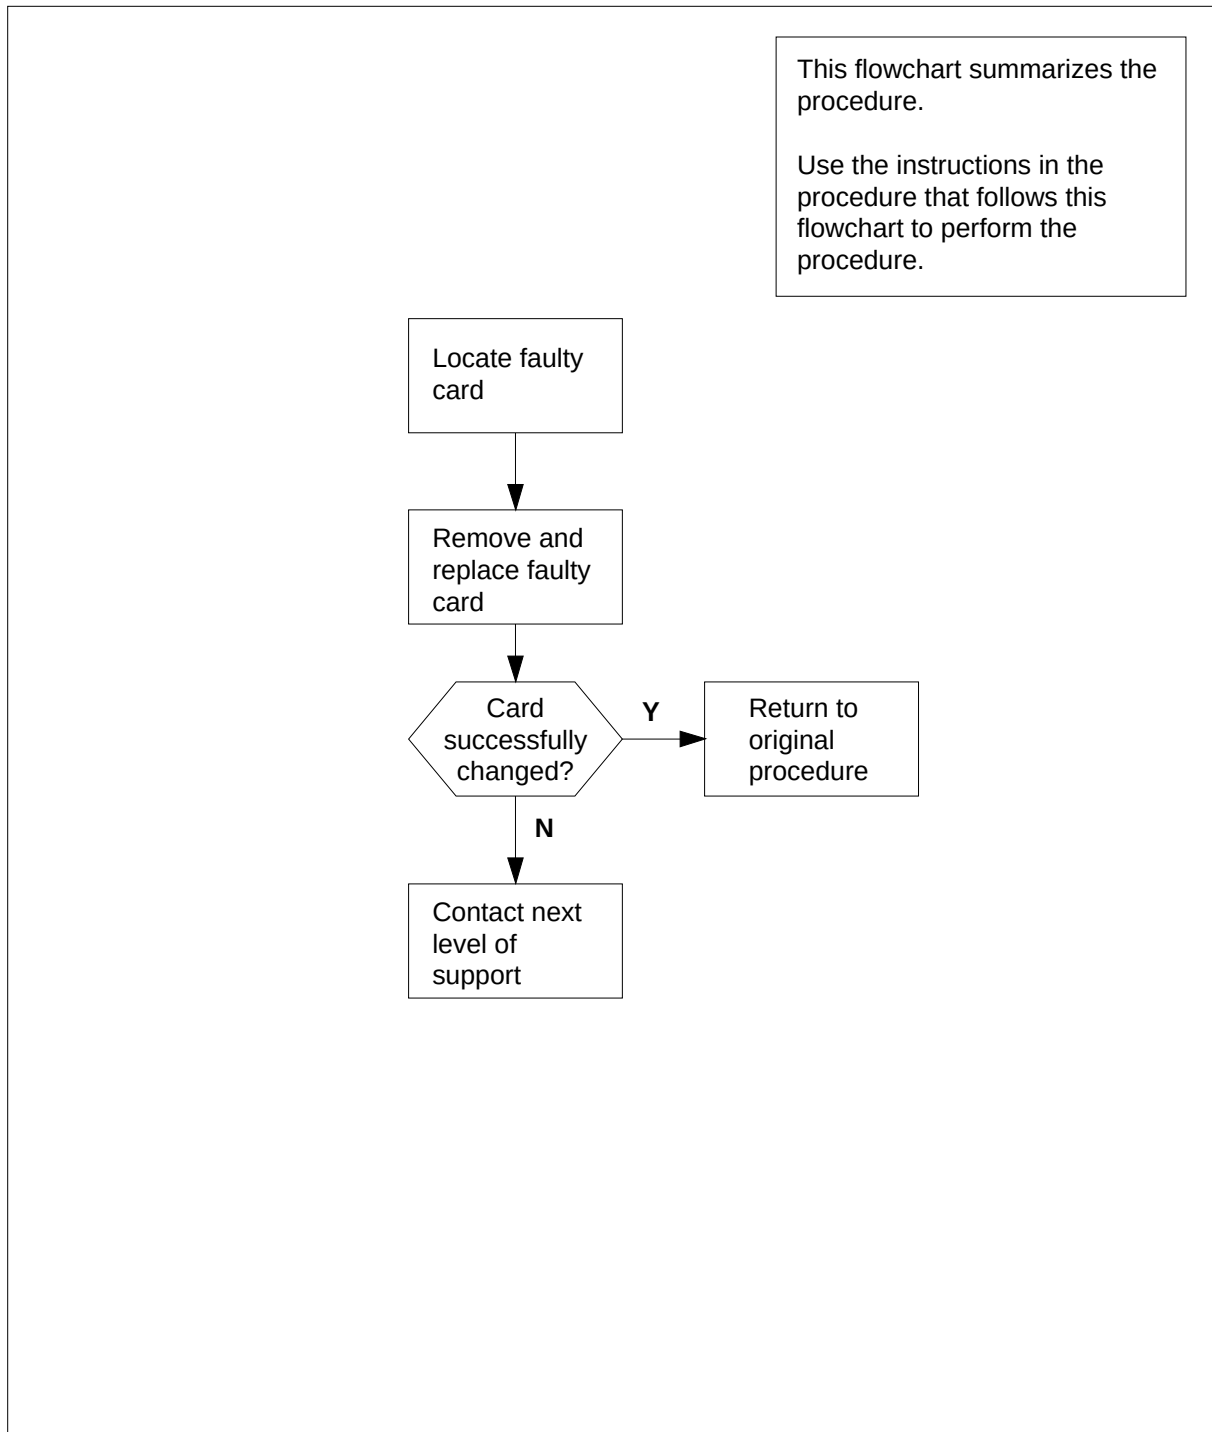

## NTRX43 in an IOPAC MSP (continued)

### Replacing an NTRX43 in an MSP

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front of the MSP*


3



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap connected to a wrist strap grounding point to protect equipment against damage caused by static electricity.

Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

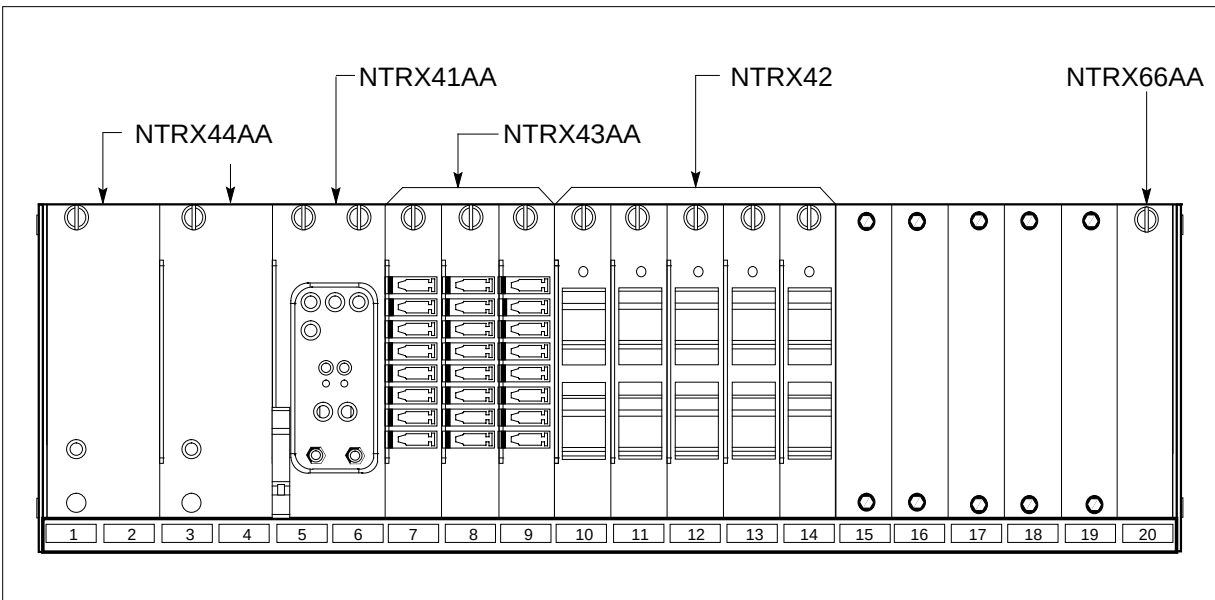

## NTRX43 in an IOPAC MSP (continued)

---

*At the rear of the MSP*

4




### **DANGER**

**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage could result.

Put on a wrist strap.

Before removing fuses from fuse module, observe fuse colors, values, and positions. Remove fuses from fuse module. When servicing the fuse module, fans may shut down, alarms may be activated, and there may be a loss of alarms.

- 5 Disconnect the NTRX43 circuit card as shown in the following figure.
- Swing the frame out and locate the back of the card to be replaced.
  - Note wire color and location to facilitate reconnection.

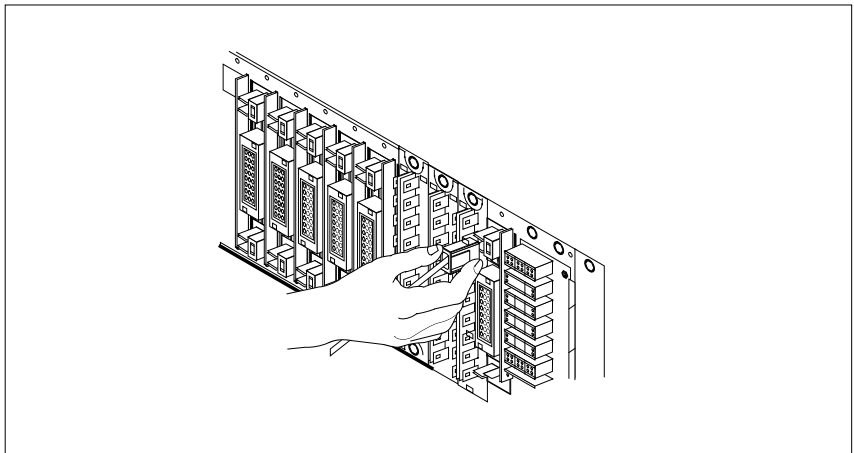

- Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.
- Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- Remove and tag jumper connectors and cables, which may be present on the back of the circuit card and save for use on the replacement circuit card.

## NTRX43 in an IOPAC MSP (continued)

*At the front of the MSP*

6




### DANGER

**Risk of injury from high energy levels, equipment damage**  
When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.

Remove the NTRX43 circuit card as shown in the following figure.

- a Disengage the captive screw at the top of the circuit card.
- b Gently pull the circuit card towards you until it clears the shelf.

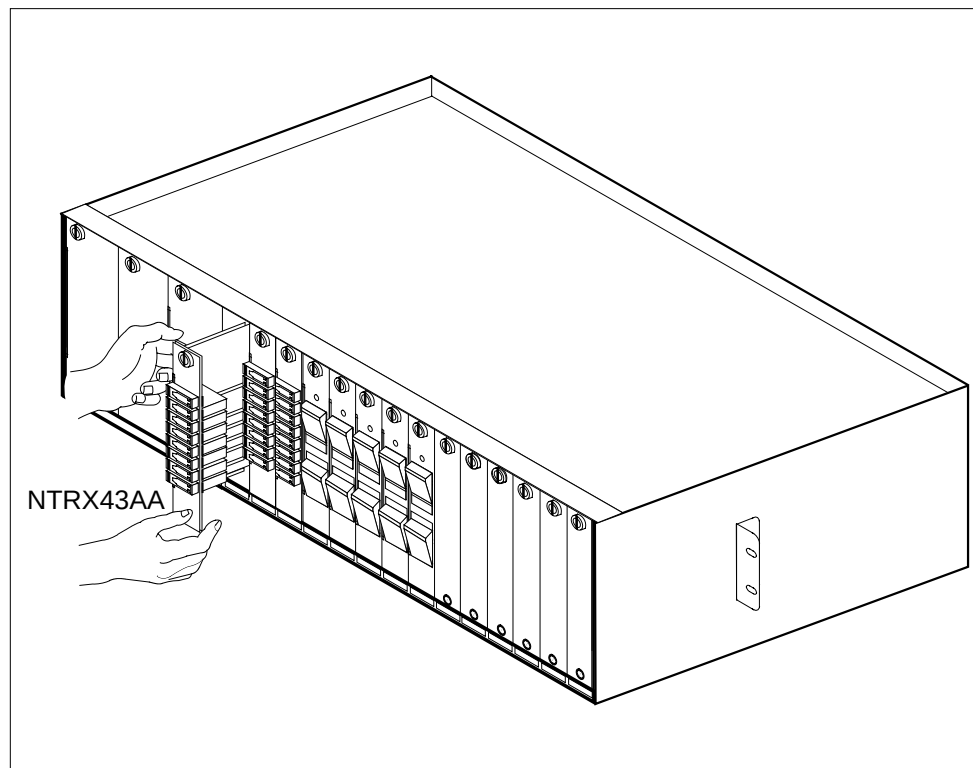


- 7 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the captive screw at the top of the circuit card.

## NTRX43 in an IOPAC MSP (end)

---

### *At the rear of the MSP*

- 8 Locate the replaced circuit card and reattach the power connectors.  
Install the jumper connectors and cables removed in step 5 e.e onto the replacement circuit card.

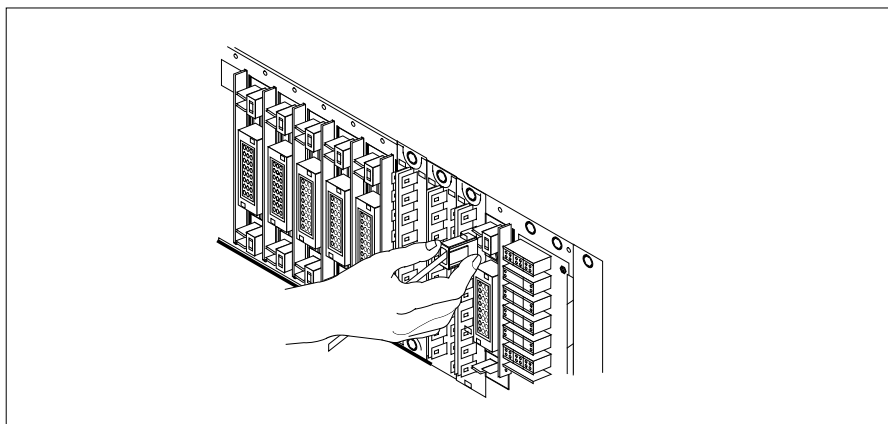

### *At the front of the MSP:*

- 9 Replace fuses removed in step 4.

| If Fuses        | Do      |
|-----------------|---------|
| do not blow     | step 10 |
| blow (protrude) | step 12 |

- 10 Send any faulty cards for repair according to local procedure.
- 11 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 13.
- 12 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 13 You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure, and continue as directed.



---

## NTRX43 in an OPAC MSP

---

### Application

Use this procedure to replace NTRX43 card in an MSP.

| PEC    | Suffixes | Name        |
|--------|----------|-------------|
| NTRX43 | AA       | Fuse Module |

### Common procedures

None

### Action

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules.

This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector.

As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

The following is an illustration of the connector removal tool.


## **NTRX43** **in an OPAC MSP (continued)**

---

### **Connector removal tool**

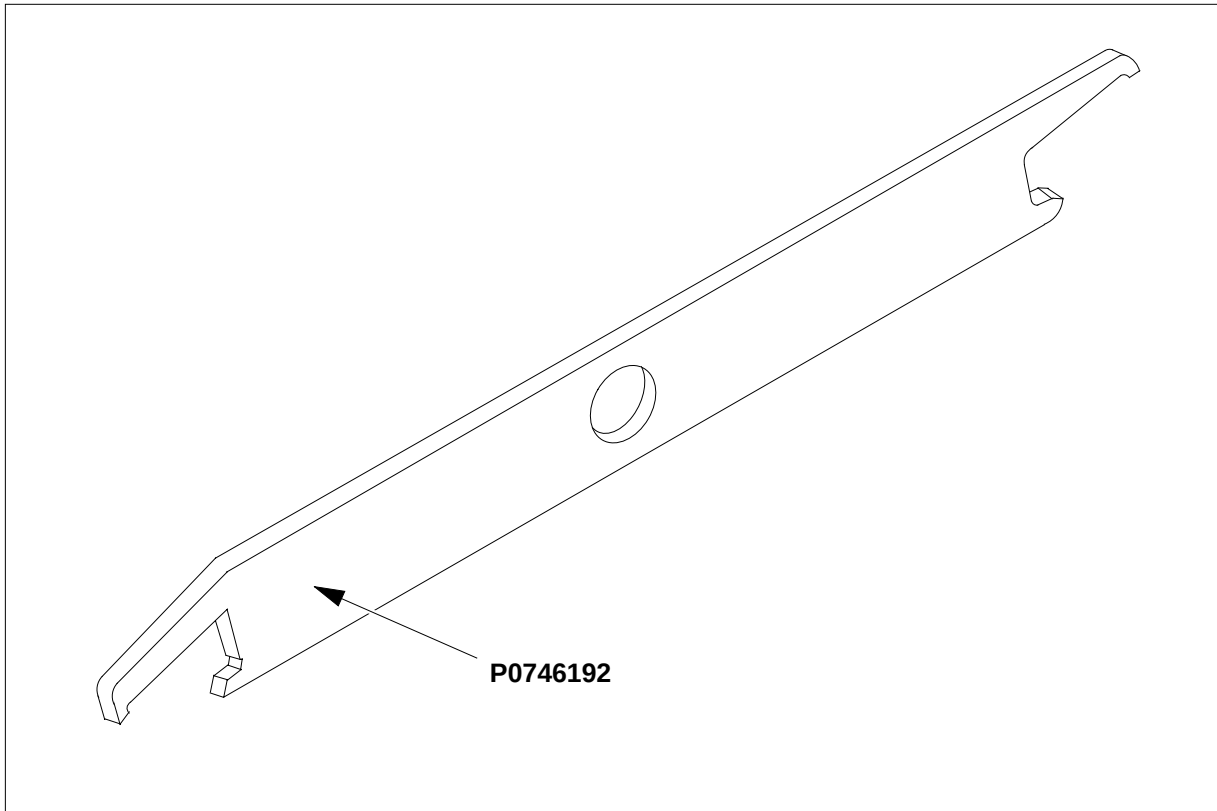

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

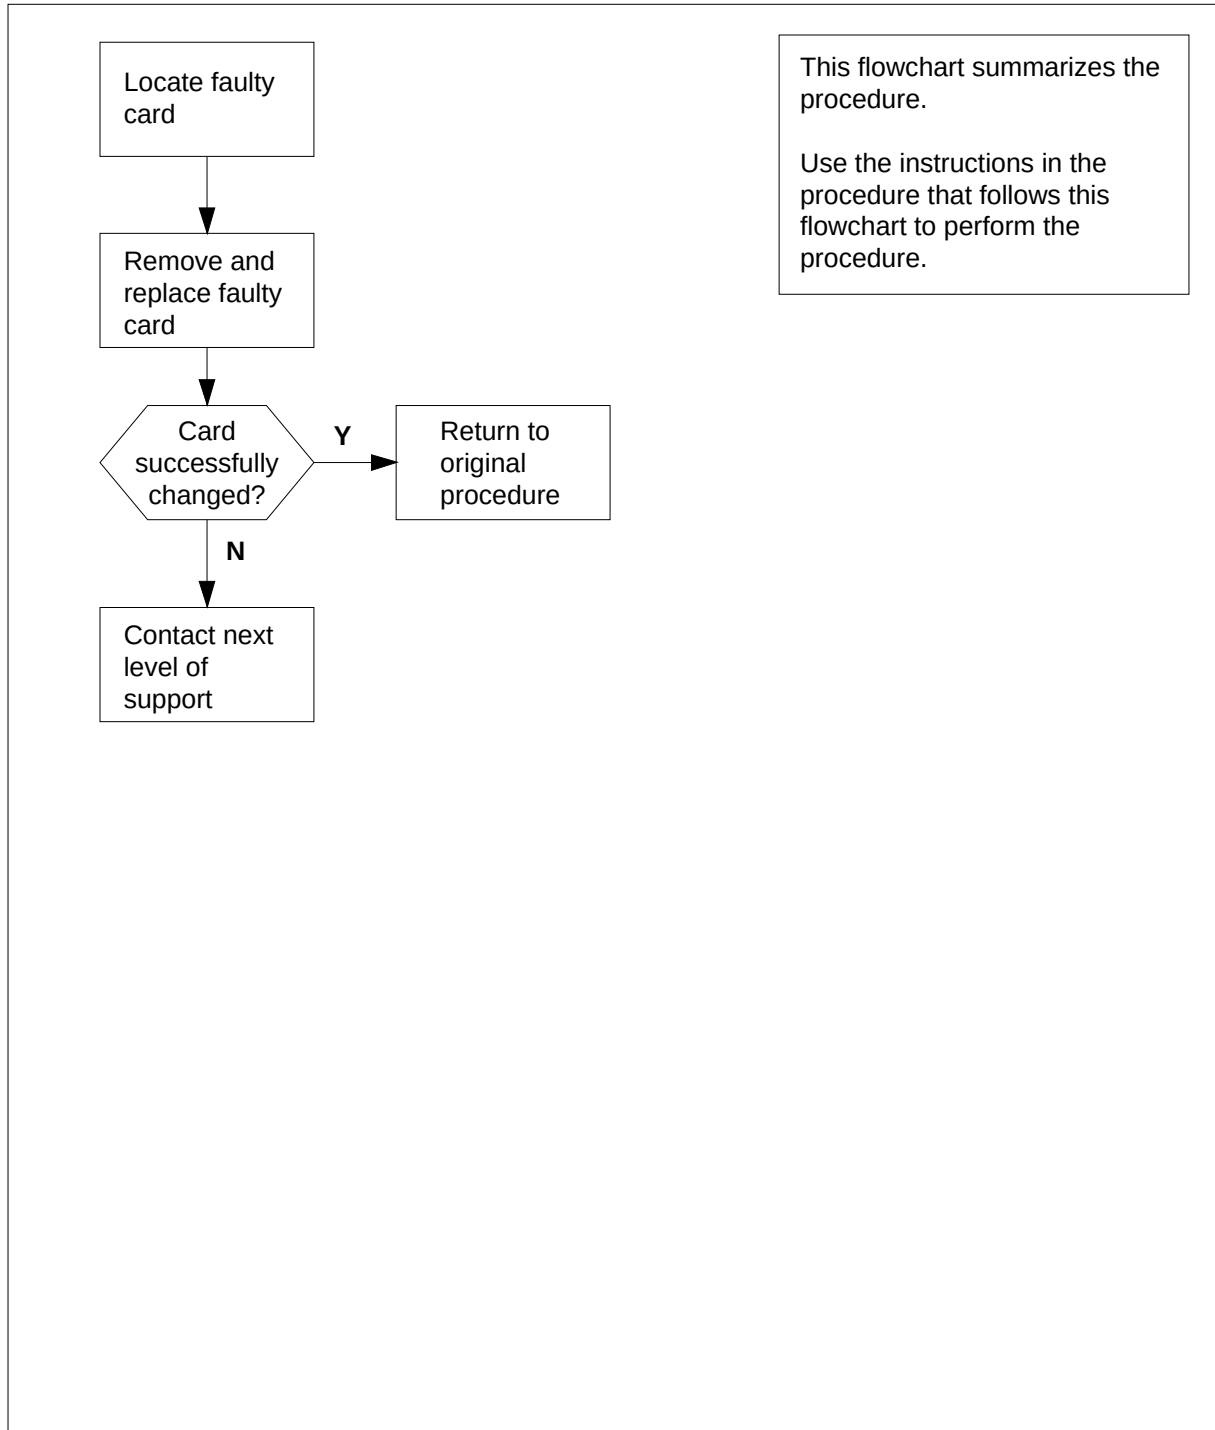**NTRX43**  
**in an OPAC MSP** (continued)**Summary of card replacement procedure for an NTRX43 card in an MSP**

## NTRX43 in an OPAC MSP (continued)

### Replacing an NTRX43 in an MSP

#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front of the MSP*


3



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap connected to a wrist strap grounding point to protect equipment against damage caused by static electricity.

Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

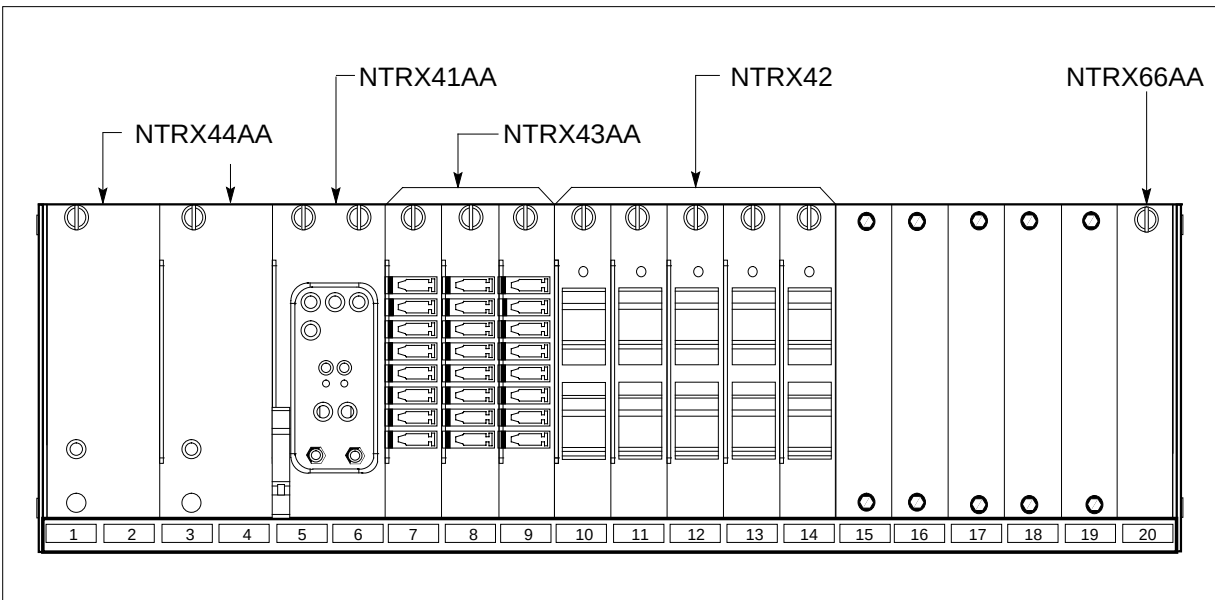

## NTRX43 in an OPAC MSP (continued)

### At the rear of the MSP

4


**DANGER**

Risk of injury from high energy levels, voltage present  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage could result.

Put on a wrist strap.

Before removing fuses from fuse module, observe fuse colors, values, and positions. Remove fuses from fuse module. When servicing the fuse module, fans may shut down, alarms may be activated, and there may be a loss of alarms.

- 5 Disconnect the NTRX43 circuit card as shown in the following figure.
- a Swing the frame out and locate the back of the card to be replaced.
  - b Note wire color and location to facilitate reconnection.

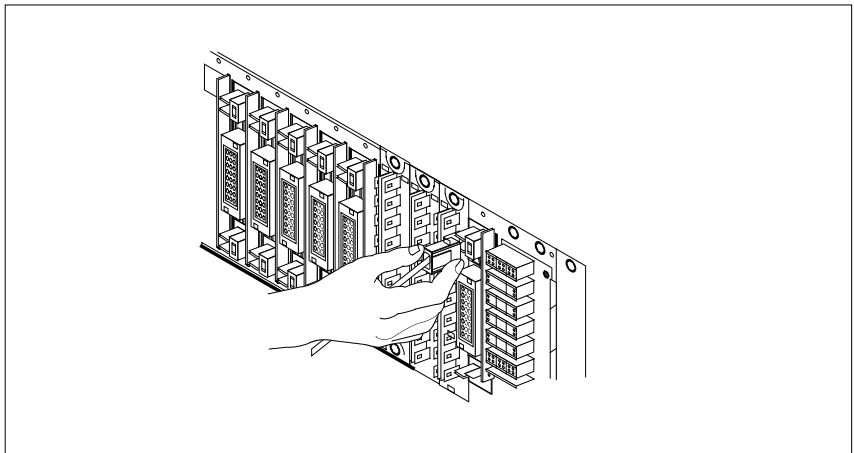

- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.
- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- e Remove and tag jumper connectors and cables, which may be present on the back of the circuit card and save for use on the replacement circuit card.

## NTRX43 in an OPAC MSP (continued)

---

*At the front of the MSP*

6




**DANGER**

**Risk of injury from high energy levels, equipment damage**  
When removing or inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.

Remove the NTRX43 circuit card as shown in the following figure.

- a Disengage the captive screw at the top of the circuit card.
- b Gently pull the circuit card towards you until it clears the shelf.

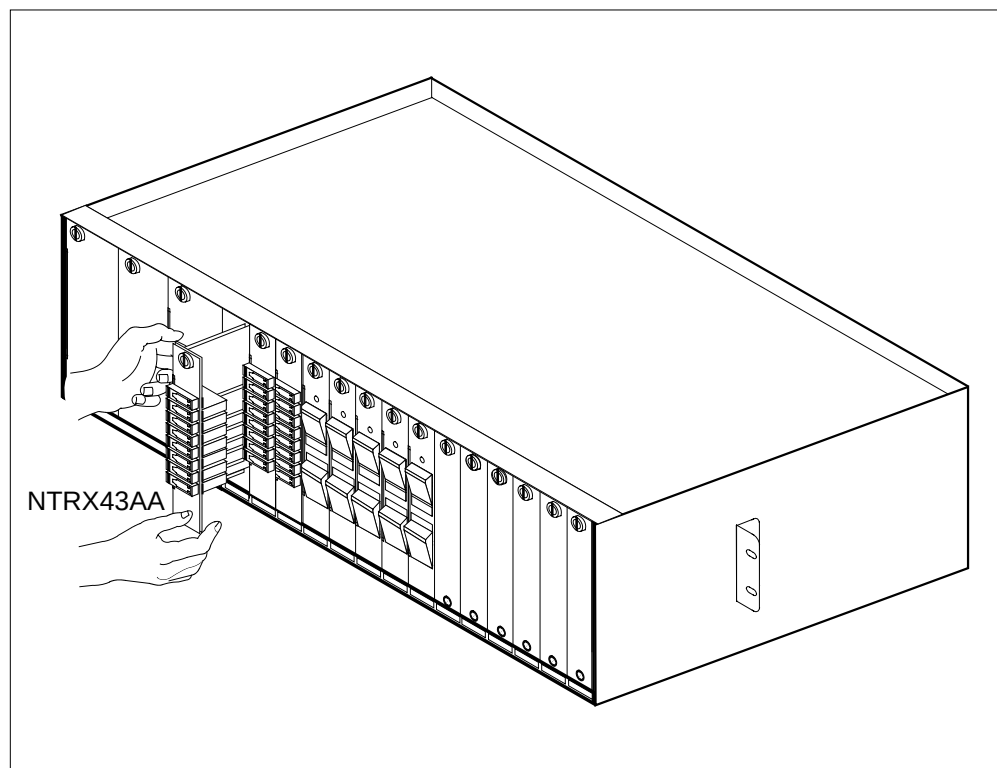

- 7
- Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the captive screw at the top of the circuit card.


---

**NTRX43**  
**in an OPAC MSP (end)**

---

***At the rear of the MSP***

- 8** Locate the replaced circuit card and reattach the power connectors. Install the jumper connectors and cables removed in step 5 onto the replacement circuit card.

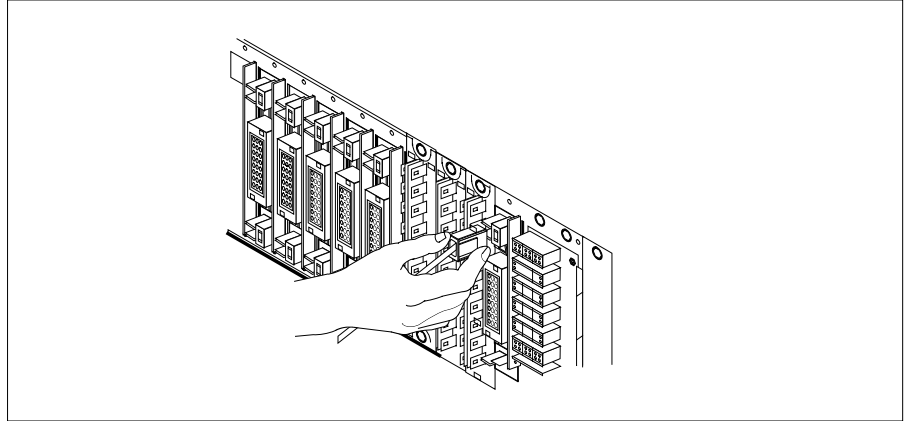***At the front of the MSP:***

- 9** Replace fuses removed in step 4.

| If Fuses        | Do      |
|-----------------|---------|
| do not blow     | step 10 |
| blow (protrude) | step 12 |

- 10** Send any faulty cards for repair according to local procedure.
- 11** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 13.
- 12** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 13** You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure, and continue as directed.

## **NTRX43 in an RSC-M/MSP**

---

### **Application**

Use this procedure to replace an NTRX43 card in a modular supervisory panel (MSP) that supports a Remote Switching Center Multi-access (RSC-M) cabinet.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b> |
|------------|-----------------|-------------|
| NTRX43     | AA              | Fuse module |

### **Common procedures**

The common returning a card procedure is referenced in this procedure.

### **Action**

A connector removal tool is available to allow removal of the AMP Faston receptacles. This tool allows removal of these receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). Use the shorter tool when conditions cause limited access to the rear of the MSP. Limited access can occur when MSP modules are behind the cabinet bulkhead.

This tool is approximately 2 mm (0.090 in.) thick and 17 mm (0.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. Use the shorter tip of each profile to position the receptacle in the tool.


The first meeting point of the tool serves as the pivot point. When you rotate the tool around this pivot point, you engage one tip with the action-arm of the power connector. This tip is the longer tip of the profile that has a hook on the end of the tip. As you press the action-arm of the connector, you disengage the receptacle from the connector tab. To remove the receptacle, pull the tool with the receptacle trapped in the jaw of the tool away from the connector. To disengage the tool from the receptacle, rotate the hook of the tool off the action-arm of the receptacle.

The shape of the cut-out is the same on each end of the tool. The position of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles. You can require the use of the tool at different angles because of limited access to the connectors.



## **NTRX43** **in an RSC-M/MSP (continued)**

### **Connector removal tool**

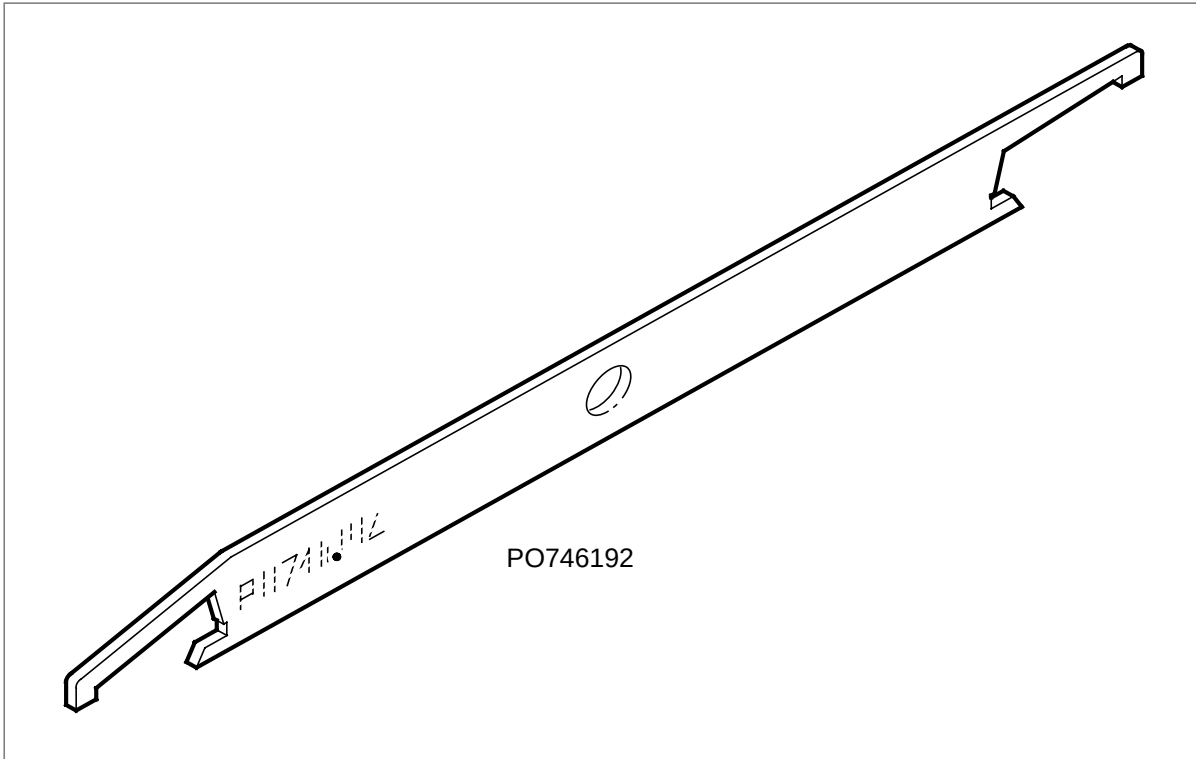


This card replacement procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

## NTRX43 in an RSC-M/MSP (continued)

---

### Summary of Replacing an NTRX43 in an RSC-M/MSP

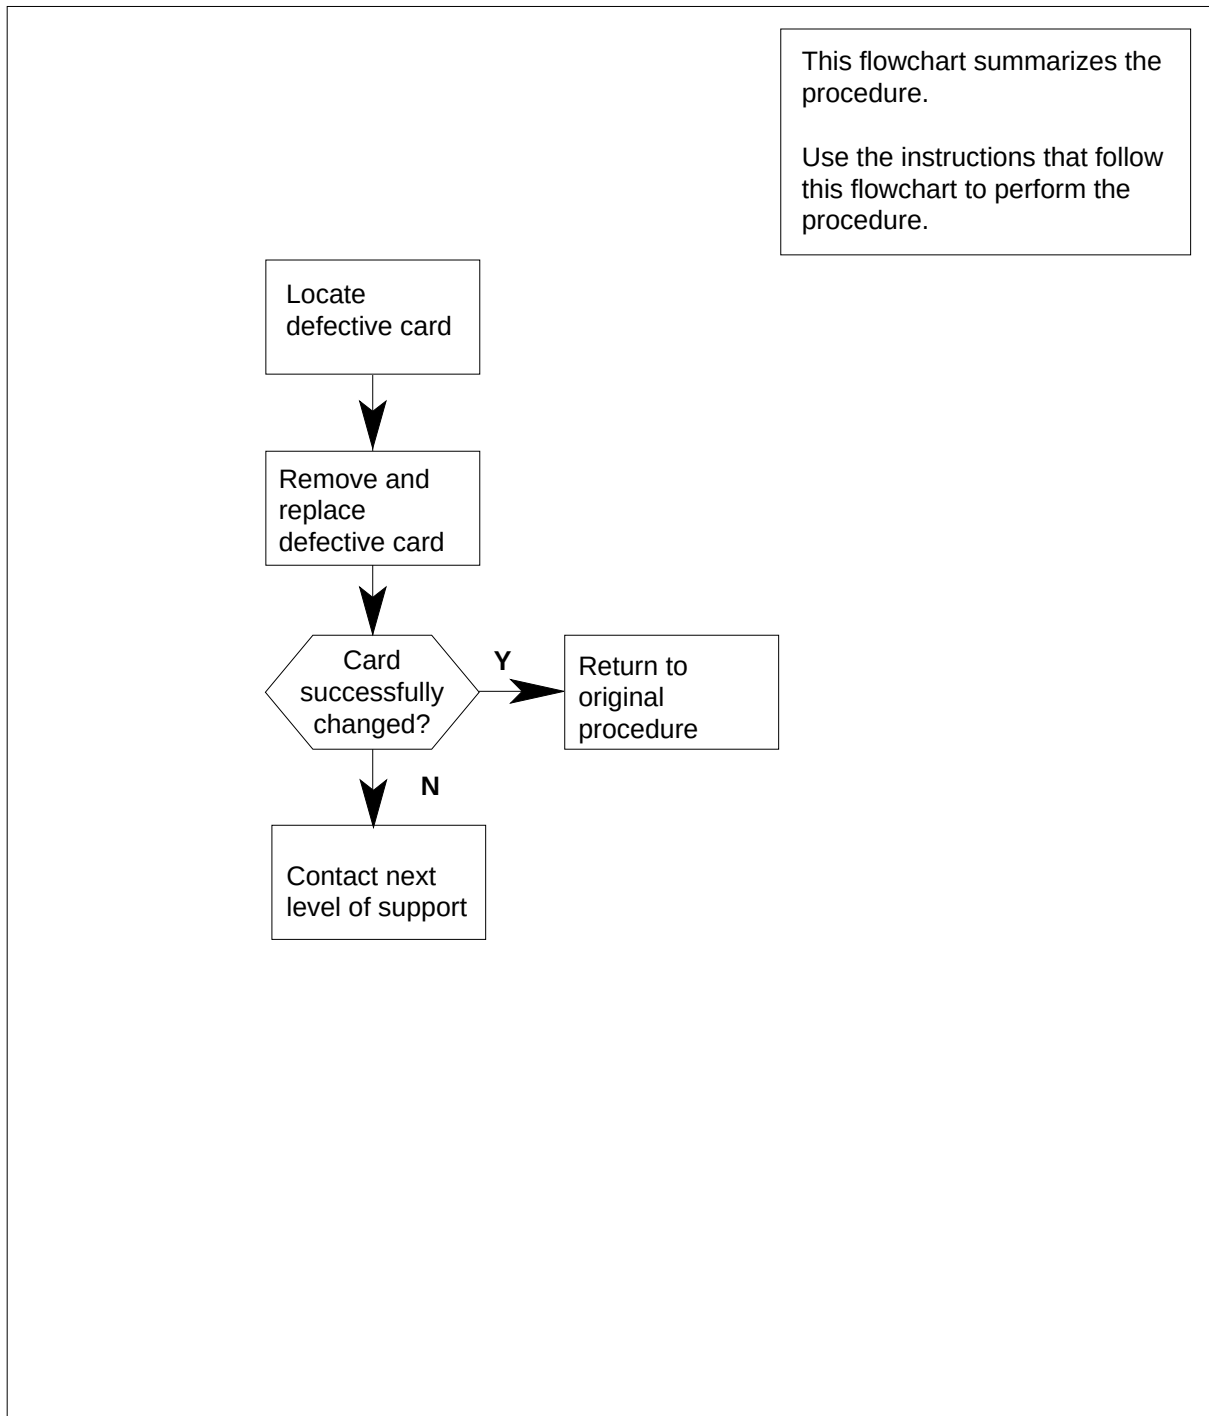

## NTRX43 in an RSC-M/MSP (continued)

### Replacing an NTRX43 in an RSC-M/MSP


#### *At the MAP terminal*

- 1 Proceed if the maintenance support group or a step in a maintenance procedure directed you to this card replacement procedure. Use this procedure to verify or accept cards.
- 2 Obtain a replacement circuit card. Make sure the replacement circuit card has the same product equipment code (PEC) and suffix as the circuit card you want to remove.

#### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches. Swing the cover down to the open position.

#### MSP

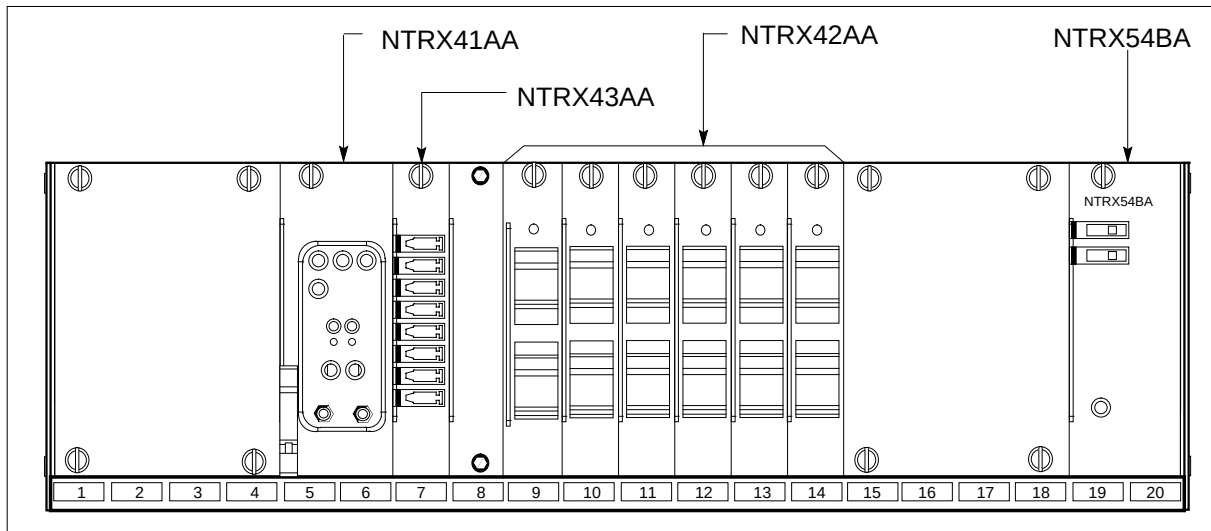

- 4 Power down the circuit breaker that supplies the fuse module. Safety tag the front of the circuit breaker. When you service the fuse module, fans can shut down, alarms can sound or a loss of alarms can occur.

## NTRX43 in an RSC-M/MSP (continued)

---

5



### WARNING

**Risk of injury from high energy levels, static electricity damage**

Wear a wrist strap connected to the wrist-strap grounding point on the left side of the modular supervisory panel (MSP) to remove cards. The wrist strap protects the equipment static electricity damage.



### DANGER

**Risk of injury from high energy levels, equipment damage**

Take these precautions when you remove or insert a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards in the slots.

Wear a wrist strap.

6

Remove the fuses from the fuse module.

**Note:** Observe fuse colors, values and positions before you remove fuses from the fuse module. At the front panel of the cabinet

Open the front cover of the MSP. Release the two cover latches. Swing the cover down to the open position.

MSP

Power down the circuit breaker that supplies the fuse module. Safety tag the front of the circuit breaker. When you service the fuse module, fans can shut down, alarms can sound or a loss of alarms can occur.

Wear a wrist strap.

Remove the fuses from the fuse module.

Observe fuse colors, values and positions before you remove fuses from the fuse module.

## NTRX43 in an RSC-M/MSP (continued)

*At the rear panel of the cabinet*

7




### DANGER

**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage can result.

Remove the NTRX43 circuit card as appears in the following figures.

- a Open the rear doors of the cabinet. Locate the back of the card to replace.
- b Note the wire color and the location to facilitate connection.

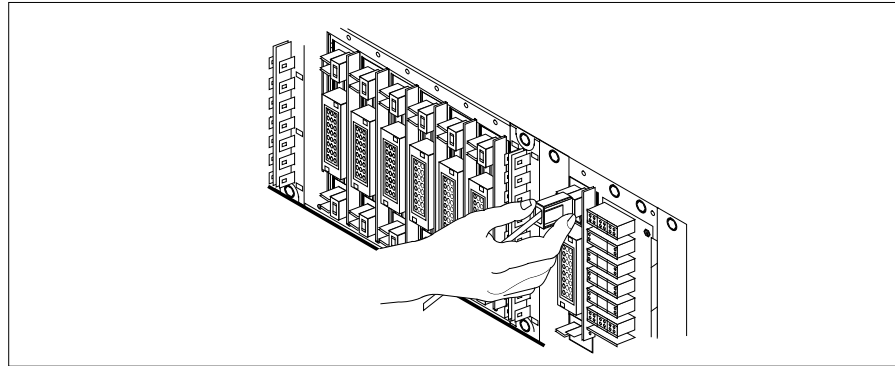


- c Use the connector removal tool to disconnect the power connectors to the circuit card manually. Work from the bottom of the MSP shelf to the top of the MSP shelf. Manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Make sure that you disconnect the black connectors *before* you remove the circuit card.
- d The connectors have voltage present. The connectors are insulated. Secure the connectors to the power-connector bundle with a line-tie until the time comes to connect the connectors again.
- e Jumper connectors and cables can be present. Remove and tag these jumper connectors and cables on the back of the circuit card. Save the jumper connectors and cables for use on the replacement circuit card.

## **NTRX43** **in an RSC-M/MSP (continued)**

---

### ***At the front panel of the cabinet***

- 8** Remove the NTRX43 circuit card.
  - a** Disengage the knurled thumbscrew at the top of the circuit card.
  - b** Carefully pull the circuit card toward you until the circuit card clears the shelf.

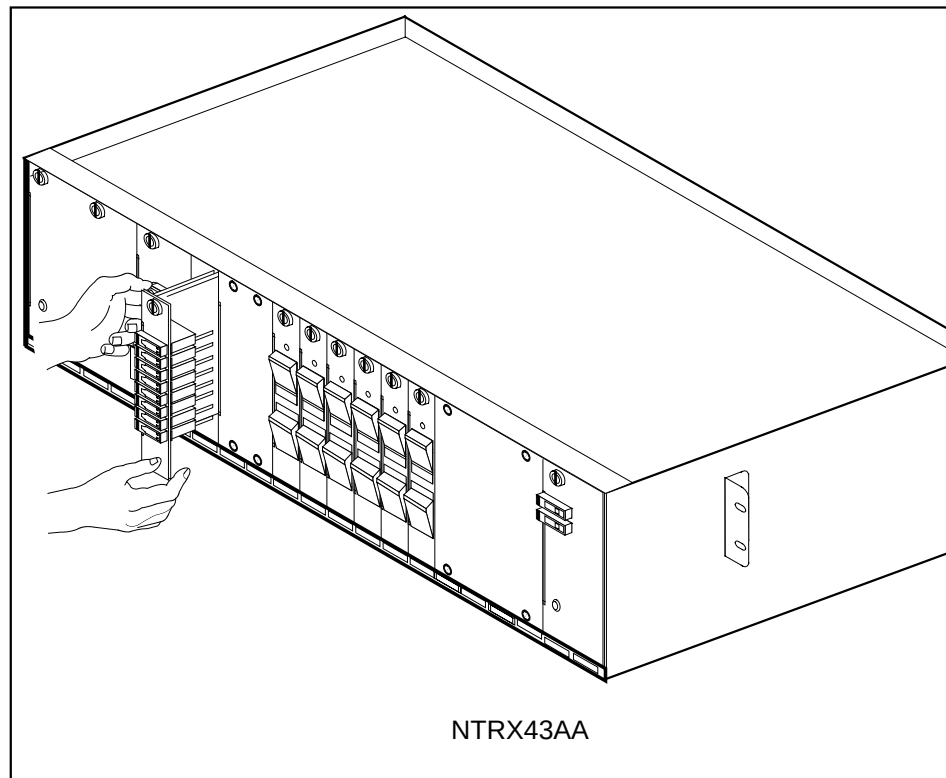


- 9** Make sure the replacement circuit card has the same PEC and suffix as the circuit card you removed.
  - a** Align the circuit card with the slots in the shelf. Carefully slide the circuit card in the shelf.
  - b** Carefully seat the circuit card tight.
  - c** Tighten the knurled thumbscrew at the top of the circuit card.

### ***At the rear panel of the cabinet***

- 10** Locate the replaced circuit card. Attach the power connectors again.

**NTRX43**  
**in an RSC-M/MSP (end)**

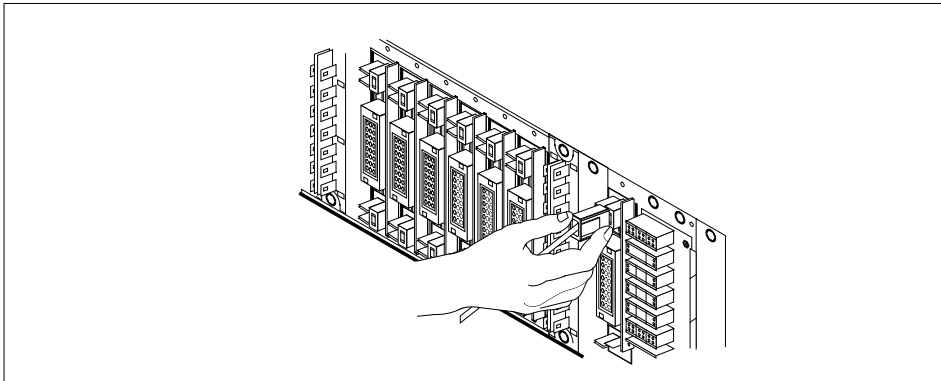

- 11** Install the jumper connectors and cables removed in step 7 on the replacement circuit card.

***At the front of the cabinet***

- 12** Replace the fuses removed in step 6.
- 13** Power up the circuit breaker that supplies the fuse module. Remove the safety tag.

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 14 |
| blow (protrude) | step 16 |

- 14** Go to the common returning a card procedure in this document.
- 15** This procedure is complete. Return to the maintenance procedure that directed you to this card replacement procedure.
- 16** For additional help with this card replacement, contact the next level of support.

## **NTRX43 in an RSC MSP**

---

### **Application**

Use this procedure to replace an NTRX43 card in a modular supervisory panel (MSP) in the following cabinets.

- Cabinetized Extension Module (CEXT)
- Cabinetized Line Concentrating Equipment (CLCE)
- Cabinetized Power Distribution Center (CPDC)
- Cabinetized Remote Switching Center (CRSC)
- Cabinetized Miscellaneous Equipment (CMIS)
- Cabinetized Remote Miscellaneous Equipment (CRME)

| PEC    | Suffixes | Name        |
|--------|----------|-------------|
| NTRX43 | AA       | Fuse Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged




---

**NTRX43**  
**in an RSC MSP** (continued)

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

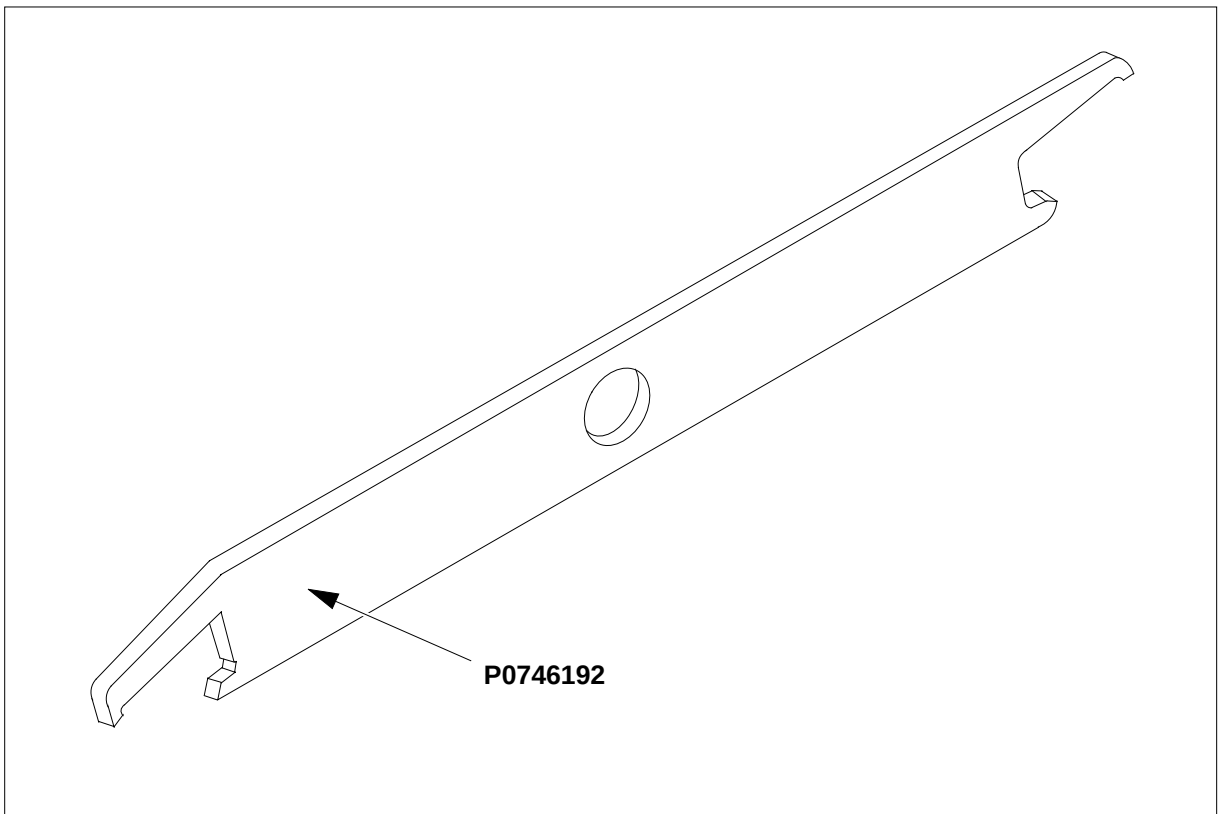
**Connector removal tool**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX43 in an RSC MSP (continued)

---

### Summary of card replacement procedure for an NTRX43 card in RSC MSP

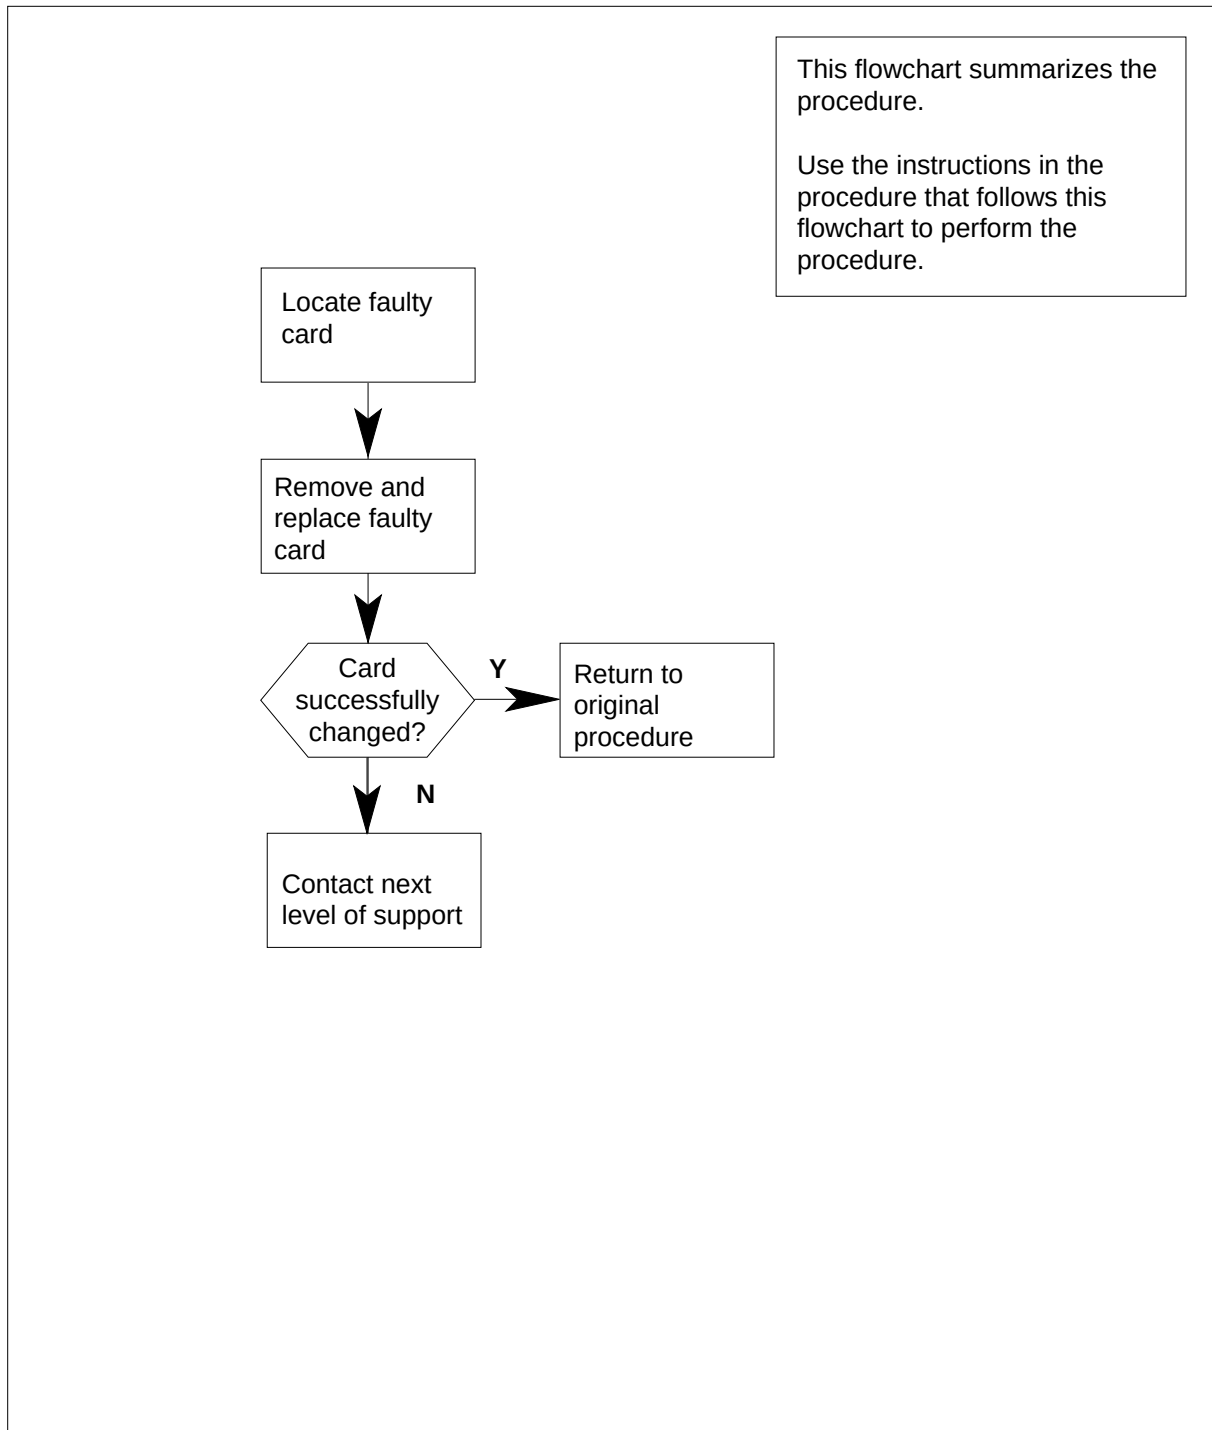

## NTRX43 in an RSC MSP (continued)

### Replacing an NTRX43 card in RSC MSP


#### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

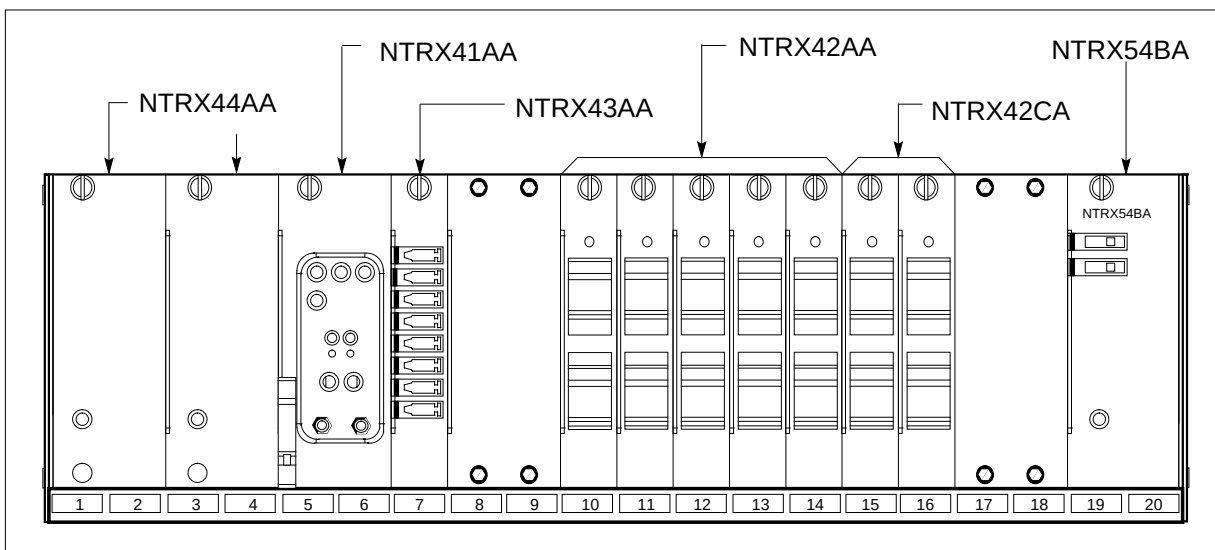

- 4 Power down circuit breaker supplying fuse module. Safety tag the front of the circuit breaker. When servicing the fuse module, fans may shut down, alarms may sound, or there may be a loss of alarms.

## NTRX43 in an RSC MSP (continued)

---

5



**DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



**DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

6

Remove fuses from fuse module.

**Note:** Observe fuse colors, values, and positions before removing fuses from fuse module.

7

Pull out corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the connectors on the rear of the MSP. This step does *not* apply to the CMIS, CPDC, and CRME.

8



**DANGER**


**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Remove the NTRX43 circuit card as shown in the following figures.

- a Open the rear doors of the cabinet and locate the back of the card to be replaced.
- b Note wire color and location to facilitate re-connection.

## **NTRX43** **in an RSC MSP (continued)**

---

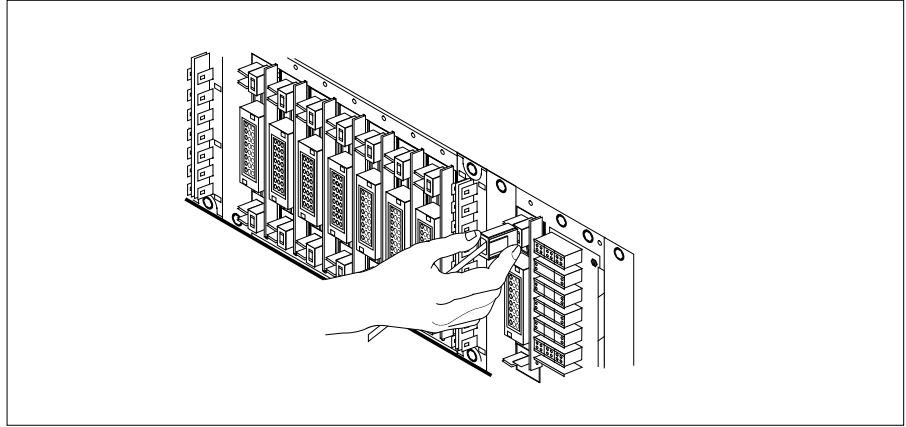


- 9 Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.
- 10 Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- 11 Remove and tag jumper connectors and cables, which may be present on the back of the circuit card and save for use on the replacement circuit card.

### ***At the front panel of the cabinet***

- 12 Remove the NTRX43 card.
  - a Disengage the knurled thumbscrew at the top of the card.
  - b Gently pull the card towards you until it clears the shelf.

## NTRX43 in an RSC MSP (continued)

---

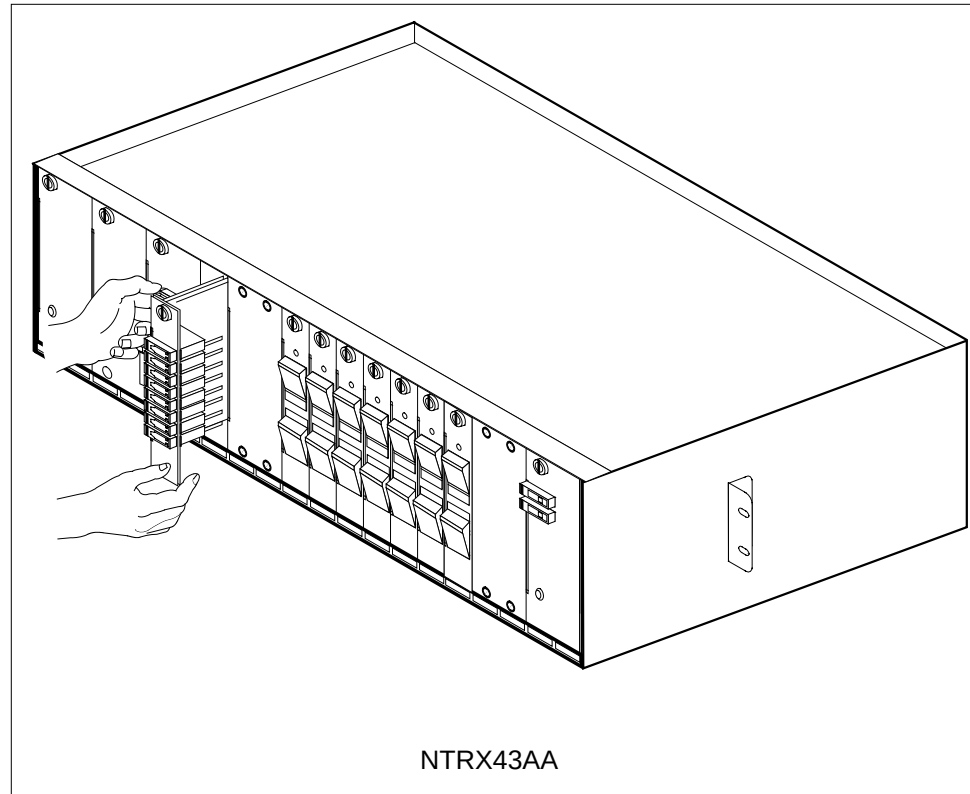


- 13** Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a** Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b** Gently but firmly seat the circuit card.
  - c** Tighten the knurled thumbscrew at the top of the circuit card.

***At the rear panel of the cabinet***

- 14** Locate the replaced circuit card and re-attach the power connectors.

**NTRX43**  
**in an RSC MSP (end)**

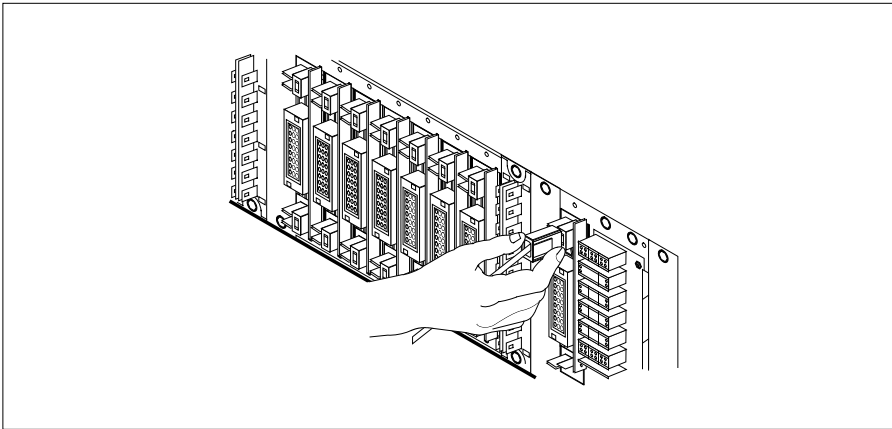

- 15** Install the jumper connectors and cables removed in step 8 onto the replacement circuit card.

***At the front of the cabinet***

- 16** Push in corresponding line shelf. Please note this step does *not* apply to the CMIS, CPDC, and CRME.
- 17** Replace fuses removed in step 6.
- 18** Power up circuit breaker supplying fuse module and remove safety tag.

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 19 |
| blow (protrude) | step 21 |

- 19** Send any faulty cards for repair according to local procedure.
- 20** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 22.
- 21** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 22** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX43 in an RSC-S (DS-1) Model B MSP**

---

### **Application**

Use this procedure to replace an NTRX43 card in a modular supervisory panel (MSP) located in a

- cabinetized extension module (CEXT)
- cabinetized line concentrating equipment (CLCE)
- cabinetized line module ISDN (CLMI)
- cabinetized power distribution center (CPDC)
- cabinetized remote switching center (CRSC)
- cabinetized miscellaneous equipment (CMIS)
- cabinetized remote miscellaneous equipment (CRME)

| PEC    | Suffixes | Name        |
|--------|----------|-------------|
| NTRX43 | AA       | Fuse Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged




---

**NTRX43**  
**in an RSC-S (DS-1) Model B MSP (continued)**

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

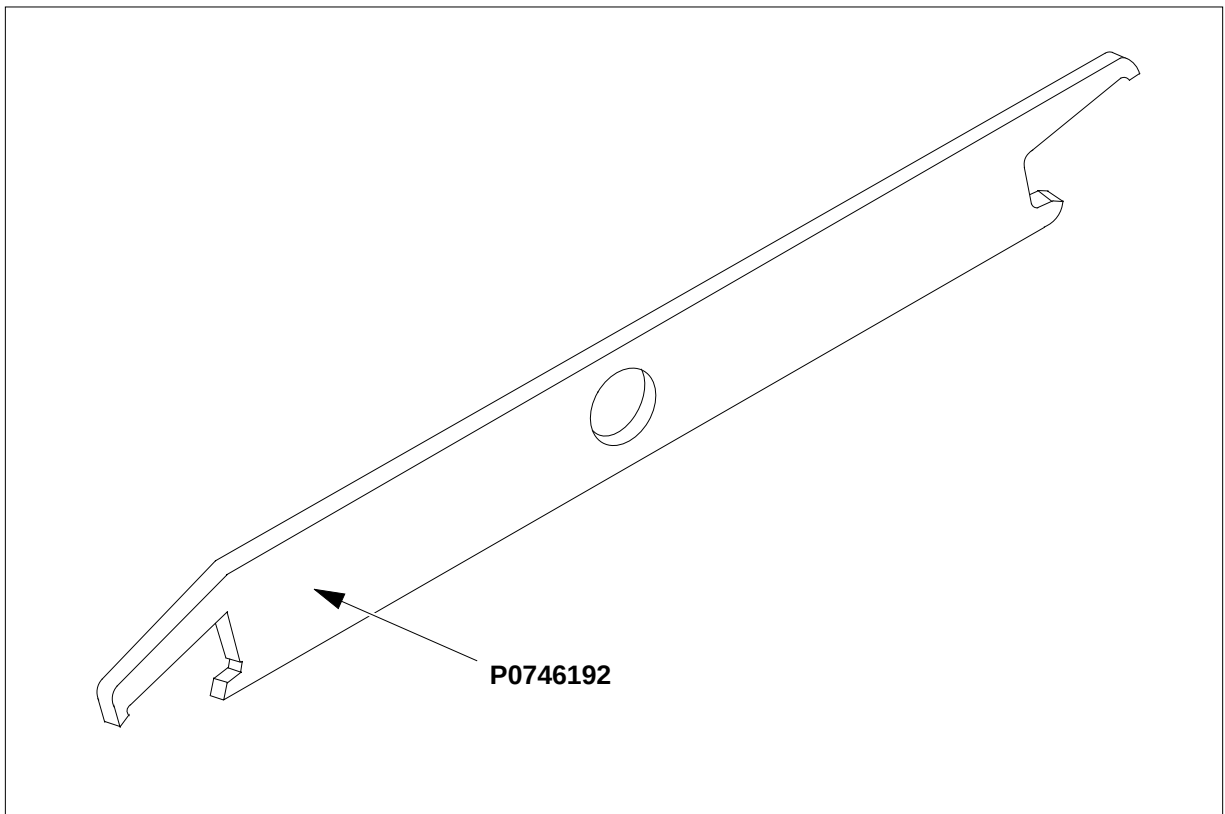
**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure.

## NTRX43 in an RSC-S (DS-1) Model B MSP (continued)

---

### Summary of card replacement procedure for an NTRX43 card in RSC-S MSP

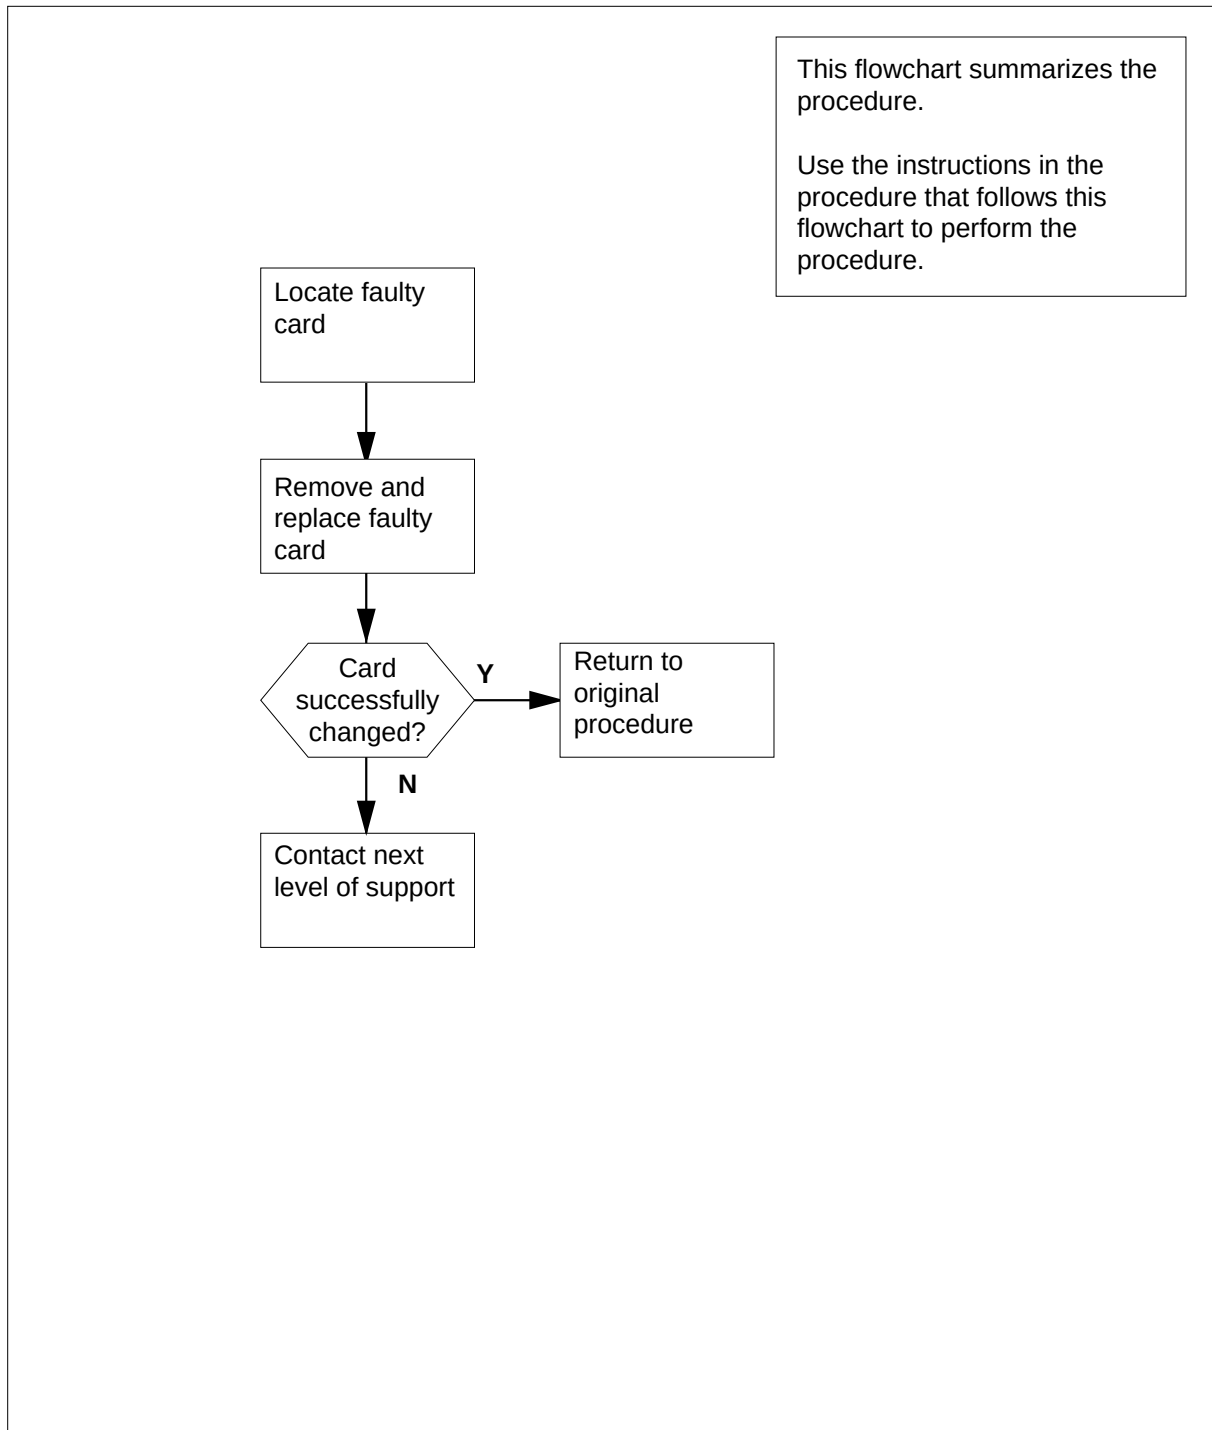

## NTRX43

### in an RSC-S (DS-1) Model B MSP (continued)

#### Replacing an NTRX43 card in RSC-S MSP


##### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

##### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

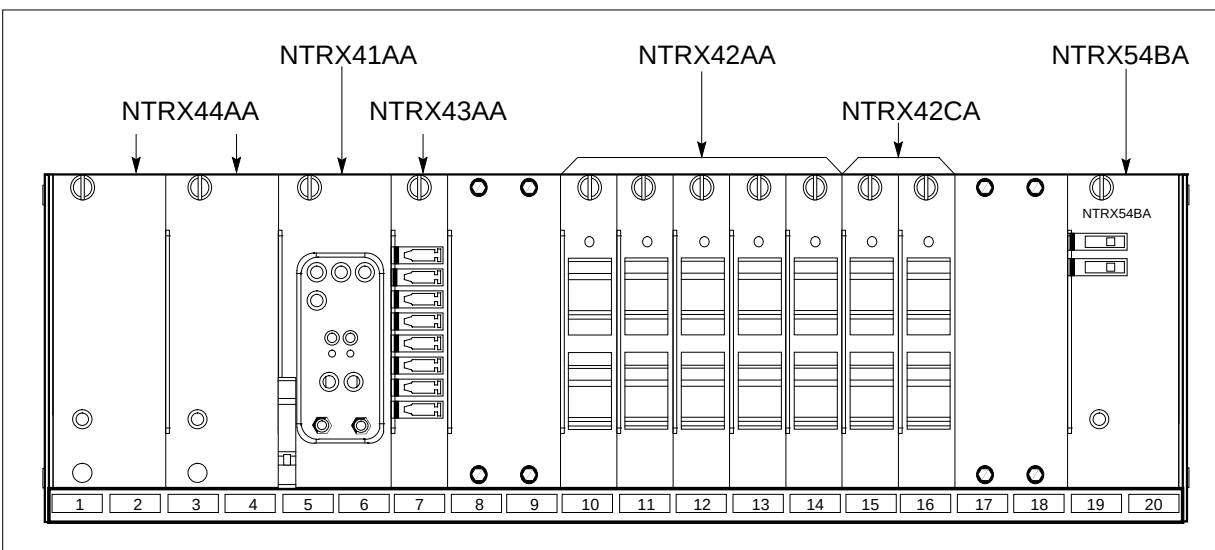

- 4 Power down circuit breaker supplying fuse module. Safety tag the front of the circuit breaker. When servicing the fuse module, fans may shut down, alarms may sound, or there may be a loss of alarms.

## NTRX43 in an RSC-S (DS-1) Model B MSP (continued)

---

5



**DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



**DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

6 Remove fuses from fuse module.

**Note:** Observe fuse colors, values, and positions before removing fuses from fuse module.

7 Pull out corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the connectors on the rear of the MSP. This step does *not* apply to the CMIS, CPDC, and CRME.

***At the rear panel of the cabinet***

8



**DANGER**

**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.


Remove the NTRX43 circuit card as shown in the following figures.

- a Open the rear doors of the cabinet and locate the back of the card to be replaced.
- b Note wire color and location to facilitate re-connection.

**NTRX43**

**in an RSC-S (DS-1) Model B MSP (continued)**

---

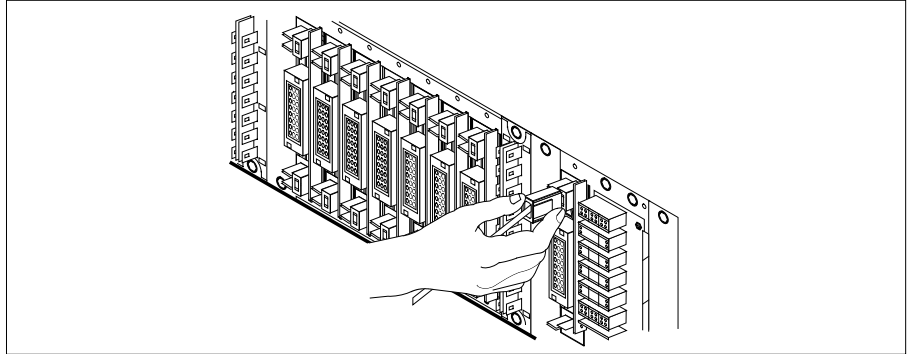


- c** Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.
- d** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- e** Remove and tag jumper connectors and cables, which may be present on the back of the circuit card and save for use on the replacement circuit card.

***At the front panel of the cabinet***

- 9** Remove the NTRX43 card.
  - a** Disengage the knurled thumbscrew at the top of the card.
  - b** Gently pull the card towards you until it clears the shelf.

## NTRX43 in an RSC-S (DS-1) Model B MSP (continued)


---

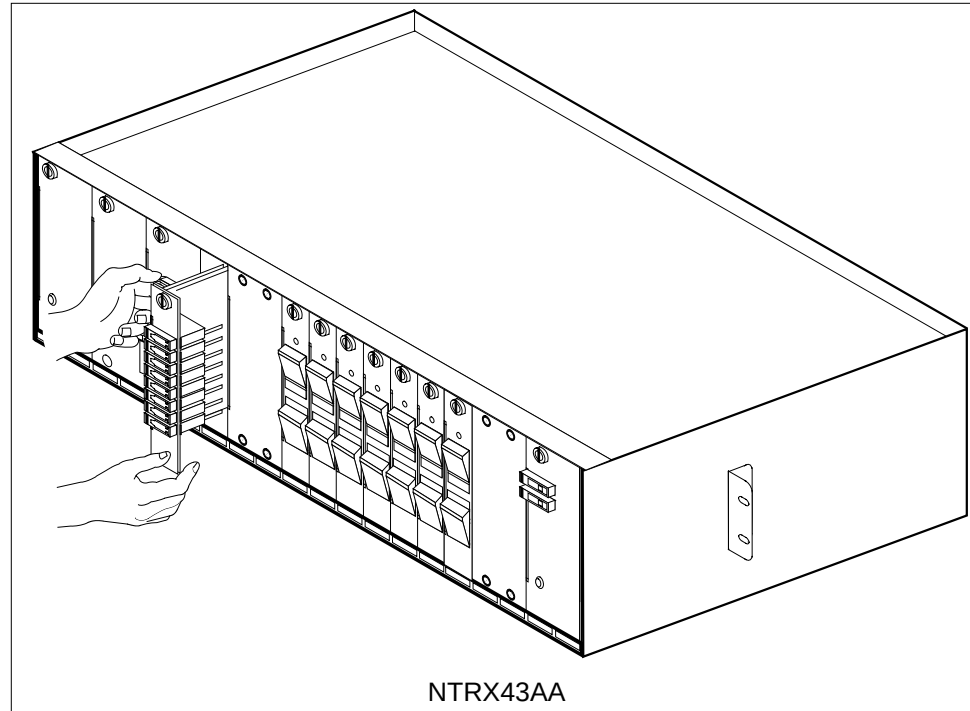

- 10** Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a** Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b** Gently but firmly seat the circuit card.
  - c** Tighten the knurled thumbscrew at the top of the circuit card.

### ***At the rear panel of the cabinet***

- 11** Locate the replaced circuit card and re-attach the power connectors.

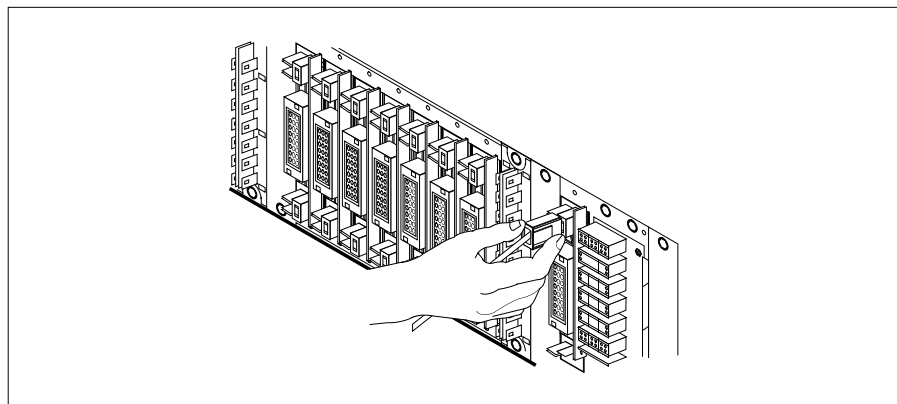

---

**NTRX43**  
**in an RSC-S (DS-1) Model B MSP (end)**

---

- 12** Install the jumper connectors and cables removed in step 8 onto the replacement circuit card.

***At the front of the cabinet***

- 13** Push in corresponding line shelf. Please note this step does *not* apply to the CMIS, CPDC, and CRME.
- 14** Replace fuses removed in step 6.
- 15** Power up circuit breaker supplying fusEve module and remove safety tag.

| <b>If fuses</b> | <b>Do</b> |
|-----------------|-----------|
| do not blow     | step 16   |
| blow (protrude) | step 18   |

- 16** Send any faulty cards for repair according to local procedure.
- 17** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 19.
- 18** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 19** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX43 in an SMA2 MSP**

---

### **Application**

Use this procedure to replace a NTRX43 card in a modular supervisory panel (MSP) located in a:

- cabinetized multi-vendor interface (CMVI)
- multi-vendor interface equipment frame (MVIE)
- multi-vendor double density frame (MVDD)

| PEC    | Suffixes | Name        |
|--------|----------|-------------|
| NTRX43 | AA       | Fuse Module |

### **Common procedures**

The common returning a card procedure is referenced in this procedure.

Do not go to a common procedure unless directed to do so in the step-action procedure.

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is pressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.




---

**NTRX43**  
**in an SMA2 MSP (continued)**

---

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required because of limited access to the connectors.

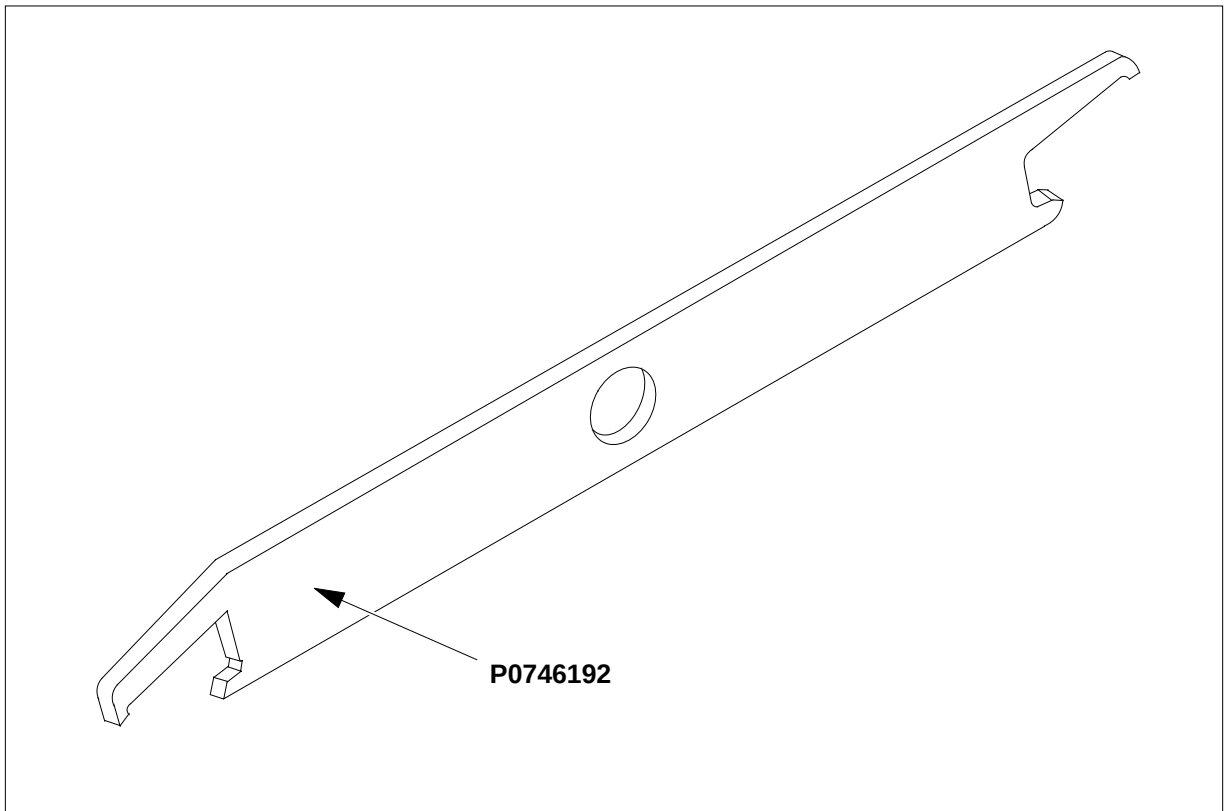
**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure.

## NTRX43 in an SMA2 MSP (continued)

---

### Summary of card replacement procedure for an NTRX43 card in an SMA2 MSP

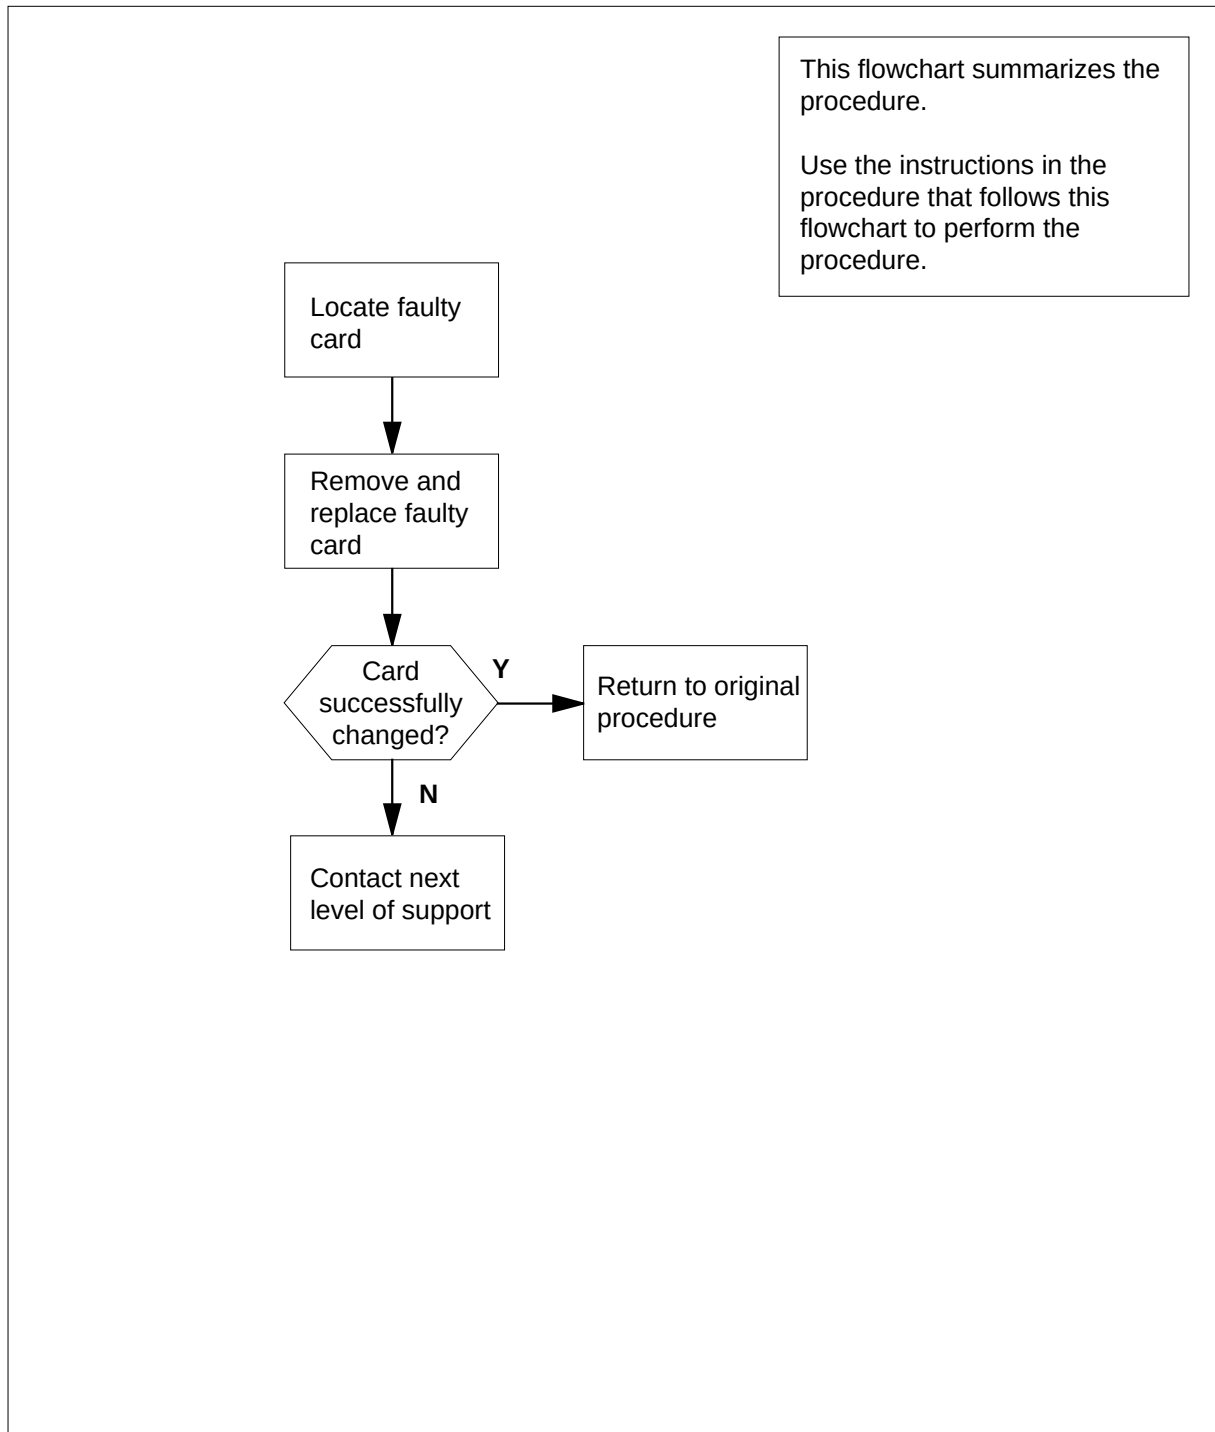

## NTRX43 in an SMA2 MSP (continued)

### Replacing an NTRX43 card in an SMA2 MSP

#### *At your current location*


- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front panel of the frame or cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** When servicing the fuse module, fans may shut down, alarms may sound, or there may be a loss of alarms. Use the following figure to identify fuse assignment.

#### MSP

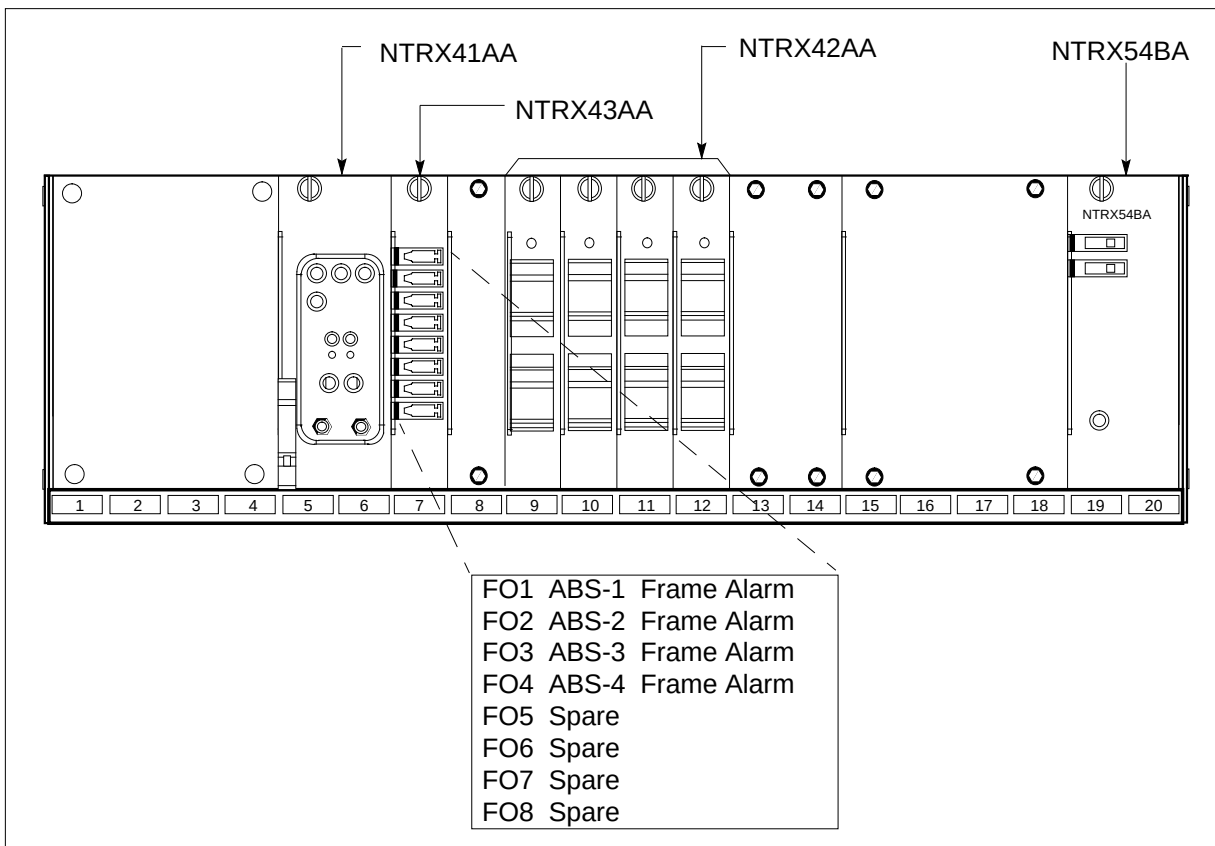

## NTRX43 in an SMA2 MSP (continued)

---

4



### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.



### **DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

5

Remove fuses from fuse module.

**Note:** Observe fuse colors, values, and positions before removing fuses from fuse module.

*At the rear panel of the frame or cabinet*

6



### **DANGER**


**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors. Voltage is present and equipment damage could result.

Remove the NTRX43 circuit card as shown in the following figures.

- a Open the rear doors of the cabinet and locate the back of the card to be replaced.
- b Note wire color and location to facilitate re-connection.

## **NTRX43** **in an SMA2 MSP (continued)**

---

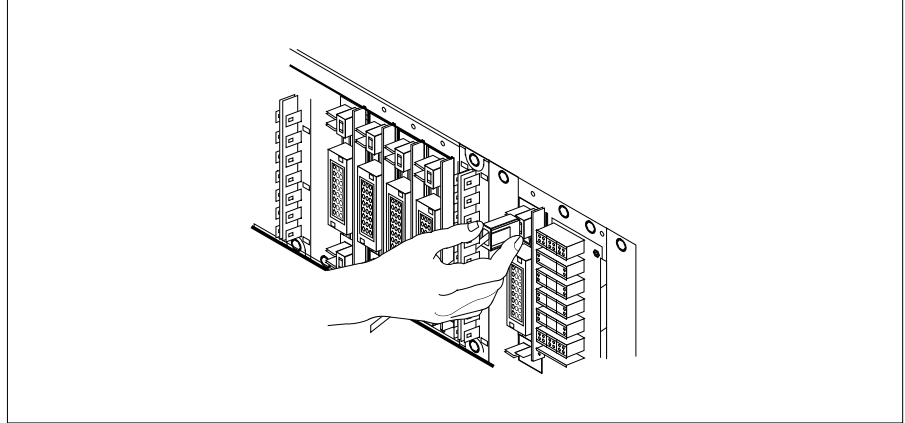


- c** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.
- d** Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.
- e** Remove and tag jumper connectors and cables, which may be present on the back of the circuit card and save for use on the replacement circuit card.

### ***At the front panel of the frame or cabinet***

- 7** Remove the NTRX43 card.
  - a** Disengage the knurled thumbscrew at the top of the card.
  - b** Gently pull the card towards you until it clears the shelf.

## NTRX43 in an SMA2 MSP (continued)

---

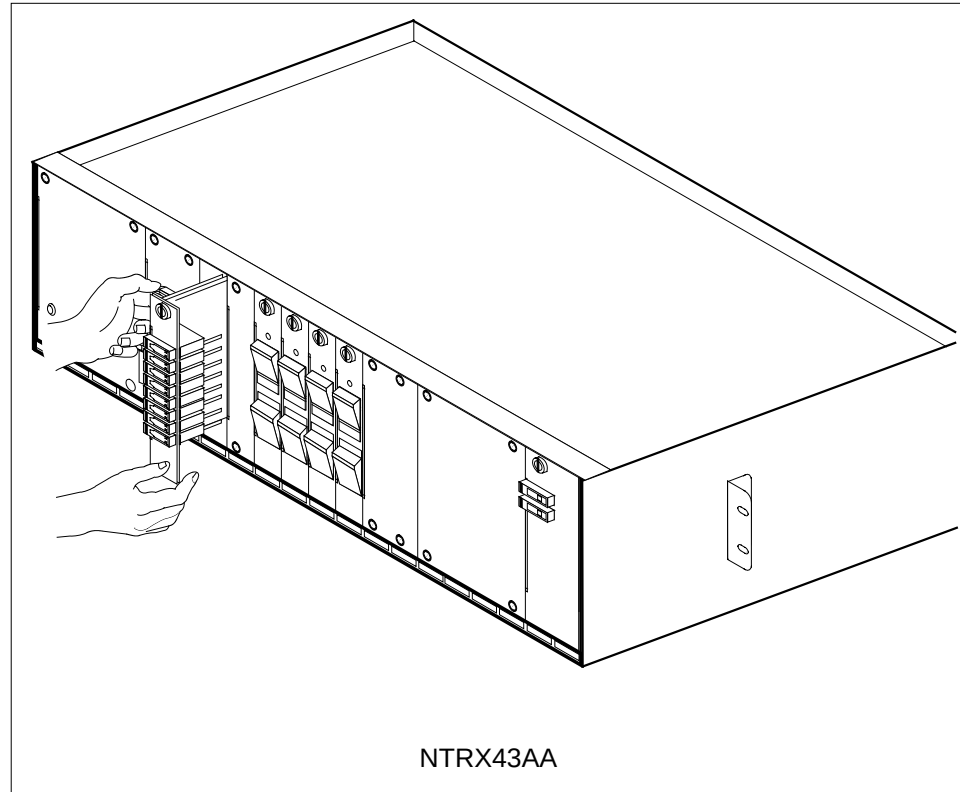


- 8 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
  - a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the knurled thumbscrew at the top of the circuit card.

### ***At the rear panel of the frame or cabinet***

- 9 Locate the replaced circuit card and re-attach the power connectors.

**NTRX43**  
**in an SMA2 MSP (end)**

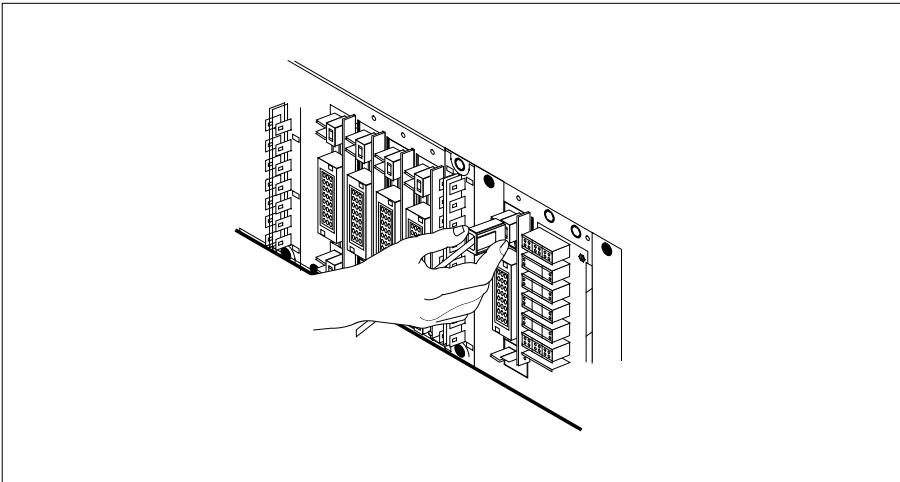

- 10** Install the jumper connectors and cables removed in step 6 onto the replacement circuit card.

***At the front panel of the frame or cabinet***

- 11** Replace fuses removed in step 5.
- 12** Power up circuit breaker supplying fuse module and remove safety tag.

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 13 |
| blow (protrude) | step 14 |

- 13** Go to the common returning a card procedure in this document.  
Go to step 15.
- 14** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 15** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX44 in an IOPAC MSP**

---

### **Application**

Use this procedure to replace the following card in an IOPAC MSP.

| PEC    | Suffixes | Name                |
|--------|----------|---------------------|
| NTRX44 | AA       | Talk Battery Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules.

This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited.

An example of limited access is MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end is engaged with the action-arm of the power connector.

As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.




---

**NTRX44**  
**in an IOPAC MSP** (continued)

---

The following is an illustration of the connector removal tool.

**Connector removal tool**

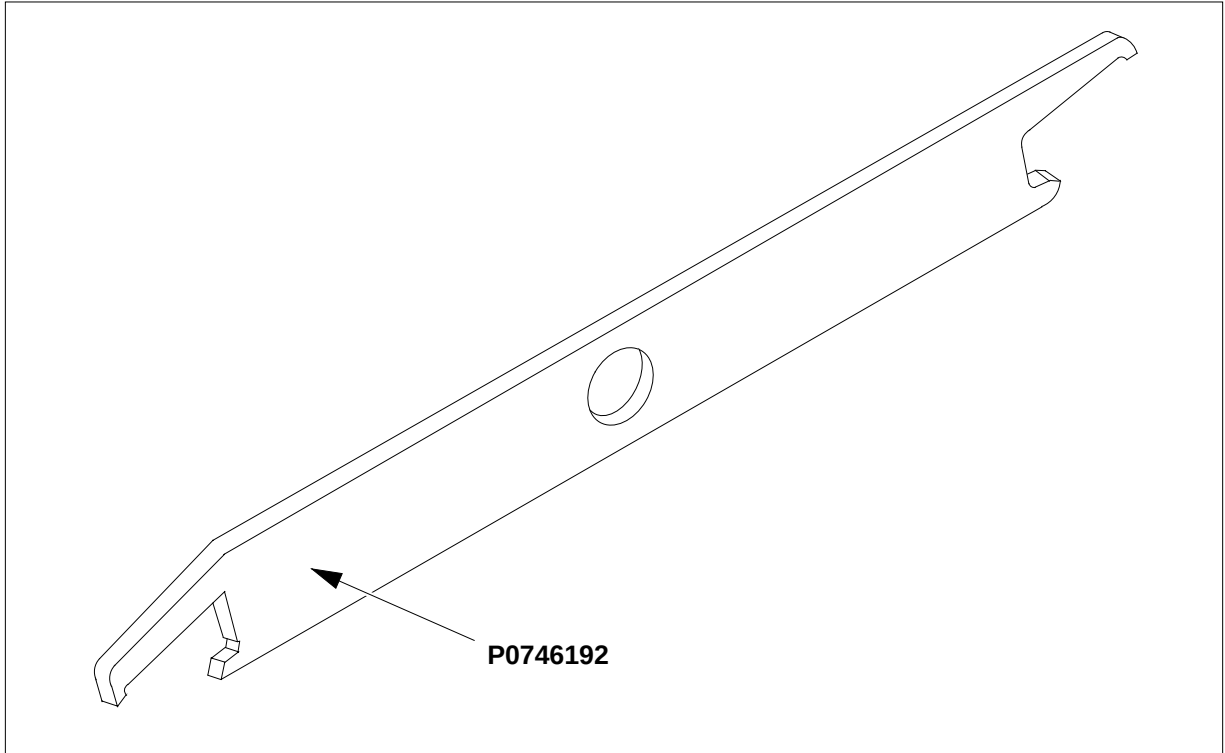


The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX44 in an IOPAC MSP (continued)

---

### Summary of card replacement procedure for an NTRX44 card in MSP

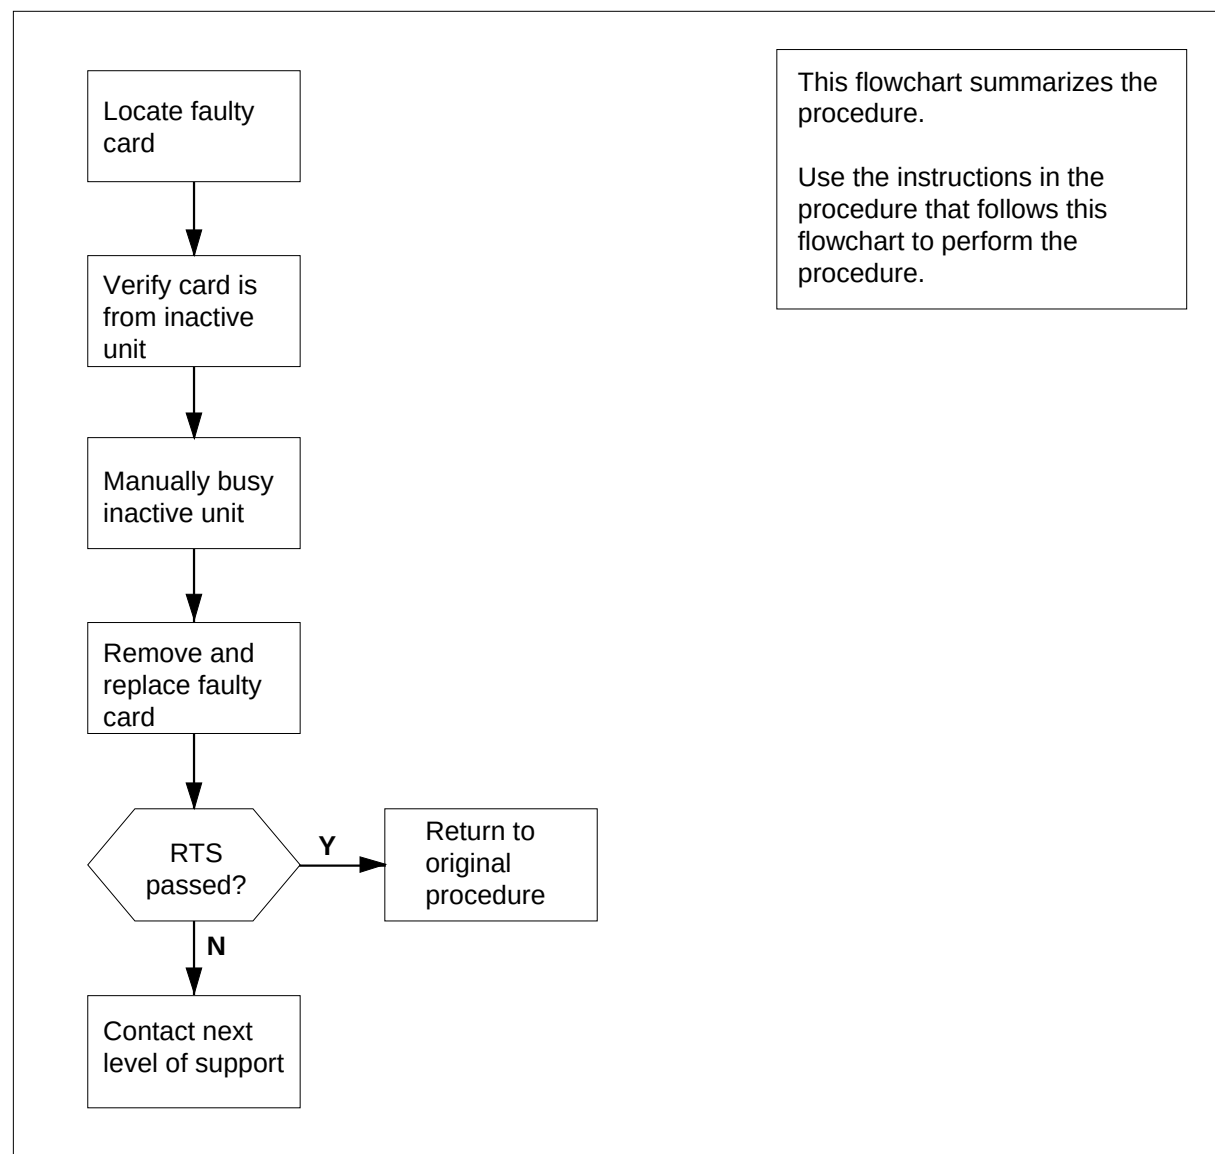

---

## NTRX44 in an IOPAC MSP (continued)

---

### Replacing an NTRX44 in MSP

#### *At your current location:*

1

**DANGER****Loss of service**

A loss of service *will* occur when this procedure is used as an acceptance procedure or when talk battery is already available on the affected ILCM unit. Bussing the LCM unit is a precaution only and does not transfer talk battery to the other ILCM unit. Talk battery is *not redundant*, and therefore a loss of service occurs on the affected ILCM unit. Perform this procedure only during periods of low traffic.

Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.

- 2 Obtain a replacement card. Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal:*

- 3 Access the PM level and post the ILCM by typing:

**>MAPCI;MTC;PM;POST ILCM site frame lcm**

and pressing the Enter key.

*where*

**site**

is the name of the site at which the LCM is located

**frame**

is the number of the frame in which the LCM is located

**lcm**

is the number of the ILCM unit with the faulty card

*Example of a MAP display:*

## NTRX44

### in an IOPAC MSP (continued)

```

CM MS IOD Net PM CCS Lns Trks Ext APPL
. . . . 1ILCM

ILCM.
0 Quit PM 1 0 0 0 0 0 126
2 Post_ ILCM. 0 0 0 0 1 9
3 ListSet
4 SwRG ILCM. REM1 14 1 ISTb Links_00S: CSide 0 PSide 0
5 TrnsL_ Unit0: InSv /RG: 1
6 Tst_ Unit1: InSv /RG: 1
7 Bsy_
8 RTS_ Drwr: 01 23 45 67 89 01 23 45 67 89 RG:Pref 1 ISTB
9 OffL
10 LoadPM_
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18

```

#### At the MAP terminal:

- 4 Busy the affected in-service LCM unit by typing

```
>bsy unit lcm_unit_no
```

and pressing the Enter key.

where

**lcm\_unit\_no**

is the number of the affected LCM unit (0 or 1)

**Note:** The Talk Battery Modules are provisioned by slot positions.

For example:

- Talk battery module in slots 1 and 2 controls unit 0
- Talk battery module in slots 3 and 4 controls unit 1

## NTRX44 in an IOPAC MSP (continued)

*At Row A Bay 1 of the IOPAC cabinet*

5




### DANGER

**Risk of injury from high energy levels, static electricity damage**

Wear a wrist strap and connect it to a wrist strap grounding point. This protects the equipment from damage caused by static electricity. A wrist strap grounding point is located at the top of each frame near the hinge.

Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.

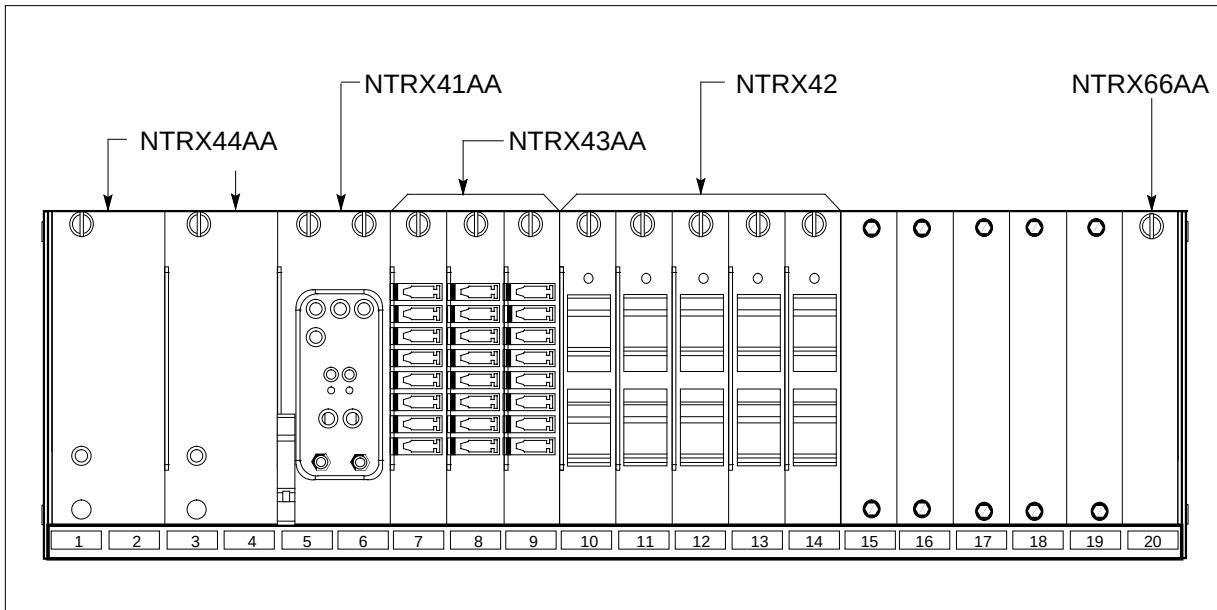

- 6 The circuit breaker designation may vary. Verify the circuit breaker designation, front and rear of MSP, before replacing the talk battery module.
- 7 Turn OFF the associated circuit breaker in slot 10 (circuit breaker 02) if replacing the talk battery module in slots 1 and 2. Turn OFF the associated circuit breaker at slot 11 (circuit breaker 04) if replacing the talk battery module in slots 3 and 4.

## NTRX44 in an IOPAC MSP (continued)

---

### *At the rear of the MSP*

8




#### **DANGER**

**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage could result.

Disconnect the NTRX44 card as shown in the following figure.

- a Swing the frame out and locate the back of the card to be replaced. The card is located in slots 1 and 2 for talk battery "A" or in slots 3 and 4 for talk battery "B".
- b Note wire color and location to facilitate reconnection.

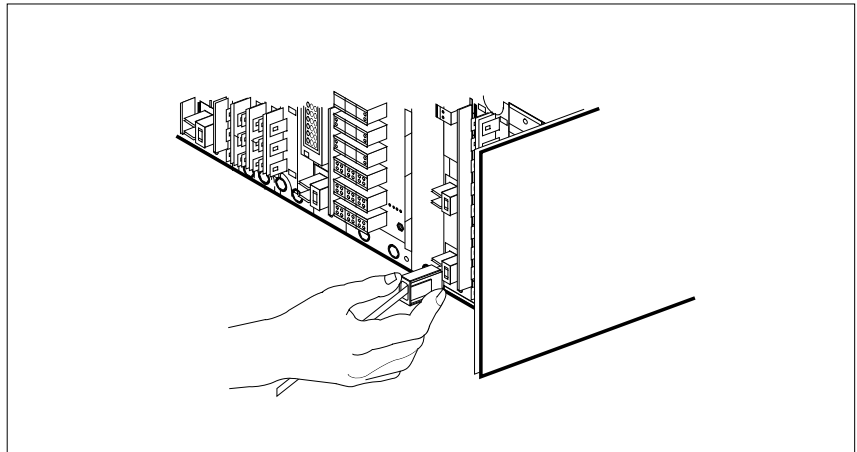


- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors before removing the circuit card.
- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.

### *At the front of the MSP*

- 9 Remove the NTRX44 card as shown in the following figure.

## NTRX44 in an IOPAC MSP (continued)

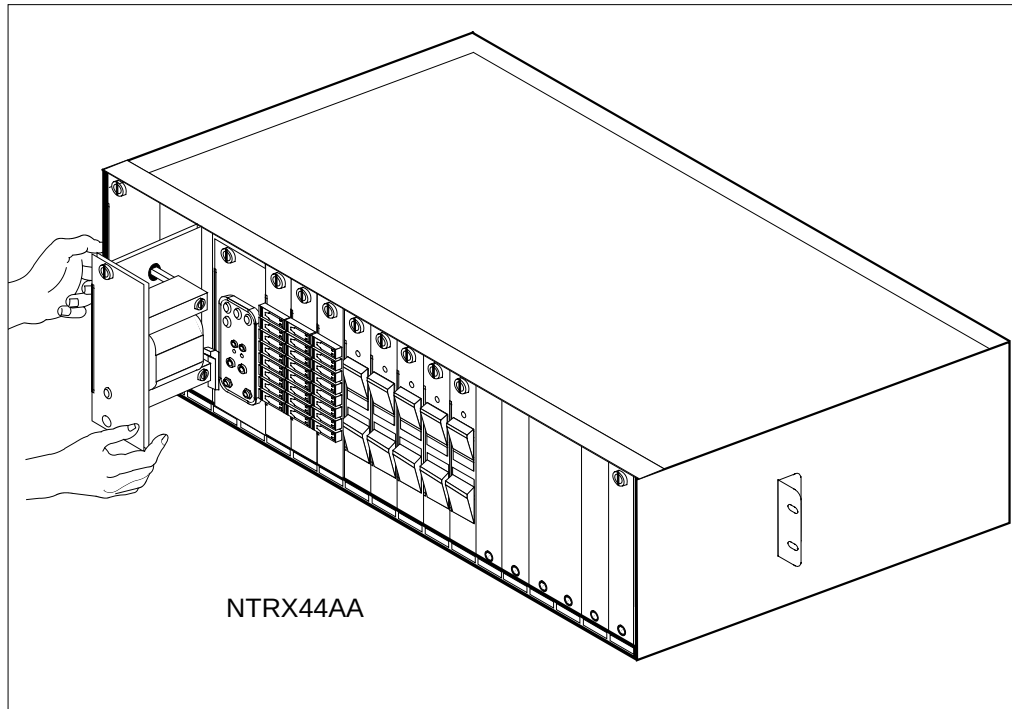

- a Disengage the captive screw at the top of the card.
- b Gently pull the card toward you until it clears the shelf.

10



### DANGER

**Risk of injury from high energy levels, equipment damage**  
When inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.

Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


- a Align the card with the slots in the shelf and gently slide the card into the shelf.
- b Gently but firmly seat the card.
- c Tighten the captive screw at the top of the card.

### *At the rear of the MSP*

- 11 Locate the replaced card and reattach the power connectors, as noted in step 8.

## NTRX44 in an IOPAC MSP (continued)

---

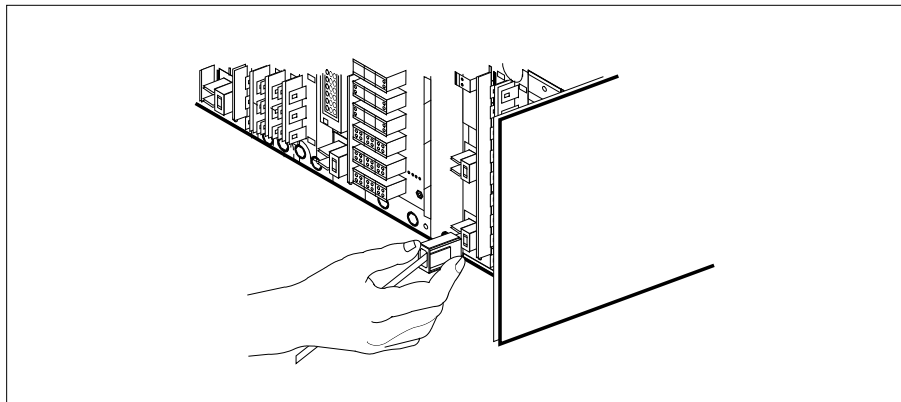

### ***At the front of the MSP***

- 12** If talk battery A, in slots 1 and 2, was replaced, turn on the circuit breaker at slot 10 (circuit breaker 02). If talk battery B, in slots 3 and 4, was replaced, turn on the circuit breaker at slot 11 (circuit breaker 04).

### ***At the MAP terminal***

- 13** Load the PM by typing  
**>LOADPM UNIT lcm\_unit\_no CC**  
and pressing the Enter key.  
*where*  
**lcm\_unit\_no**  
is the number of the ILCM unit to be loaded  
and pressing the Enter key.

| If                                                        | Do      |
|-----------------------------------------------------------|---------|
| message "loadfile not found in directory" is not received | step 14 |
| load passed                                               | step 31 |
| load failed                                               | step 34 |

**14** Determine the type of device on which the PM load files are located.

| If load files are located on | Do      |
|------------------------------|---------|
| tape                         | step 15 |
| IOC disk                     | step 21 |
| SLM disk                     | step 26 |



---

**NTRX44**  
**in an IOPAC MSP (continued)**

---

15 Locate the tape that contains the PM load files.

16 Mount the tape on a magnetic tape drive.

***At the MAP display***

17 Download the tape by typing

**>MOUNT tape\_no**

and pressing the Enter key.

*where*

**tape\_no**

is the number of the tape drive containing the PM load files

18 List the contents of the tape in your user directory by typing

**>TLIST T tape\_no**

and pressing the Enter key.

*where*

**tape\_no**

is the number of the tape drive containing the PM load files.

19 Demount the tape drive by typing

**>DEMOUNT T tape\_no**

and pressing the Enter key.

*where*

**tape\_no**

is the number of the tape drive containing the PM load files

20 Go to step 30.

21 From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.

22 Access the disk utility level of the MAP by typing

**>DSKUT**

and pressing the Enter key.

23 List the IOC file names into your user directory by typing

**>LISTVOL volume\_name ALL**

and pressing the Enter key.

*where*

**volume\_name**

is the name of the volume that contains the PM load files, obtained in step 21.

24 Leave the disk utility by typing

**>QUIT**

and pressing the Enter key.

## NTRX44

### in an IOPAC MSP (continued)

---

- 25 Go to step 30.
- 26 From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 27 Access the disk utility level of the MAP by typing  
**>DISKUT**  
 and pressing the Enter key.
- 28 List the SLM file names into your user directory by typing  
**>LV CM**  
 and pressing the Enter key.  
**>LF load\_file\_name**  
 and pressing the Enter key.  
*where*  
     **load\_file\_name**  
         is the name of the volume that contains the PM load files, obtained in step 26.
- 29 Leave the disk utility by typing  
**>QUIT**  
 and pressing the Enter key.
- 30 Load the ILCM unit by typing  
**>LOADPM UNIT lcm\_unit\_no CC**  
 and pressing the Enter key.  
*where*  
     **lcm\_unit\_no**  
         is the number of the ILCM unit to be loaded  
 and pressing the Enter key.
- | If          | Do      |
|-------------|---------|
| load passed | step 31 |
| load failed | step 34 |
- 31 Return the busied ILCM unit to service by typing the following string:  
**>RTS UNIT lcm\_unit\_no**  
 and pressing the Enter key.  
*where*

---

**NTRX44**  
**in an IOPAC MSP (end)**

---

**lcm\_unit\_no**

is the number of the ILCM unit to be returned to service

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 32   |
| failed        | step 34   |

- 32** Send any faulty cards for repair according to local procedure.
- 33** Record the date card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 35.
- 34** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 35** You have completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX44 in an OPAC MSP**

---

### **Application**

Use this procedure to replace the following card in an MSP.

| PEC    | Suffixes | Name                |
|--------|----------|---------------------|
| NTRX44 | AA       | Talk Battery Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules.

This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited.

An example of limited access is MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end is engaged with the action-arm of the power connector.

As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.


---

**NTRX44**  
**in an OPAC MSP** (continued)

---

The following is an illustration of the connector removal tool.


**Connector removal tool**

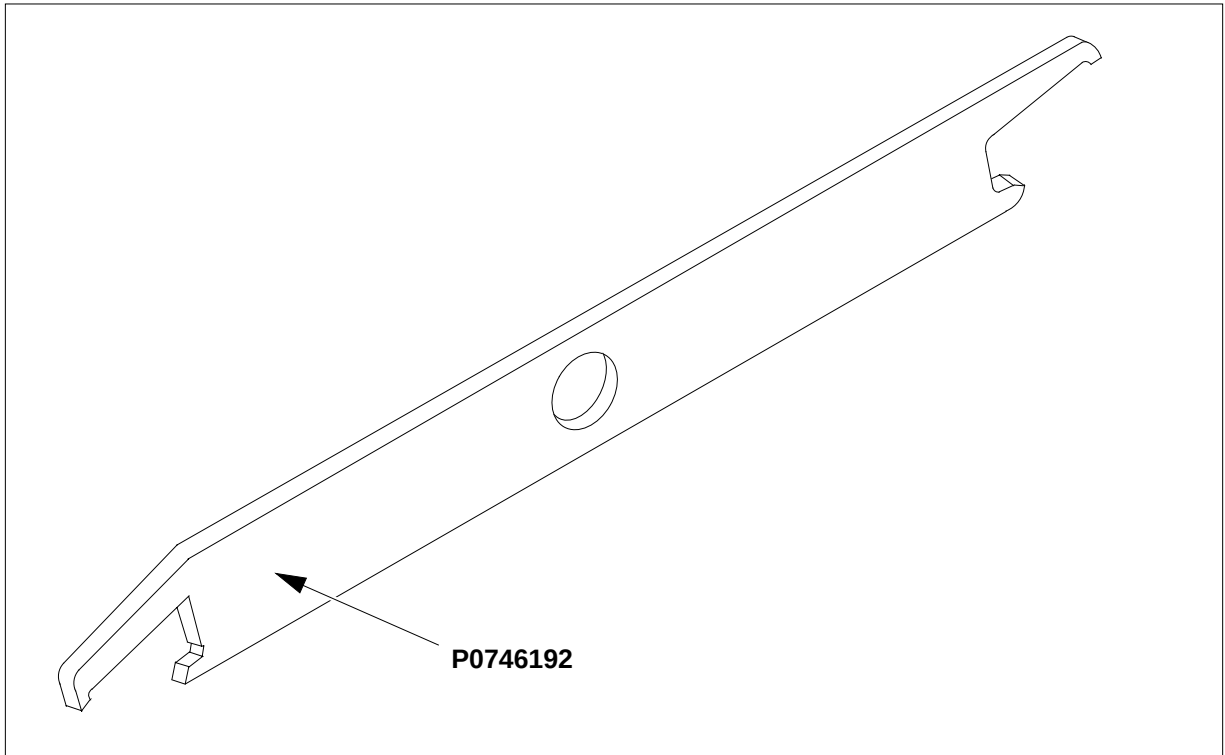

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX44 in an OPAC MSP (continued)

### Summary of card replacement procedure for an NTRX44 card in an MSP

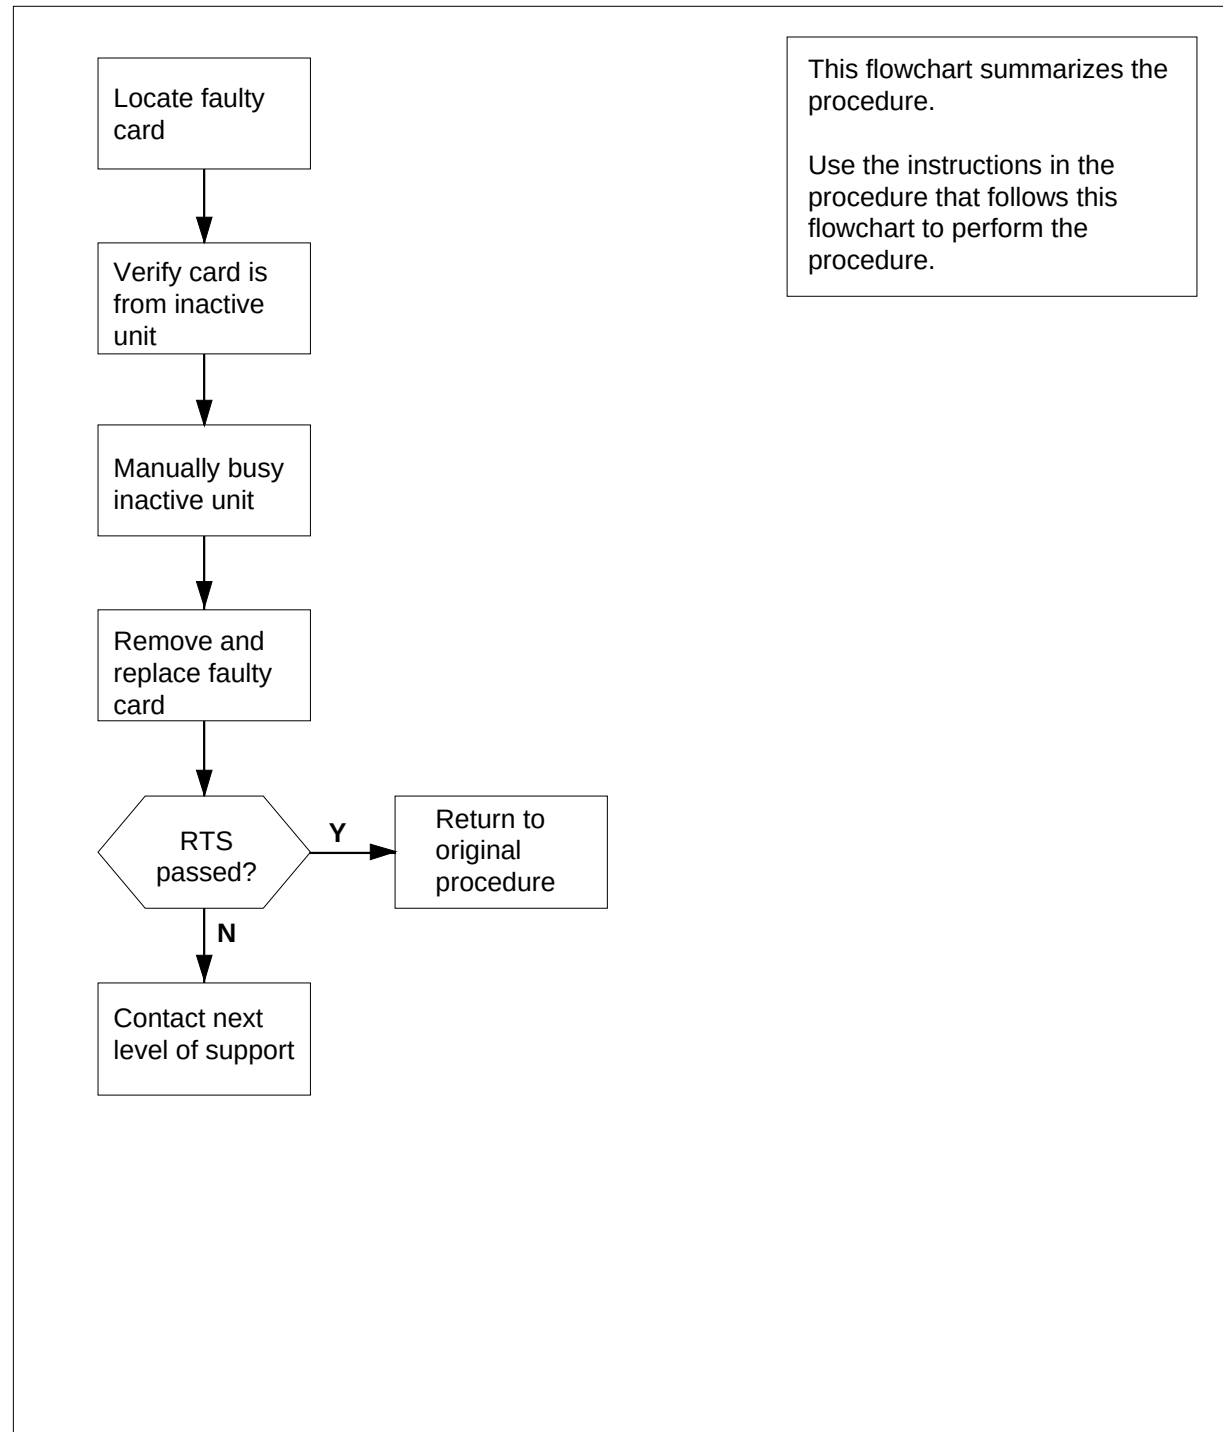

---

## NTRX44 in an OPAC MSP (continued)

---

### Replacing an NTRX44 in an MSP

#### *At your current location:*

1

**CAUTION****Loss of service**

A loss of service *will* occur when this procedure is used as an acceptance procedure or when talk battery is already available on the affected LCM unit. Busing the LCM unit is a precaution only and does not transfer talk battery to the other LCM unit. Talk battery is *not redundant*, and therefore a loss of service occurs on the affected LCM unit. Perform this procedure only during periods of low traffic.

Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.

- 2 Obtain a replacement card. Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal:*

- 3 Access the PM level and post the LCM by typing:

**>MAPCI;MTC;PM;POST LCM site frame lcm**

and pressing the Enter key.

*where*

**site**

is the site name (alphanumeric) of the OPAC

**frame**

is the frame number (0-511) of the OPAC

**lcm**

is the number (0 to 1) of the LCM

*Example of a MAP display:*

## NTRX44 in an OPAC MSP (continued)

```

CM MS IOD Net PM CCS Lns Trks Ext APPL
. . . . 1LCM

LCM.
0 Quit PM 1 0 0 0 0 0 126
2 Post_ LCM. 0 0 0 0 1 9
3 ListSet
4 SwRG LCM. REM1 14 1 ISTb Links_OOS: CSide 0 PSide 0
5 TrnsL_ Unit0: InSv /RG: 1
6 Tst_ Unit1: InSv /RG: 1
7 Bsy_
8 RTS_ Drwr: 01 23 45 67 89 01 23 45 67 89 Stby 0 InSv
9 OffL
10 LoadPM_
11 Disp_
12 Next
13
14 QueryPM
15
16
17
18

```

- 4 Busy the affected in-service LCM unit by typing

**>bsy unit lcm\_unit\_no**

and pressing the Enter key.

where

**lcm\_unit\_no**

is the number of the INACTIVE LCM unit (0 or 1)

**Note:** The Talk Battery Module in slots 1 and 2 controls unit number 0; the Module in slots 3 and 4 controls unit number 1.

**At Bay 1 of the OPAC:**

5



### DANGER


**Risk of injury from high energy levels, static electricity damage**

Wear a wrist strap and connect it to a wrist strap grounding point. This protects the equipment from damage caused by static electricity. A wrist strap grounding point is located at the top of each frame near the hinge.

Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.



## NTRX44 in an OPAC MSP (continued)

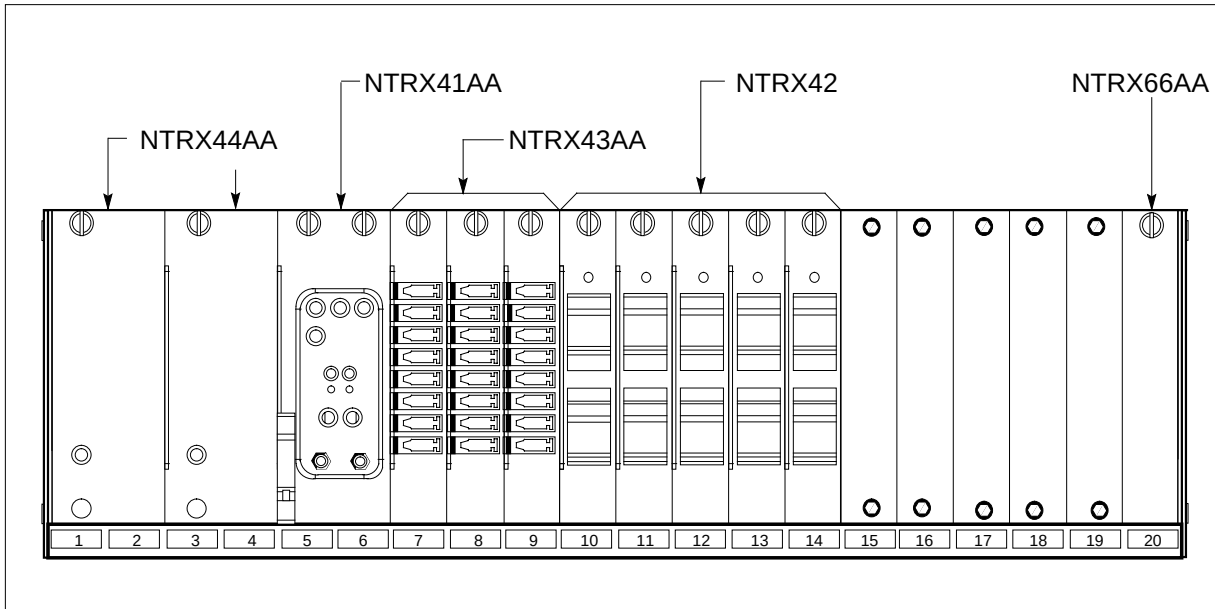

- 6 The circuit breaker designation may vary. Verify the circuit breaker designation, front and rear of MSP, before replacing the talk battery module.
- 7 Turn OFF the associated circuit breaker in slot 10 (circuit breaker 02) if replacing the talk battery module in slots 1 and 2. Turn OFF the associated circuit breaker at slot 11 (circuit breaker 04) if replacing the talk battery module in slots 3 and 4.

### *At the rear of the MSP*

8



#### **DANGER**


**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage could result.

Disconnect the NTRX44 card as shown in the following figure.

- a Swing the frame out and locate the back of the card to be replaced. The card is located in slots 1 and 2 for talk battery "A" or in slots 3 and 4 for talk battery "B".
- b Note wire color and location to facilitate reconnection.

## **NTRX44** **in an OPAC MSP (continued)**

---

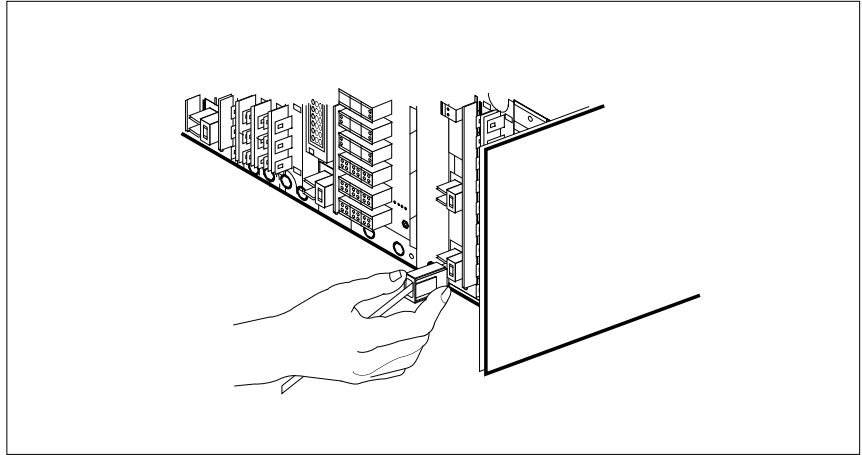


- c** Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors before removing the circuit card.
- d** Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.

### ***At the front of the MSP***

- 9** Remove the NTRX44 card as shown in the following figure.

## NTRX44 in an OPAC MSP (continued)

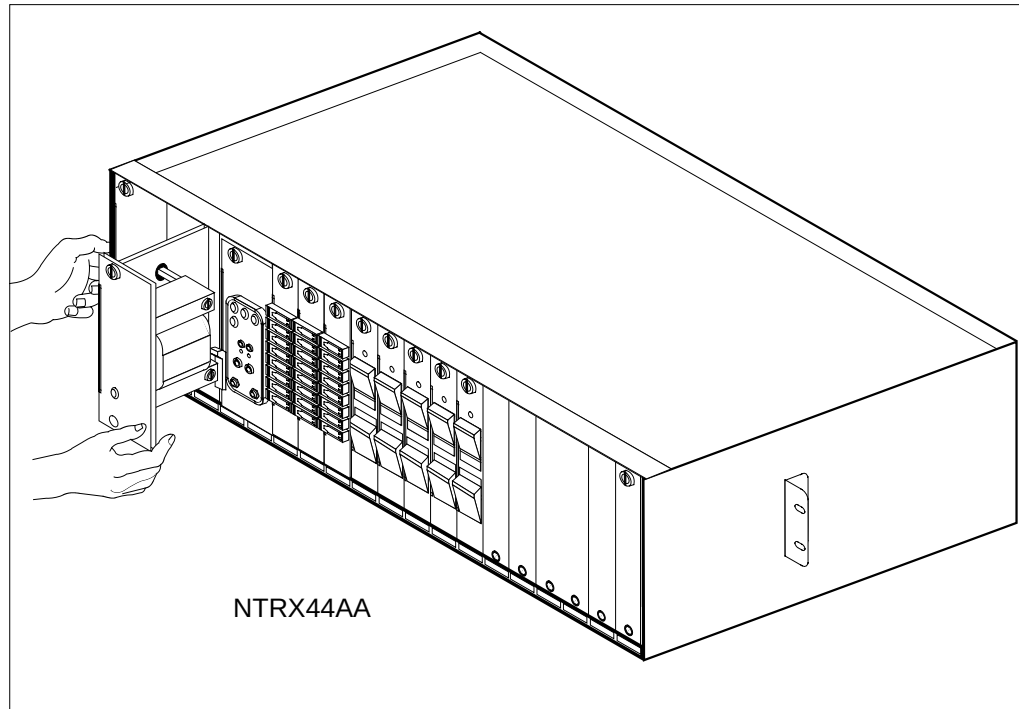

- a Disengage the captive screw at the top of the card.
- b Gently pull the card toward you until it clears the shelf.

10



### DANGER

**Risk of injury from high energy levels, equipment damage**  
When inserting a card, do not apply direct pressure to the components and do not force the cards into the slots.

Ensure the replacement card has the same PEC, including suffix, as the card you just removed.


- a Align the card with the slots in the shelf and gently slide the card into the shelf.
- b Gently but firmly seat the card.
- c Tighten the captive screw at the top of the card.

### *At the rear of the MSP*

- 11 Locate the replaced card and reattach the power connectors, as noted in step 8.

## NTRX44 in an OPAC MSP (continued)

---

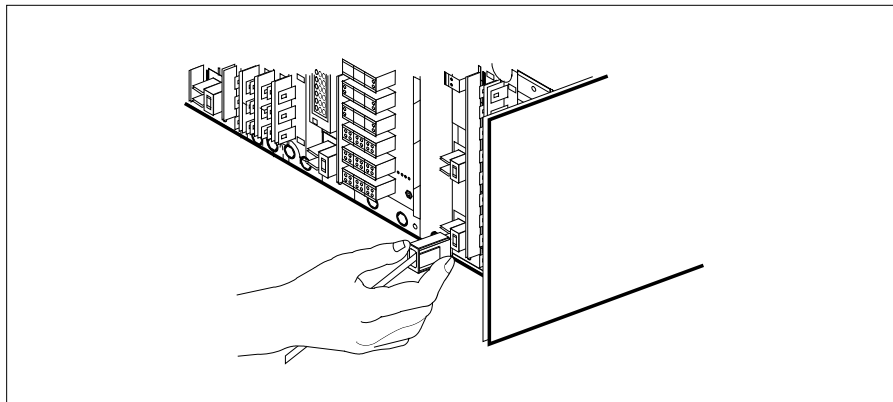

### ***At the front of the MSP***

- 12** If talk battery A, in slots 1 and 2, was replaced, turn on the circuit breaker at slot 10 (circuit breaker 02). If talk battery B, in slots 3 and 4, was replaced, turn on the circuit breaker at slot 11 (circuit breaker 04).

### ***At the MAP terminal***

- 13** Load the PM by typing  
**>LOADPM UNIT lcm\_unit\_no CC**  
and pressing the Enter key.  
*where*  
**lcm\_unit\_no**  
is the number of the LCM unit to be loaded  
and pressing the Enter key.

| If                                                        | Do      |
|-----------------------------------------------------------|---------|
| message "loadfile not found in directory" is not received | step 14 |
| load passed                                               | step 31 |
| load failed                                               | step 34 |

**14** Determine the type of device on which the PM load files are located.

| If load files are located on | Do      |
|------------------------------|---------|
| tape                         | step 15 |
| IOC disk                     | step 21 |
| SLM disk                     | step 26 |

---

## NTRX44 in an OPAC MSP (continued)

---

15 Locate the tape that contains the PM load files.

16 Mount the tape on a magnetic tape drive.

***At the MAP display***

17 Download the tape by typing

**>MOUNT tape\_no**

and pressing the Enter key.

*where*

**tape\_no**

is the number of the tape drive containing the PM load files

18 List the contents of the tape in your user directory by typing

**>TLIST T tape\_no**

and pressing the Enter key.

*where*

**tape\_no**

is the number of the tape drive containing the PM load files.

19 Demount the tape drive by typing

**>DEMOUNT T tape\_no**

and pressing the Enter key.

*where*

**tape\_no**

is the number of the tape drive containing the PM load files

20 Go to step 30.

21 From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.

22 Access the disk utility level of the MAP by typing

**>DSKUT**

and pressing the Enter key.

23 List the IOC file names into your user directory by typing

**>LISTVOL volume\_name ALL**

and pressing the Enter key.

*where*

**volume\_name**

is the name of the volume that contains the PM load files, obtained in step 21.

24 Leave the disk utility by typing

**>QUIT**

and pressing the Enter key.

## NTRX44

### in an OPAC MSP (continued)

---

- 25 Go to step 30.
- 26 From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 27 Access the disk utility level of the MAP by typing  
**>DISKUT**  
 and pressing the Enter key.
- 28 List the SLM file names into your user directory by typing  
**>LV CM**  
 and pressing the Enter key.  
**>LF load\_file\_name**  
 and pressing the Enter key.  
*where*  
     **load\_file\_name**  
         is the name of the volume that contains the PM load files, obtained in step 26.
- 29 Leave the disk utility by typing  
**>QUIT**  
 and pressing the Enter key.
- 30 Load the LCM unit by typing  
**>LOADPM UNIT lcm\_unit\_no CC**  
 and pressing the Enter key.  
*where*  
     **lcm\_unit\_no**  
         is the number of the LCM unit to be loaded  
 and pressing the Enter key.
- | If          | Do      |
|-------------|---------|
| load passed | step 31 |
| load failed | step 34 |
- 31 Return the busied LCM unit to service by typing the following string:  
**>RTS UNIT lcm\_unit\_no**  
 and pressing the Enter key.  
*where*

---

**NTRX44**  
**in an OPAC MSP (end)**

---

**lcm\_unit\_no**

is the number of the LCM unit to be returned to service

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 32   |
| failed        | step 34   |

- 32** Send any faulty cards for repair according to local procedure.
- 33** Record the date card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 35.
- 34** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 35** You have completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX44 in an RSC MSP**

---

### **Application**

Use this procedure to replace an NTRX44 card in a modular supervisory panel (MSP) in the following cabinets.

- Cabinetized Extension Module (CEXT)
- Cabinetized Line Concentrating Equipment (CLCE)
- Cabinetized Power Distribution Center (CPDC)
- Cabinetized Remote Switching Center (CRSC)
- Cabinetized Miscellaneous Equipment (CMIS)
- Cabinetized Remote Miscellaneous Equipment (CRME)

| PEC    | Suffixes | Name                |
|--------|----------|---------------------|
| NTRX44 | AA       | Talk Battery Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged




---

**NTRX44**  
**in an RSC MSP (continued)**

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

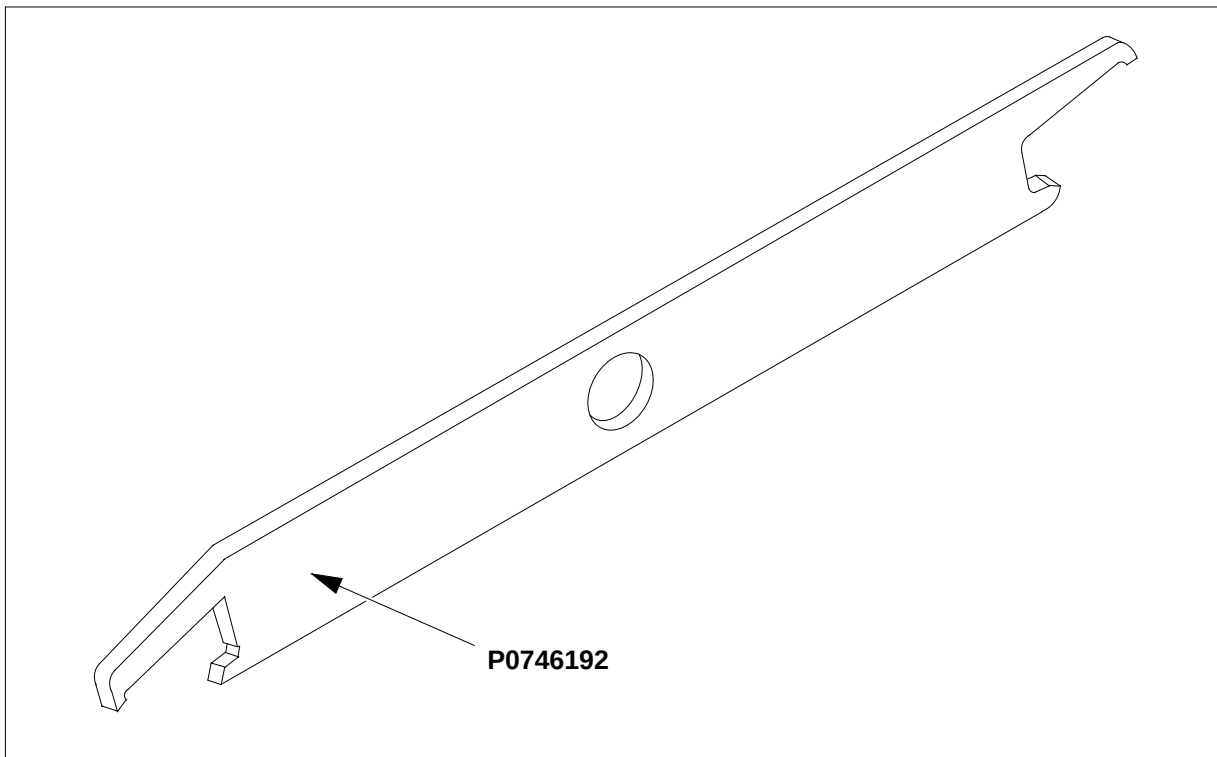**Connector removal tool**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTRX44 in an RSC MSP (continued)

### Summary of card replacement procedure for an NTRX44 card in RSC MSP

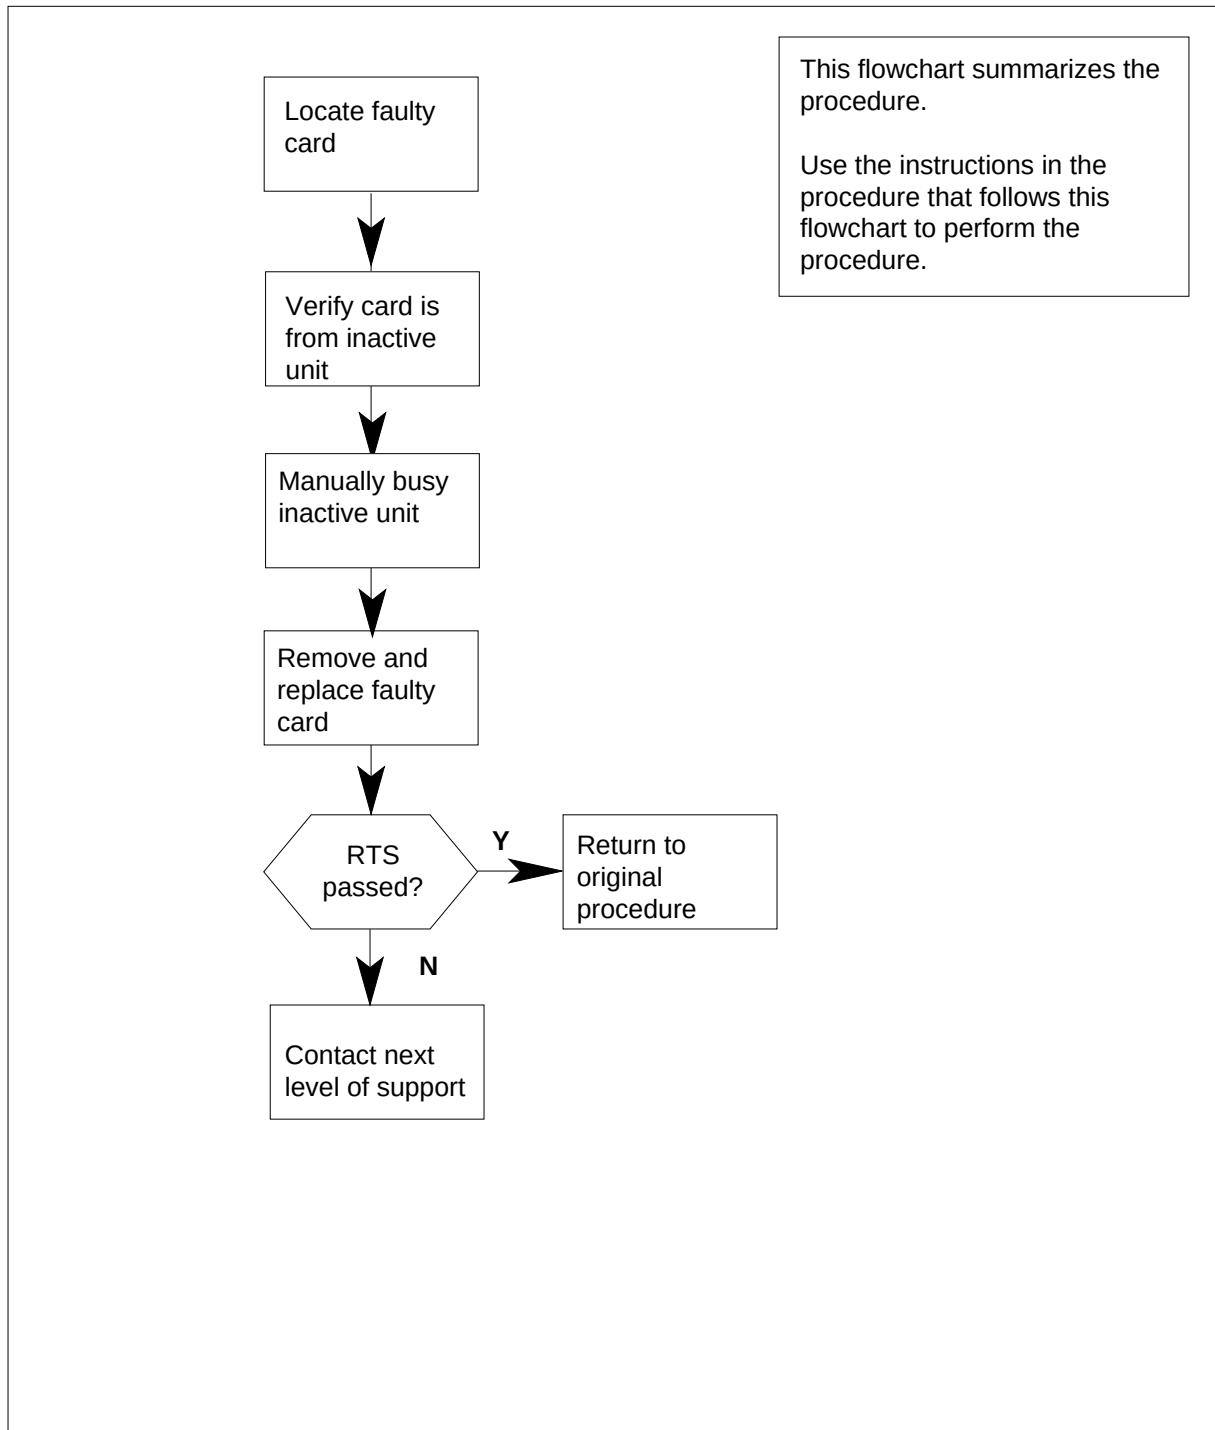

---

## NTRX44 in an RSC MSP (continued)

---

### Replacing an NTRX44RX44 card in RSCE MSP

#### *At your current location*

1



#### **CAUTION**

##### **Loss of service**

A loss of service *will* occur when this procedure is used as an acceptance procedure or when talk battery is already available on the affected LCM unit. Busing the LCM unit is a precaution only and does not transfer talk battery to the other LCM unit. Talk battery is *not redundant*, and therefore a loss of service occurs on the affected LCM unit. Perform this procedure only during periods of low traffic.

Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.

- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP terminal*

- 3 Set the MAP display to the PM level and post the LCME powered by the talk battery module by typing

**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**

and pressing the Enter key.

*where*

##### **site**

is the name of the site at which the LCME is located

##### **lcme\_frame\_no**

is the number of the frame in which the LCME is located

##### **lcme\_no**

is the number of the LCME powered by the talk battery module

*Example of a MAP display*

## NTRX44

### in an RSC MSP (continued)

| CM         | MS     | IOD   | Net  | PM    | CCS  | Lns        | Trks  | Ext       | APPL          |
|------------|--------|-------|------|-------|------|------------|-------|-----------|---------------|
| .          | .      | .     | .    | 1LCME | .    | .          | .     | .         | .             |
| LCME       |        |       | SysB | ManB  | OffL | CBsy       | ISTb  | InSv      |               |
| 0 Quit     | PM     |       | 1    | 0     | 2    | 0          | 2     | 12        |               |
| 2 Post_    | LCME   |       | 0    | 0     | 2    | 0          | 2     | 9         |               |
| 3 ListSet  |        |       |      |       |      |            |       |           |               |
| 4 SwRG     | LCME   | RSC-S | 14   | 1     | ISTb | Links_00S: | CSide | 0         | PSide 0       |
| 5 Trnsl_   | Unit0: | InSv  |      |       |      | /RG: 1     |       |           |               |
| 6 Tst_     | Unit1: | InSv  |      |       |      | /RG: 1     |       |           |               |
| 7 Bsy_     |        |       |      |       | 11   | 11         | 11    | RG:Pref 1 | ISTB          |
| 8 RTS_     | Drwr:  | 01    | 23   | 45    | 67   | 89         | 01    | 23        | 4 Stby 0 InSv |
| 9 OffL     |        | ..    | ..   | ..    | ..   | ..         | ..    | ..        |               |
| 10 LoadPM_ |        |       |      |       |      |            |       |           |               |
| 11 Disp_   |        |       |      |       |      |            |       |           |               |
| 12 Next    |        |       |      |       |      |            |       |           |               |
| 13         |        |       |      |       |      |            |       |           |               |
| 14 QueryPM |        |       |      |       |      |            |       |           |               |
| 15         |        |       |      |       |      |            |       |           |               |
| 16         |        |       |      |       |      |            |       |           |               |
| 17         |        |       |      |       |      |            |       |           |               |
| 18         |        |       |      |       |      |            |       |           |               |

- 4 Busy the affected in-service PM unit by typing

**>BSY UNIT lcme\_unit\_no**

and pressing the Enter key.

where

**lcme\_unit\_no**

is the number of the LCME unit.


**Note:** The talk battery module in slots 1 and 2 controls unit number 0; the module in slots 3 and 4 controls unit number 1.

#### ***At the front panel of the cabinet***

- 5 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module.

## NTRX44 in an RSC MSP (continued)

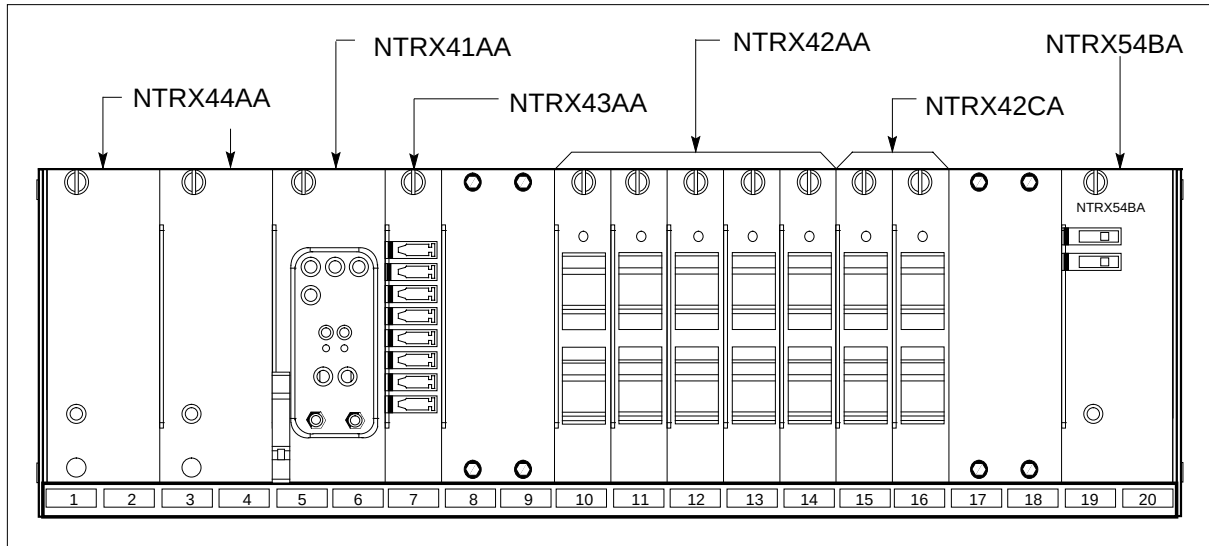

6

**DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

**DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

7

Turn off the circuit breaker at slot 15 (circuit breaker 12) if replacing the talk battery module in slots 1 and 2. Turn off the circuit breaker at slot 16 (circuit breaker 14) if replacing the talk battery module in slots 3 and 4. These circuit breaker locations correspond to the CRSC and CEXT modules.

**Note:** The circuit breaker designation may vary depending on the type of cabinet where you are replacing the talk battery module. Verify the circuit breaker designation at shelf position 61 before replacing the talk battery.

## NTRX44 in an RSC MSP (continued)

---

- 8 Pull out corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the connectors on the rear of the MSP. This step does not apply to the CMIS, CPDC, and CRME.

### *At the rear panel of the cabinet*

9




#### **DANGER**

**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage can result.

Remove the NTRX44 circuit card as shown in the following figures.

- a Open the rear doors of the cabinet and locate the back of the circuit card to be replaced. The circuit card is located in slots 1 and 2 for talk battery "A" or in slots 3 and 4 for talk battery "B".
- b Note wire color and location to facilitate re-connection.

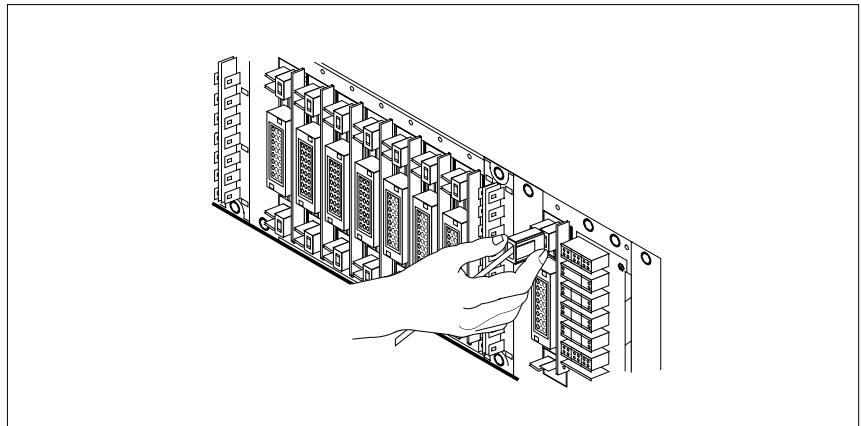


- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors before removing the circuit card.
- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.

## **NTRX44** **in an RSC MSP (continued)**

### ***At the front panel of the cabinet***

- 10** Remove the NTRX44 card.
  - a** Disengage the knurled thumbscrew at the top of the card.
  - b** Gently pull the card towards you until it clears the shelf.

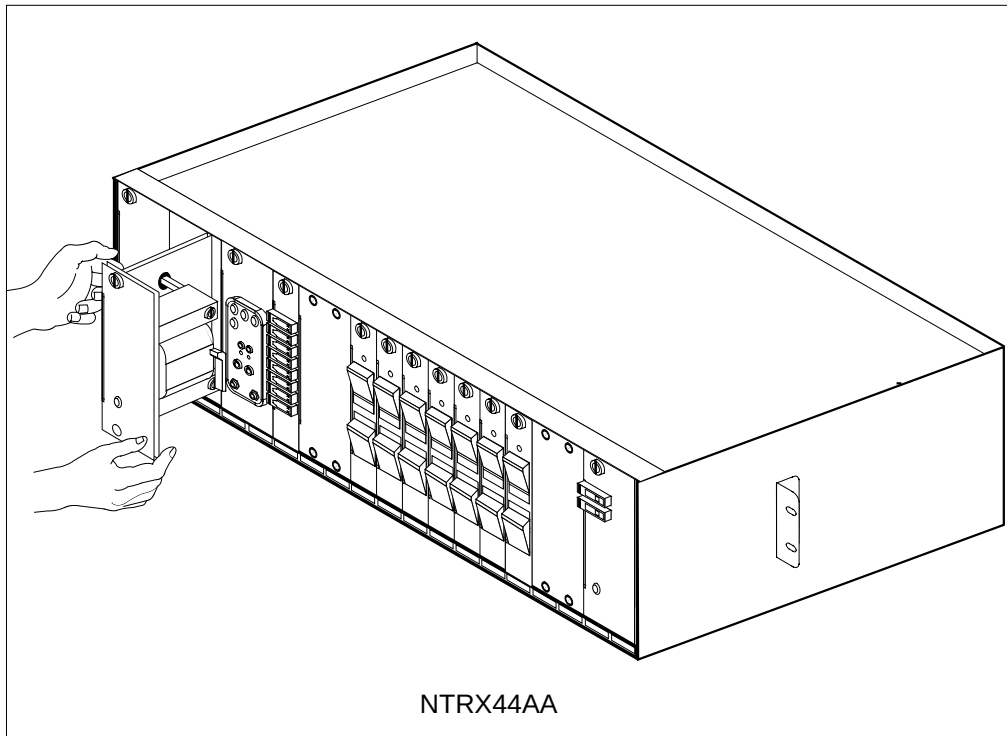


- 11** Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
  - a** Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b** Gently but firmly seat the circuit card.
  - c** Tighten the knurled thumbscrew at the top of the circuit card.

### ***At the rear panel of the cabinet***

- 12** Locate the replaced circuit card and re-attach the power connectors.

## NTRX44 in an RSC MSP (continued)

---

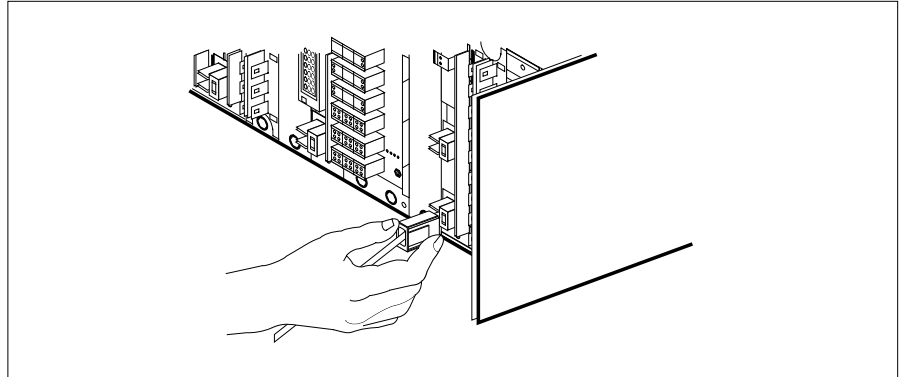

- 13** Install the jumper connectors and cables removed in step 9 onto the replacement circuit card.

### *At the front of the cabinet*

- 14** If talk battery A, in slots 1 and 2, was replaced, turn on the circuit breaker at slot 15 (circuit breaker 12). If Talk Battery B, in slots 3 and 4, was replaced, turn on the circuit breaker at slot 16 (circuit breaker 14).

**Note:** The circuit breaker designation may vary depending on the type of cabinet where you are replacing the talk battery module. Verify the circuit breaker designation at shelf position 61 before replacing the talk battery.

- 15** Push in corresponding line shelf. Note that this step does *not* apply to the CMIS, CPDC, and CRME.

### *At the MAP terminal*

- 16** Return the LCME to service by typing  
**>RTS UNIT lcme\_unit\_no**  
and pressing the Enter key.  
where

**lcme\_unit\_no**  
is the number of the LCME unit.

---

| If RTS       | Do      |
|--------------|---------|
| passed       | step 17 |
| did not pass | step 19 |

---

- 17** Send any faulty cards for repair according to local procedure.
- 18** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 20.
- 19** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.



**NTRX44**  
**in an RSC MSP (end)**

---

- 20** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX44 in an RSC-S (DS-1) Model B MSP**

---

### **Application**

Use this procedure to replace an NTRX44 card in a modular supervisory panel (MSP) located in a

- cabinetized extension module (CEXT)
- cabinetized line concentrating equipment (CLCE)
- cabinetized line module ISDN (CLMI)
- cabinetized power distribution center (CPDC)
- cabinetized remote switching center (CRSC)
- cabinetized miscellaneous equipment (CMIS)

| PEC    | Suffixes | Name                |
|--------|----------|---------------------|
| NTRX44 | AA       | Talk Battery Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged


---

**NTRX44**  
**in an RSC-S (DS-1) Model B MSP (continued)**

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.


Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

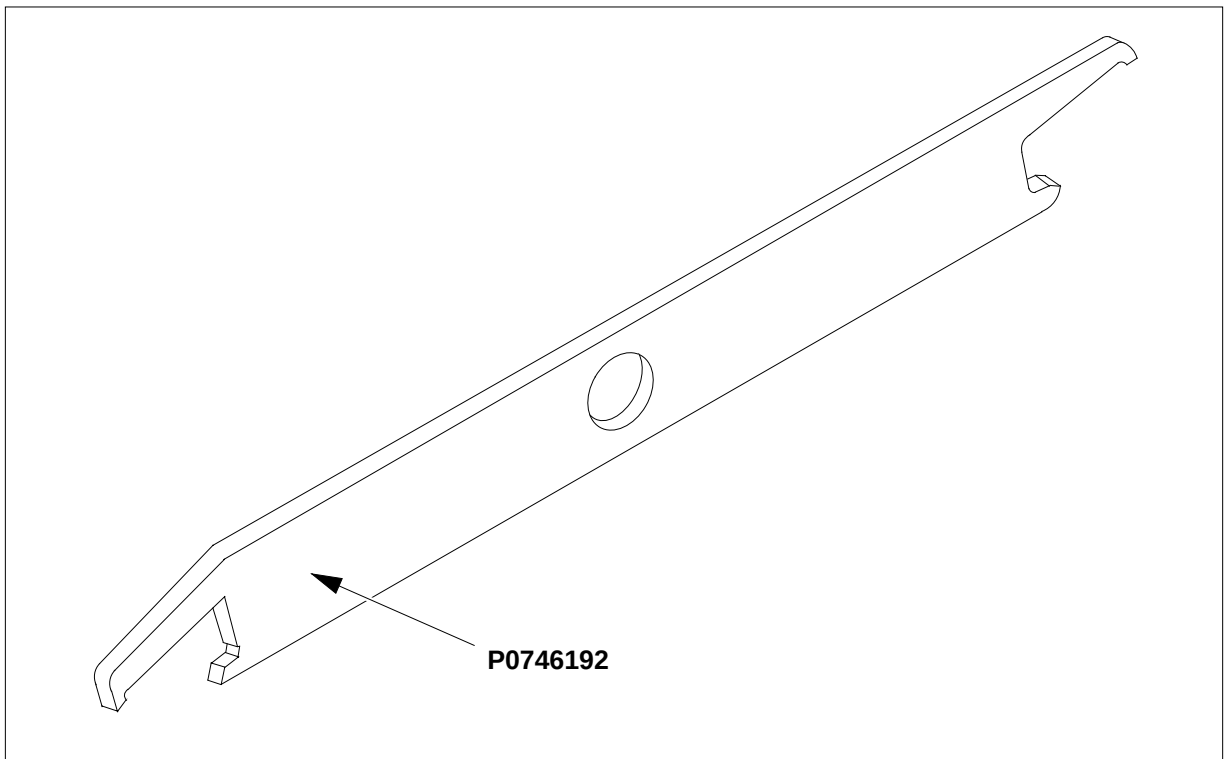**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure.

## NTRX44 in an RSC-S (DS-1) Model B MSP (continued)

### Summary of card replacement procedure in an NTRX44 card in RSC-S MSP

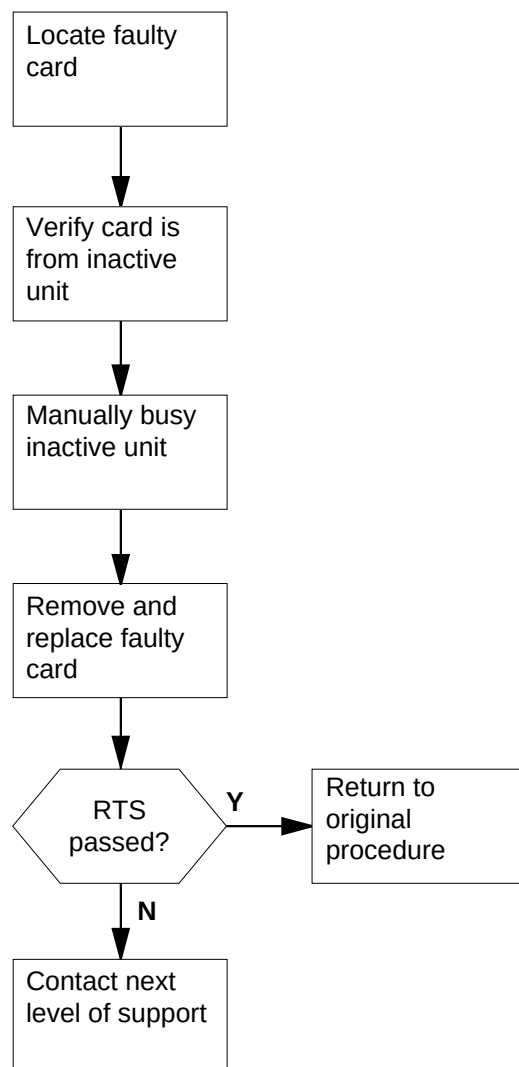

This flowchart summarizes the procedure.

Use the instructions in the procedure that follows this flowchart to perform the procedure.

---

## NTRX44

### in an RSC-S (DS-1) Model B MSP (continued)

---

#### Replacing an NTRX44 card in RSC-S MSP

##### *At your Current Location*

1

**CAUTION****Loss of service**

A loss of service *will* occur when this procedure is used as an acceptance procedure or when talk battery is already available on the affected LCM unit. Busying the LCM unit is a precaution only and does not transfer talk battery to the other LCM unit. Talk battery is *not redundant*, and therefore a loss of service occurs on the affected LCM unit. Perform this procedure only during periods of low traffic.

Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.

- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

##### *At the MAP terminal*

- 3 Set the MAP display to the PM level and post the LCME powered by the talk battery module by typing

**>MAPCI;MTC;PM;POST LCME site lcme\_frame\_no lcme\_no**

and pressing the Enter key.

*where*

**site**

is the name of the site at which the LCME is located

**lcme\_frame\_no**

is the number of the frame in which the LCME is located

**lcme\_no**

is the number of the LCME powered by the talk battery module

*Example of a MAP display*

## NTRX44

### in an RSC-S (DS-1) Model B MSP (continued)

| CM         | MS     | IOD   | Net  | PM    | CCS  | Lns        | Trks  | Ext       | APPL          |
|------------|--------|-------|------|-------|------|------------|-------|-----------|---------------|
| .          | .      | .     | .    | 1LCME | .    | .          | .     | .         | .             |
| LCME       |        |       | SysB | ManB  | OffL | CBsy       | ISTb  | InSv      |               |
| 0 Quit     | PM     |       | 1    | 0     | 2    | 0          | 2     | 12        |               |
| 2 Post_    | LCME   |       | 0    | 0     | 2    | 0          | 2     | 9         |               |
| 3 ListSet  |        |       |      |       |      |            |       |           |               |
| 4 SwRG     | LCME   | RSC-S | 14   | 1     | ISTb | Links_00S: | CSide | 0         | PSide 0       |
| 5 Trnsl_   | Unit0: | InSv  |      |       |      | /RG: 1     |       |           |               |
| 6 Tst_     | Unit1: | InSv  |      |       |      | /RG: 1     |       |           |               |
| 7 Bsy_     |        |       |      |       | 11   | 11         | 11    | RG:Pref 1 | ISTB          |
| 8 RTS_     | Drwr:  | 01    | 23   | 45    | 67   | 89         | 01    | 23        | 4 Stby 0 InSv |
| 9 OffL     |        | ..    | ..   | ..    | ..   | ..         | ..    | ..        |               |
| 10 LoadPM_ |        |       |      |       |      |            |       |           |               |
| 11 Disp_   |        |       |      |       |      |            |       |           |               |
| 12 Next    |        |       |      |       |      |            |       |           |               |
| 13         |        |       |      |       |      |            |       |           |               |
| 14 QueryPM |        |       |      |       |      |            |       |           |               |
| 15         |        |       |      |       |      |            |       |           |               |
| 16         |        |       |      |       |      |            |       |           |               |
| 17         |        |       |      |       |      |            |       |           |               |
| 18         |        |       |      |       |      |            |       |           |               |

- 4 Busy the affected in-service PM unit by typing

**>BSY UNIT lcme\_unit\_no**

and pressing the Enter key.

where

**lcme\_unit\_no**

is the number of the LCME unit.

**Note:** The talk battery module in slots 1 and 2 controls unit number 0; the module in slots 3 and 4 controls unit number 1.


#### **At the front panel of the cabinet**

- 5 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module.

## NTRX44

### in an RSC-S (DS-1) Model B MSP (continued)

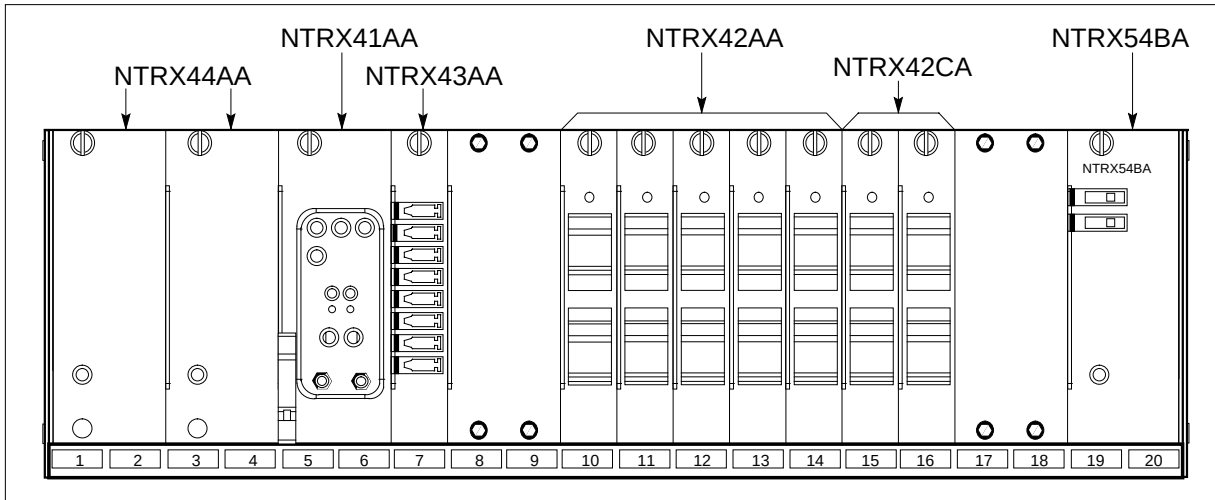

6

**DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

**DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

- 7** Turn off the circuit breaker at slot 15 (circuit breaker 12) if replacing the talk battery module in slots 1 and 2. Turn off the circuit breaker at slot 16 (circuit breaker 14) if replacing the talk battery module in slots 3 and 4. These circuit breaker locations correspond to the CRSC and CEXT modules.

**Note:** The circuit breaker designation may vary depending on the type of cabinet where you are replacing the talk battery module. Verify the circuit breaker designation at shelf position 61 before replacing the talk battery.

- 8** Pull out corresponding line shelf approximately 152 mm (6 in.). The line shelf is located below the MSP. This approach permits easier hand access to the

## NTRX44 in an RSC-S (DS-1) Model B MSP (continued)

---

connectors on the rear of the MSP. This step does not apply to the CMIS, CPDC, and CRME.

*At the rear panel of the cabinet*

9




### **DANGER**

**Risk of injury from high energy levels, voltage present**  
Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage can result.

Remove the NTRX44 circuit card as shown in the following figures.

- a Open the rear doors of the cabinet and locate the back of the circuit card to be replaced. The circuit card is located in slots 1 and 2 for talk battery "A" or in slots 3 and 4 for talk battery "B".
- b Note wire color and location to facilitate re-connection.

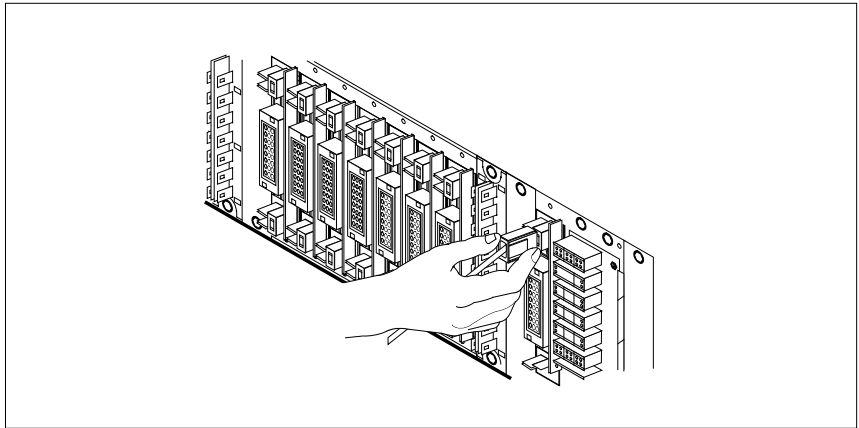

- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black power connectors located above the large blue power connector. Ensure you disconnect the black connectors before removing the circuit card.
- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.



---


## **NTRX44**

### **in an RSC-S (DS-1) Model B MSP (continued)**

---

***At the front panel of the cabinet***

- 10** Remove the NTRX44 card.
- a** Disengage the knurled thumbscrew at the top of the card.
  - b** Gently pull the card towards you until it clears the shelf.

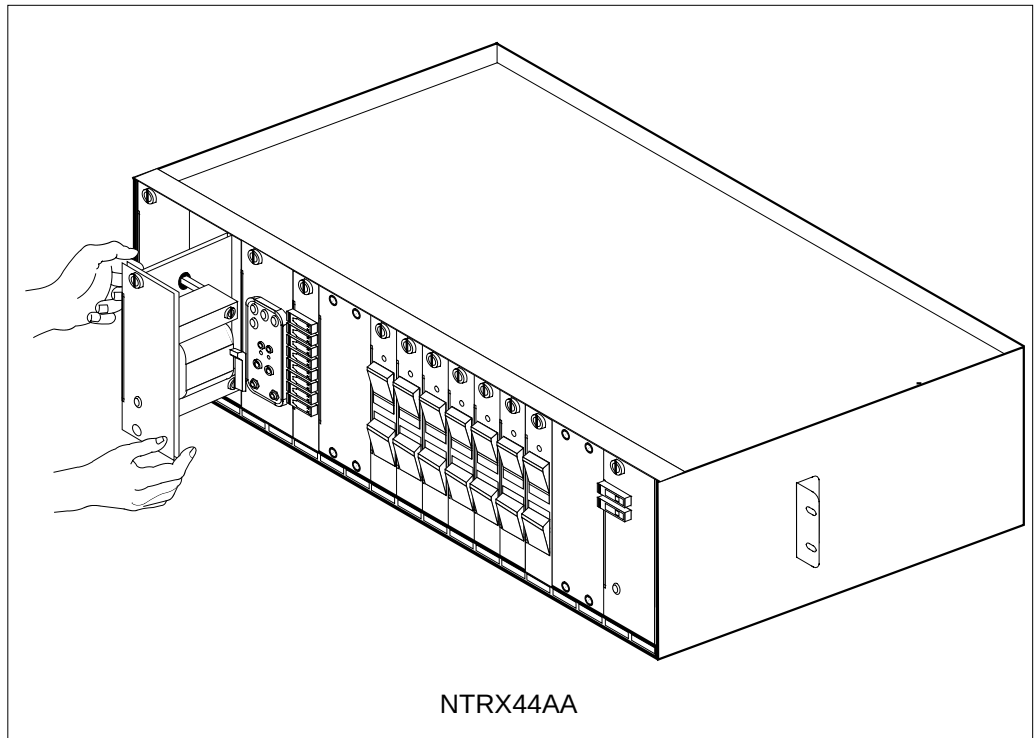

- 11** Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a** Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b** Gently but firmly seat the circuit card.
  - c** Tighten the knurled thumbscrew at the top of the circuit card.


***At the rear panel of the cabinet***

- 12** Locate the replaced circuit card and re-attach the power connectors.

## NTRX44

### in an RSC-S (DS-1) Model B MSP (continued)

---

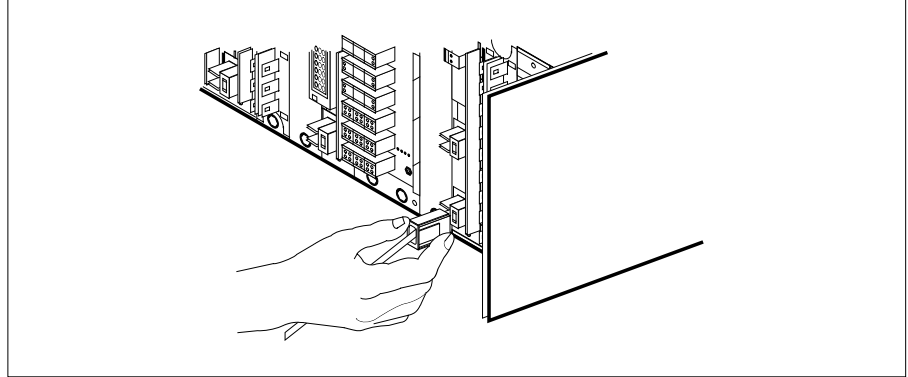

- 13** Install the jumper connectors and cables removed in step 9 9 onto the replacement circuit card.

#### *At the front of the cabinet*

- 14** If talk battery A, in slots 1 and 2, was replaced, turn on the circuit breaker at slot 15 (circuit breaker 12). If Talk Battery B, in slots 3 and 4, was replaced, turn on the circuit breaker at slot 16 (circuit breaker 14).

**Note:** The circuit breaker designation may vary depending on the type of cabinet where you are replacing the talk battery module. Verify the circuit breaker designation at shelf position 61 before replacing the talk battery.

- 15** Push in corresponding line shelf. Note that this step does *not* apply to the CMIS, CPDC, and CRME.

#### *At the MAP terminal*

- 16** Return the LCME to service by typing

**>RTS UNIT lcme\_unit\_no**

and pressing the Enter key.

where

**lcme\_unit\_no**

is the number of the LCME unit.

---

| If RTS       | Do      |
|--------------|---------|
| passed       | step 17 |
| did not pass | step 19 |

---

- 17** Send any faulty cards for repair according to local procedure.

- 18** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 20.

- 19** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.

**NTRX44**

**in an RSC-S (DS-1) Model B MSP (end)**

---

- 20** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX54 in an RSC-M/MSP**

---

### **Application**

Use this procedure to replace an NTRX54 card in a modular supervisory panel (MSP) that supports the RCO2 shelf in the Remote Switching Center Multi-access (RSC-M) cabinet.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>              |
|------------|-----------------|--------------------------|
| NTRX54     | BA              | Fan power control module |

### **Common procedures**

The common returning a card procedure is referenced in this procedure.

### **Action**

A connector removal tool is available to allow removal of the AMP Faston receptacles. This tool allows removal of these receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.) and P0747552 254 mm (10 in.). You can use the shorter tool when conditions cause limited access to the rear of the MSP. An example of limited access is MSP modules located behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile positions the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. When you rotate the tool around this pivot point, you engage a profile tip with the action-arm of the power connector. This profile tip is the longer tip of the profile that has a hook on the end of the tip. As you press the action-arm of the connector, you disengage the receptacle from the connector tab. To remove the receptacle, pull the tool with the receptacle trapped in the jaw of the tool away from the connector. To disengage the tool from the receptacle, rotate the hook of the tool off the action-arm of the receptacle.


The shape of the cut-out is the same on each end of the tool. The position of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles. You can require the use of the tool at different angles because of limited access to the connectors.

---

**NTRX54**  
**in an RSC-M/MSP** (continued)

---

**Connector removal tool**

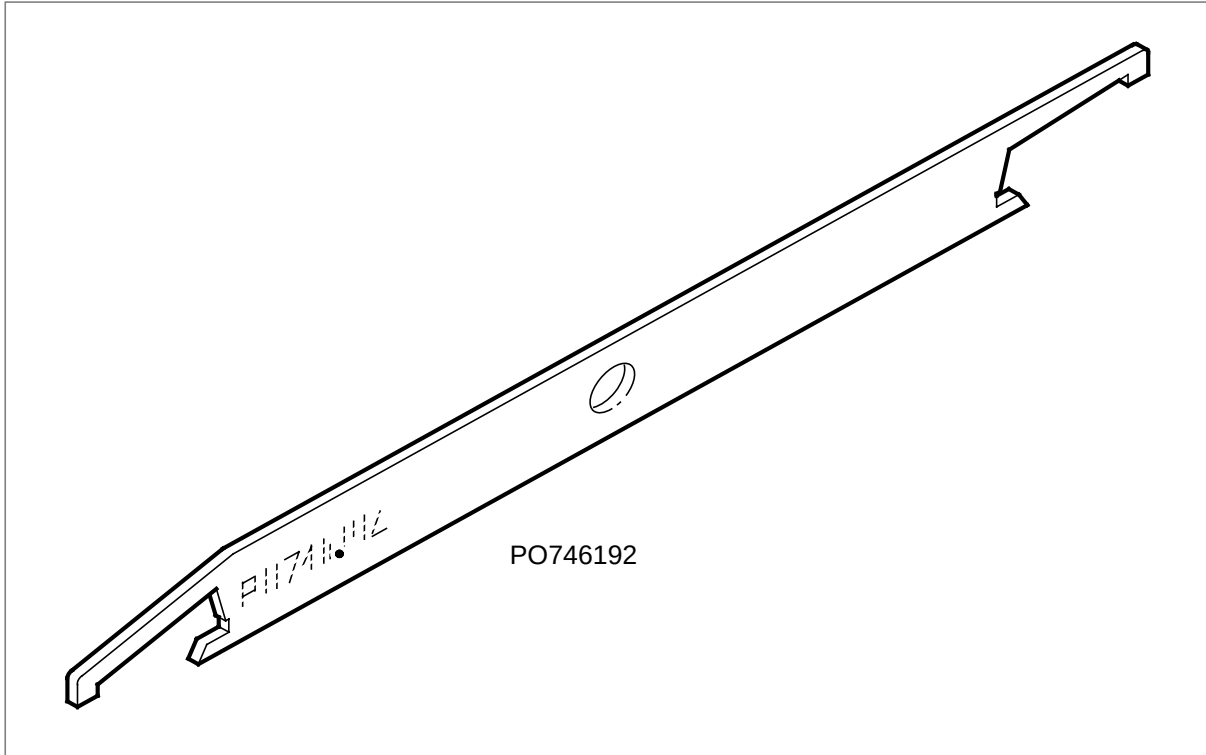


This card replacement procedure contains a summary flowchart and a list of steps. Use the flowchart to review the procedure. Follow the steps to perform the procedure.

## NTRX54 in an RSC-M/MSP (continued)

---

### Summary of Replacing an NTRX54 in an RSC-M/MSP

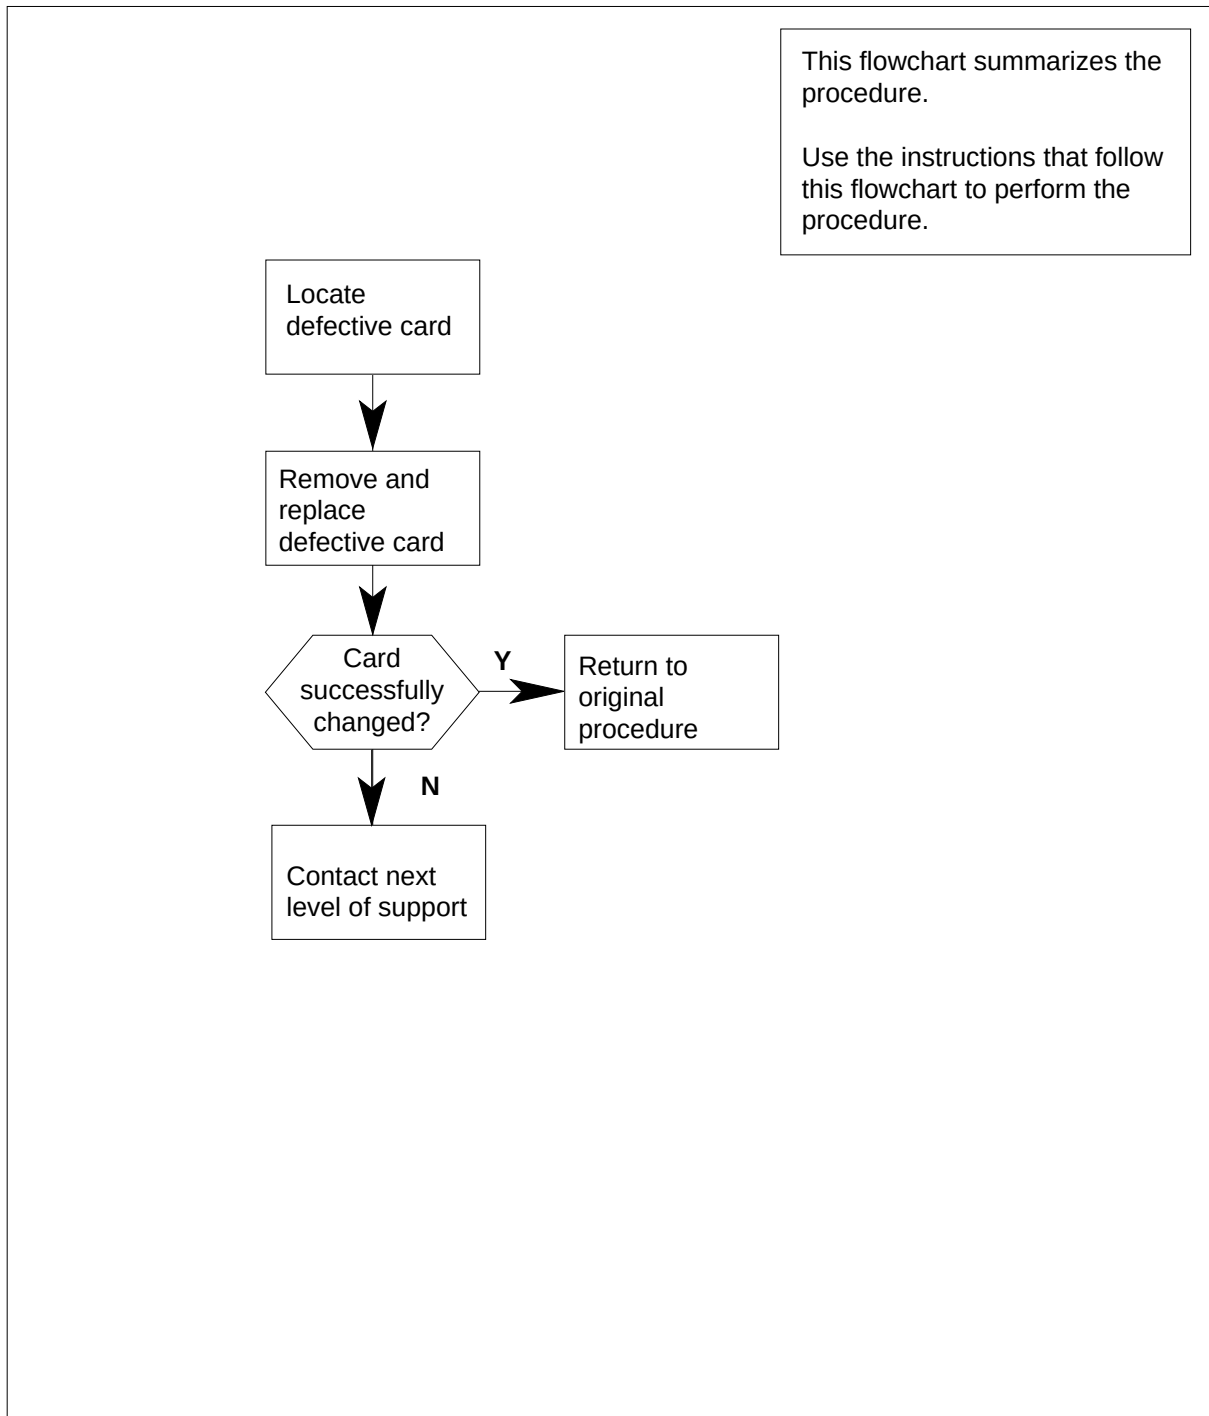

## NTRX54 in an RSC-M/MSP (continued)

### Replacing a/an NTRX54 card in an RSC-M/MSP


#### At the MAP terminal

- 1 Proceed if your maintenance support group or a step in a maintenance procedure directed you to this card replacement procedure. Use the procedure to verify or accept cards.
- 2 Obtain a replacement circuit card. Make sure the replacement circuit card has the same product equipment code (PEC) and suffix as the circuit card you want to remove.

#### At the front panel of the cabinet

- 3 Open the front cover of the MSP. Release the two cover latches. Swing the cover down to the open position.

#### MSP

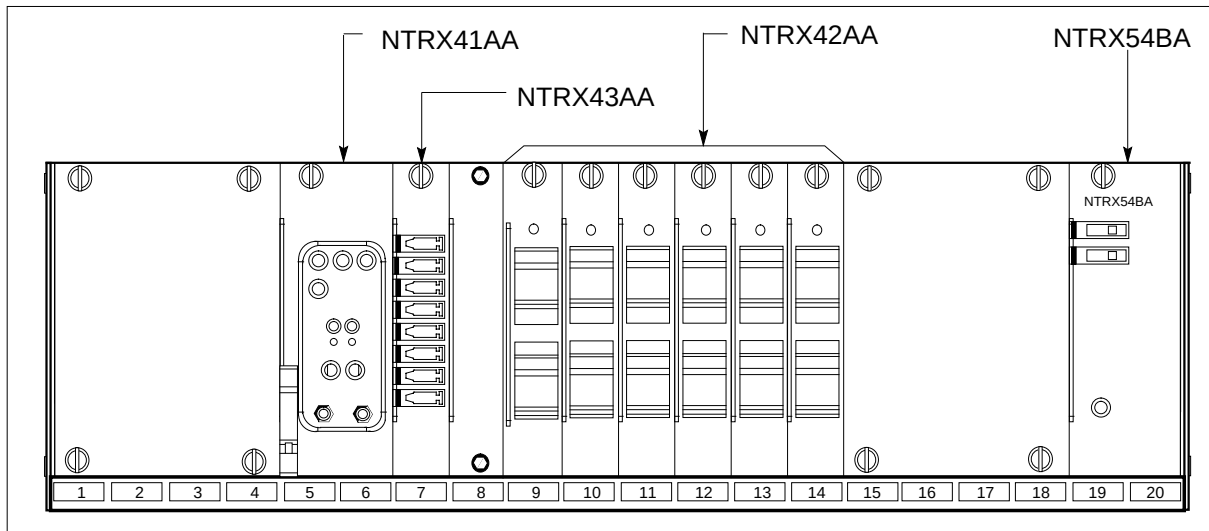

4



#### WARNING

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap that connects to the wrist-strap grounding point on the left side of the modular supervisory panel (MSP) to remove cards. The wrist strap protects the equipment against static electricity damage.

## NTRX54 in an RSC-M/MSP (continued)



### **DANGER**

**Risk of injury from high energy levels, equipment damage**  
Take these precautions when you remove or insert a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards in the slots.



### **DANGER**

#### **Heat damage**


Do not leave this card out of service for more than 30 min. A large amount of damage the whole cabinet can occur if cooling does not occur for more than 30 min.

Put on a wrist strap.

- 5 Remove the two fuses in the fan power control module.

### ***At the rear panel of the cabinet***

- 6 Remove the NTRX54 circuit card as shown in the following figures.
  - a Open the rear doors of the cabinet. Locate the circuit card. The circuit card is in slots 19 and 20.
  - b Loosen the four screws. Slide the access plate sideways to remove the access plate.

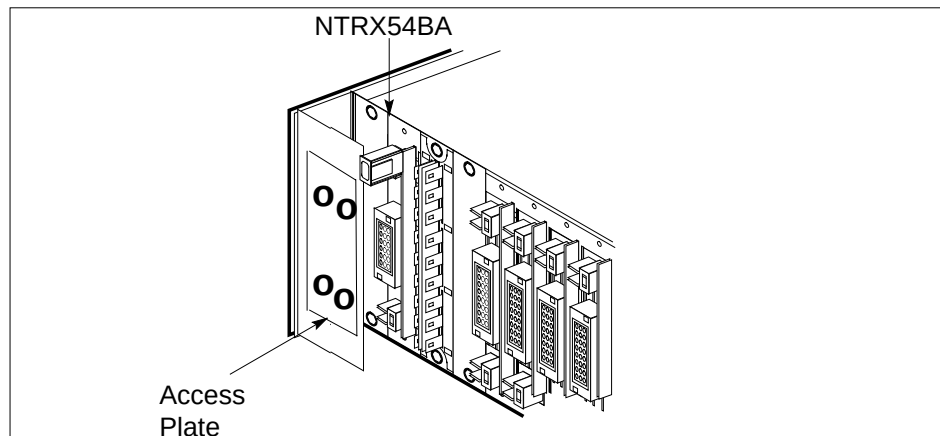

- 7 Note the wire color and location of the connector cables to facilitate connection.
- 8 Use the connector removal tool to disconnect the power connectors to the circuit card manually. Work from the bottom of the MSP shelf to the top of the MSP shelf. Manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue




## NTRX54 in an RSC-M/MSP (continued)

power connector. Disconnect the smaller black power connectors located above the large blue power connector. Make sure you disconnect the black connectors before you remove the circuit card.

- 9 The connectors have voltage present. The connectors are insulated. Secure the connectors to the power-connector bundle with a line-tie until the time arrives to connect the connectors again.

### *At the front panel of the cabinet*

- 10 Remove the NTRX54 circuit card.
  - a Disengage the knurled thumbscrew at the top of the circuit card.
  - b Carefully pull the circuit card toward you until the circuit card clears the shelf.

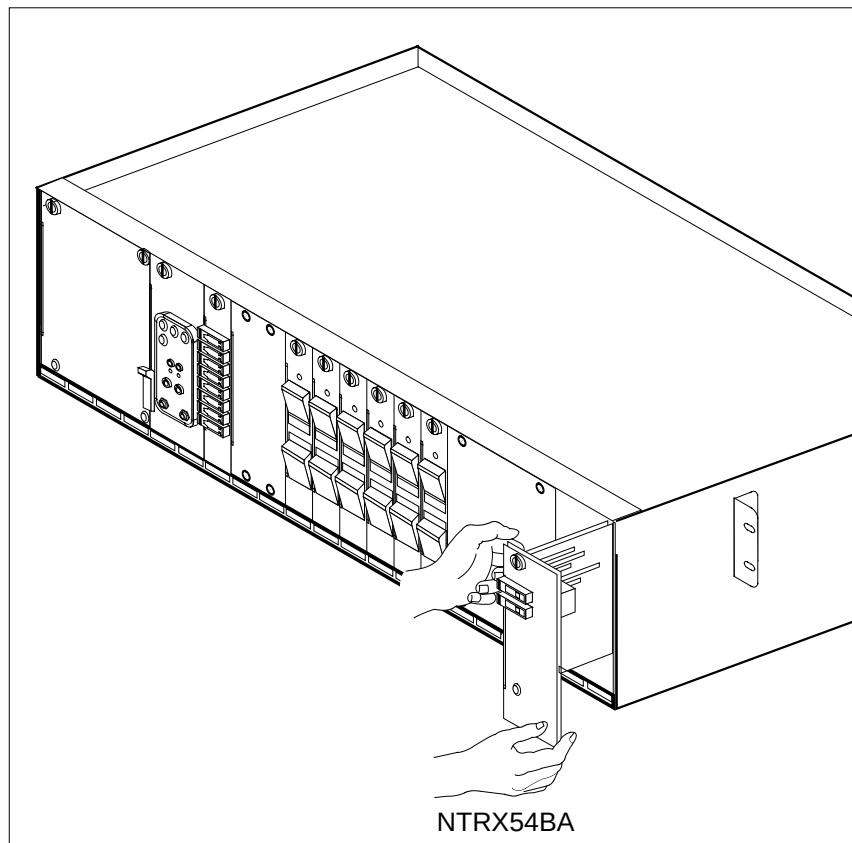


- 11 Make sure the replacement circuit card has the same PEC and suffix as the circuit card you removed.
  - a Align the circuit card with the slots in the shelf. Carefully slide the circuit card in the shelf.
  - b Carefully seat the circuit card tight.
  - c Tighten the knurled thumbscrew at the top of the circuit card.

## NTRX54 in an RSC-M/MSP (end)

---

### *At the rear panel of the cabinet*

- 12** Locate the replaced circuit card. Attach the power connectors. Step 6 describes how to attach the power connectors.

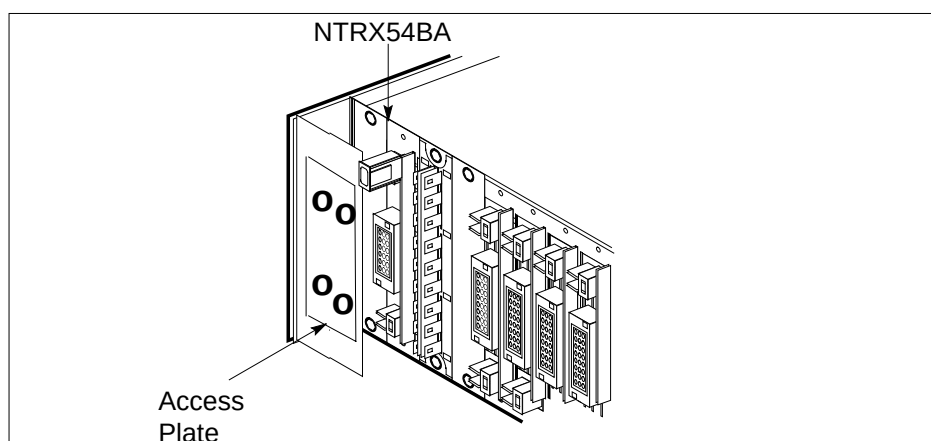

- 13** Replace the two fuses removed in step 5.
- 14** Send defective cards for repair according to local procedure.

---

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 15 |
| blow (protrude) | step 16 |

---

- 15** Go to the common returning a card procedure in this document.  
Go to step 17.
- 16** For additional help with this card replacement, contact the next level of support.
- 17** This procedure is complete. Return to the maintenance procedure that directed you to this card replacement procedure.

---

## NTRX54 in an RSC MSP

---

### Application

Use this procedure to replace an NTRX54 card in a modular supervisory panel (MSP) in the following cabinets.

- Cabinetized Extension Module (CEXT)
- Cabinetized Line Concentrating Equipment (CLCE)
- Cabinetized Power Distribution Center (CPDC)
- Cabinetized Remote Switching Center (CRSC)
- Cabinetized Miscellaneous Equipment (CMIS)
- Cabinetized Remote Miscellaneous Equipment (CRME)

| PEC    | Suffixes | Name                     |
|--------|----------|--------------------------|
| NTRX54 | BA       | Fan Power Control Module |

### Common procedures

None

### Action

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged


## **NTRX54** **in an RSC MSP (continued)**

---


from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

### **Connector removal tool**

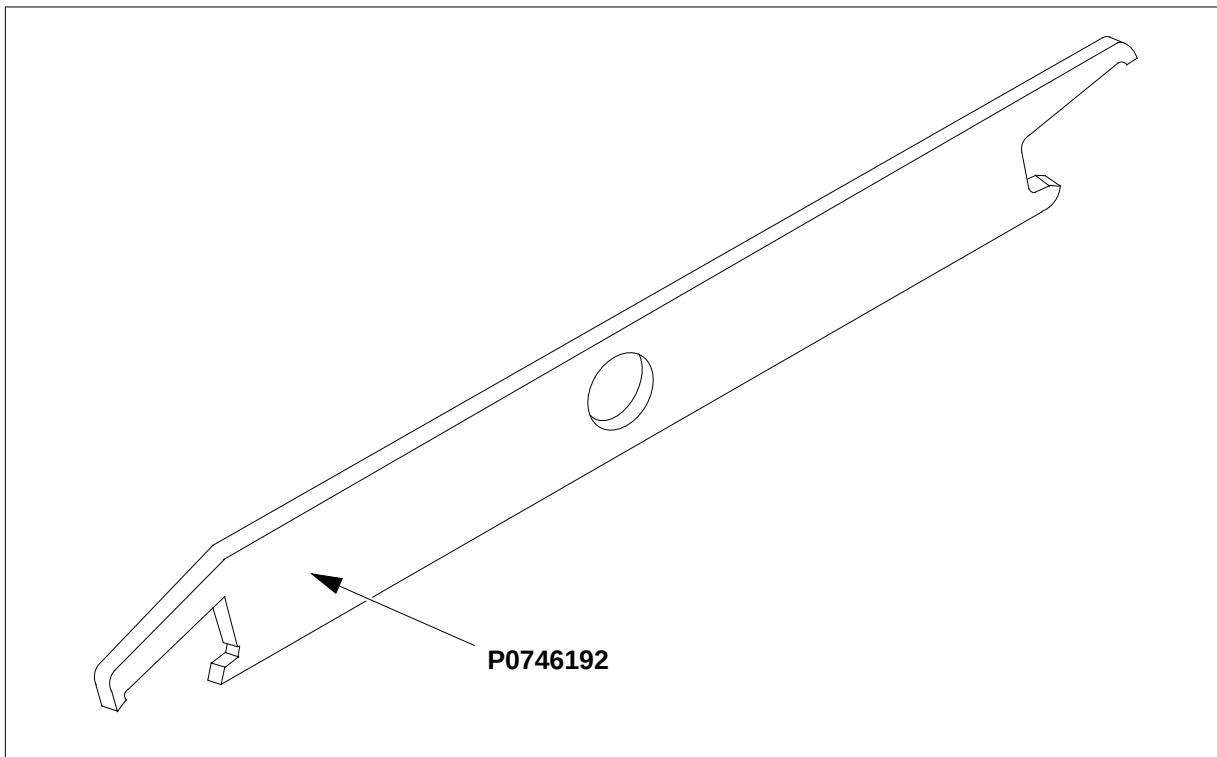

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

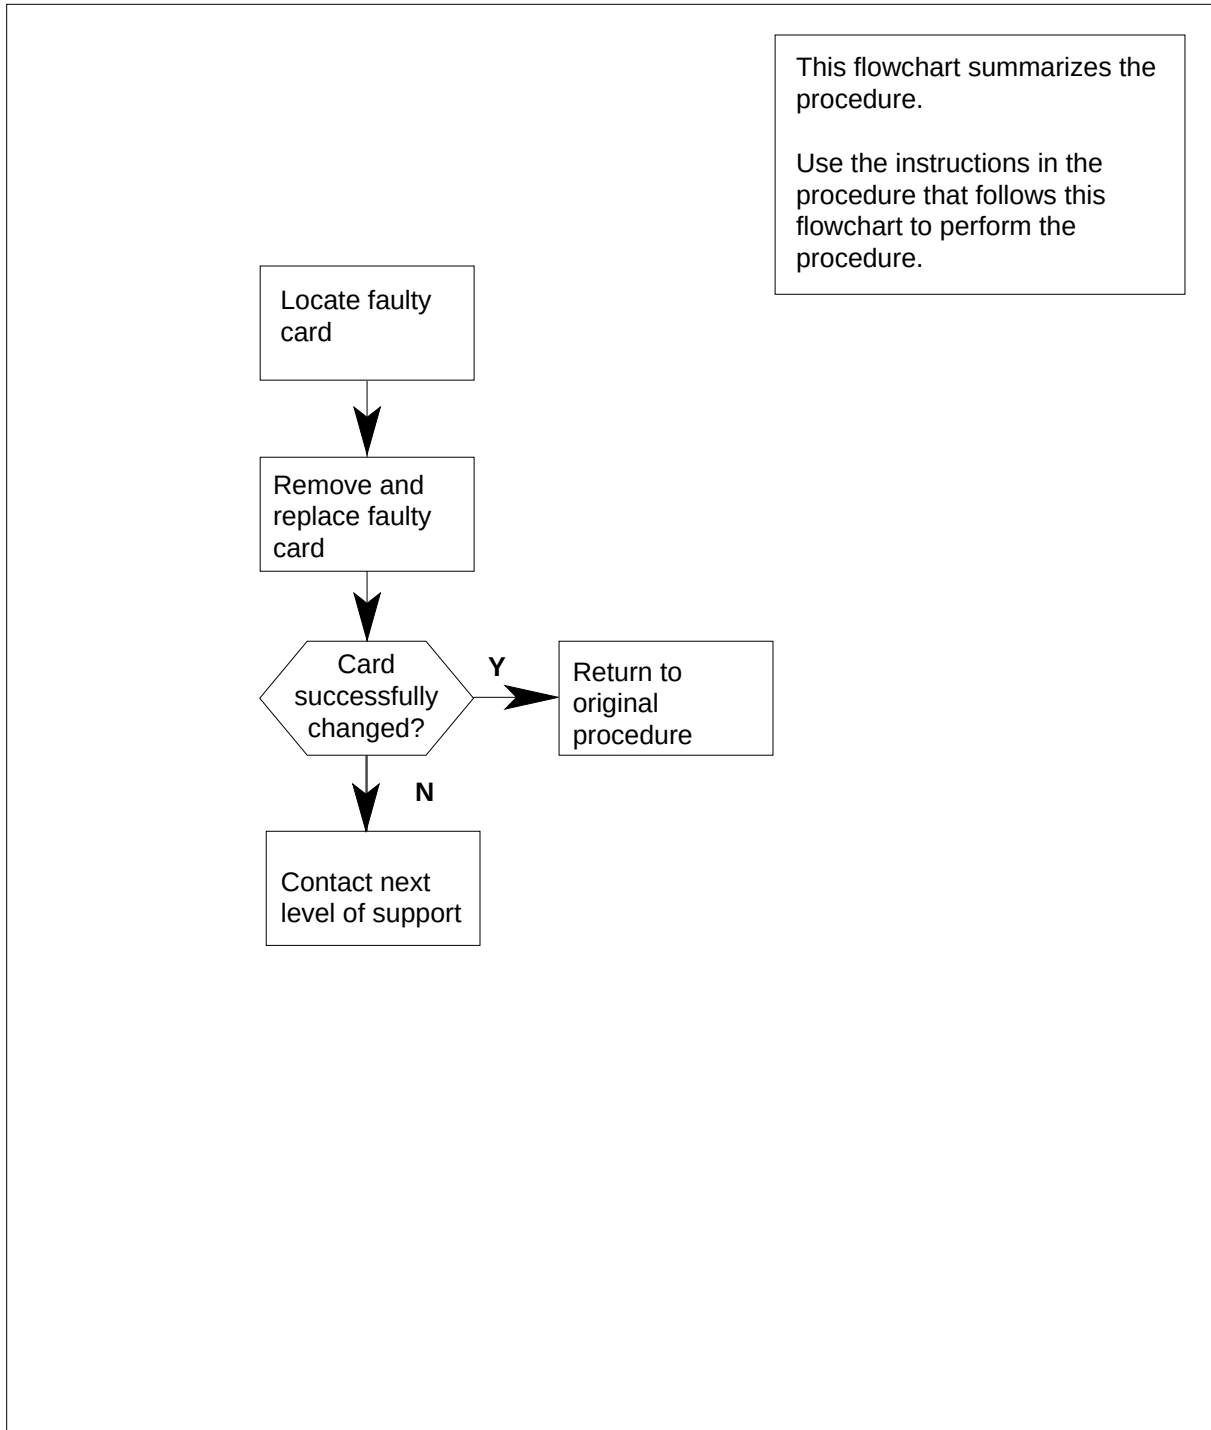**NTRX54**  
**in an RSC MSP** (continued)**Summary of card replacement procedure for an NTRX54 card in RSC MSP**

## NTRX54 in an RSC MSP (continued)

### Replacing an NTRX54 card in RSCE MSP


#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

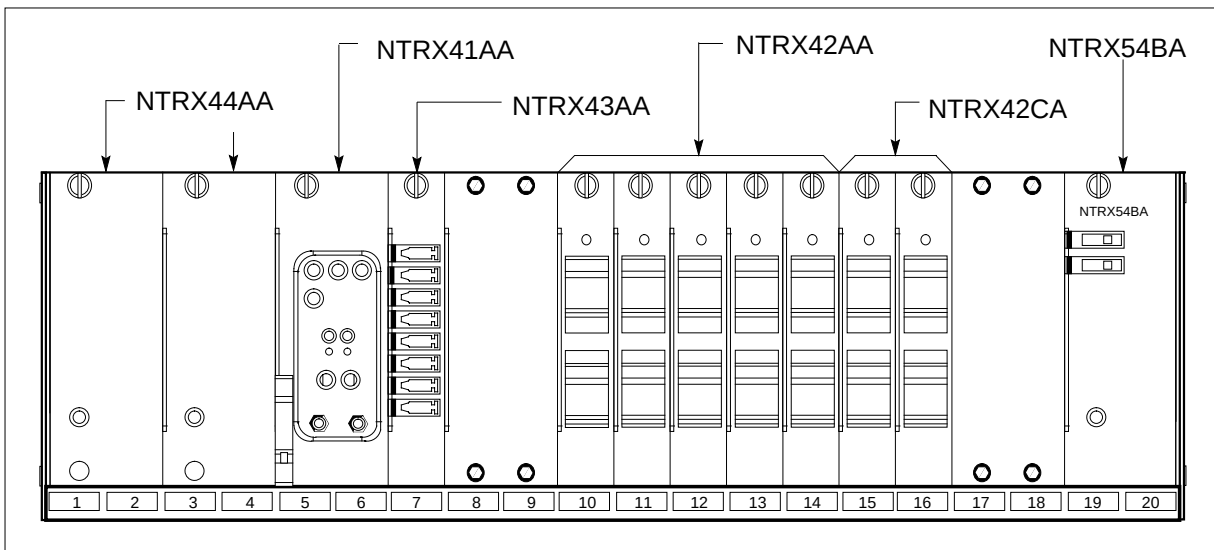

4



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

## NTRX54 in an RSC MSP (continued)

**DANGER**

**Risk of injury from high energy levels, equipment damage**

Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

**DANGER**

**Heat damage**


Avoid leaving this card out of service for more than 30 minutes. Extensive damage to the entire cabinet may occur if cooling is lost for more than 30 minutes.

Put on a wrist strap.

- 5 Remove the two fuses in the fan power control module.

***At the rear panel of the cabinet***

- 6 Remove the NTRX54 circuit card as shown in the following figures.
  - a Open the rear doors of the cabinet and locate the circuit card, it will be in slots 19 and 20.
  - b Note the wire color and location to facilitate re-connection.

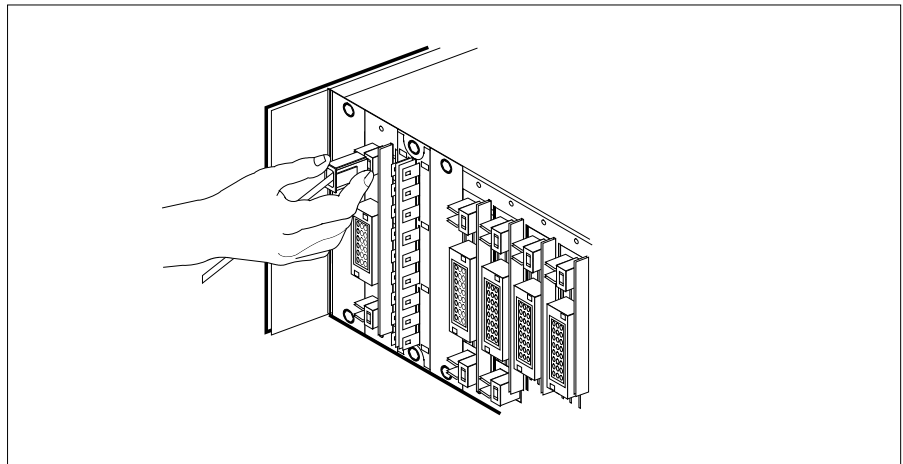

- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black

## NTRX54 in an RSC MSP (continued)


---

power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.

### ***At the front panel of the cabinet***

- 7 Remove the NTRX54 card.
  - a Disengage the knurled thumbscrew at the top of the card.
  - b Gently pull the card towards you until it clears the shelf.

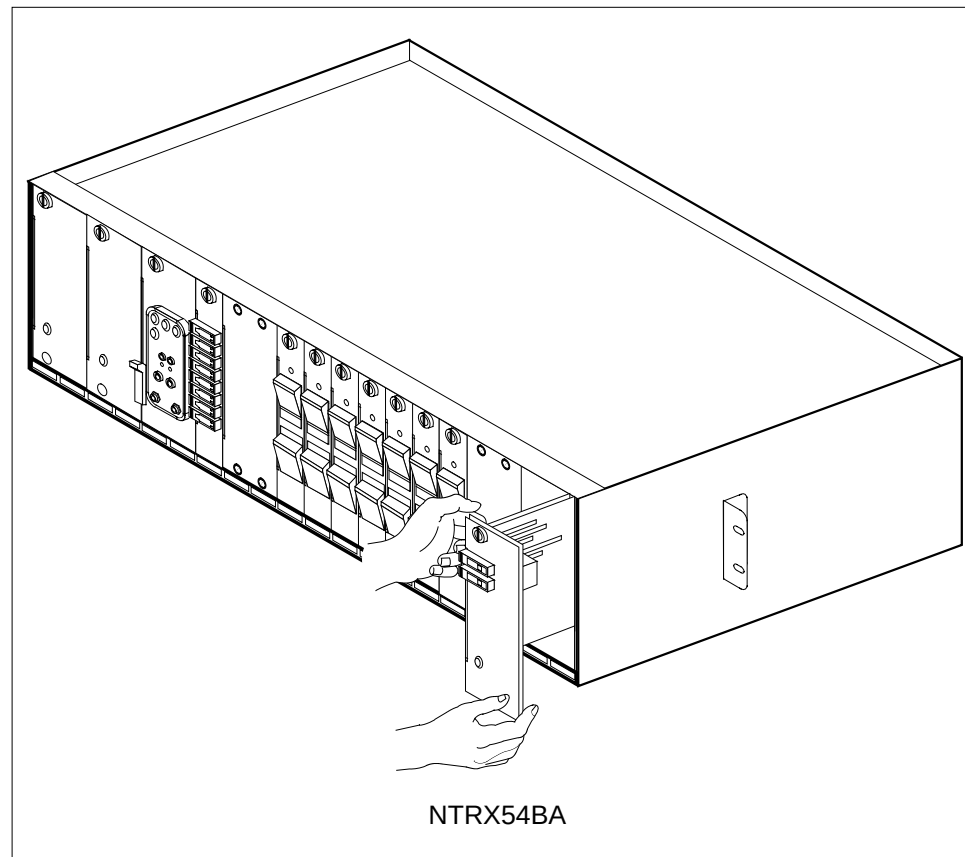


- 8 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
  - a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the knurled thumbscrew at the top of the circuit card.



**NTRX54**  
**in an RSC MSP (end)**

***At the rear panel of the cabinet***

- 9** Locate the replaced circuit card and re-attach the power connectors, as noted in step 6.

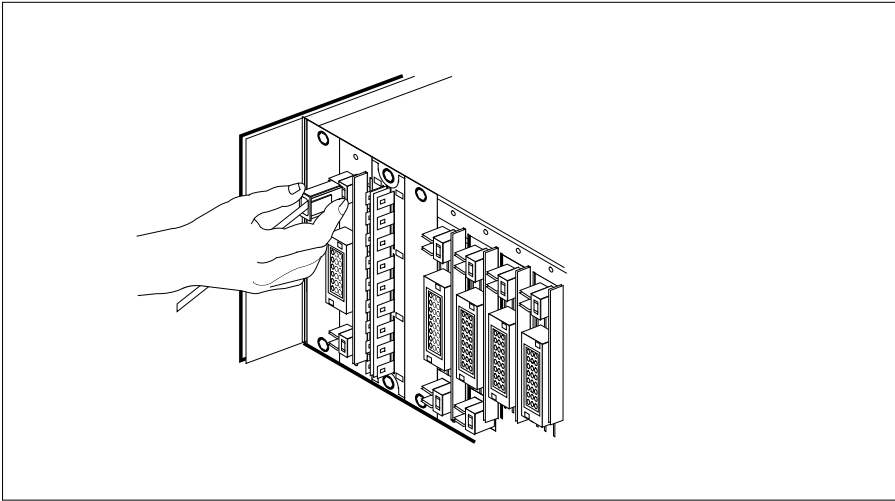

- 10** Replace the two fuses removed in step 5.

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 11 |
| blow (protrude) | step 13 |

- 11** Send any faulty cards for repair according to local procedure.
- 12** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 14.
- 13** Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 14** You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX54 in an RSC-S (DS-1) Model B MSP**

---

### **Application**

Use this procedure to replace an NTRX54 card in a modular supervisorb(MSP) located in a

- cabinetized extension module (CEXT)
- cabinetized line concentrating equipment (CLCE)
- cabinetized line module ISDN (CLMI)
- cabinetized power distribution center (CPDC)
- cabinetized remote switching center (CRSC)
- cabinetized miscellaneous equipment (CMIS)

| PEC    | Suffixes | Name                     |
|--------|----------|--------------------------|
| NTRX54 | BA       | Fan Power Control Module |

### **Common procedures**

None

### **Action**

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.

The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged


---

**NTRX54**  
**in an RSC-S (DS-1) Model B MSP (continued)**

---

from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required due to limited access to the connectors.

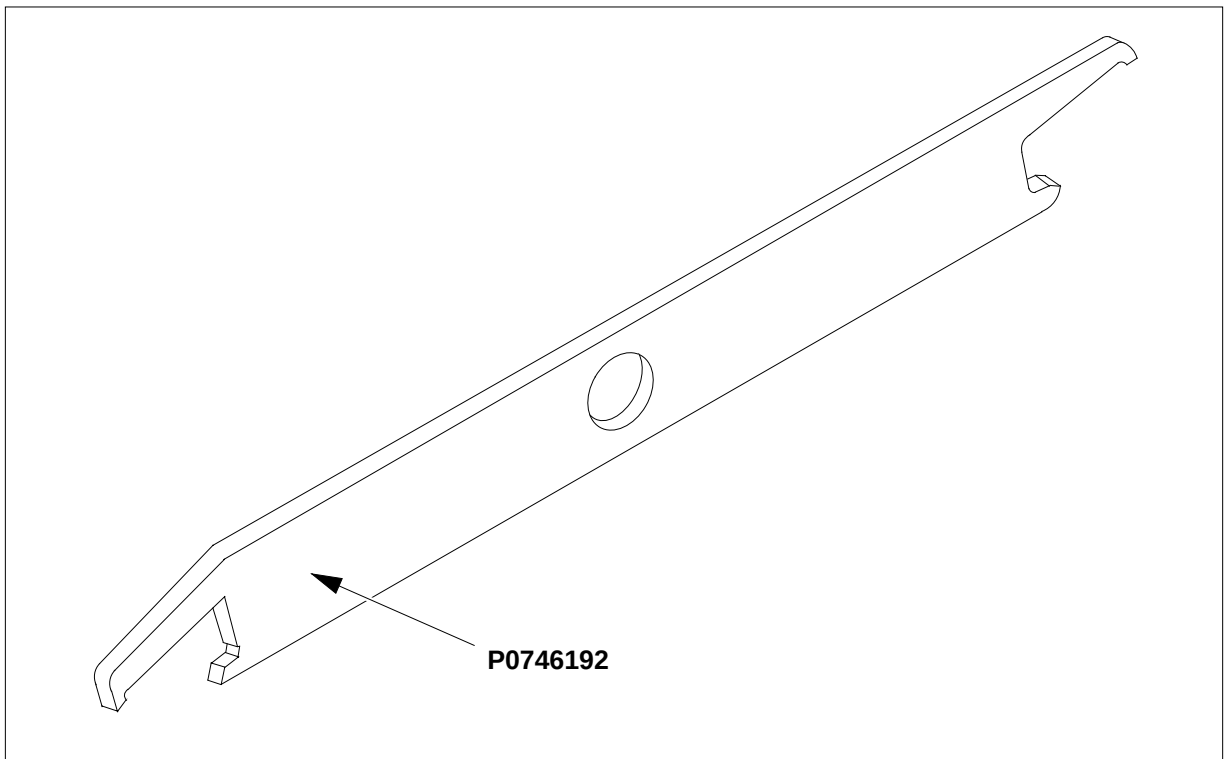
**Connector removal tool**

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure.

## NTRX54 in an RSC-S (DS-1) Model B MSP (continued)

---

### Summary of card replacement procedure for an NTRX54 card in RSC-S MSP

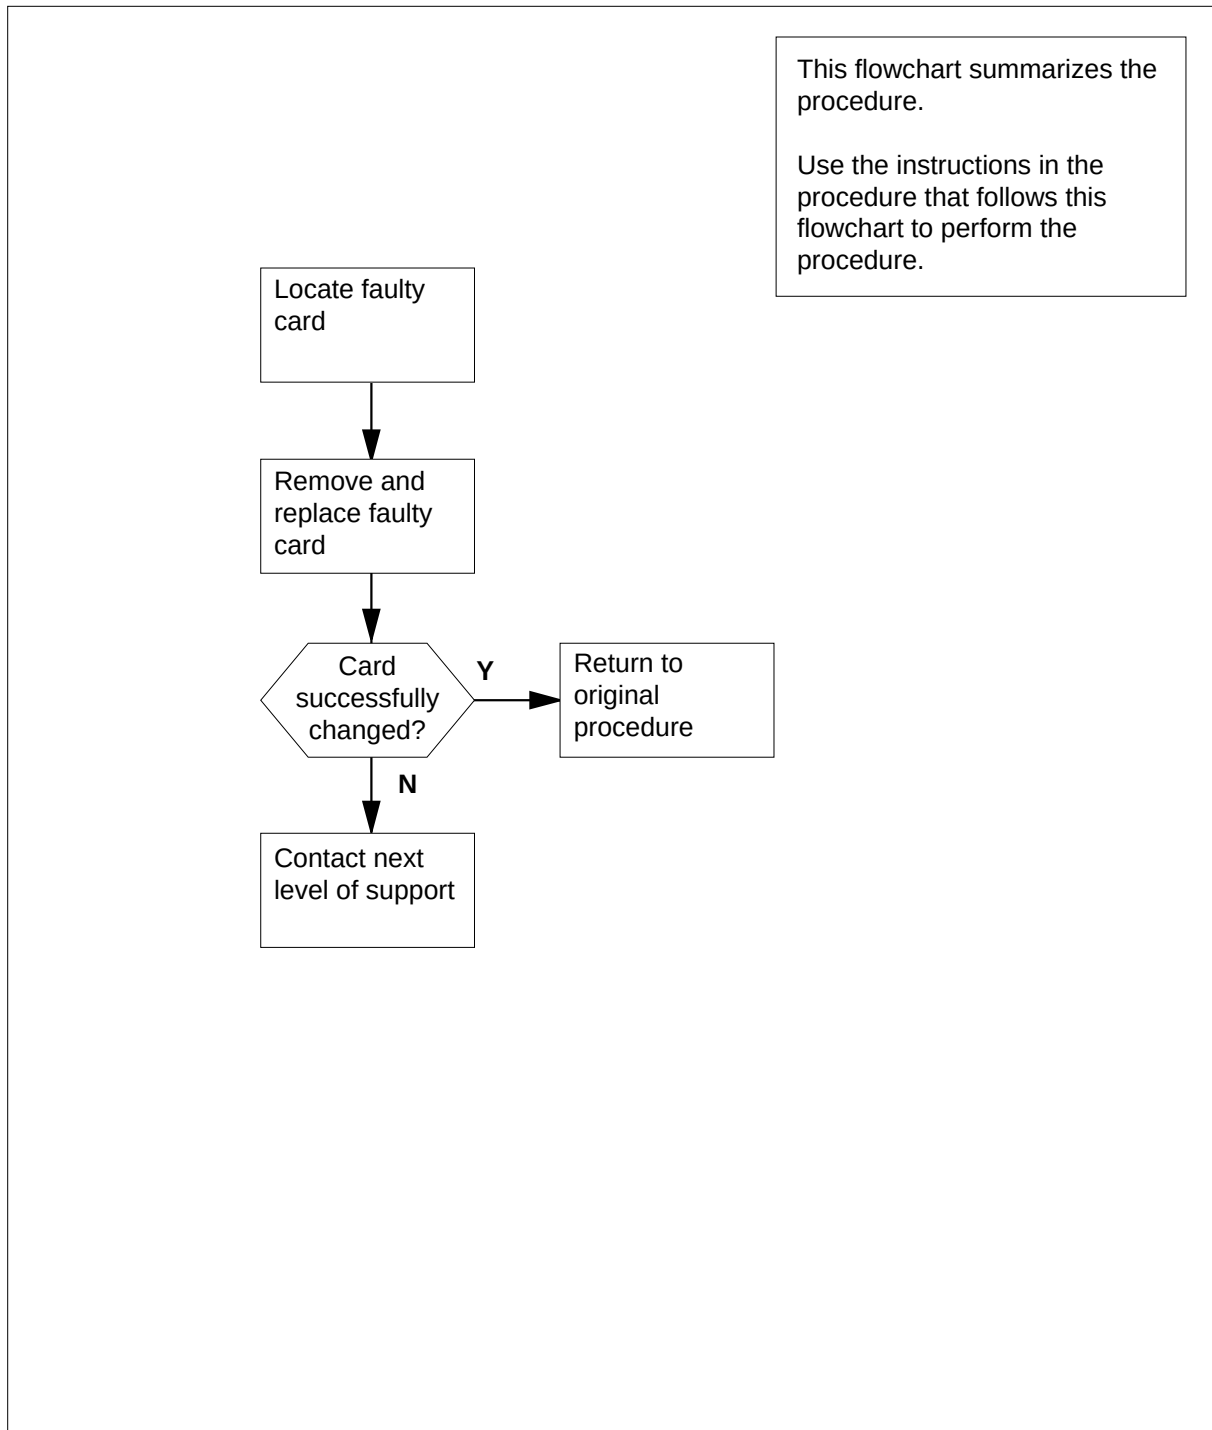

## NTRX54

### in an RSC-S (DS-1) Model B MSP (continued)

#### Replacing an NTRX54 card in RSC-S MSP


##### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

##### *At the front panel of the cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

**Note:** The illustrations in this card replacement procedure are for the MSP shelf in an CRSC or CEXT module. The circuit breaker designation may vary depending on the type of cabinet you are working in.

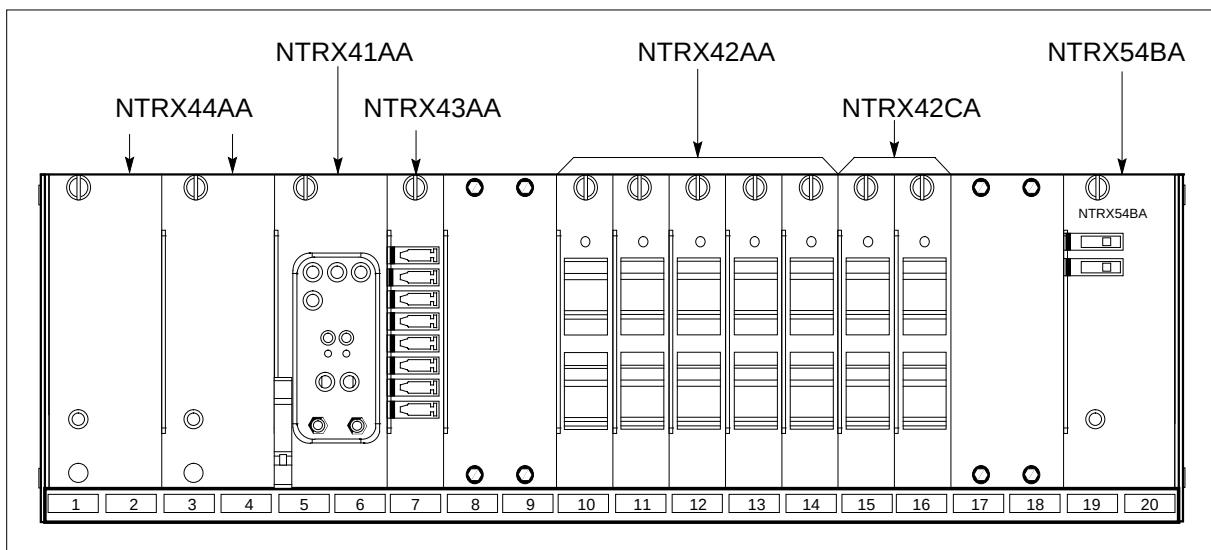

4



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

## NTRX54 in an RSC-S (DS-1) Model B MSP (continued)

---



### **DANGER**

**Risk of injury from high energy levels, equipment damage**

Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.



### **DANGER**

**Heat damage**


Avoid leaving this card out of service for more than 30 minutes. Extensive damage to the entire cabinet may occur if cooling is lost for more than 30 minutes.

Put on a wrist strap.

- 5 Remove the two fuses in the fan power control module.

### ***At the rear panel of the cabinet***

- 6 Remove the NTRX54 circuit card as shown in the following figures.
  - a Open the rear doors of the cabinet and locate the circuit card, it will be in slots 19 and 20.
  - b Note the wire color and location to facilitate re-connection.

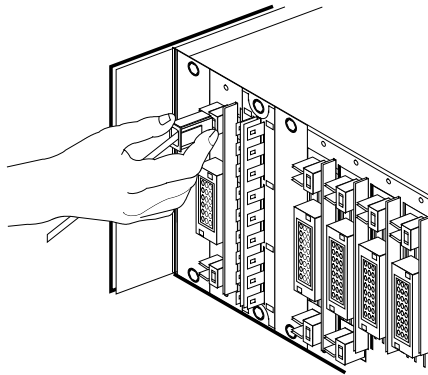

- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black

---

## NTRX54

### in an RSC-S (DS-1) Model B MSP (continued)


---

power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.

#### ***At the front panel of the cabinet***

- 7 Remove the NTRX54 card.
  - a Disengage the knurled thumbscrew at the top of the card.
  - b Gently pull the card towards you until it clears the shelf.

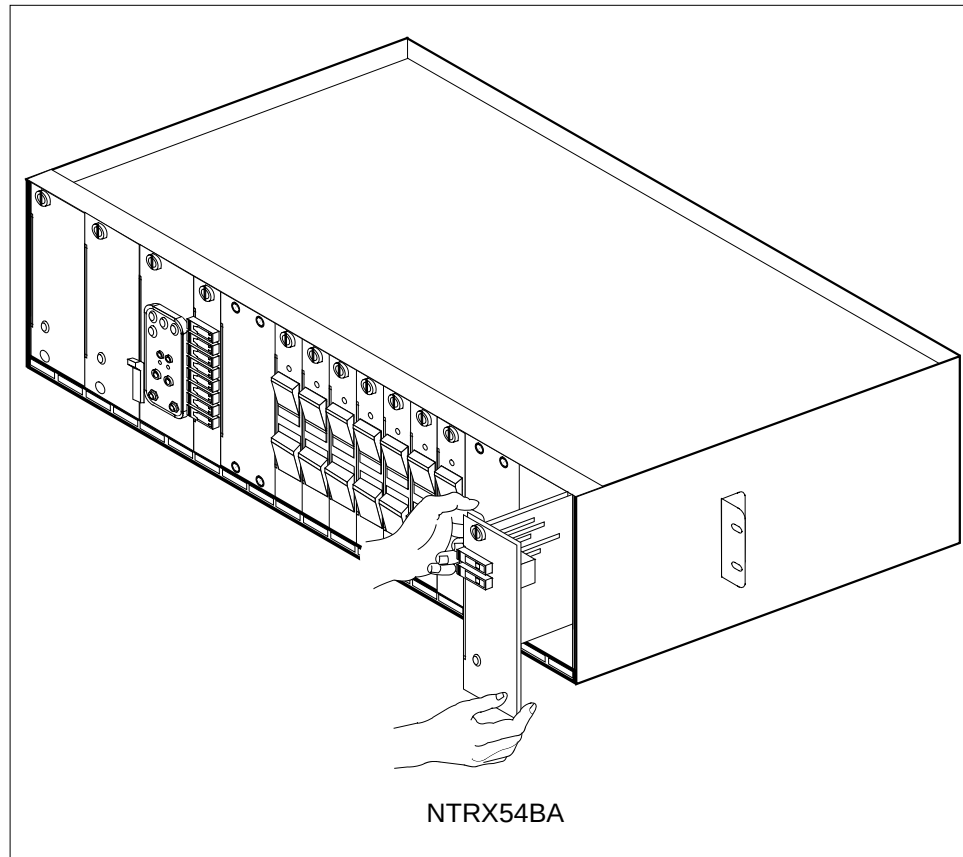


- 8 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
  - a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the knurled thumbscrew at the top of the circuit card.

## NTRX54 in an RSC-S (DS-1) Model B MSP (end)

---

### *At the rear panel of the cabinet*

- 9 Locate the replaced circuit card and re-attach the power connectors, as noted in step 6.

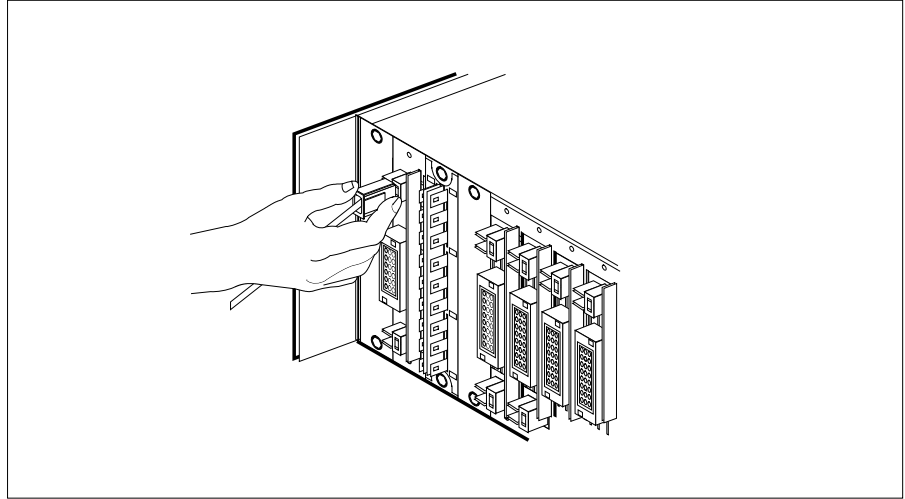

- 10 Replace the two fuses removed in step 5.

---

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 11 |
| blow (protrude) | step 13 |

---

- 11 Send any faulty cards for repair according to local procedure.
- 12 Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 14.
- 13 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 14 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.



---

## NTRX54 in an SMA2 MSP

---

### Application

Use this procedure to replace a NTRX54 card in a modular supervisory panel (MSP) located in a:

- cabinetized multi-vendor interface (CMVI)
- multi-vendor interface equipment frame (MVIE)
- multi-vendor double density frame (MVDD)

| PEC    | Suffixes | Name                     |
|--------|----------|--------------------------|
| NTRX54 | BA       | Fan Power Control Module |

### Common procedures

The common returning a card procedure is referenced in this procedure.

Do not go to a common procedure unless directed to do so in the step-action procedure.

### Action

A connector removal tool is available to facilitate removal of the AMP Faston receptacles from the power input and output connectors of the MSP modules. This tool comes in two lengths: P0746192 152 mm (6 in.), and P0747552 254 mm (10 in.). The shorter tool is used when access to the rear of the MSP is very limited. An example of limited access is, MSP modules located directly behind the cabinet bulkhead.

This tool is approximately 2 mm (.090 in.) thick and 17 mm (.65 in.) wide, with a jaw-like cut-out at each end. The cut-out profile conforms to the shape of the Faston receptacle. The shorter tip of each profile is used to position the receptacle in the tool.


The first meeting point of the tool serves as the pivot point. By rotating the tool around this pivot point, the longer tip of the profile which has a hook on its end, is engaged with the action-arm of the power connector. As the action-arm of the connector is depressed, the receptacle is disengaged from the connector tab. The receptacle is removed by pulling the tool with the receptacle trapped in its jaw, away from the connector. The tool is disengaged from the receptacle by rotating the tool's hook off the action-arm of the receptacle.

## **NTRX54** **in an SMA2 MSP (continued)**

---

Although the shape of the cut-out is the same on each end of the tool, the orientation of the profile is off by 15 degrees. This difference allows for the use of the tool at different angles, which may be required because of limited access to the connectors.


### **Connector removal tool**

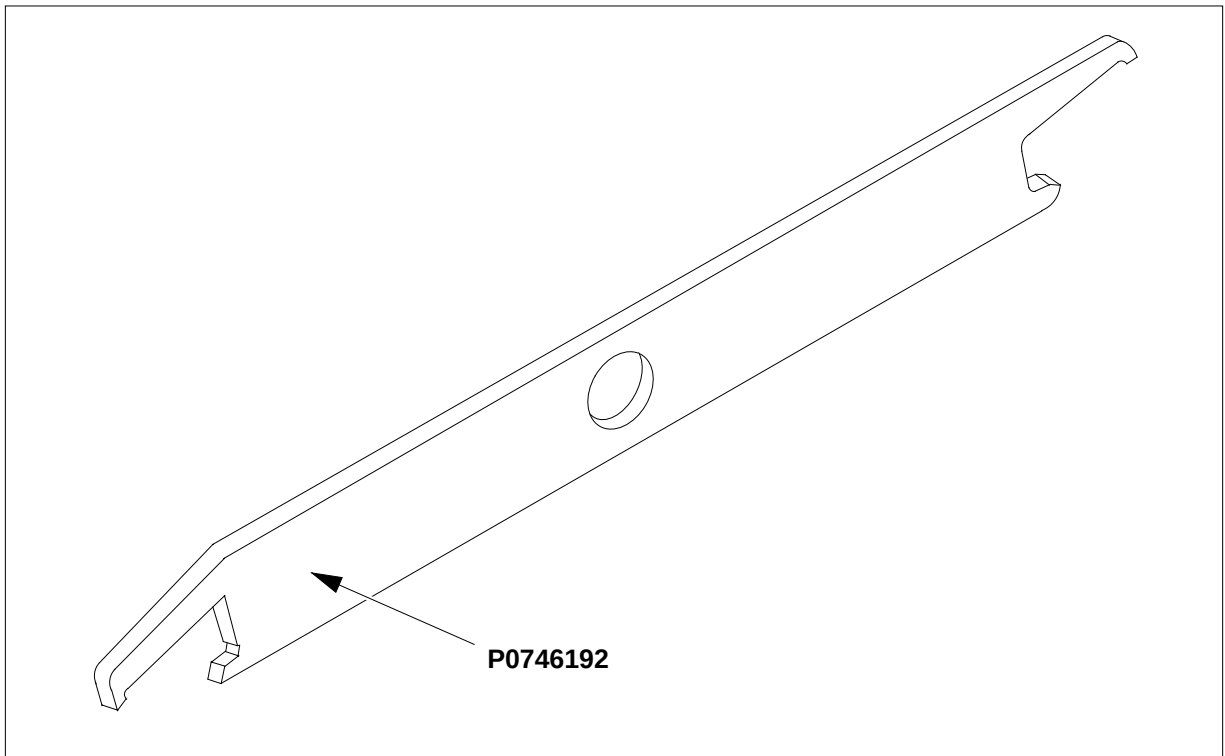

The following flowchart is a summary of this procedure. Use the instructions in the step-action table that follows the flowchart to perform the procedure.

## NTRX54 in an SMA2 MSP (continued)

### Summary of card replacement procedure for an NTRX54 card in an SMA2 MSP

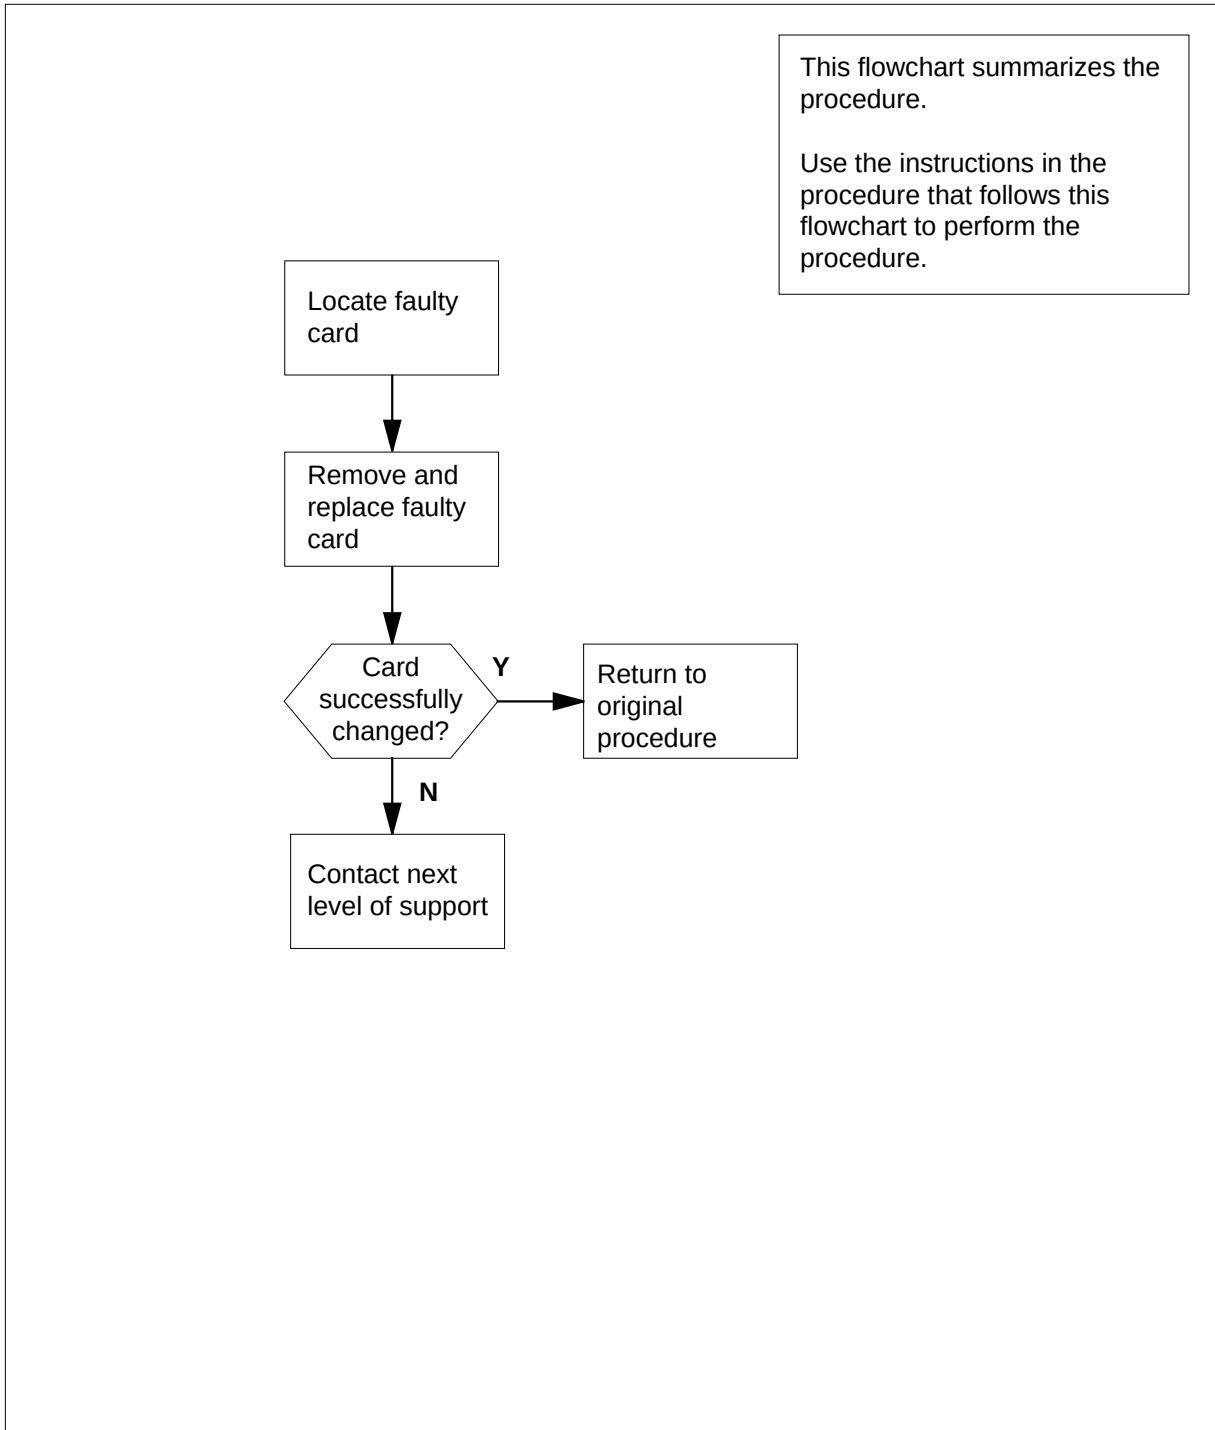

## NTRX54 in an SMA2 MSP (continued)

### Replacing an NTRX54 card in an SMA2 MSP


#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Obtain a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the front panel of the frame or cabinet*

- 3 Open the front cover of the MSP. Release the two cover latches and swing the cover down to the open position.

#### MSP

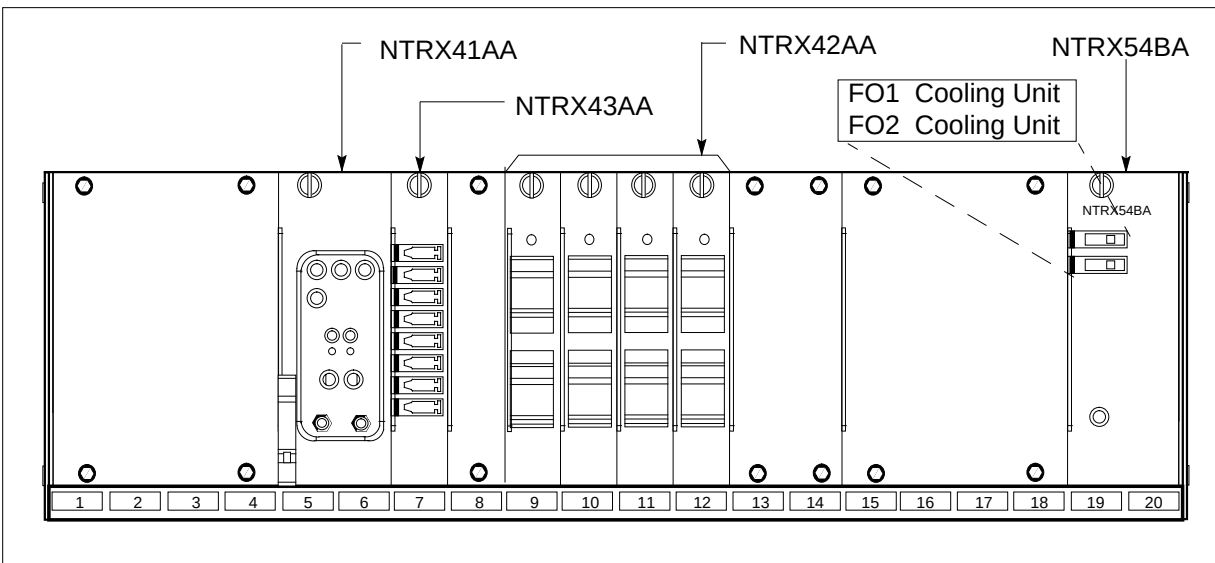

4



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the modular supervisory panel (MSP). This protects the equipment against damage caused by static electricity.

## NTRX54 in an SMA2 MSP (continued)

**DANGER**

**Risk of injury from high energy levels, equipment damage**

Take these precautions when removing or inserting a card:

1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

**WARNING**

**Heat damage**


Avoid leaving this card out of service for more than 30 minutes. Extensive damage to the entire cabinet may occur if cooling is lost for more than 30 minutes.

Put on a wrist strap.

- 5 Remove the two fuses in the fan power control module.

***At the rear panel of the frame or cabinet***

- 6 Remove the NTRX54 circuit card as shown in the following figures.
- a Open the rear doors of the cabinet and locate the circuit card, it will be in slots 19 and 20.
  - b Note the wire color and location to facilitate re-connection.

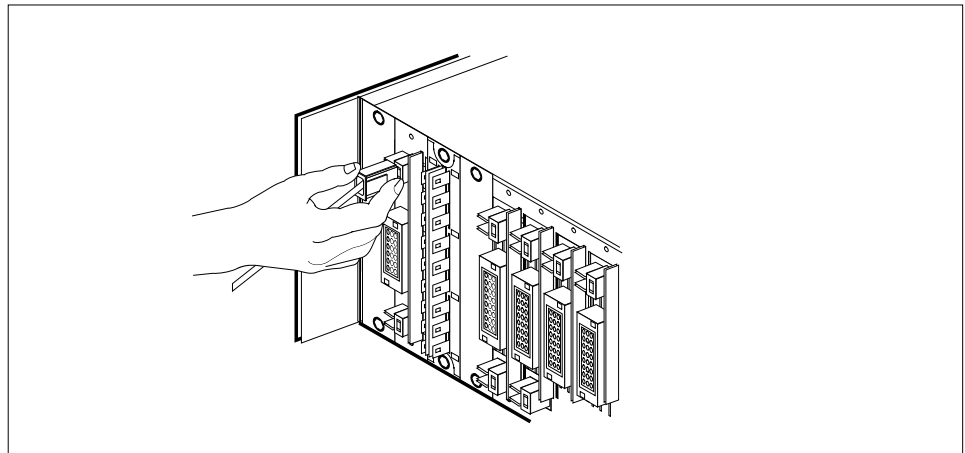

- c Using the connector removal tool, manually disconnect the power connectors to the circuit card. Working from the bottom of the MSP shelf to the top of the MSP shelf, manually disconnect the smaller black power connectors located below the larger blue power connector. Manually disconnect the large blue power connector. Disconnect the smaller black

## NTRX54 in an SMA2 MSP (continued)


---

power connectors located above the large blue power connector. Ensure you disconnect the black connectors *before* removing the circuit card.

- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.

### ***At the front panel of the frame or cabinet***

- 7 Remove the NTRX54 card.
  - a Disengage the knurled thumbscrew at the top of the card.
  - b Gently pull the card towards you until it clears the shelf.

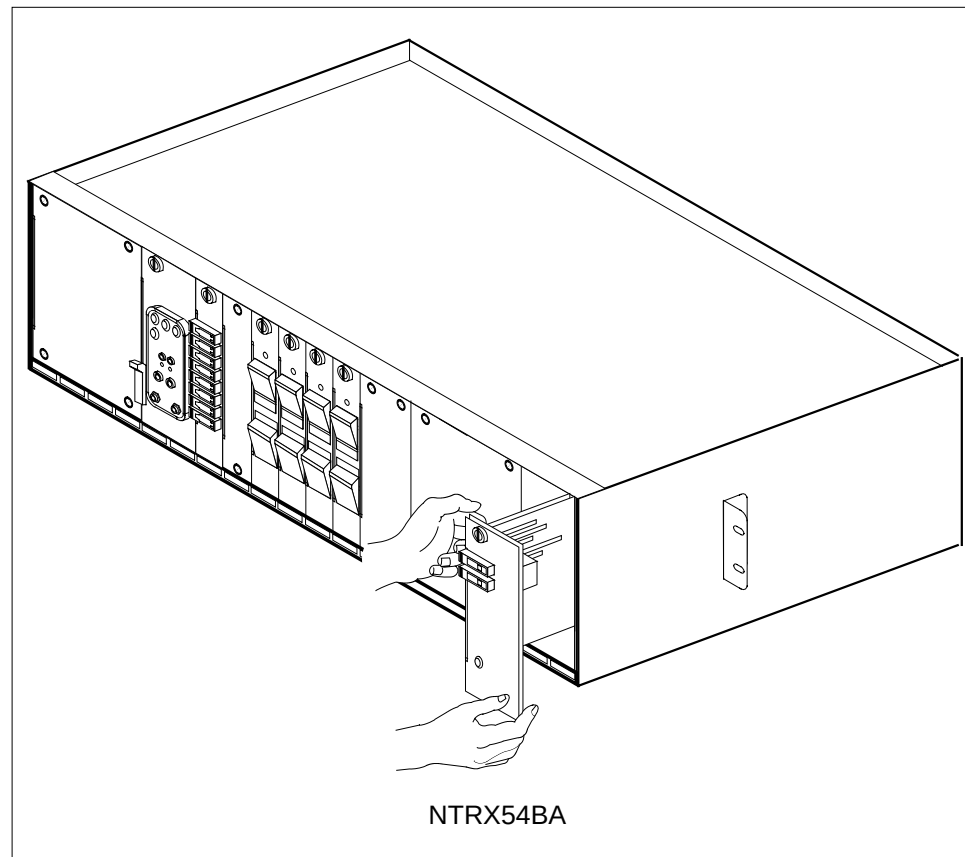


- 8 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
  - a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the knurled thumbscrew at the top of the circuit card.

**NTRX54**  
**in an SMA2 MSP (end)**

*At the rear panel of the frame or cabinet*

- 9 Locate the replaced circuit card and re-attach the power connectors, as noted in step 6.

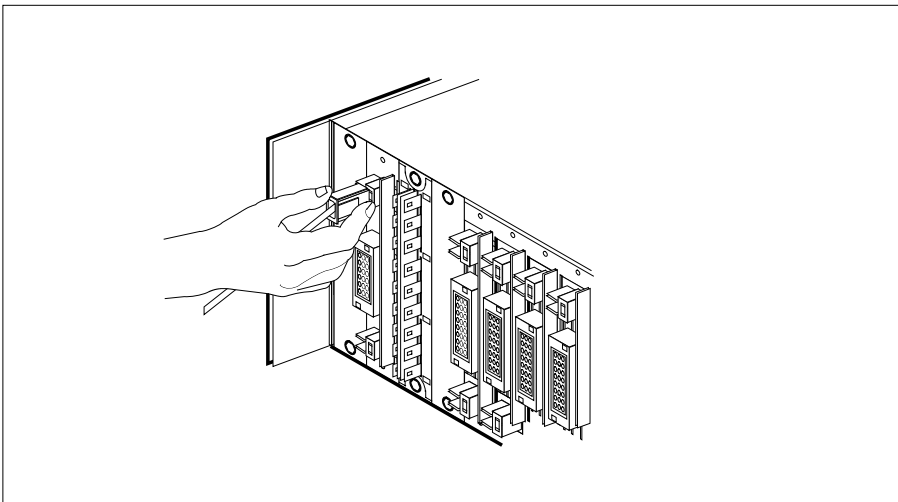

- 10 Replace the two fuses removed in step 5.

| If fuses        | Do      |
|-----------------|---------|
| do not blow     | step 11 |
| blow (protrude) | step 12 |

- 11 Go to the common returning a card procedure in this document.  
Go to step 13.
- 12 Obtain further assistance in replacing this card by contacting the personnel responsible for the next higher level of support.
- 13 You have successfully completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTRX66 MSP**

---

### **Application**

Use this procedure to replace NTRX66 card in an MSP.

| <b>PEC</b> | <b>Suffix</b> | <b>Name</b>      |
|------------|---------------|------------------|
| NTRX66     | AA            | Fan Alarm Module |

### **Common procedures**


None

### **Action**

None

The following flowchart is a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

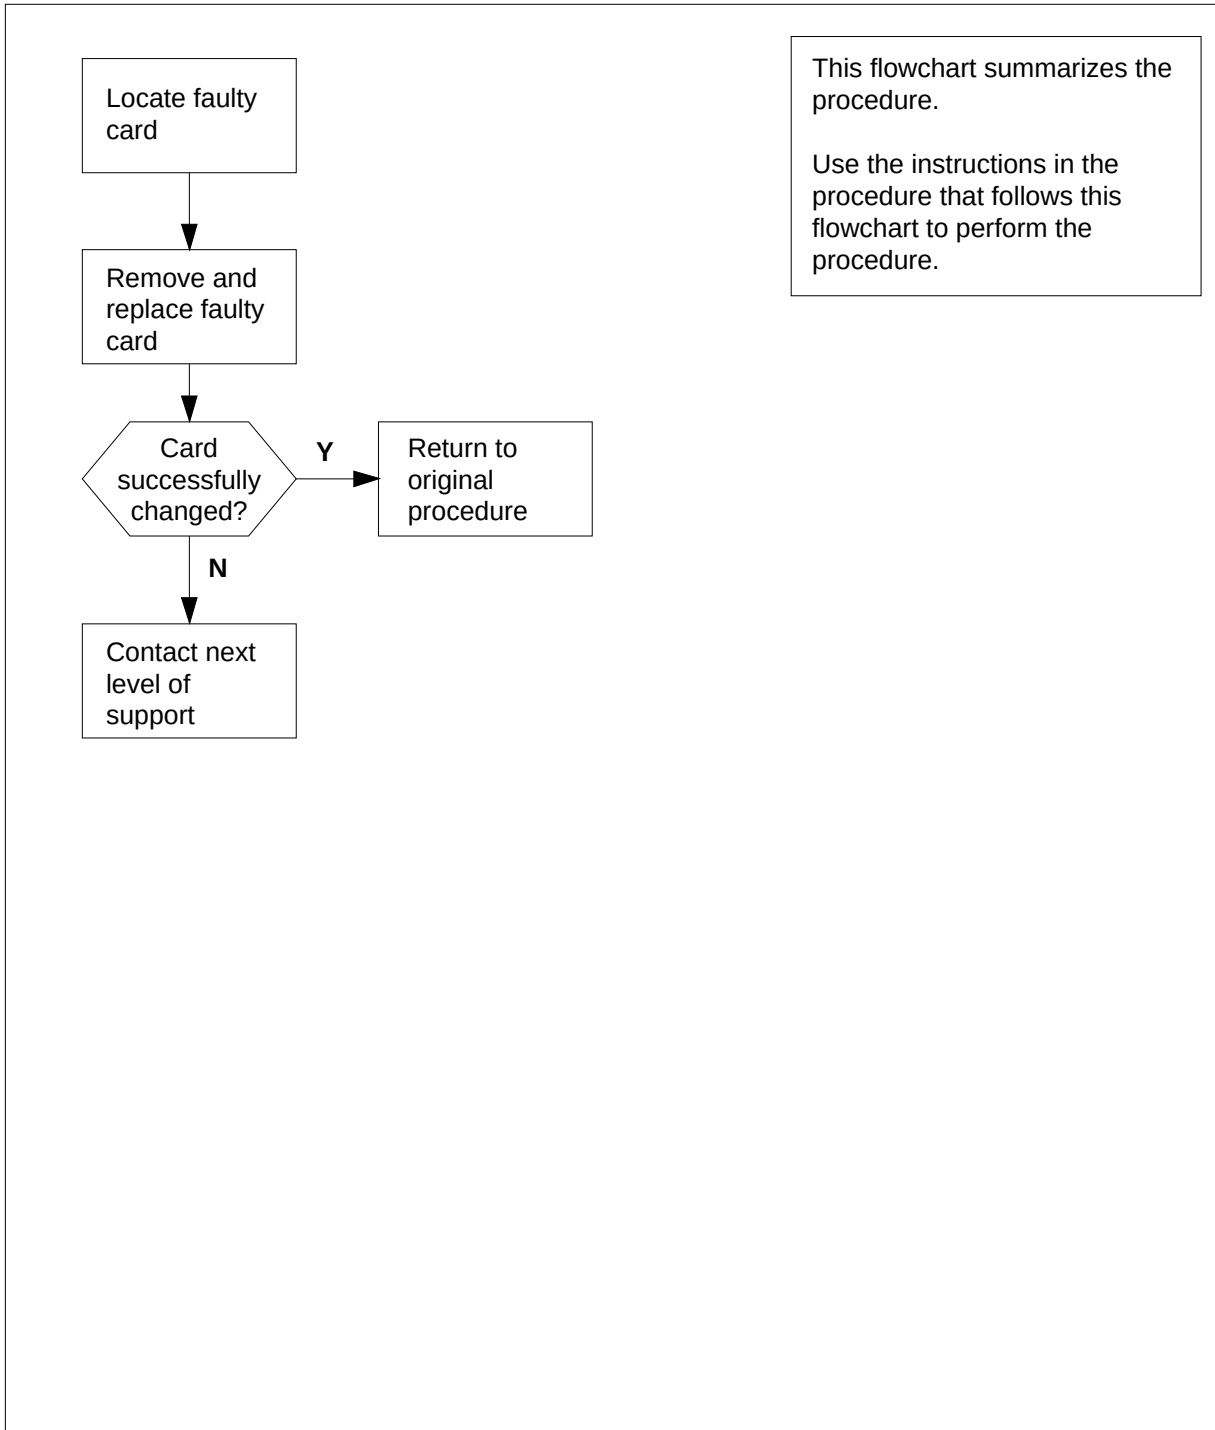

**NTRX66**  
**MSP** (continued)**Summary of card replacement procedure for an NTRX66 card in an MSP**

## NTRX66

### MSP (continued)

#### Replacing an NTRX66 in an MSP

##### *At your Current Location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Ensure that the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

##### *At the front of the MSP*


3



#### **DANGER**

**Risk of injury from high energy levels, static electricity damage**  
Wear a wrist strap connected to a wrist strap grounding point.  
This protects the equipment against damage caused by static electricity.

Open the front cover of the MSP by pulling outward firmly at the finger holes provided and swing the cover down to the open position.

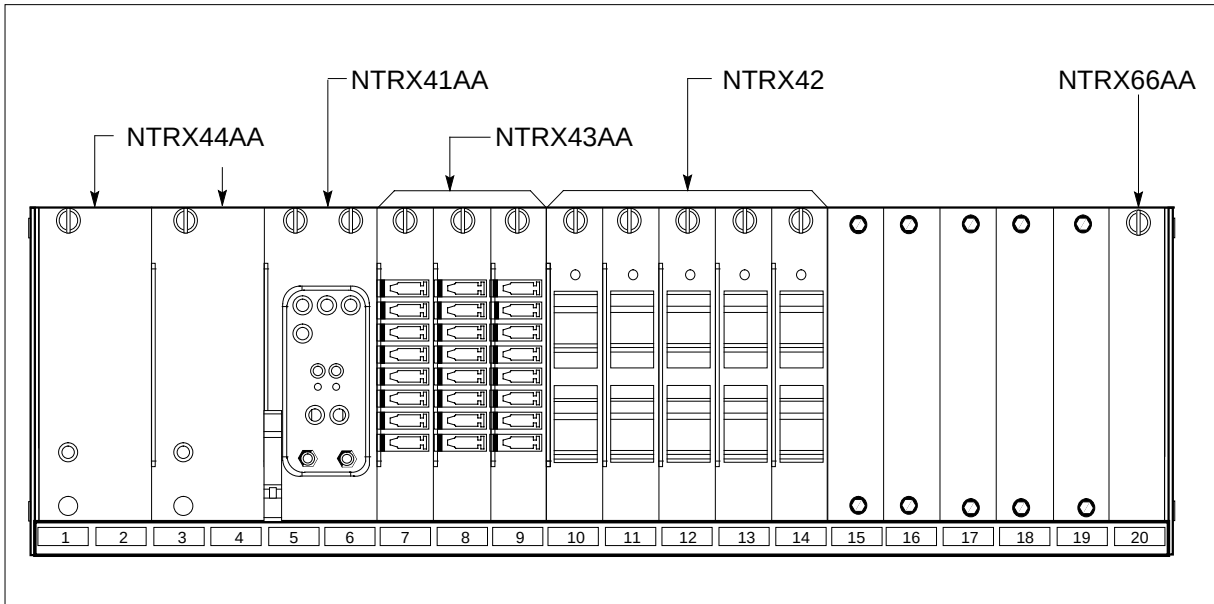

**NTRX66**  
**MSP (continued)**

4

**DANGER****Risk of injury from high energy levels, equipment damage**

Take these precautions when removing or inserting a card.  
Do not apply direct pressure to the components and do not force the cards into the slots.

Put on a wrist strap.

*At the rear of the MSP*


5

**DANGER****Risk of injury from high energy levels, voltage present**

Do not insert metallic objects into the black connectors.  
Voltage is present and equipment damage could result.

Disconnect the NTRX66 circuit card as shown in the following figure.

- a Swing the frame out and locate the back of the circuit card to be replaced. The circuit card is in slot 20.
- b Note the wire color and location to facilitate reconnection.

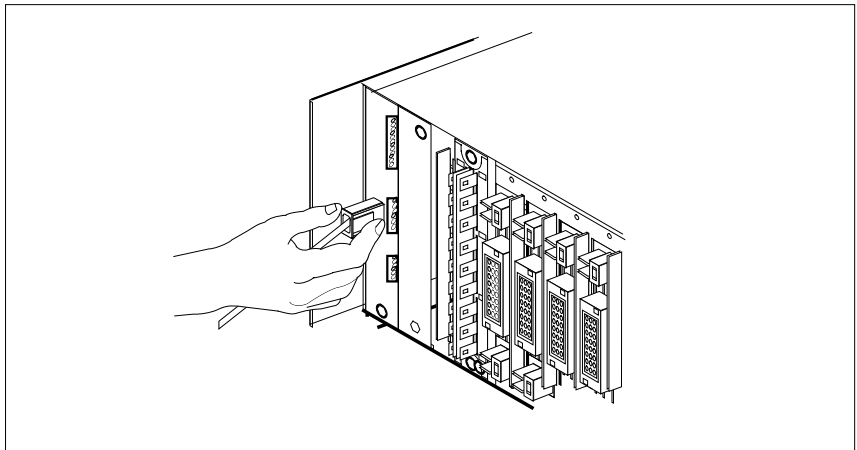

- c Manually disconnect all connectors from the circuit card.
- d Although the connectors have voltage present on them, they are insulated. Secure the connectors to the power-connector bundle with a line-tie until it is time to reconnect them.


## **NTRX66**

### **MSP (continued)**

---

#### ***At the front of the MSP***

- 6 Remove the NTRX66 as shown in the following figure.

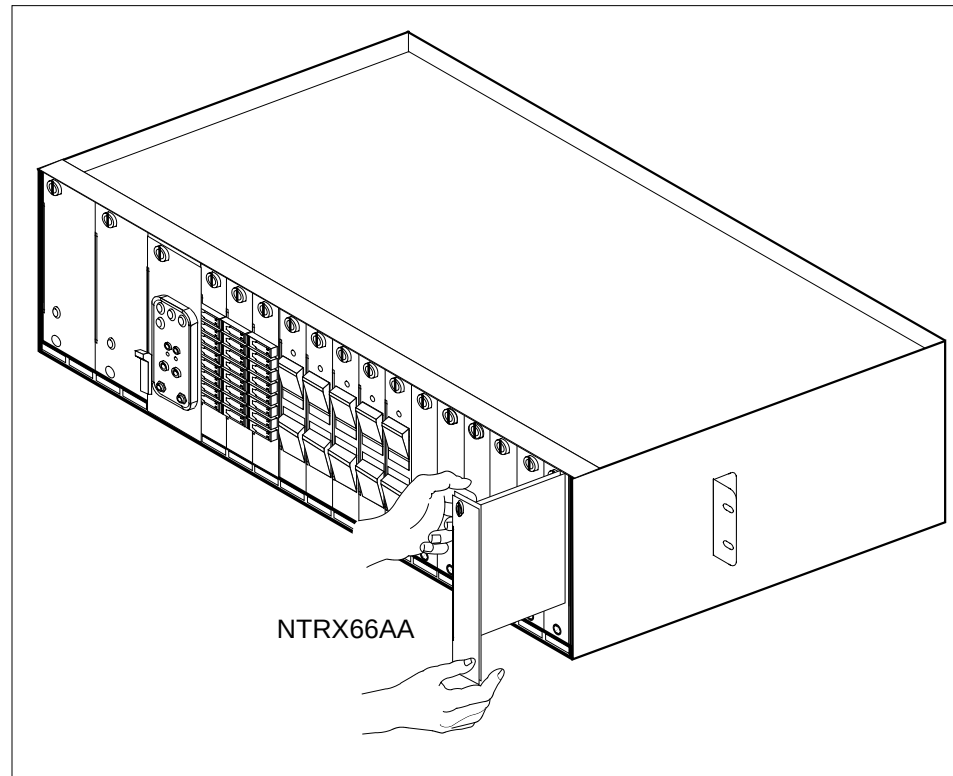


- a Disengage the captive screw at the top of the circuit card.
  - b Gently pull the circuit card towards you until it clears the shelf.
- 7 Ensure the replacement circuit card has the same PEC, including suffix, as the circuit card just removed.
- a Align the circuit card with the slots in the shelf and gently slide the circuit card into the shelf.
  - b Gently but firmly seat the circuit card.
  - c Tighten the captive screw at the top of the circuit card.

#### ***At the rear of the MSP***

- 8 Locate the replaced circuit card and reattach the connectors, as noted in step 5.

**NTRX66**  
**MSP (end)**

---

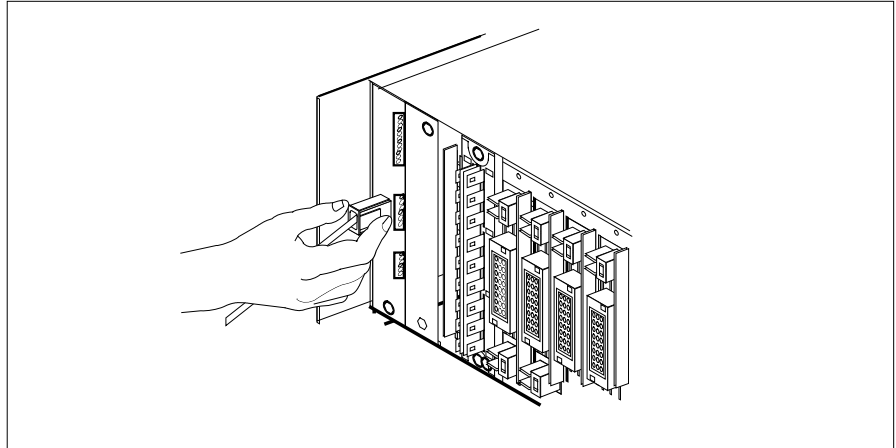

- 9** Send any faulty cards for repair according to local procedure.
- 10** Record the date the card was replaced, the serial number of the card, and the symptoms that prompted replacement of the card. Go to step 11.
- 11** You have completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTTR46 in an RLD**

---

### **Application**

Use this procedure to replace an NTTR46 in a Star Remote Module Equipment (SRME) cabinet or Star Remote Module Outside (SRMO) cabinet as identified in the following table.


| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>        |
|------------|-----------------|--------------------|
| NTTR46     | AA              | ac to dc rectifier |

### **Common procedures**

No common procedures are referenced in this procedure.

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

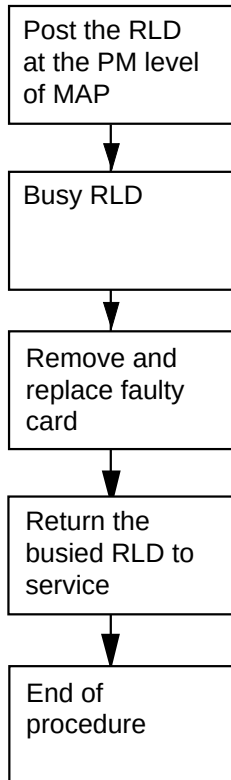**NTTR46**  
**in an RLD (continued)****Summary of replacing an NTTR46 in an RLD**

This flowchart summarizes the procedure.

Use the instructions in the procedure that follows this flowchart to perform the procedure.

## NTTR46 in an RLD (continued)

### Replacing an NTTR46 in an RLD

#### *At your current location:*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP display*

- 3 To post the Star Hub the RLD is connected to, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
and press the Enter key.

*where*

**site**

is the name of the STAR site

**frame**

is the frame number of the STAR (0 to 511)

**unit**

is 0 for the STAR

*Example of a MAP display:*

```

 SysB ManB OffL CBsy ISTb InSv
 PM 0 0 0 0 1 130
 STAR 0 0 0 0 1 10
STAR Rem1 00 0 ISTb Links_00S: CSide 0 PSide 0
Unit 0: InSv Mtce TakeOver /RG: 0
Unit 1: SysB Mtce /RG: 0
DRwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG:
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 0 InSv
.. ..

```

- 4 To post the RLD, type  
**>RLD;POST rld\_no**  
and press the Enter key.

*where*

**rld\_no**

is the RLD number to be posted

*Example of a MAP display:*



## NTTR46 in an RLD (continued)

```

 SysB ManB OffL CBsy ISTb InSv
 PM 4 0 10 3 3
 STAR 0 0 0 0 1 1

STAR REM1 00 0 ISTb Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0: ISTb /RG: 0
Unit 1: ManB /RG: 0
Drwr: 11 11 11 11 11 22 22 22 22 33 33 33 RG
01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 0 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- --
REM9 RLD DRWR 8 SYSB LogDrwr: 16 17
BANK_0: Active Links_00S: 2
BANK_1: Stby RLD BDch: -

```

- 5 To busy the posted RLD, type

**>BSY DRWR**

and press the Enter key.

*Example of a MAP display:*

```

Warning: Calls on RLD may be affected.
Do you wish to continue?
Please confirm ("YES", "Y", "NO", "N")

```

- 6 To respond affirmatively to the confirmation request, type

**>Y**

and press the Enter key.

### **At the SRME or SRMO site**

- 7 The type of enclosure for the Star Module determines your next action.

**Note:** Because the rectifier has failed, the RLD is on battery power. The batteries support subscribers for up to 8 hours, depending on traffic.

| If the RLD is in an     | Do      |
|-------------------------|---------|
| SRME (inside) cabinet   | step 8  |
| SRMO (outdoors) cabinet | step 10 |

- 8 Use a flat blade screwdriver and turn the three 1/4-turn fastening screws at the bottom of the cover. Hold the cover by the left and right sides, lift up, and pull the cover towards you. Set the cover against a vertical surface with the inside facing out. This makes the equipment location diagram visible.

## NTTR46 in an RLD (continued)

---

9



### **DANGER**

#### **Static electricity damage**

Before removing the rectifier, put on a wrist strap and connect it to the wrist strap grounding point in the top right corner of the TSS. This protects the equipment against damage caused by static electricity.

The rectifier is in the lower right corner of the telephony subsystem (TSS). Perform the following steps to remove and replace the rectifier:

- a To remove power from the rectifier, disconnect the gray power cord. Disconnect the dc output connector.
- b Use a Phillips screwdriver to remove the five screws that hold the rectifier in its holding bracket.
- c Remove the rectifier.
- d Install a replacement rectifier with one of the same PEC and suffix.
- e Use a Phillips screwdriver to install and tighten the screws to the rectifier holding bracket.
- f Connect the dc output connector that was disconnected in step a.a
- g To supply power to the rectifier, connect the ac supply cable that was disconnected in step a.a
- h Go to step 13.

- 10 Unlock and open the cabinet door. The door alarm generates a Major alarm at the MAP terminal. Silence the alarm. Use a flat blade screwdriver to unscrew the two large knurled screws at the left side of the inside TSS cover.

11



### **DANGER**

#### **Static electricity damage**

Before removing the rectifier, put on a wrist strap and connect it to the wrist strap grounding point in the top left corner of the TSS. This protects the equipment against damage caused by static electricity.

The rectifier is at the bottom center of the telephony subsystem (TSS) cover. Perform the following steps to remove and replace the rectifier.

- a Remove power from the rectifier by setting the Rectifier breaker on the ac panel to the OFF position. Disconnect the rectifier output connector. Disconnect the power cord from the rectifier. Use a 7mm nutdriver to loosen the nut that secures the ground strap. Remove the ground strap.
- b Open the TSS cover.

## NTTR46 in an RLD (end)

- c Use a Phillips screwdriver to loosen and remove the three screws that hold the rectifier to the TSS cover.
  - d Remove the rectifier.
  - e Install a replacement rectifier with one of the same PEC and suffix.
  - f Use a Phillips screwdriver to tighten the three screws that hold the rectifier to the TSS cover.
  - g Close the TSS cover.
  - h Install the ground strap and nut. Tighten the nut with a 7mm nutdriver. Connect the rectifier output connector and the power cord that were disconnected in step a.a
  - i Supply power to the rectifier by setting the Rectifier breaker on the ac panel to the ON position.
- 12** Open the TSS cover.
- 13** Note the condition of the indicator lights on the faceplate of the NTTR70AA Star Module control (SMC) card. Check that the Critical alarm light emitting diode (LED) is no longer lit. Also make sure the green LED on the rectifier is lit.
- 14** Close the TSS cover. Close and lock the SRMO front door.

### ***At the MAP terminal***

- 15** To return the RLD to service, type  
**>RTS DRWR**  
 and press the Enter key.

| If the RTS | Do      |
|------------|---------|
| passes     | step 16 |
| fails      | step 18 |

- 16** Send any cards with faults for repair according to local procedure.
- 17** Record the following items in office records:
- date the card was replaced
  - serial number of the card
  - problems that prompted replacement of the card
- Go to step 19.
- 18** Get additional support for replacing this card by calling operating company personnel responsible for a higher level of support.
- 19** You have correctly completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTTR47 in an RLD**

---

### **Application**

Use this procedure to replace an NTTR47 in a remote line drawer (RLD) in Star Remote Module Outside (SRMO) as identified in the following table.


| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b> |
|------------|-----------------|-------------|
| NTTR47     | AA              | ac panel    |

### **Common procedures**

This procedure does not refer to any common procedures.

### **Action**

The flowchart that follows provides a summary of this procedure. Use the instructions in the step-action procedure that follows the flowchart to replace the card.

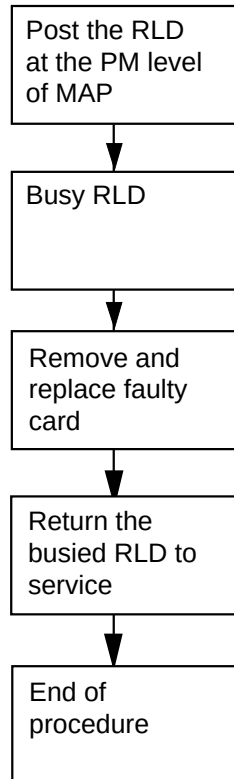**NTTR47**  
**in an RLD (continued)****Summary of replacing an NTTR47 in an RLD**

This flowchart provides a summary of the procedure.

Use the instructions in the step-action procedure that follows this flowchart to perform the procedure.

## NTTR47 in an RLD (continued)

### Replacing an NTTR47 in an RLD

#### *At the current location*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP display*

- 3 To post the Star Hub the RLD is connected to, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
and press the Enter key.

*where*

**site**

is the name of the STAR site

**frame**

is the frame number of the STAR (0 to 511)

**unit**

is 0 for the STAR

*Example of a MAP display:*

```

 SysB ManB OffL CBsy ISTb InSv
 PM 0 0 0 0 1 130
 STAR 0 0 0 0 1 10
STAR Rem1 00 0 ISTb Links_00S: CSide 0 PSide 0
Unit 0: InSv Mtce TakeOver /RG: 0
Unit 1: SysB Mtce /RG: 0
DRwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG:
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Pref 0 InSv
.. Stby 1 InSv

```

- 4 To post the RLD, type  
**>RLD;POST rld\_no**  
and press the Enter key.

*where*

**rld\_no**

is the RLD number to be posted

*Example of a MAP display:*

**NTTR47**  
**in an RLD (continued)**

```

 SysB ManB OffL CBsy ISTb InSv
 PM 4 0 10 3 3
STAR STAR 0 0 0 0 1 1
STAR REM1 00 0 ISTb Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0: ISTb /RG: 0
Unit 1: ManB /RG: 0
Drwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 Pref
0 InSv
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby
1 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- -- -- --
REM9 RLD DRWR 8 SYSB LogDrwr: 16 17
BANK_0: Active Links_00S: 2
BANK_1: Stby RLD BDch: -
```

- 5      To busy the posted RLD, type  
         **>BSY DRWR**  
         and press the Enter key.  
         *Example of a MAP display:*  
  
         Warning: Calls on RLD may be affected.  
         Do you wish to continue?  
         Please confirm ("YES", "Y", "NO", "N")
- 6      To respond affirmatively to the confirmation request, type  
         **>Y**  
         and press the Enter key.

**At the SRMO site**  
**7**



**WARNING**  
**Static electricity damage**  
Before removing the ac panel, put on a wrist strap and connect it to the wrist strap grounding point on the TSS. This protects the equipment against damage caused by static electricity.

## NTTR47 in an RLD (continued)

---

8



### **DANGER**

#### **Risk of electrocution**

To eliminate the risk of electrical shock, remove external ac power to the SRMO cabinet before accessing the ac panel.

Set the circuit breaker that supplies external ac power to the SRMO cabinet to the OFF position.

- 9 Unlock and open the cabinet door. The door alarm generates a Major alarm at the MAP terminal. Silence the alarm by pulling the interlock switch out.
- 10 Set the main and rectifier circuit breakers on the ac panel to the OFF position.
- 11 Use a flat blade screwdriver to loosen the screw to open the ac panel. Swing the ac panel cover out and lift up to release the cover from the mounting bracket. Put the cover on the SRMO cabinet floor.
- 12 Disconnect the main ac input load (L) wire that connects to CB1, the 16 A main circuit breaker. Loosen the locking screw at the bottom of the circuit breaker to release the wire.
- 13 Disconnect the ac neutral cable from J3-1 (TB1) on the ac panel.
- 14 Use a 7 mm nutdriver to loosen the ground wire nut. Remove the green and yellow ground wire from the ac panel (not the ac panel cover).
- 15 Disconnect the ac panel output connectors J1 and J2.
- 16 Use a 10 mm nutdriver to loosen the nut that secures the ac panel to the back wall of the SRMO cabinet. Remove the nut. Lift up on the ac panel to remove it from the mounting bracket.
- 17 Install the replacement ac panel on the ac panel mounting bracket.
- 18 Install the 10 mm nut that was removed in step 16. Use a 10 mm nutdriver to tighten the nut and secure the ac panel to the rear wall of the SRMO cabinet. Make sure the flat washer and lock washer are behind the nut and not behind the ac panel.
- 19 Connect the ac panel output connectors J1 and J2.
- 20 Install the ground wire. Use a 7 mm nutdriver to tighten the nut that secures the green and yellow ground wire to the ac panel.
- 21 Connect the ac neutral cable to J3-1 (TB1) on the ac panel.
- 22 Connect the main ac input load (L) wire to CB1, the 16 A main circuit breaker. Tighten the locking screw at the bottom of the circuit breaker to secure the wire.
- 23 Install the ac panel cover. Use a flat blade screwdriver to tighten the screw to secure the ac panel.
- 24 Close the circuit breaker that supplies external ac power to the SRMO cabinet.



## NTTR47 in an RLD (end)

- 25** Set the main and rectifier circuit breakers on the ac panel to the ON position.
- 26** Make sure the green power light emitting diode (LED) on the ac panel is lit.
- 27** Open the TSS front panel. Note the condition of the indicator lights on the faceplate of the NTTR70AA/AB Star Module control (SMC) card. Check that the Critical alarm LED is no longer lit.

| <b>If alarm LEDs on the SMC card are</b> | <b>Do</b> |
|------------------------------------------|-----------|
| lit                                      | step 32   |
| not lit                                  | step 28   |

- 28** Close the TSS front cover.

***At the MAP terminal***

- 29** To return the posted RLD to service, type  
**>RTS DRWR**  
and press the Enter key.

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| fails         | step 32   |
| passes        | step 30   |

- 30** Send any faulty cards for repair according to local procedure.
- 31** Record the following items in office records:
- date the card was replaced
  - serial number of the card
  - problems that prompted replacement of the card
- Go to step 33.
- 32** Get additional support in replacing this card by contacting operating company personnel responsible for a higher level of support.
- 33** You have correctly completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTTR60 in a STAR**

---

### **Application**

Use this procedure to replace the following card in STAR.


| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>    |
|------------|-----------------|----------------|
| NTTR60     | AA, BA          | Ring Generator |

### **Common procedures**

None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

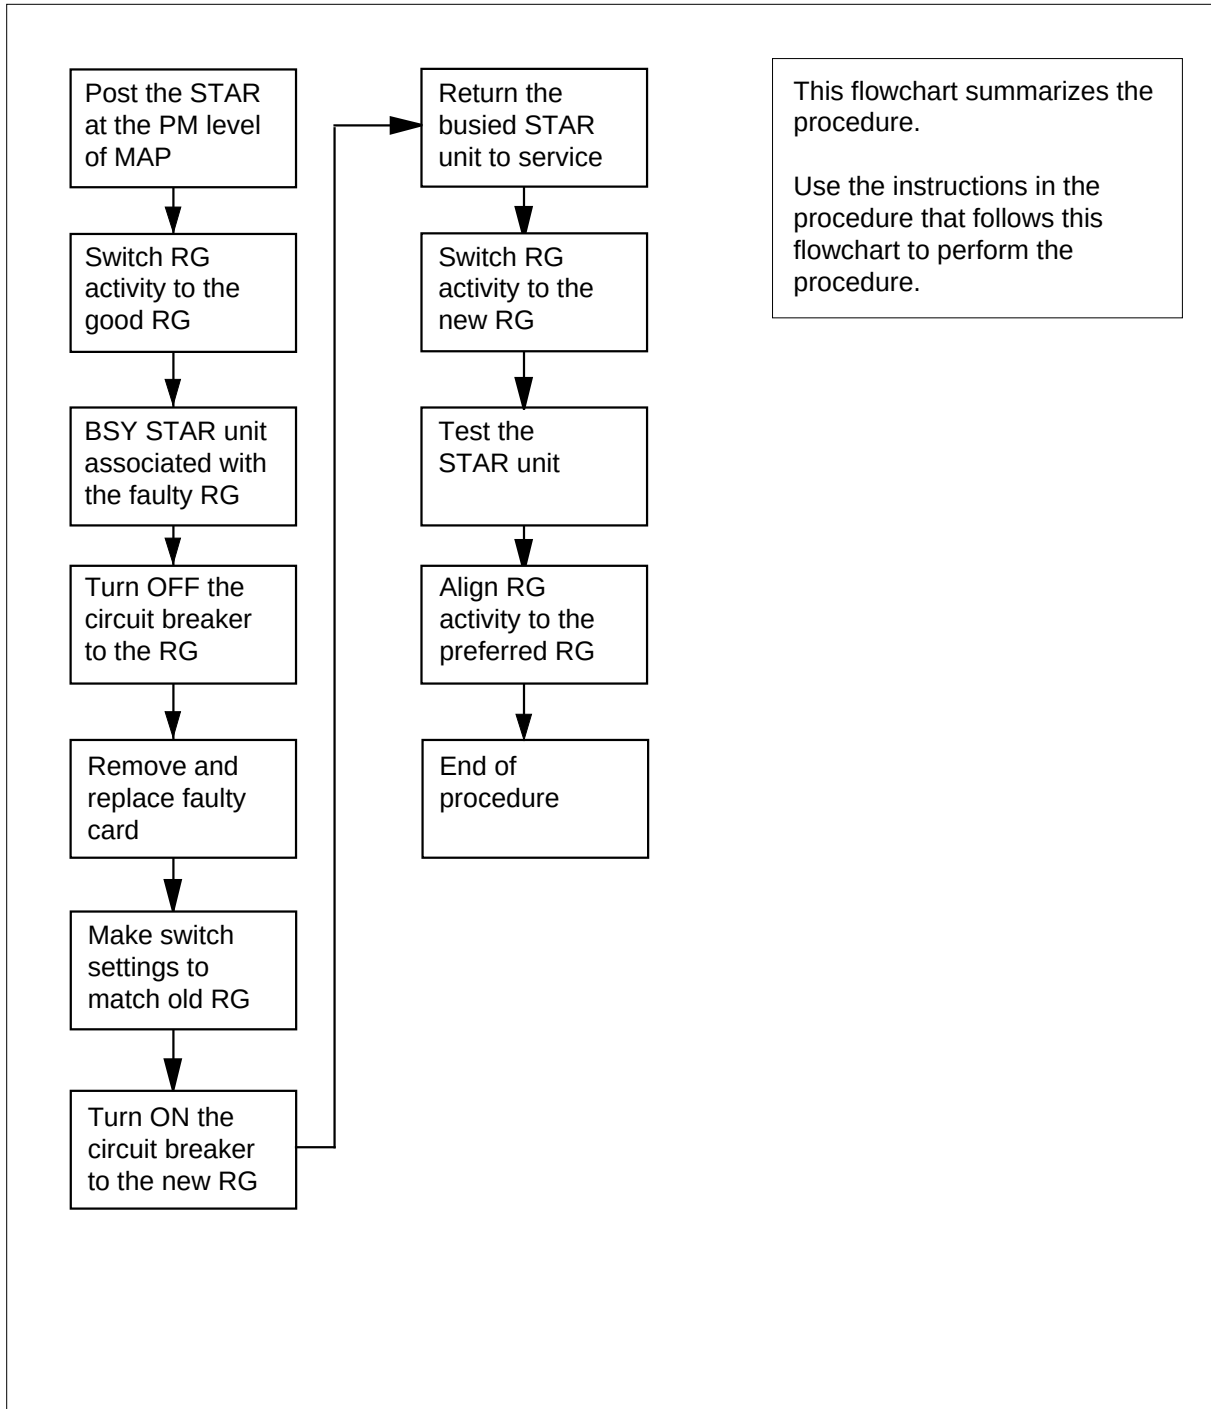**NTTR60**  
**in a STAR** (continued)**Summary of card replacement procedure for an NTTR60 card in a STAR**

## NTTR60 in a STAR (continued)

---

### Replacing an NTTR60 card in a STAR

#### *At your current location*

1



#### **CAUTION**

##### **Loss of service**

This procedure includes directions to manually busy one or more peripheral module (PM) units. Since manually busying a PM unit can cause service degradation, perform this procedure only if necessary to restore out-of-service components. Otherwise, carry out this procedure during periods of low traffic.

Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or were directed to this procedure by your maintenance support group.

- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.
- 3 If you were directed to this procedure from an alarm clearing procedure in this manual, go to step 9. Otherwise, continue with step 4.

#### *At the MAP terminal*

- 4 To post the STAR containing the card to be replaced, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
and press the Enter key.

*where*

##### **site**

is the name of the site where the STAR is located

##### **frame**

is the frame number of the STAR with the faulty card (0 to 511)

##### **unit**

is 0 for the STAR

*Example of a MAP response:*

## NTTR60 in a STAR (continued)

|      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|
|      | SysB | ManB | OffL | CBSy | ISTb | InSv |
| PM   | 0    | 0    | 2    | 0    | 1    | 12   |
| STAR | 0    | 0    | 2    | 0    | 1    | 9    |

STAR REM1 00 0 ISTb Links\_00S: CSide 0 PSide 0 UMP 00S:0  
 Unit 0: ISTb /RG: 0  
 Unit 1: ManB /RG: 0 RG:  
 Drwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 Pref 0 InSv  
 01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 1 InSv  
 .. .. .

- 5 Determine the unit associated with the NTTR60 card to be replaced by using the following table.

| If STAR unit | Do RG card   |
|--------------|--------------|
| 0            | 0 in slot 1  |
| 1            | 1 in slot 22 |

- 6 Check the state of the STAR units.

| If the STAR units are                                      | Do     |
|------------------------------------------------------------|--------|
| OFFL or SysB                                               | step 8 |
| One unit is InSv or ISTb<br>the other unit is ISTB or SysB | step 7 |

- 7 To switch ringing generator activity to the good NTTR60 card, type  
**>SWRG UNIT unit\_no**  
 and press the Enter key.

where

**unit\_no**  
 is the STAR unit (0 or 1) aligned to the faulty RG

**Note:** If necessary, repeat this step until both units of the STAR are on the good RG.

| If the SWRG command | Do      |
|---------------------|---------|
| passes              | step 8  |
| fails               | step 21 |

- 8 To busy the STAR unit associated with the faulty RG, type  
**>BSY UNIT unit\_no**  
 and press the Enter key.

## NTTR60 in a STAR (continued)

---

where

**unit\_no**  
is the STAR unit (0 or 1) as seen in step 5

### At the FSP

- 9 Turn OFF the circuit breaker for the ringing generator to be replaced by using the information in the following table.

| IfCircuit breaker label | DoRinging generator |
|-------------------------|---------------------|
| Ring 0                  | 0 in slot 1         |
| Ring 1                  | 1 in slot 22        |

10



#### WARNING

##### Static electricity damage

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the STAR. This protects the equipment against damage caused by static electricity.



#### WARNING

##### Equipment damage

Take these precautions when removing or inserting a card.1. Do not apply direct pressure to the components.2. Do not force the cards into the slots.

Put on a wrist strap.

### At the STAR

- 11 Remove the NTTR60 card as follows:
- a Locate the card to be removed on the appropriate shelf.
  - b Open the locking levers on the card to be replaced and gently pull the card towards you until it clears the shelf.
  - c Place the card you have removed in an electrostatic discharge (ESD) protective container.
  - d Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card you just removed.
- 12 Open the locking levers on the replacement card. Align the card with the slots in the shelf and gently slide the card into the shelf.
- 13 Seat and lock the card.

## NTTR60 in a STAR (continued)

- a Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure the card is fully seated in the shelf.
- b Close the locking levers.

### ***At the FSP***

- 14 Turn ON the circuit breaker turned OFF in step 9.
- 15 Remove the wrist strap.
- 16 If you were directed to this procedure from an alarm clearing procedure in this manual, return now to the alarm clearing procedure that directed you here. Otherwise, continue with step 17.

### ***At the MAP terminal***

- 17 To return the STAR unit to service, type

**>RTS UNIT unit\_no**

and press the Enter key.

where

**unit\_no**

is the number of the STAR unit (0 or 1) busied in step 8

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passes        | step 18   |
| fails         | step 21   |

- 18 To switch ringing generator activity to the new NTTR60 card, type

**>SWRG UNIT unit\_no**

and press the Enter key.

where

**star\_unit**

is the STAR unit (0 or 1) where the RG was replaced

| <b>If the SWRG command</b> | <b>Do</b> |
|----------------------------|-----------|
| passes                     | step 19   |
| fails                      | step 21   |

- 19 Send any faulty cards for repair according to local procedure.

- 20 Record the following items in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Go to step 22.

**NTTR60**  
**in a STAR** (end)

---

- 21 Get additional help replacing this card by contacting personnel responsible for a higher level of support.
- 22 You have correctly completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.



**NTTR66  
in an RLD**

---

**Application**

Use this procedure to replace an NTTR66 in a remote line drawer (RLD) in a Star Remote Module Equipment (SRME) wall mount or Star Remote Module Outside (SRMO) cabinet as identified in the following table.

| PEC    | Suffixes | Name                                           |
|--------|----------|------------------------------------------------|
| NTTR66 | AA       | Electromagnetic interference (EMI) filter pack |

**Common procedures**


No common procedures are referenced in this procedure.

**Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR66 in an RLD (continued)

### Summary of replacing an NTTR66 in an RLD

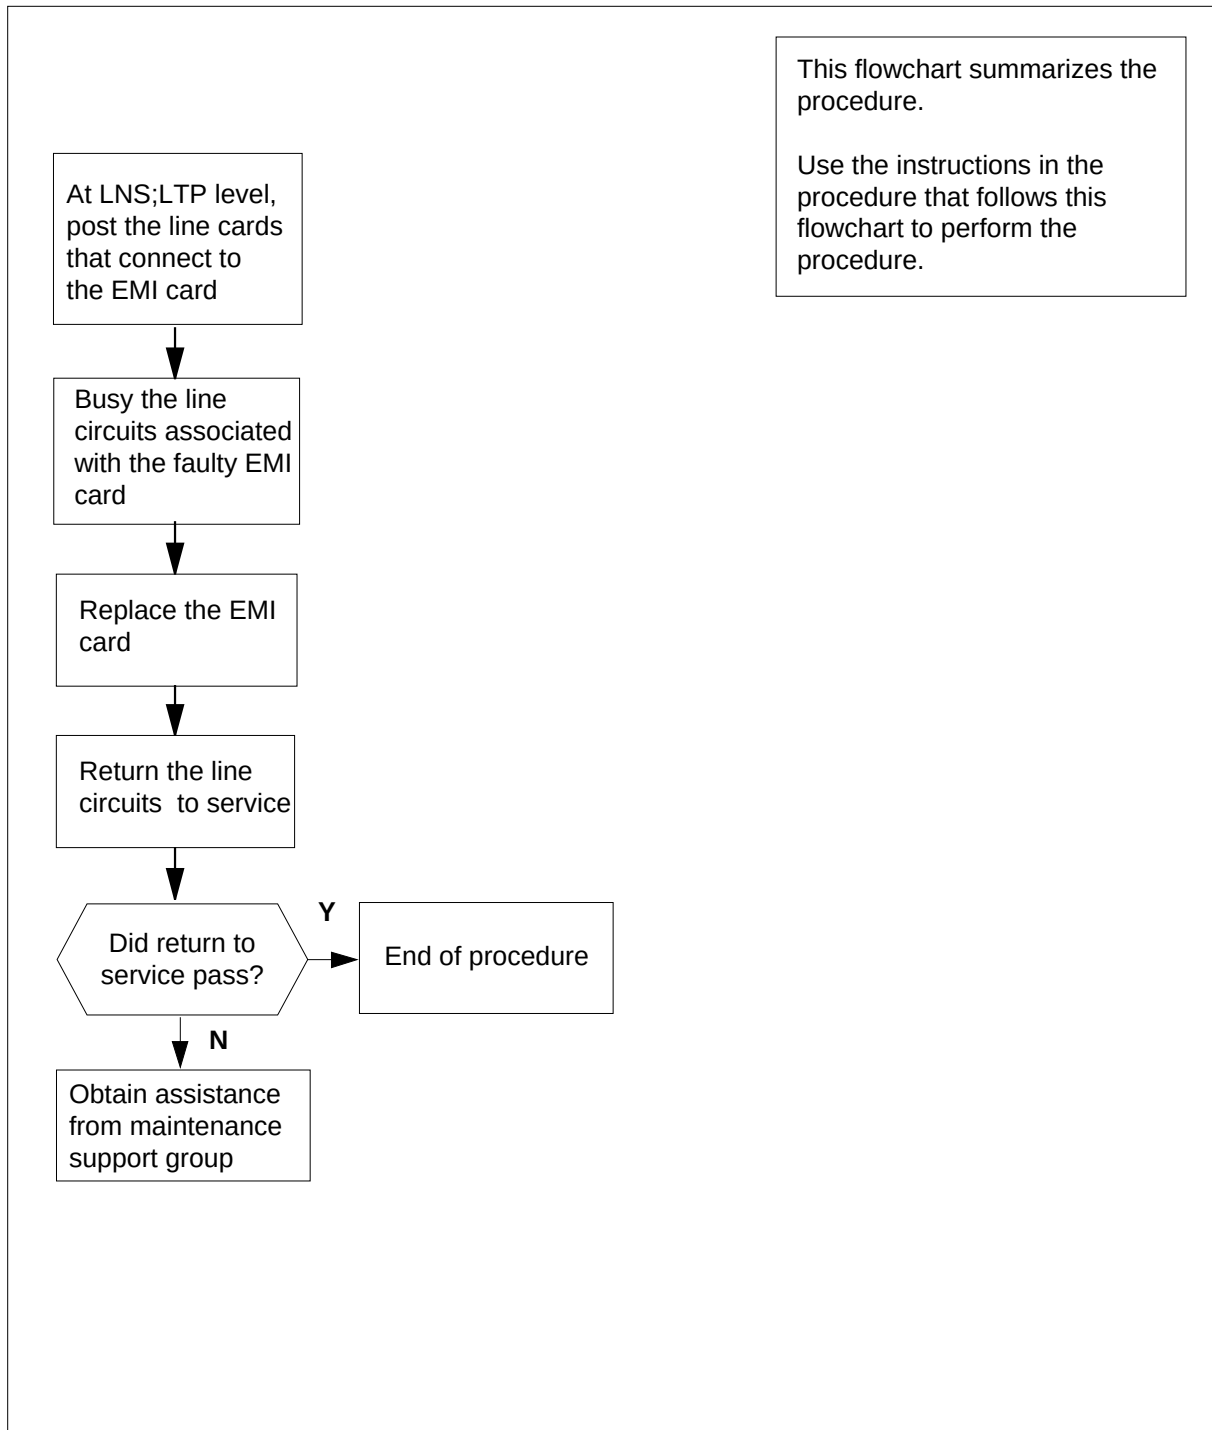

## NTTR66 in an RLD (continued)

---

### Replacing an NTTR66 in an RLD

#### *At your current location:*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.
- 3



#### **CAUTION**


##### **Service disruption: calls may be dropped!**

Perform this card replacement activity only during a period of low traffic. All calls being handled by the lines connected to the EMI filter card being replaced will be dropped.

Identify the EMI card to be replaced based on the Telephony subsystem (TSS) diagram. The relationship between the EMI card and the affected line cards is identified in the table following the figure. This information is also printed on a label on the back of the front cover of the SRME cabinet and on the inside of the TSS cover of the SRMO cabinet.

## NTTR66 in an RLD (continued)

### Telephony subsystem

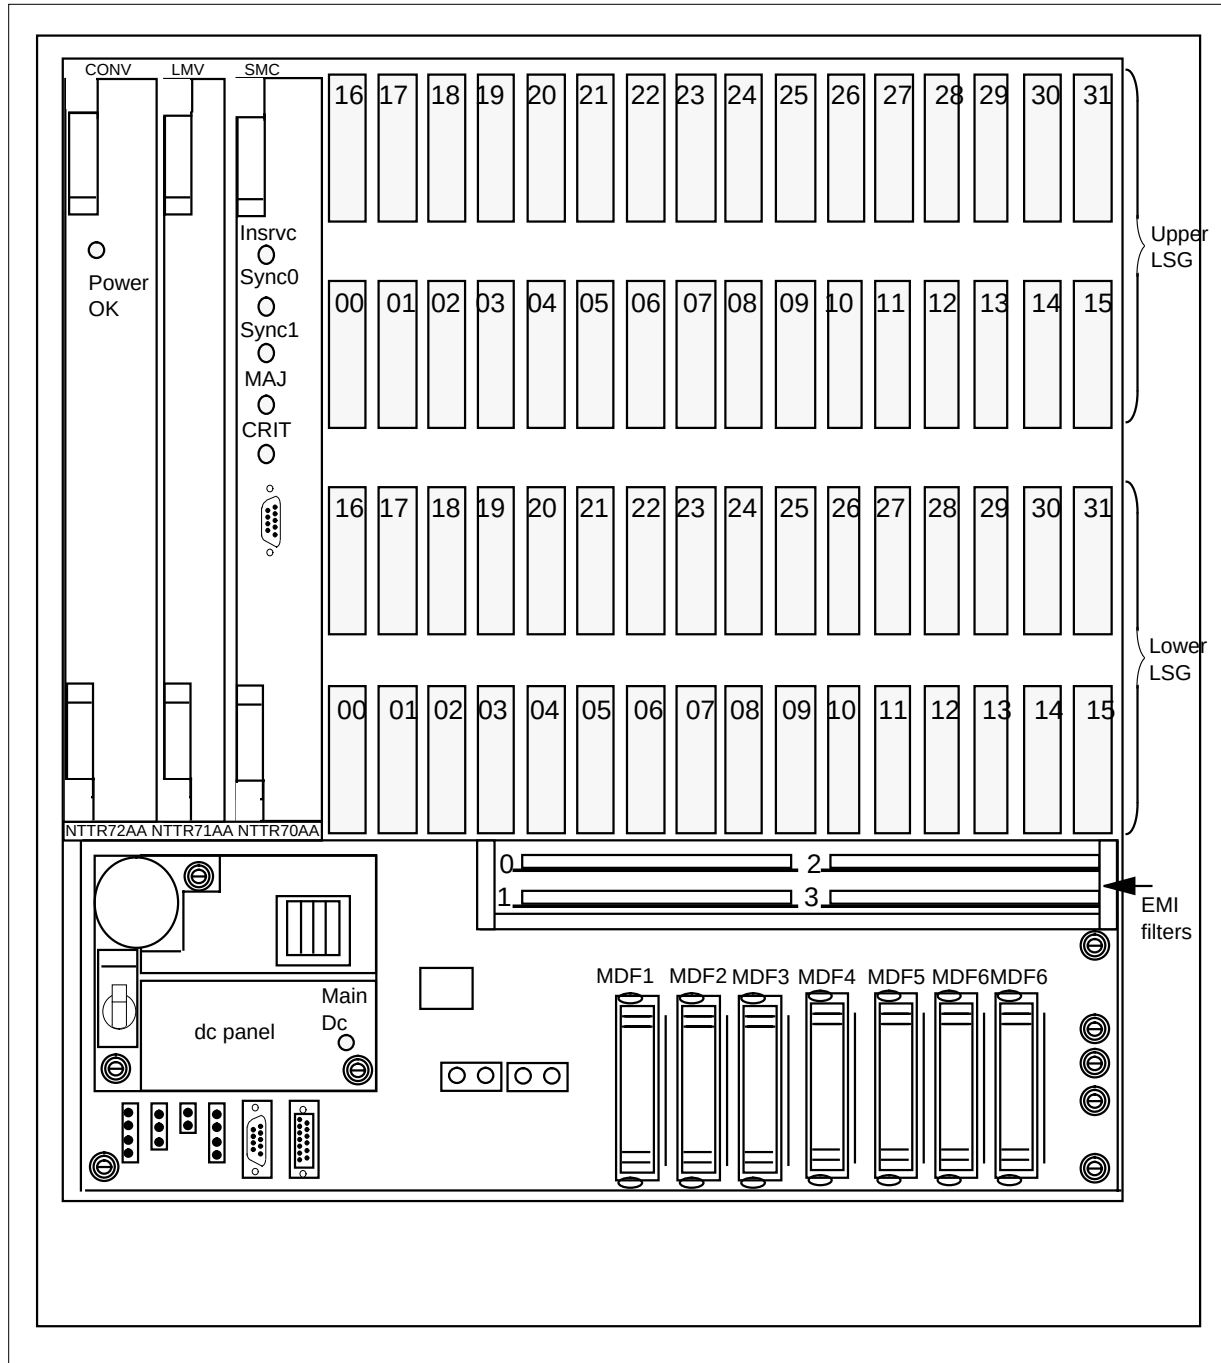

## NTTR66 in an RLD (continued)

| EMI card number | Line cards affected              |
|-----------------|----------------------------------|
| 0               | Lower line subgroup, cards 0-15  |
| 1               | Lower line subgroup, cards 16-31 |
| 2               | Upper line subgroup, cards 0-15  |
| 3               | Upper line subgroup, cards 16-31 |

- 4 To access the line test position (LTP) level of the MAP terminal and post the lines associated with the EMI card, type

**>MAPCI;MTC;LNS;LTP;POST L site frame unit lsg ckt\_range**

and press the Enter key.

where

**site**

is the name of the site where the STAR is located

**frame**

is the frame number of the STAR with the faulty card

**unit**

is 0 for the STAR

**lsg**

is the number of the line subgroup with the faulty card (0-35)

**ckt\_range**

is the range of circuits associated with the faulty card, such as 0-15 or 16-31

*Example of a MAP response:*

```
LCC PTY RNG LEN..... DN STA F S LTA TE RESULT
RES REM1 00 0 03 03 7213355 MB
```

- 5 To busy the lines, type

**>BSY**

and press the Enter key.

**Note:** The BSY command does not complete until there are no calls in the talking state within the range of the posted lines.

### **At the RLD site**

- 6 Get a replacement card with the same product equipment code (PEC), including suffix, as the card you just removed.
- 7 Open the Star Module and access the TSS. Locate the EMI filter to be replaced using the TSS diagram.

## NTTR66 in an RLD (end)

---

8



### **WARNING**

#### **Static electricity damage**

Wear a wrist strap connected to the wrist strap grounding point on the frame supervisory panel (FSP) while handling cards. This precaution protects the cards against damage caused by static electricity.

Carefully remove the EMI card. Place the card you removed in an electrostatic discharge (ESD) protective container.

9 Install the replacement card.

10 Close the TSS cover, if necessary and close the Star Module.

### ***At the MAP terminal***

11 To return the line cards to service, type

**>RTS lsg ckt\_range**

and press the Enter key.

*where*

**lsg**

is the number of the line subgroup with the faulty card (0-1)

**ckt\_range**

is the range of circuits associated with the faulty card, such as 0-15 or 16-31

---

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passed        | step 12   |
| failed        | step 14   |

---

12 Send any cards with faults for repair according to local procedure.

13 Record the following items in office records:

- date the card was replaced
- serial number of the card
- problems that prompted replacement of the card

Go to step 15.

14 Get additional support in replacing this card by contacting the operating company personnel responsible for higher level of support.

15 You have correctly completed this procedure.

**NTTR67  
in an RLD**

---

**Application**

Use this procedure to replace an NTTR67 in a remote line drawer (RLD) in a Star Remote Module Equipment (SRME) or Star Remote Module Outside (SRMO) as identified in the following table.

| PEC    | Suffixes | Name     |
|--------|----------|----------|
| NTTR67 | AA       | dc panel |

**Common procedures**

This procedure does not refer to any common procedures.


**Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR67 in an RLD (continued)

---

### Summary of replacing an NTTR67 in an RLD

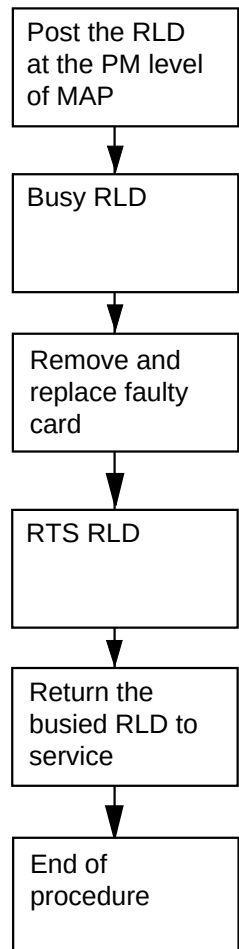

This flowchart summarizes the procedure.

Use the instructions in the procedure that follows this flowchart to perform the procedure.



## NTTR67 in an RLD (continued)

### Replacing an NTTR67 in an RLD

#### *At the current location:*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP display*

- 3 To post the Star Hub the RLD is connected to, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
 and press the Enter key.

where

**site**

is the name of the STAR site

**frame**

is the frame number of the STAR (0 to 511)

**unit**

is 0 for the STAR

*Example of a MAP display:*

```

 SysB ManB OffL CBsy ISTb InSv
 PM 0 0 0 0 1 130
 STAR 0 0 0 0 1 10
STAR Rem1 00 0 ISTb Links_00S: CSide 0 PSide 0
Unit 0: InSv Mtce TakeOver /RG: 0
Unit 1: SysB Mtce /RG: 0
DRwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG:
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 0 InSv
.. Stby 1 InSv

```

- 4 To post the RLD, type  
**>RLD;POST rld\_no**  
 and press the Enter key.

where

**rld\_no**

is the RLD number to be posted

*Example of a MAP display:*

## NTTR67

### in an RLD (continued)

```

 SysB ManB OffL CBSy ISTb InSv
PM 4 0 10 3 3 3
STAR 0 0 0 0 1 1
STAR REM1 00 0 ISTb Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0: ISTb /RG: 0
Unit 1: ManB /RG: 0
Drwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 1 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- -- --
REM9 RLD DRWR 8 SYSB LogDrwr: 16 17
BANK_0: Active Links_00S: 2
BANK_1: Stby RLD BDch: -

```

- 5 To busy the posted RLD, type

**>BSY DRWR**

and press the Enter key.

*Example of a MAP display:*

```

Warning: Calls on RLD may be affected.
Do you wish to continue?
Please confirm ("YES", "Y", "NO", "N")

```

- 6 To respond affirmatively to the confirmation request, type

**>Y**

and press the Enter key.

#### At the SRME or SRMO site

- 7 The type of enclosure for the Star Module determines your next action.

**Note:** Because the dc panel has failed, there is no power available for the RLD to support subscribers.

| If the RLD is in an      | Do      |
|--------------------------|---------|
| SRME (inside) wall mount | step 8  |
| SRMO (outdoors) cabinet  | step 11 |

- 8



#### WARNING

##### Static electricity damage

Before removing the dc panel, put on a wrist strap and connect it to the wrist strap grounding point on the TSS. This protects the equipment against damage caused by static electricity.

---

**NTTR67**  
**in an RLD (continued)**

---

Use a slot screwdriver and turn the three 1/4-turn screws at the bottom of the cover. Hold the cover by the left and right sides, lift up, and pull the cover towards you. Set the cover out of the way.

- 9** The dc panel is in the lower left hand corner of the telephony subsystem (TSS). Perform the following steps to remove and replace the rectifier:
  - a** Power down the RLD by performing the following steps:
    - i** Set the circuit breaker on the dc panel to OFF.
    - ii** Remove ac power from the RLD as follows.
      - if the enclosure is an indoor wall-mounted SRME, remove power at the local ac power panel
      - disconnect the battery connector
    - iii** Note that the green Power On LED is not lit.
    - iv** The RLD is now powered down.
  - b** Use a slot screwdriver to loosen the three screws that hold the dc panel to the TSS.
  - c** Remove the dc panel.
  - d** Remove the four fuses from the dc panel, recording the fuse size and color to ensure correct installation in the replacement dc panel
  - e** Install a replacement dc panel with one of the same PEC and suffix.
  - f** Install the four fuses that were removed in step 9d
  - g** Use a slot screwdriver to tighten the three screws that hold the dc panel to the TSS.
  - h** Power up the RLD by performing the following steps:
    - i** Provide ac power to the RLD as follows.
      - if the enclosure is an indoor wall-mounted SRME, supply power at the local ac power panel
      - reconnect the battery connector
    - ii** Set the circuit breaker on the dc panel to ON.
    - iii** Reconnect the battery connector
    - iv** Note that the green Power On LED is lit. Make sure no alarm condition is indicated by the LEDs on the SMC card.
    - v** The RLD is now powered up
- 10** Replace the SRME cover. Use a slot screwdriver and turn the three 1/4-turn screws at the bottom of the cover. Go to step 13.

## NTTR67 in an RLD (continued)

---

11



### **WARNING**

#### **Static electricity damage**

Before removing the dc panel, put on a wrist strap and connect it to the wrist strap grounding point in the top left corner of the TSS. This protects the equipment against damage caused by static electricity.

Unlock and open the cabinet door. The door alarm generates a Major alarm at the MAP terminal. Silence the alarm by pulling the interlock switch out. Loosen the two large screws at the left side of the inside TSS cover. Open the TSS cover to access the TSS.

- a** Power down the RLD by performing the following steps:
  - i** Set the circuit breaker on the dc panel to OFF
  - ii** Remove ac power from the RLD as follows:
    - if the enclosure is an outdoor pad or pole-mounted SRMO, set the Rectifier circuit breaker on the ac panel to the OFF position. Then set the Main circuit breaker on the ac panel to the OFF position.
    - disconnect the battery connector
  - iii** Note that the green Power On LED is not lit
  - iv** The RLD is now powered down
- b** Use a slot screwdriver to loosen the three screws that hold the dc panel to the TSS.
- c** Remove the dc panel.
- d** Remove the four fuses from the dc panel, recording the fuse size and color to ensure correct installation in the replacement dc panel.
- e** Install a replacement dc panel with one of the same PEC and suffix.
- f** Install the four fuses that were removed in step 11d
- g** Use a slot screwdriver to tighten the three screws that hold the dc panel to the TSS.
- h** Provide ac power to the RLD as follows:
  - i** if the enclosure is an outdoor pad or pole-mounted SRMO, set the Main circuit breaker on the dc panel to the ON position. Then set the Rectifier circuit breaker on the ac panel to the ON position.
  - ii** reconnect the battery connector
- i** Set the circuit breaker on the dc panel to ON
- j** Reconnect the battery connector
- k** Note that the green Power On LED is lit. Make sure no alarm condition is indicated by the LEDs on the SMC card

---

**NTTR67**  
**in an RLD (end)**

---

I The RLD is now powered up.

- 12** Close and secure the TSS cover using the two screws on the left side of the TSS. Close and lock the cabinet door.

***At the MAP terminal***

- 13** To return the RLD to service, type

**>RTS DRWR**

and press the Enter key.

---

| <b>If the RTS</b> | <b>Do</b> |
|-------------------|-----------|
| passes            | step 14   |
| fails             | step 16   |

---

- 14** Send any faulty cards for repair according to local procedure.

- 15** Record the following items in office records:

- date the card was replaced
- serial number of the card
- problems that prompted replacement of the card

Go to step 17.

- 16** Get additional support in replacing this card by contacting operating company personnel responsible for a higher level of support.

- 17** You have correctly completed this procedure. Return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

## **NTTR70 in an RLD**

---

### **Application**

Use this procedure to replace an NTTR70 in a remote line drawer (RLD) in a Star Remote Module Equipment (SRME) or Star Remote Module Outside (SRMO) as identified in the following table.


| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>                       |
|------------|-----------------|-----------------------------------|
| NTTR70     | AA AB           | Star Module Controller (SMC) card |

### **Common procedures**

No common procedures are referenced in this procedure.

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

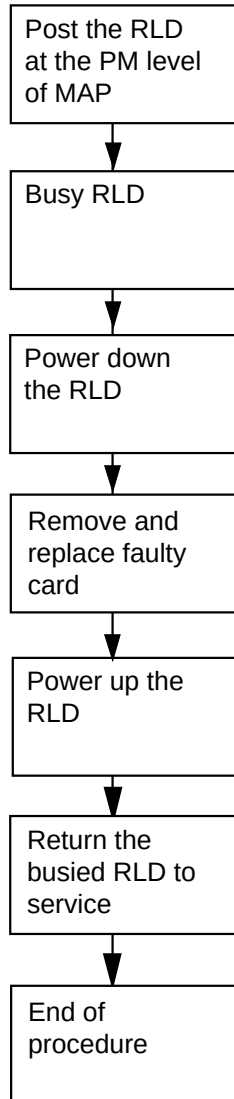**NTTR70**  
**in an RLD (continued)****Summary of replacing an NTTR70 RLD**

This flowchart summarizes the procedure.

Use the instructions in the procedure that follows this flowchart to perform the procedure.

## NTTR70 in an RLD (continued)

### Replacing an NTTR70 in an RLD

#### *At your current location:*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP display*

- 3 To access the PM level of the MAP and post the Star Hub where the RLD is connected. Type

**>MAPCI;MTC;PM;POST STAR site frame unit**

and press the Enter key.

where

**site**

is the name of the STAR site

**frame**

is the frame number of the STAR (0 to 511)

**unit**

is 0 for the STAR

*Example of a MAP display:*

```

 SysB ManB OffL CBsy ISTb InSv
 PM 0 0 0 0 1 130
 STAR 0 0 0 0 1 10
STAR Rem1 00 0 ISTb Links_00S: CSide 0 PSide 0
Unit 0: InSv Mtce TakeOver /RG: 0
Unit 1: SysB Mtce /RG: 0
DRwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG:
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Pref 0 InSv
.. SS Stby 1 InSv

```

- 4 To post the RLD, type

**>RLD;POST rld\_no**

and press the Enter key.

where

**rld\_no**

is the RLD number to be posted

*Example of a MAP display:*



## NTTR70 in an RLD (continued)

```

 SysB ManB OffL Cbsy ISTb InSv
 PM 4 0 10 3 3 3
 STAR 0 0 0 0 1 1
STAR REM1 00 0 ISTb Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0: ISTb /RG: 0
Unit 1: ManB /RG: 0
Drwr: 11 11 11 11 11 22 22 22 22 33 33 33 RG Pref 0 InSv
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 1 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- -- -- --
REM9 RLD DRWR 8 SYSB LogDrwr: 16 17
BANK_0: Active Links_00S: 2
BANK_1: Stby RLD BDch: -

```

- 5 To busy the posted RLD, type

**>BSY DRWR**

and press the Enter key.

*Example of a MAP display:*

```

Warning: Calls on RLD may be affected.
Do you wish to continue?
Please confirm ("YES", "Y", "NO", "N")

```

- 6 To respond affirmatively to the confirmation request, type

**>Y**

and press the Enter key.

### **At the SRME or SRMO site**

- 7 The type of enclosure the Star Module has determines your next action.

| If the RLD is in an      | Do     |
|--------------------------|--------|
| SRME (inside) wall mount | step 8 |
| SRMO (outdoors) cabinet  | step 9 |

- 8 Use a slot screwdriver and turn the 1/4-turn screws at the bottom of the cover. Hold the cover by the left and right sides, lift up, and pull the cover towards you. Set the cover out of the way. Pull the interlock switch out to silence the door alarm at the MAP terminal. Go to step 11.
- 9 Unlock and open the cabinet door. The door alarm generates a Major alarm at the MAP terminal. Silence the alarm by pulling the interlock switch out. Loosen the two large screws at the left side of the inside TSS cover. Open the TSS cover to access the TSS. Pull the interlock switch out to silence the door alarm at the MAP terminal.
- 10 Power down the RLD by performing the following steps:
- a Set the circuit breaker on the dc panel to OFF.

## NTTR70 in an RLD (continued)

- b Remove ac power from the RLD as follows.
  - if the enclosure is an indoor wall-mounted SRME, remove power at the local ac power panel
  - if the enclosure is an outdoor pad or pole-mounted SRMO, set the Rectifier circuit breaker on the ac panel to the OFF position. Then set the Main circuit breaker on the ac panel to the OFF position.
  - disconnect the battery connector.
  - Note that the green Power On LED is not lit
- c The RLD is now powered down.

11



### WARNING

#### Static electricity damage

Before removing the SMC card, put on a wrist strap and connect it to the wrist strap grounding point on the TSS. This protects the equipment against damage caused by static electricity.

The NTTR70 is in the right card slot in the upper left side of the TSS.

**Note:** Record the position of the DIP switches on the SMC card.

- 12 Set the DIP switches on the replacement card to the same settings as those on the card you have just removed.

Refer to the following tables for information about correct switch settings.

### SMC DIP switches S1 and S2 settings

|                          |                  |               | DIP switch settings |    |    |     |     |     |     |     |
|--------------------------|------------------|---------------|---------------------|----|----|-----|-----|-----|-----|-----|
| Function                 |                  | Switch number | 1                   | 2  | 3  | 4   | 5   | 6   | 7   | 8   |
| Grounding receive shield | Disable          | 1             | On                  | On | On | Off | Off | Off | Off | Off |
|                          |                  | 2             |                     |    |    |     |     |     |     |     |
|                          | Enable Direct    | 1             | On                  | On | On | Off | Off | Off | Off | On  |
|                          |                  | 2             |                     |    |    |     |     |     |     |     |
|                          | Enable capacitor | 1             | On                  | On | On | Off | Off | Off | Off | Off |
|                          |                  | 2             |                     |    |    |     |     |     |     | On  |

## NTTR70 in an RLD (continued)

### SMC DIP switch S3 settings

| Mode                                                                                      | DIP switch settings |      |      |      | Distance to Star Hub |         |
|-------------------------------------------------------------------------------------------|---------------------|------|------|------|----------------------|---------|
|                                                                                           | S3-1                | S3-2 | S3-3 | D3-4 | Feet                 | Meters  |
| DS-1 extended superframe (ESF) binary eight bit zero substitution (B8ZS) code suppression | Off                 | Off  | Off  | Off  | 0-133                | 0-41    |
|                                                                                           | Off                 | Off  | Off  | On   | 133-266              | 41-81   |
|                                                                                           | Off                 | Off  | On   | Off  | 266-399              | 81-122  |
|                                                                                           | Off                 | Off  | On   | On   | 399-533              | 122-163 |
|                                                                                           | Off                 | On   | Off  | Off  | 533-655              | 163-200 |

**13** Replace the SMC card.

**14** Power up the RLD by performing the following steps:

**a** Provide ac power to the RLD as follows.

- if the enclosure is an indoor wall-mounted SRME, supply power at the local ac power panel
- if the enclosure is an outdoor pad or pole-mounted SRMO, set the Main circuit breaker on the ac panel to the ON position. Then set the Rectifier circuit breaker on the ac panel to the ON position.
- reconnect the battery connector.

**b** Set the circuit breaker on the dc panel to ON.

**c** Note that the green Power On LED is lit. Make sure no alarm condition is indicated by the LEDs on the SMC card.

**d** The RLD is now powered up.

**15** Wait at least 3 minutes for the Star Module to power up and become stable before continuing to the next step.

#### ***At the MAP terminal***

**16** Load the standby (Stby) flash memory bank on the NTTR70 card. To load the Stby bank, type

**>LOADRLD CC**

and press the Enter key.

| <b>If LOADRLD</b> | <b>Do</b> |
|-------------------|-----------|
| passes            | step 17   |
| fails             | step 24   |

## NTTR70 in an RLD (end)

---

- 17** Switch the activity of the memory banks to make the newly loaded bank active. To switch the activity, type  
**>SWBNK**  
and press the Enter key.
- 18** Load the Stby flash memory bank on the NTTR70 card from the active bank. To load the Stby bank, type  
**>LOADRLD MATE**  
and press the Enter key.
- | If LOADRLD | Do      |
|------------|---------|
| passes     | step 19 |
| fails      | step 24 |
- 19** To return the RLD to service, type  
**>RTS DRWR**  
and press the Enter key.
- | If RTS | Do      |
|--------|---------|
| passes | step 22 |
| fails  | step 24 |
- 20** Look at the status and alarm LEDs on the SMC card. Make sure the Inservice LED is lit.
- 21** Close the TSS cover, if applicable. Replace the cover on the SRME wall mount. Close and lock the cabinet door on the SRMO cabinet.
- 22** Send any faulty cards for repair according to local procedure.
- 23** Record the following items in office records:
- date the card was replaced
  - serial number of the card
  - indications that prompted replacement of the card
- Go to step 25.
- 24** Get additional help replacing this card by contacting the operating company personnel responsible for a higher level of support.
- 25** You have correctly completed this procedure.

**NTTR71  
in an RLD**

---

**Application**

Use this procedure to replace an NTTR71 in a remote line drawer (RLD) in a Star Remote Module Equipment (SRME) or Star Remote Module Outside (SRMO) as identified in the following table.

| PEC    | Suffixes | Name                             |
|--------|----------|----------------------------------|
| NTTR71 | AA       | Line maintenance unit (LMU) card |

**Common procedures**

No common procedures are referenced in this procedure.

**Action**


The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR71

### RLD (continued)

---

#### Summary of replacing an NTTR71 in an RLD

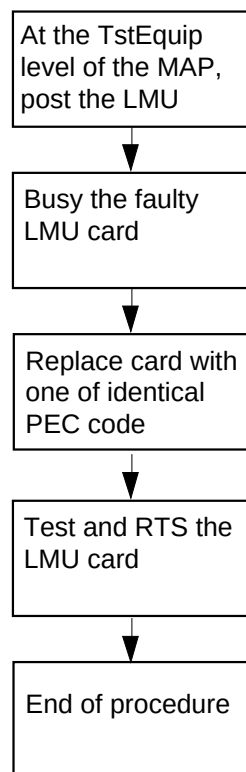

This flowchart summarizes the procedure.

Use the instructions in the procedure that follows this flowchart to perform the procedure.

## NTTR71

### RLD (continued)

#### Replacing an NTTR71 in an RLD

##### *At your current location:*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

##### *At the MAP display*

- 3 To access the test equipment (TSTEQUIP) level and post all LMUs, type **>MAPCI;MTC;MTCNA;TSTEQUIP;POST LMU ALL** and press the Enter key.

*Example of a MAP response:*

|          |      |      |      |      |      |      |
|----------|------|------|------|------|------|------|
|          | SysB | ManB | OffL | CBsy | ISTb | InSv |
| TSTEQUIP | 0    | 0    | 2    | 0    | 1    | 12   |
| LMU      | 0    | 0    | 2    | 0    | 1    | 9    |

|      |          |     |       |
|------|----------|-----|-------|
|      | PM       | MTE | STATE |
| STAR | REM1 0 0 | 0   | SYSB  |

- 4 Use the NEXT command to post the next LMU in the posted set until you access the LMU that is in the SysB state.
- 5 To busy the posted SysB LMU card, type **>BSY** and press the Enter key.

##### *At the SRME or SRMO site*

- 6 The type of enclosure the Star Module has determines your next action.

| If the RLD is in an      | Do     |
|--------------------------|--------|
| SRME (inside) Wall Mount | step 7 |
| SRMO (outdoors) cabinet  | step 8 |

- 7 Use a slot screwdriver and turn the 1/4-turn screws at the bottom of the cover. Hold the cover by the left and right sides, lift up, and pull the cover towards you. Set the cover out of the way. Pull the interlock switch out to silence the door alarm at the MAP terminal. Go to step 9.
- 8 Unlock and open the cabinet door. The door alarm generates a Major alarm at the MAP terminal. Silence the alarm by pulling the interlock switch out. Loosen the two large screws at the left side of the TSS cover. Open the TSS cover to access the TSS. Pull the interlock switch out to silence the door alarm at the MAP terminal.

## NTTR71

### RLD (continued)

---

9



#### **DANGER**

##### **Static electricity damage**

Before removing the LMU card, put on a wrist strap and connect it to the wrist strap grounding point in the top left corner of the TSS. This protects the equipment against damage caused by static electricity.

The NTTR71 is in the center card slot in the upper left side of the telephony subsystem (TSS).

- 10 Replace the LMU card.
- 11 Look at the status and alarm LEDs on the SMC card. Make sure the Inservice LED is lit.
- 12 Close the TSS cover, if applicable. Replace the cover on the SRME Wall Mount. Close and lock the cabinet door on the SRMO cabinet.

#### ***At the MAP terminal***

- 13 To test the new LMU card, type  
**>TST**  
and press the Enter key.

| If TST | Do      |
|--------|---------|
| fails  | step 17 |
| passes | step 14 |

- 14 To return the new LMU card to service, type  
**>RTS**  
and press the Enter key.

| If RTS | Do      |
|--------|---------|
| fails  | step 17 |
| passes | step 15 |

- 15 Send any faulty cards for repair according to local procedure.
- 16 Record the following items in office records:
  - date the card was replaced
  - serial number of the card
  - indications that prompted replacement of the cardGo to step 18.



**NTTR71**  
**RLD (end)**

---

- 17** Get additional help replacing this card by contacting the operating company personnel responsible for a higher level of support.
- 18** You have correctly completed this procedure.

## **NTTR72 in an RLD**

---

### **Application**

Use this procedure to replace an NTTR72 in a remote line drawer (RLD) in a Star Remote Module Equipment (SRME) or Star Remote Module Outside (SRMO) as identified in the following table.


| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>                                |
|------------|-----------------|--------------------------------------------|
| NTTR72     | AA              | Power converter and ringing generator card |

### **Common procedures**

No common procedures are referenced in this procedure.

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

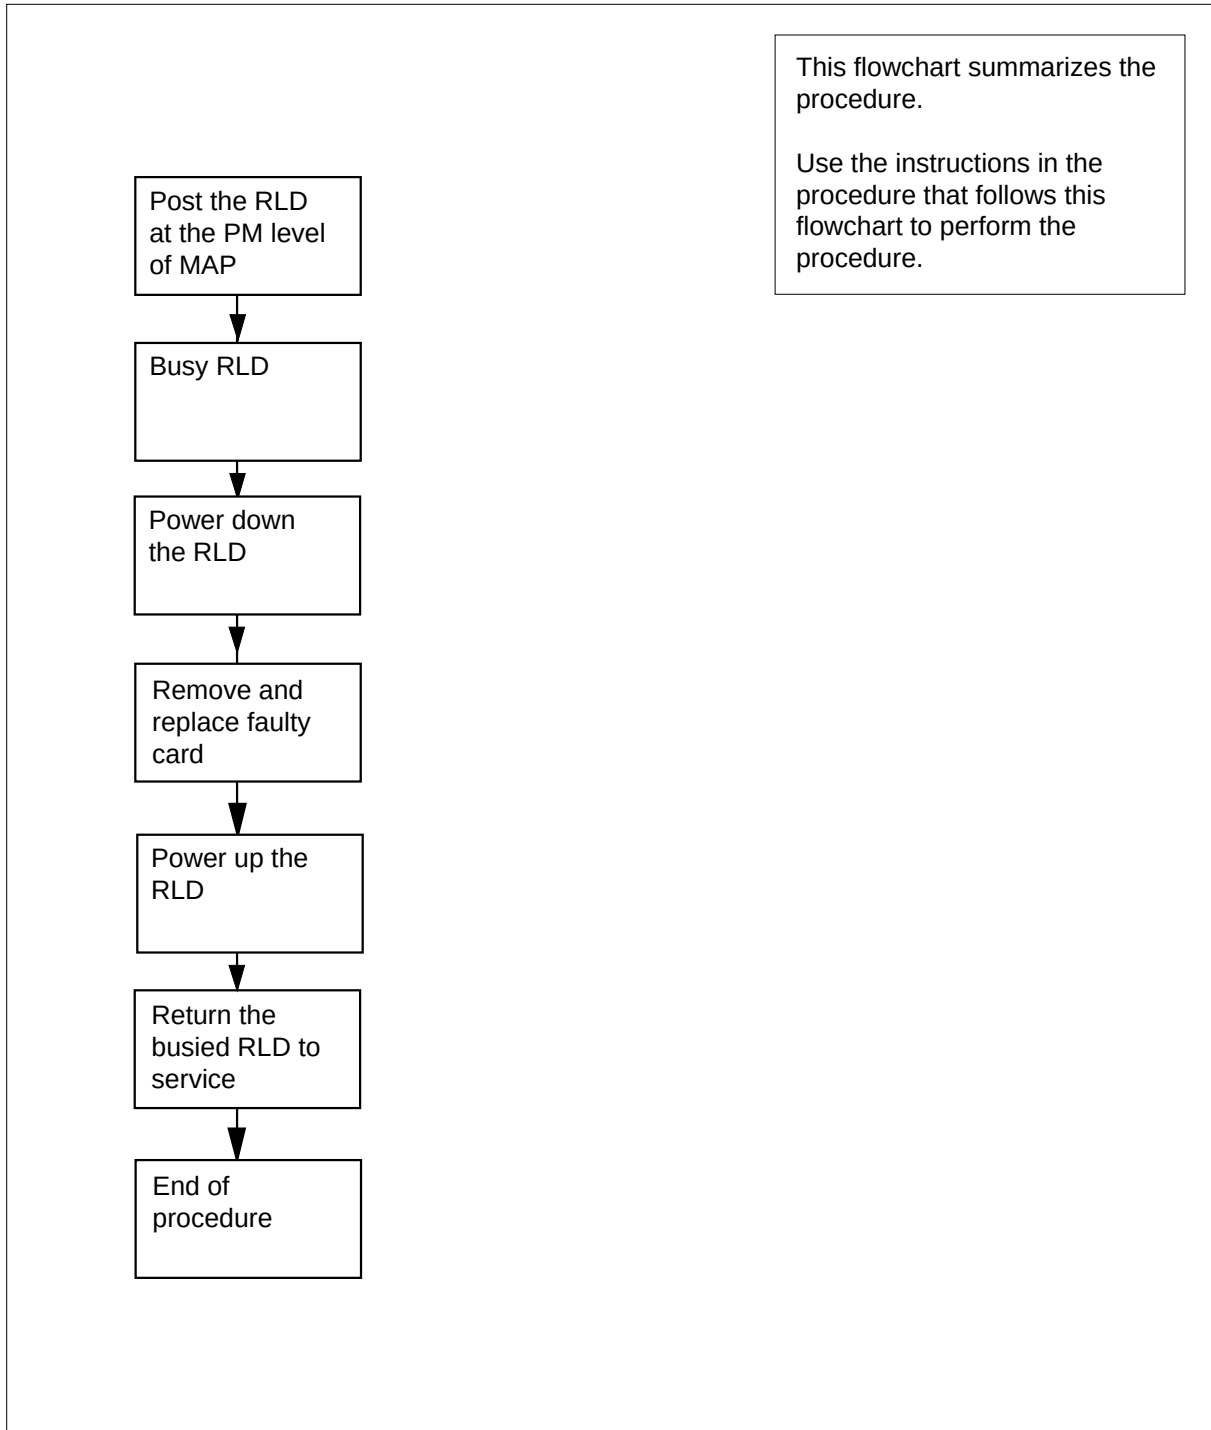**NTTR72**  
**in an RLD (continued)****Summary of replacing an NTTR72 RLD**

## NTTR72 in an RLD (continued)

### Replacing an NTTR72 in an RLD

#### *At your current location:*

- 1 Proceed only if you were either directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure to check or accept cards, or were directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

#### *At the MAP display*

- 3 To access the PM level of the MAP and post the Star Hub where the RLD is connected, type

**>MAPCI;MTC;PM;POST STAR site frame unit**

and press the Enter key.

*where*

**site**

is the name of the STAR site

**frame**

is the frame number of the STAR (0 to 511)

**unit**

is 0 for the STAR

*Example of a MAP display:*

```

 SysB ManB OffL CBsy ISTb InSv
 PM 0 0 0 0 1 130
 STAR 0 0 0 0 1 10
STAR Rem1 00 0 ISTb Links_00S: CSide 0 PSide 0
Unit 0: InSv Mtce TakeOver /RG: 0
Unit 1: SysB Mtce /RG: 0
DRwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG:
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Pref 0 InSv
... .. SS Stby 1 InSv

```

- 4 To post the RLD, type

**>RLD;POST rld\_no**

and press the Enter key.

*where*

**rld\_no**

is the STAR drawer (RLD) number to be posted

*Example of a MAP display:*

## NTTR72 in an RLD (continued)

```

 SysB ManB OffL Cbsy ISTb InSv
 PM 4 0 10 3 3 3
 STAR 0 0 0 0 1 1
STAR REM1 00 0 ISTb Links_OOS: CSide 0 PSide 0 UMP 0 OOS:
Unit 0: ISTb /RG: 0
Unit 1: ManB /RG: 0
Drwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG Pref 0 InSv
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 1 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- -- --
REM9 RLD DRWR 8 SYSB LogDrwr: 16 17
BANK_0: Active Links_OOS: 2
BANK_1: Stby RLD BDch: -

```

- 5 To busy the posted RLD, type

**>BSY DRWR**

and press the Enter key.

*Example of a MAP display:*

```

Warning: Calls on RLD may be affected.
Do you wish to continue?
Please confirm ("YES", "Y", "NO", "N")

```

- 6 To respond affirmatively to the confirmation request, type

**>Y**

and press the Enter key.

### **At the SRME or SRMO site**

- 7 The type of enclosure the Star Module has determines your next action.

**Note:** Because the power and ringing card has failed, there is no power or ringing voltage available in the RLD to support subscribers.

| If the RLD is in an      | Do     |
|--------------------------|--------|
| SRME (inside) Wall Mount | step 8 |
| SRMO (outdoors) cabinet  | step 9 |

- 8 Use a slot screwdriver and turn the 1/4-turn screws at the bottom of the cover. Hold the cover by the left and right sides, lift up, and pull the cover towards you. Set the cover out of the way. Pull the interlock switch out to silence the door alarm at the MAP terminal. Go to step 11.
- 9 Unlock and open the cabinet door. The door alarm generates a Major alarm at the MAP terminal. Silence the alarm by pulling the interlock switch out. Loosen the two large screws at the left side of the TSS cover. Open the TSS cover to access the TSS. Pull the interlock switch out to silence the door alarm at the MAP terminal.
- 10 Power down the RLD by performing the following steps:

## NTTR72 in an RLD (continued)

---

- a Set the circuit breaker on the dc panel to OFF.
- b Remove ac power from the RLD as follows:
  - if the enclosure is an indoor wall-mounted SRME, remove power at the local ac power panel
  - if the enclosure is an outdoor pad or pole-mounted SRMO, set the Rectifier circuit breaker on the ac panel to the OFF position. Then set the Main circuit breaker on the ac panel to the OFF position.
  - disconnect the battery connector
  - Note that the green Power On LED is not lit
- c The RLD is now powered down.

11



### WARNING

#### Static electricity damage

Before removing the NTTR72 card, put on a wrist strap and connect it to the wrist strap grounding point on the TSS. This protects the equipment against damage caused by static electricity.

The NTTR72 is in the left card slot in the upper left area of the telephony subsystem (TSS).

- 12 Replace the NTTR72 card.
- 13 Power up the RLD by performing the following steps:
  - a Provide ac power to the RLD as follows.
    - if the enclosure is an indoor wall-mounted SRME, supply power at the local ac power panel
    - if the enclosure is an outdoor pad or pole-mounted SRMO, set the Main circuit breaker on the ac panel to the ON position. Then set the Rectifier circuit breaker on the ac panel to the ON position.
  - b Set the circuit breaker on the dc panel to ON.
  - c Re-connect the battery connector.
  - d Note that the green Power On LED is lit. Make sure no alarm condition is indicated by the LEDs on the SMC card.
  - e The RLD is now powered up.
- 14 Make sure the green Power OK LED is lit on the NTTR72. Wait a few minutes for the Star Module to power up and become stable before proceeding to the next step.
- 15 Close the TSS cover, if applicable. Replace the cover on the SRME Wall Mount. Close and lock the cabinet door on the SRMO cabinet.

---

**NTTR72**  
**in an RLD (end)**

---

***At the MAP terminal***

**16** To return the RLD to service, type

**>RTS DRWR**

and press the Enter key.

---

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| passes        | step 17   |
| fails         | step 19   |

---

**17** Send any faulty cards for repair according to local procedure.

**18** Record the following items in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Go to step 20.

**19** Get additional help replacing this card by contacting the operating company personnel responsible for a higher level of support.

**20** You have correctly completed this procedure.

## **NTTR73 in a STAR**

---

### **Application**

Use this procedure to replace the following card in a STAR HUB.

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>                      |
|------------|-----------------|----------------------------------|
| NTTR73     | AA              | Universal maintenance pack (UMP) |

### **Common procedures**

The common replacing a card procedure is referenced in this procedure.

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.




## NTTR73 in a STAR (continued)

### Summary of card replacement procedure for an NTTR73 card in a STAR

This flowchart summarizes the procedure.

Use the instructions that follow this flowchart to perform the procedure.

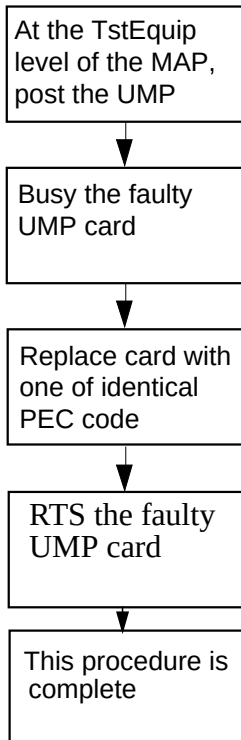

## NTTR73 in a STAR (continued)

---

### Replacing an NTTR73 card in a STAR

#### *At your current location*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.
- 3 If you were directed to this procedure from another maintenance procedure, go to step 7. Otherwise, continue with step 4.

#### *At the MAP terminal*

- 4 To access the test equipment (TSTEQUIP) level and post all UMPs, type  
**>MAPCI;MTC;MTCNA;TSTEQUIP;POST UMP ALL**  
and press the Enter key.

*Example of a MAP response:*

|          |          |       |      |      |      |      |
|----------|----------|-------|------|------|------|------|
|          | SysB     | ManB  | OffL | CBsy | ISTb | InSv |
| TSTEQUIP | 0        | 0     | 2    | 0    | 1    | 12   |
| UMP      | 0        | 0     | 2    | 0    | 1    | 9    |
| PM       | MTE      | STATE |      |      |      |      |
| STAR     | REM1 0 0 | 0     | CBSY |      |      |      |

- 5 Use the NEXT command to post the next UMP in the posted set until you access the UMP that is in the SysB state.
- 6 To busy the SysB UMP card posted in step 5, type  
**>BSY**  
and press the Enter key.

#### *At the STAR control shelf*

- 7 Replace the NTTR73 card using the common replacing a card procedure in this document. When the card is replaced, return to this point.

#### *At the MAP terminal*

- 8 To load the UMP card, type  
**>LOADTE**  
and press the Enter key.
- 9 If you were directed to this procedure from another maintenance procedure, return now to the alarm clearing procedure that directed you here. Otherwise, continue with step 10.

---

**NTTR73**  
**in a STAR (end)**

---

***At the MAP terminal***

**10** To test the new UMP card, type

**>TST**

and press the Enter key.

---

| <b>If TST</b> | <b>Do</b> |
|---------------|-----------|
| fails         | step 14   |
| passes        | step 11   |

---

**11** To return the new UMP card to service, type

**>RTS**

and press the Enter key.

---

| <b>If RTS</b> | <b>Do</b> |
|---------------|-----------|
| fails         | step 14   |
| passes        | step 12   |

---

**12** Send any faulty cards for repair according to local procedure.

**13** Record the following items in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Proceed to step 15.

**14** Get additional help replacing this card by contacting the personnel responsible for a higher level of support.

**15** You have correctly completed this procedure.

## **NTTR74 in a STAR**

---

### **Application**

Use this procedure to replace the following card in a STAR frame supervisory panel (FSP).

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>    |
|------------|-----------------|----------------|
| NTTR74     | AA              | FSP alarm card |

### **Common procedures**


None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR74 in a STAR (continued)

### Summary of replacing an NTTR74 in a STAR

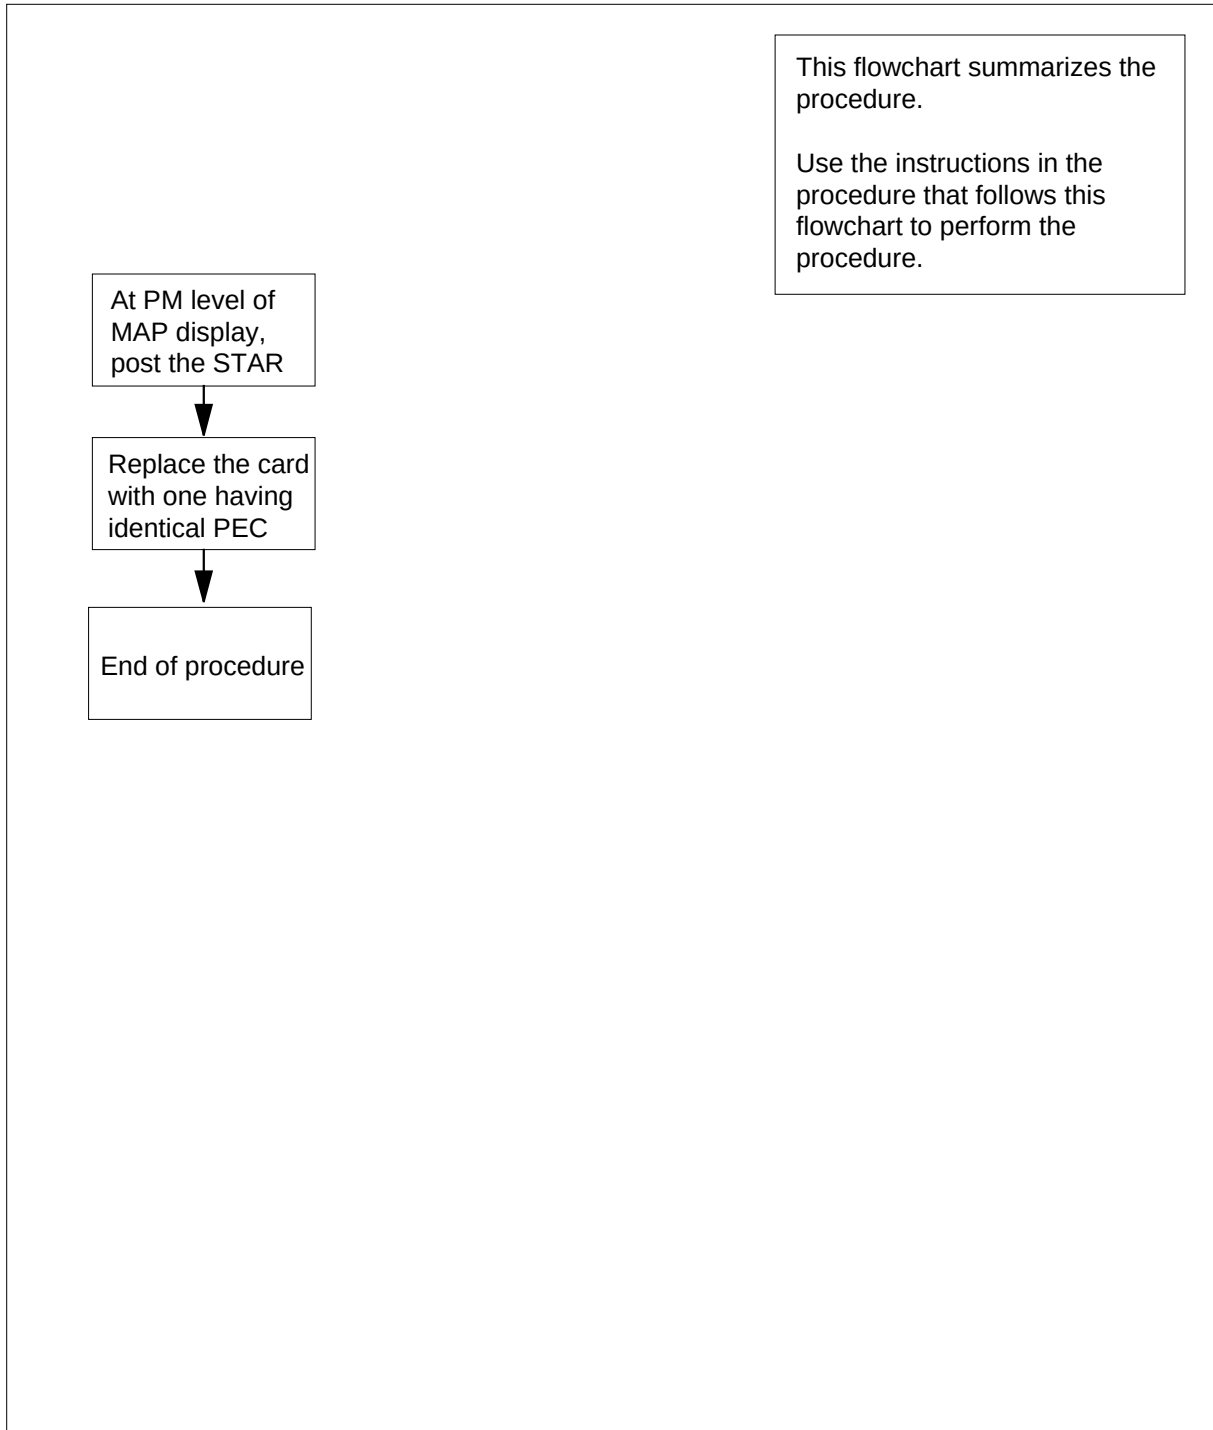

## NTTR74 in a STAR (continued)

---

### Replacing an NTTR74 in a STAR



#### CAUTION

##### Loss of service

This procedure contains directions to offline the STAR. Since putting the STAR in an offline state seriously affects subscriber service, replace the FSP alarm card only during periods of low traffic.



#### DANGER

##### Risk of electrocution

Some of the terminals inside the FSP have an electrical potential of -48 V dc. Remove all jewelry before replacing a card in the FSP. Do not touch any terminal inside the FSP.

#### *At your current location:*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

#### *At the MAP terminal*

- 3 To access the PM level and post the STAR, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
and press the Enter key.  
*where*  
**site**  
is the site name of the STAR (alphanumeric)  
**frame**  
is the frame number of the STAR (0-511)  
**unit**  
is 0 for the STAR

## NTTR74 in a STAR (continued)

---

### *At the SRHE frame*

4



#### **DANGER**


##### **Static electricity damage**

Wear a wrist strap connected to the wrist strap grounding point on the frame supervisory panel (FSP) while handling cards. This precaution protects the cards against damage caused by static electricity.

Using a slot screwdriver, unscrew the two screws located in the upper left- and right-hand corners of the FSP front panel.

- 5 Swing the FSP front panel downward to expose the interior of the FSP and the cards located on the back of the FSP front panel.
- 6 With the FSP front panel open, locate the NTTR74 alarm card. Use the following diagram to assist you.

## NTTR74 in a STAR (continued)

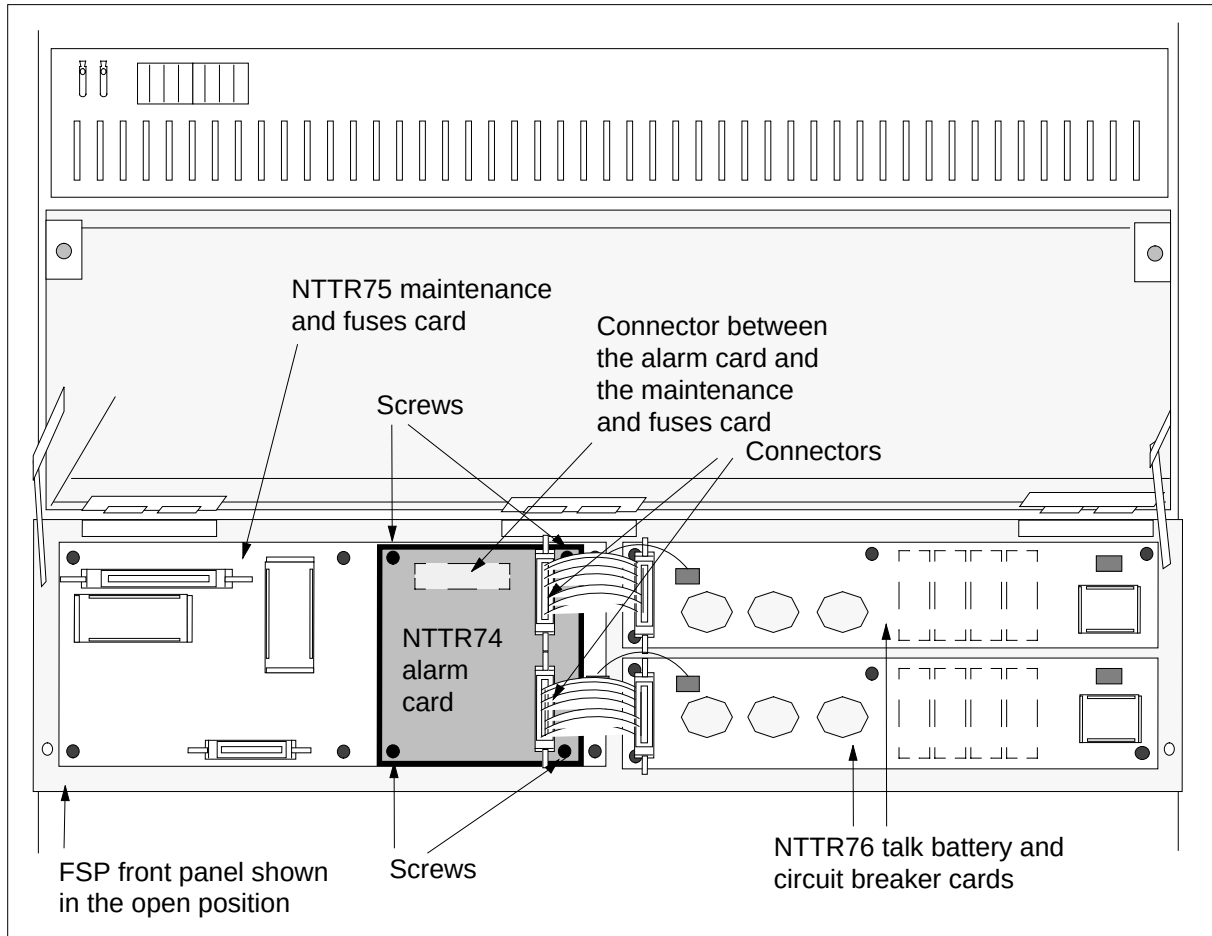

- 7 Remove the alarm card by performing the following steps:
  - a Disconnect the two cable connectors on the alarm card and note the connector numbers.
  - b Using a Phillips head screwdriver, unscrew the four Phillips head screws and remove the lock washers and flat washers that secure the NTTR74 alarms card to the NTTR75. Gently pull with a rocking motion until the pins on the underside of the alarm card are clear of the connector between the alarm card and the maintenance and fuses card.
  - c Place the card you have removed in an electrostatic discharge (ESD) protective container.
  - d Obtain a replacement card with the same product equipment code (PEC), including suffix, as the card you just removed.
- 8 Install the new alarm card by performing the following steps:
  - a Carefully install the new alarm card, positioning it to correctly align the pins to the connector on the maintenance and fuses card where the alarm card was removed from in step 7a



## NTTR74 in a STAR (end)

- b Gently press the card in place on the connector.
  - c Install the four Phillips head screws, lock washers, and flat washers in the NTTR74 alarms card to secure it to the NTTR75 Tighten the screws after all four screws are installed.
  - d Reconnect the two cable connectors that were disconnected in step 7a
- 9 Close the FSP front panel. Secure the FSP front panel by tightening the two screws that were loosened in step 4.

### **At the MAP terminal**

- 10 Determine if either unit is ISTB.

| If                  | Do      |
|---------------------|---------|
| either unit is ISTb | step 11 |
| the STAR is InSv    | step 12 |

- 11 To perform an in-service test on the ISTb unit, type

**>TST UNIT unit\_no**

and press the Enter key.

where

**unit\_no**  
is the STAR unit in the ISTb state

| If TST | Do      |
|--------|---------|
| passes | step 12 |
| fails  | step 14 |

- 12 Send any faulty cards for repair according to local procedure.

- 13 Record the following items in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Proceed to step 16.

- 14 Get additional help by contacting the personnel responsible for a higher level of support.

- 15 If alarms are displayed, proceed to the appropriate alarm clearing procedure in this manual.

- 16 You have correctly completed this procedure.

## **NTTR75 in a STAR**

---

### **Application**

Use this procedure to replace the following card in the STAR frame supervisory panel (FSP).

| <b>PEC</b> | <b>Suffixes</b> | <b>Name</b>                |
|------------|-----------------|----------------------------|
| NTTR75     | AA              | Maintenance and fuses card |

### **Common procedures**


None.

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR75 in a STAR (continued)

### Summary of replacing a/an NTTR75 in a STAR

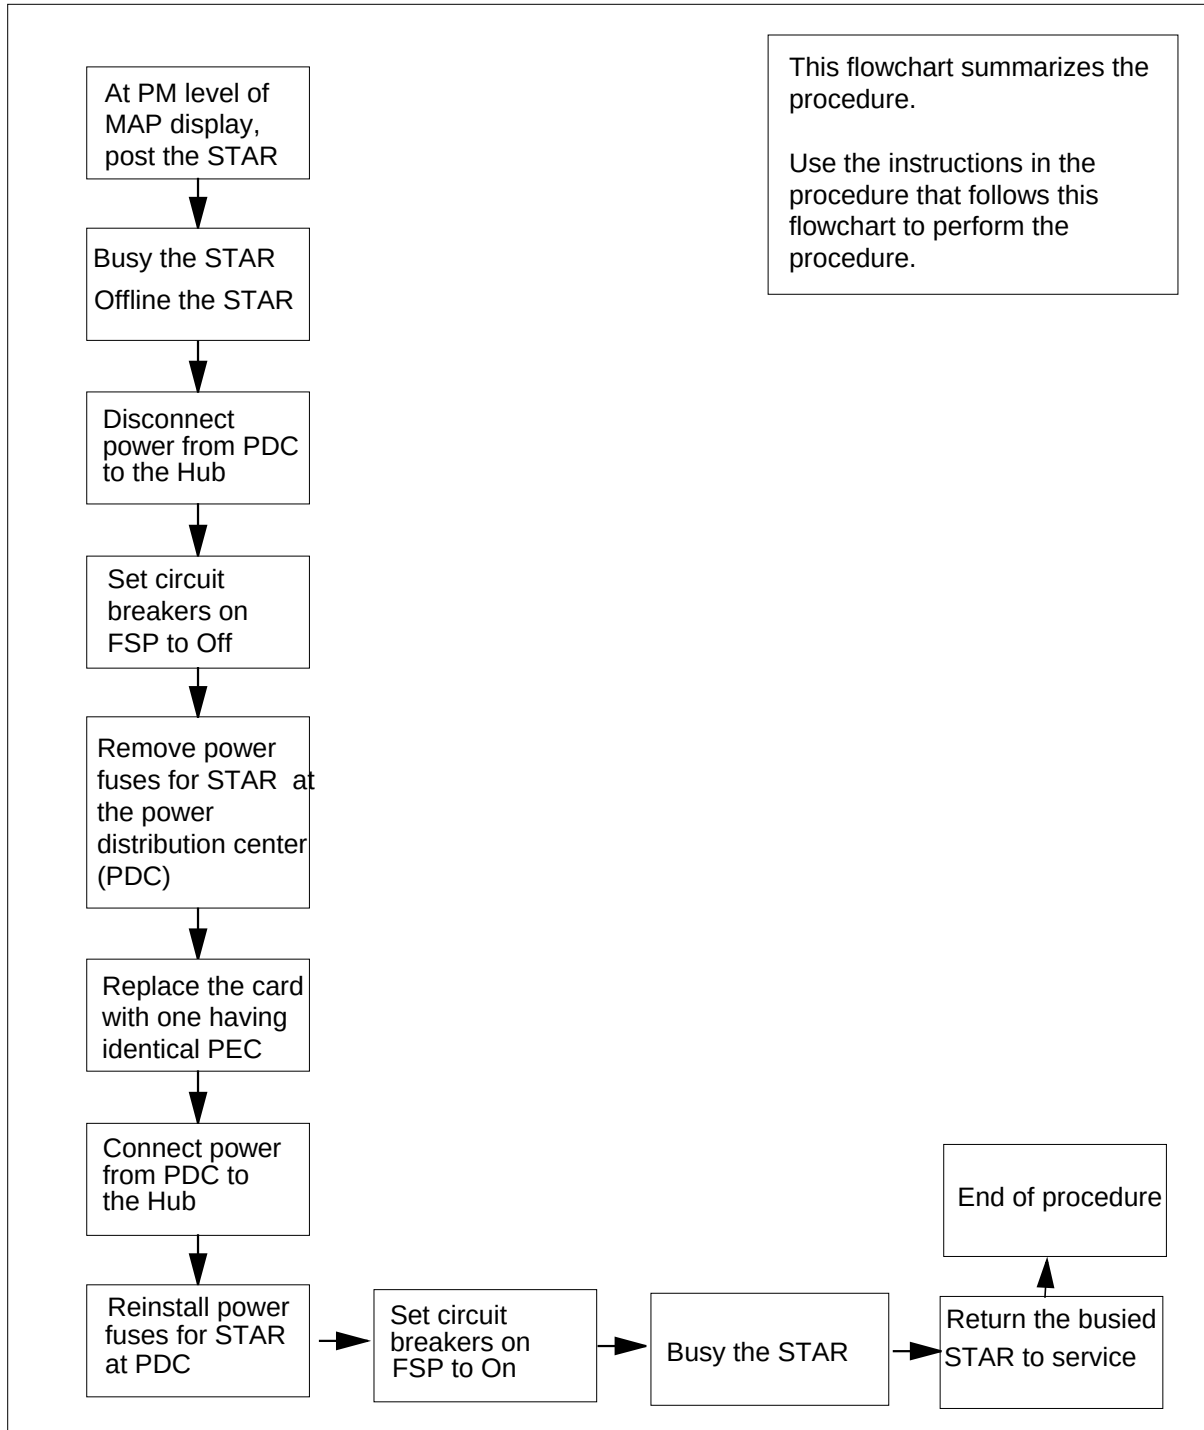

## NTTR75 in a STAR (continued)

---

### Replacing an NTTR75 in a STAR



#### CAUTION

##### Loss of service

This procedure contains directions to offline the STAR. Since putting the STAR in an offline state seriously affects subscriber service, replace the FSP alarm card only during periods of low traffic.



#### DANGER

##### Risk of electrocution

Some of the terminals inside the FSP have an electrical potential of -48 V dc. Remove all jewelry before replacing a card in the FSP. Do not touch any terminal inside the FSP.

#### *At your current location:*

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

#### *At the MAP terminal*

- 3 To access the PM level and post the STAR, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
and press the Enter key.  
*where*  
**site**  
is the site name of the STAR (alphanumeric)  
**frame**  
is the frame number of the STAR (0-511)  
**unit**  
is 0 for the STAR
- 4 To busy the STAR containing the faulty card, type  
**>BSY PM**  
and press the Enter key.

## NTTR75 in a STAR (continued)

- 5 To offline the STAR containing the faulty card, type  
**>OFFL PM**  
 and press the Enter key.

**At the SRHE frame**

- 6 Disconnect the power from the PDC to the Star Hub.
- 7 On the FSP front panel, power down the ringing generators, power converters, line drawers and NTTR73 universal maintenance pack (UMP) in the control shelf by setting the circuit breakers listed in the following table to the Off position.

| If Circuit breaker label | DoPurpose                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------|
| PS00, Slot 3             | NT6X53 power converter in unit 0, slot 3                                                       |
| PS01, Slot 5             | NT6X53 power converter in unit 0, slot 5                                                       |
| PS10, Slot 20            | NT6X53 power converter in unit 1, slot 20                                                      |
| PS11, Slot 18            | NT6X53 power converter in unit 1, slot 18                                                      |
| Ring 0, Slot 1           | NTTR60 ringing generator in unit 0, slot 1                                                     |
| Ring 1, Slot 22          | NTTR60 ringing generator in unit 1, slot 22                                                    |
| Talk A                   | Talk battery A feed to the 9 line drawers 1 - 4, 9 - 13 and UMP cards in unit 0/1, slot 11/13  |
| Talk B                   | Talk battery B feed to the 9 line drawers 5 - 8, 14 - 18 and UMP cards in unit 0/1, slot 11/13 |

- 8 Use a fuse puller to remove the following fuses on the FSP front panel


- one -48 V alarm and battery supply (ABS) fuse
- one -48 V LED
- two -48 V to universal maintenance packs (UMP)
- eight ringing voltage to line drawers
- 18 -48 V to line drawers
- 18 +15 V to line drawers
- 18 +5 V to line drawers

**Note:** Store and group the fuses by size to simplify reinstallation into the replacement card.

Use the following figure to locate the fuses and breakers and their labels.

## NTTR75 in a STAR (continued)

### FSP front panel

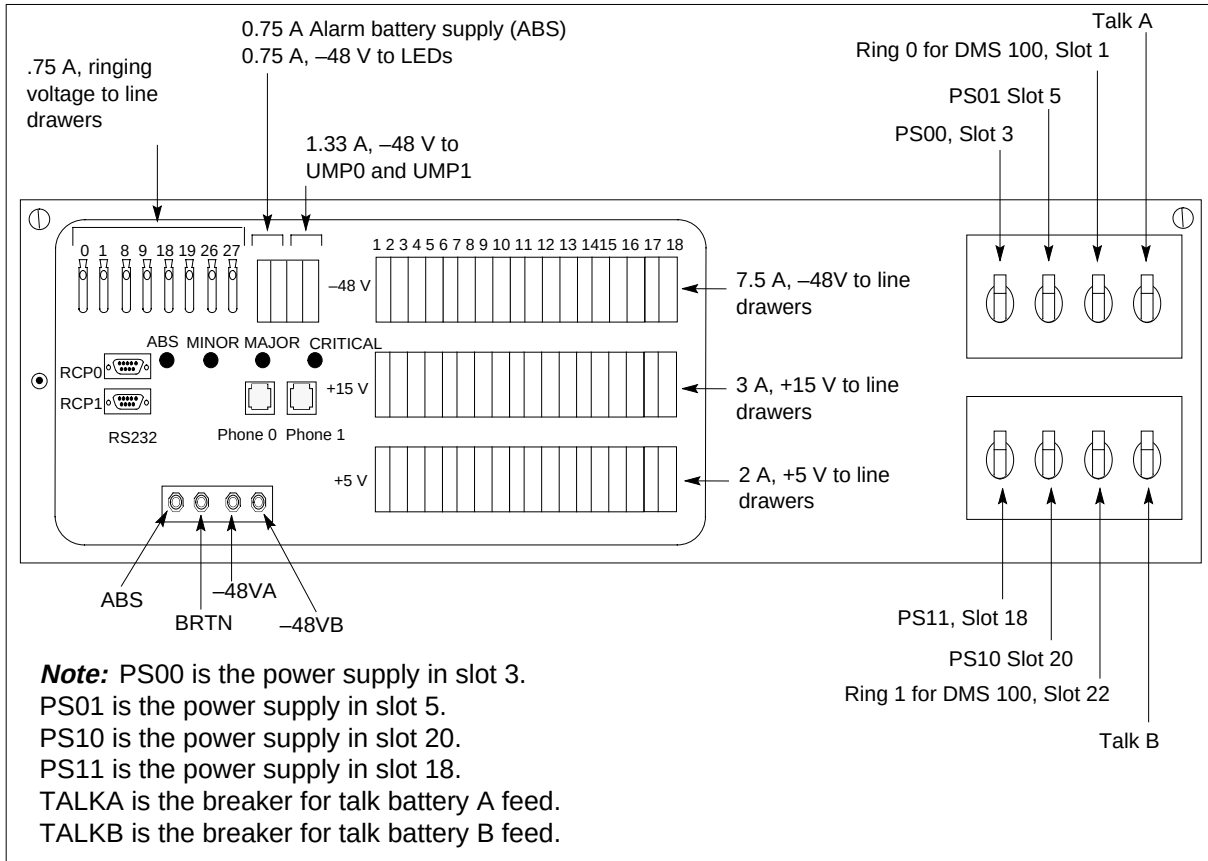

9




#### WARNING

##### Static electricity damage

Wear a wrist strap connected to the wrist strap grounding point on the FSP while handling cards. This precaution protects the cards against damage caused by static electricity.

- 10 Swing the FSP front panel downward to expose the interior of the FSP and the cards located on the back of the FSP front panel.
- 11 With the FSP front panel open, locate the NTTR74 alarm card. Use the following diagram to assist you.

## NTTR75 in a STAR (continued)

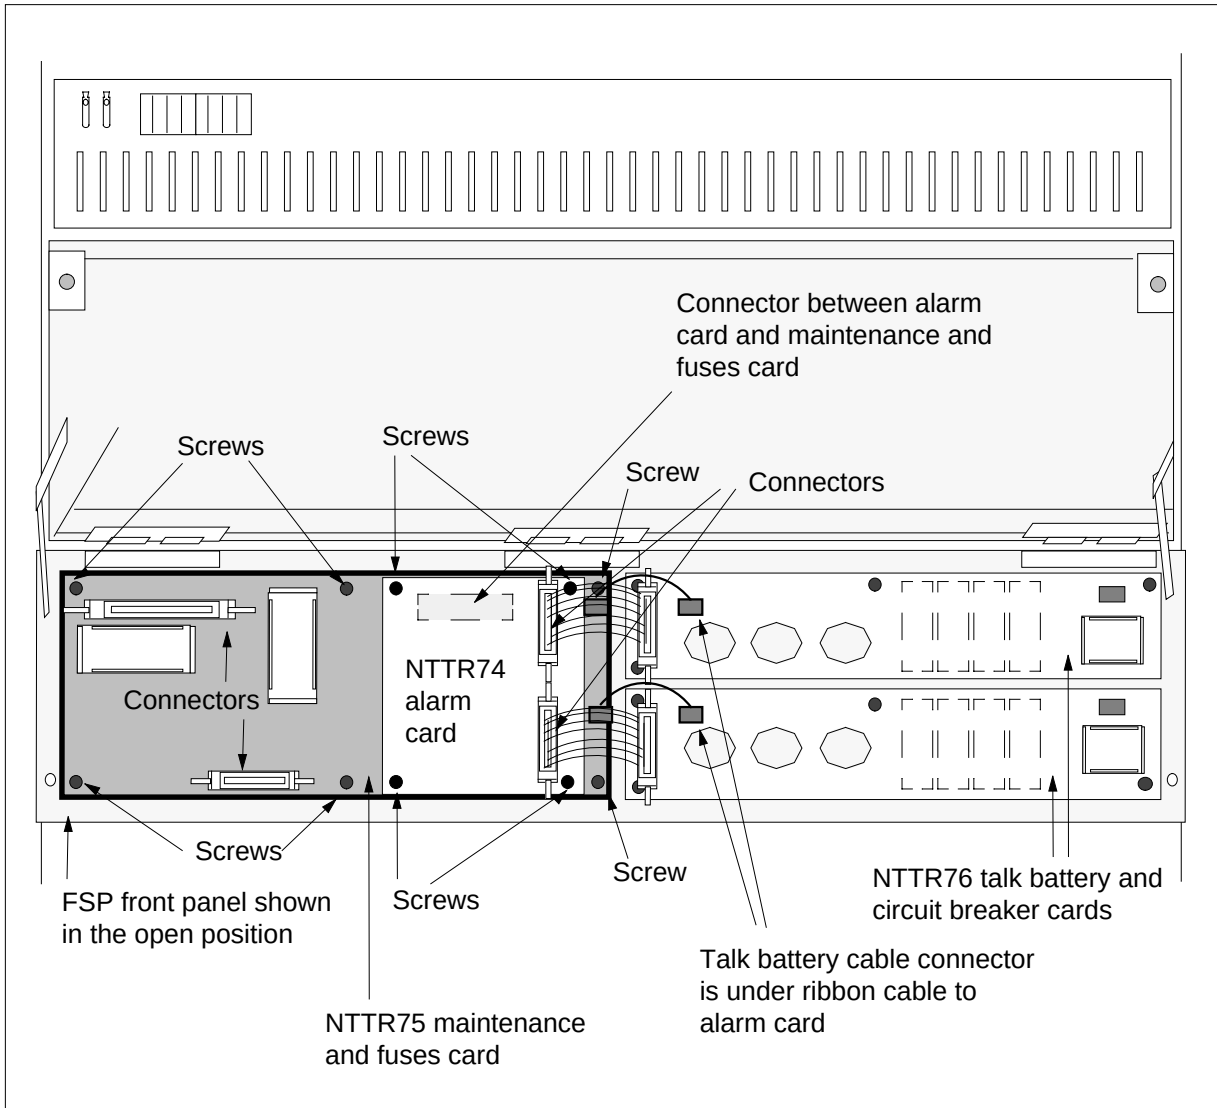

- 12** Remove the NTTR75 maintenance and fuses card by performing the following steps:
- a** Disconnect the two cable connectors on the NTTR74 alarm card and note the connector numbers.
  - b** Using a Phillips head screwdriver, unscrew the four Phillips head screws and remove the lock washers and flat washers that secure the NTTR74 alarm card to the NTTR75. Gently pull with a rocking motion until the pins on the underside of the alarm card are clear of the connector between the alarm card and the maintenance and fuses card.
  - c** Carefully remove the alarm card.

## NTTR75 in a STAR (continued)

- d Place the card you have removed in an electrostatic discharge (ESD) protective container.
  - e Disconnect the four cable connectors on the left half of the NTTR75 maintenance and fuses card and note the connector numbers. Then, disconnect the two talk battery cables on the right end of the card noting the connector labels.
  - f Using a Phillips head screwdriver, unscrew the six Phillips head screws and remove the lock washers and flat washers that secure the NTTR75 maintenance and fuses card to the back of the FSP front panel.
  - g Carefully remove the maintenance and fuses card.
  - h Place the card you have removed in an electrostatic discharge (ESD) protective container.
  - i Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card you just removed.
- 13** Install the new maintenance and fuses card by performing the following steps:
- a Install the new maintenance and fuses card, positioning it to correctly connect the cable connectors that were disconnected in step 12e.
  - b Install the six Phillips head screws, lock washers, and flat washers in the NTTR75 maintenance and fuses card to secure it to the back of the FSP front panel. Tighten the screws after all six screws are installed.
  - c Connect the four cable connectors and the two talk battery cables on the NTTR75 maintenance and fuses card that were disconnected in step 12e.
  - d Carefully install the alarms card, positioning it to correctly align the pins to the connector on the maintenance and fuses card that was disconnected in step 12b
  - e Gently press the card in place on the connector.
  - f Install the four Phillips head screws, lock washers, and flat washers in the NTTR74 alarms card to secure it to the NTTR75. Tighten the screws after all four screws are installed.
  - g Reconnect the two cable connectors that were disconnected in step 12a.
- 14** Close the FSP front panel. Secure the FSP front panel by tightening the two screws that were loosened in step 9.
- 15** Connect the power from the PDC to the Hub.
- 16** Install the fuses in the FSP front panel that were removed in step 8. Use the figure titled "FSP front panel" to aid in correct fuse placement.
- 17** Restore power to the STARs ringing generators, power converters, line drawers, and UMP cards by setting the circuit breakers to the On position that were listed in the table and turned Off in step 7.
- 18** Observe the fuses on the FSP front panel. Determine if there are blown fuses.

| If                       | Do      |
|--------------------------|---------|
| there are no blown fuses | step 19 |



---

**NTTR75**  
**in a STAR (end)**


---

| <b>If</b>             | <b>Do</b> |
|-----------------------|-----------|
| there are blown fuses | step 23   |

---

***At the MAP terminal***

**19** To busy the STAR that was offlined in step 5, type

**>BSY PM**

and press the Enter key.

**20** To return to service the STAR, type

**>RTS PM**

and press the Enter key.

| <b>If RTS</b>                                                | <b>Do</b> |
|--------------------------------------------------------------|-----------|
| passes                                                       | step 21   |
| fails and a card list appears<br>(an alarm condition exists) | step 24   |

---

**21** Send any faulty cards for repair according to local procedure.

**22** Record the following items in office records:

- date the card was replaced
- serial number of the card
- indications that prompted replacement of the card

Proceed to step 25.

**23** Get additional help by contacting the personnel responsible for a higher level of support.

**24** If alarms are displayed, go to the appropriate alarm clearing procedure in this manual.

**25** You have correctly completed this procedure.

---

**NTTR76**  
**in a STAR**

---

**Application**

Use this procedure to replace the following card in the STAR frame supervisory panel (FSP).

| PEC    | Suffixes | Name                                   |
|--------|----------|----------------------------------------|
| NTTR76 | AA       | Talk battery and circuit breakers card |

**Common procedures**


None

**Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR76 in a Star (continued)

### Summary of replacing an NTTR76 in a STAR

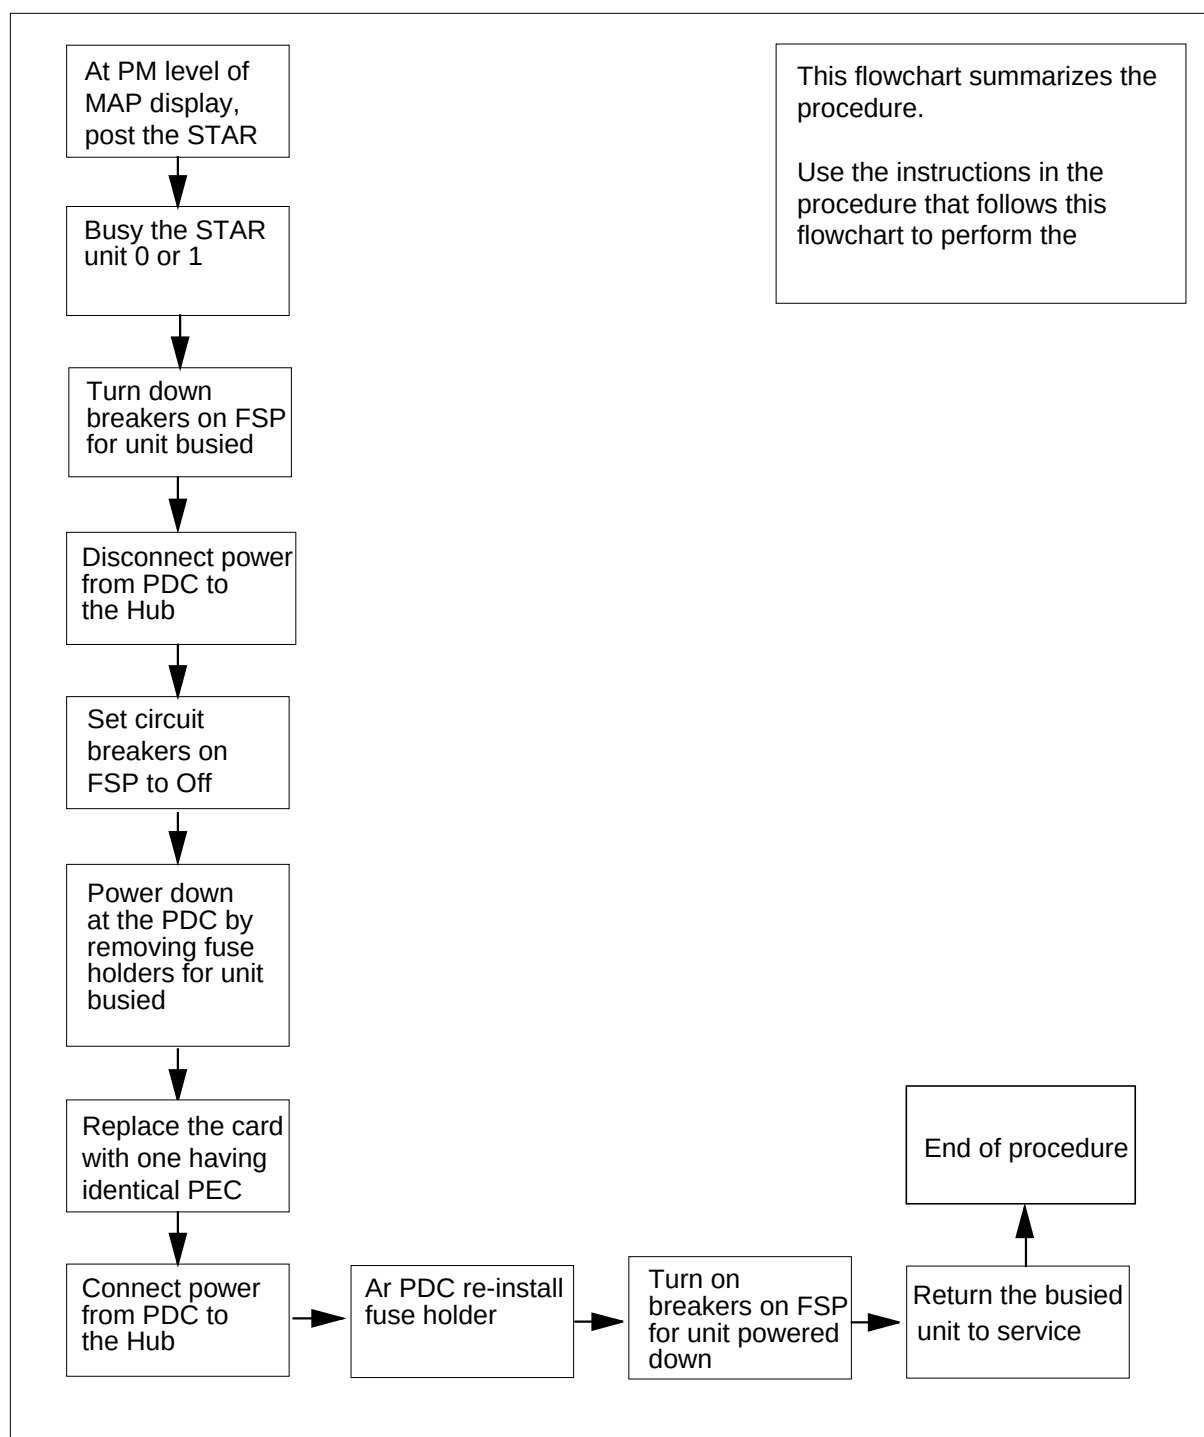

## NTTR76 in a Star (continued)

### Replacing an NTTR76 in a STAR



#### **DANGER**

##### **Risk of electrocution**

Some of the terminals inside the FSP have an electrical potential of -48 V dc. Remove all jewelry before replacing a card in the FSP. Do not touch any terminal inside the FSP.

#### ***At your current location:***

- 1 Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.
- 2 Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card to be removed.

#### ***At the MAP terminal***

- 3 To access the PM level and post the STAR, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
 and press the Enter key.  
*where*  
     **site**  
         is the site name of the STAR (alphanumeric)  
     **frame**  
         is the frame number of the STAR (0-511)  
     **unit**  
         is 0 for the STAR
- 4 Check for REX tst by typing  
**>tst rex query**  
 and press the Enter key.  
 If the MAP response is  
 STAR SHUB 00 0 REX test is ON  
 type the following  
**>tst rex off**  
 the MAP response should be  
 STAR SHUB 00 0 REX test is OFF
- 5 To busy the STAR unit containing the faulty card, type  
**>BSY UNIT unit\_no**

## NTTR76 in a Star (continued)

and press the Enter key.

where

**unit**

is the STAR unit (0 or 1) associated with the faulty talk battery and circuit breakers card

- 6** To offline the STAR unit, type

**>OFFL UNIT unit\_no**

and press the Enter key.

where

**unit**

is the STAR unit (0 or 1) associated with the faulty talk battery and circuit breakers card

### At the SRHE frame

- 7** Disconnect the power from the PDC to the Star Hub by removing the fuses from the relevant NTTR76 units.
- 8** On the FSP front panel, power down the ringing generators, power converters, line drawers and NTTR73 universal maintenance pack (UMP) in the control shelf by setting the circuit breakers listed in the following table to the OFF position.

| Circuit breaker label | Unit number | Purpose                                                                                         |
|-----------------------|-------------|-------------------------------------------------------------------------------------------------|
| PS00, Slot 3          | Unit 0      | NT6X53 power converter, slot 3                                                                  |
| PS01, Slot 5          | Unit 0      | NT6X53 power converter, slot 5                                                                  |
| Ring 0, Slot 1        | Unit 0      | NTTR60 ringing generator, slot 1                                                                |
| Talk A                | Unit 0      | Talk battery A feed to the 9 line drawers 1 - 4, 9 -13 and UMP packs, in unit 0/1, slot 11/13   |
| PS10, Slot 20         | Unit 1      | NT6X53 power converter, slot 20                                                                 |
| PS11, Slot 18         | Unit 1      | NT6X53 power converter, slot 18                                                                 |
| Ring 1, Slot 22       | Unit 1      | NTTR60 ringing generator, slot 22                                                               |
| Talk B                | Unit 1      | Talk battery B feed to the 9 line drawers 5 - 8, 14 - 18 and UMP packs, in unit 0/1, slot 11/13 |

**If**

you are replacing both NTTR76 cards

**Do**

step 9

---

## NTTR76 in a Star (continued)

---

---

| If | Do |
|----|----|
|----|----|

---

|                                                             |         |
|-------------------------------------------------------------|---------|
| else do not remove the fuses from the NTTR75 card and go to | step 10 |
|-------------------------------------------------------------|---------|

---

### ***At the FSP front panel***

**9** Use a fuse puller to remove the following fuses on the FSP front panel


- one -48 V alarm and battery supply (ABS) fuse
- one -48 V LED
- two -48 V to universal maintenance packs (UMP)
- eight ringing voltage to line drawers
- 18 -48 V to line drawers
- 18 +15 V to line drawers
- 18 +5 V to line drawers

**Note:** Store and group the fuses by size to simplify reinstallation into the panel.

Use the following figure to locate the fuses and breakers and their labels.

## NTTR76 in a Star (continued)

### FSP front panel

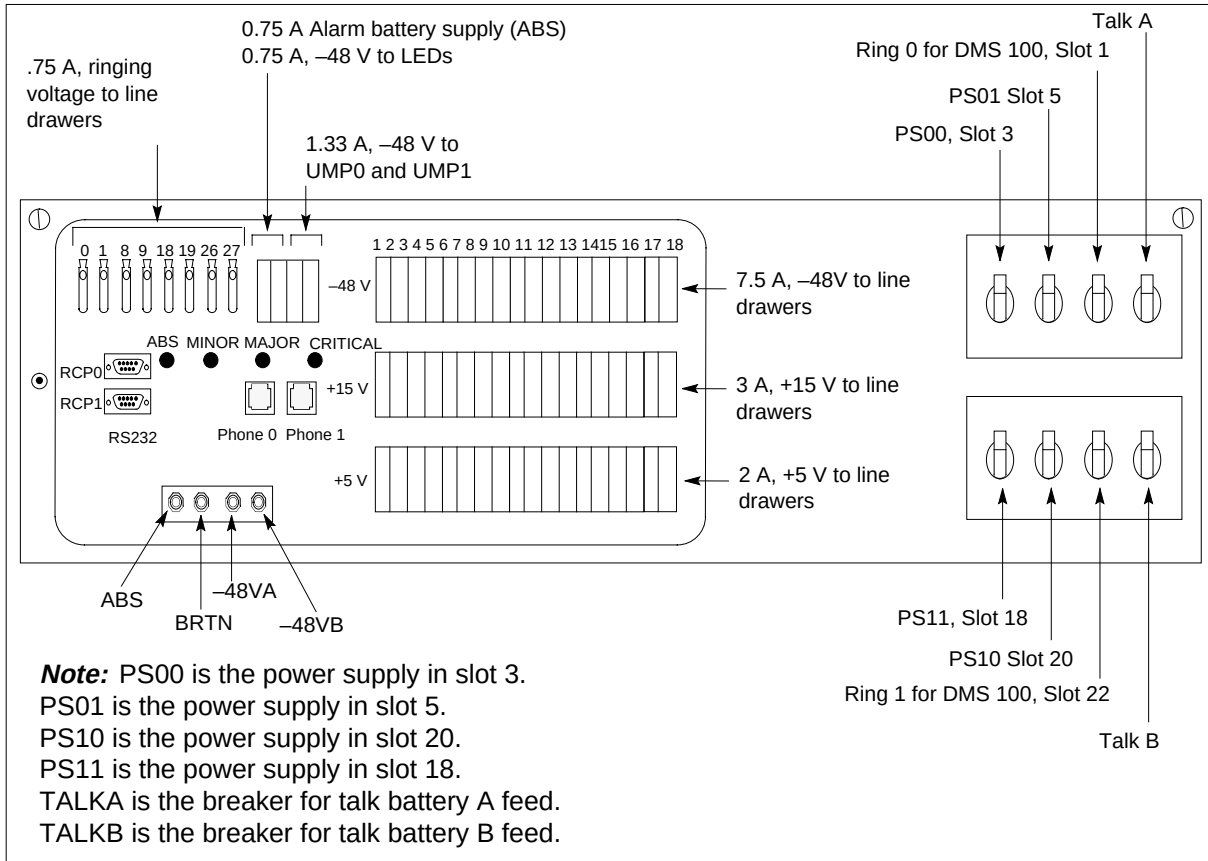

### At the SRHE frame

10



#### DANGER

##### Static electricity damage

Wear a wrist strap connected to the wrist strap grounding point on the FSP while handling cards. This precaution protects the cards against damage caused by static electricity.

Remove the metal cover.


Using a slot screwdriver, unscrew the two screws located in the upper left and right hand corners of the FSP front panel.

11

Swing the FSP front panel downward to expose the interior of the FSP and the cards located on the back of the FSP front panel.

## NTTR76 in a Star (continued)

- 12** With the FSP front panel open, locate the NTTR76 talk battery and circuit breaker cards. Use the following diagram to assist you. Determine the correct card to remove, based on whether the problem is related to the A or the B feed or a defective circuit breaker. Note in the following diagram where the NTTR76 cards are labeled A and B and the unit number they support. The A relates to the A feed and the B relates to the B feed.

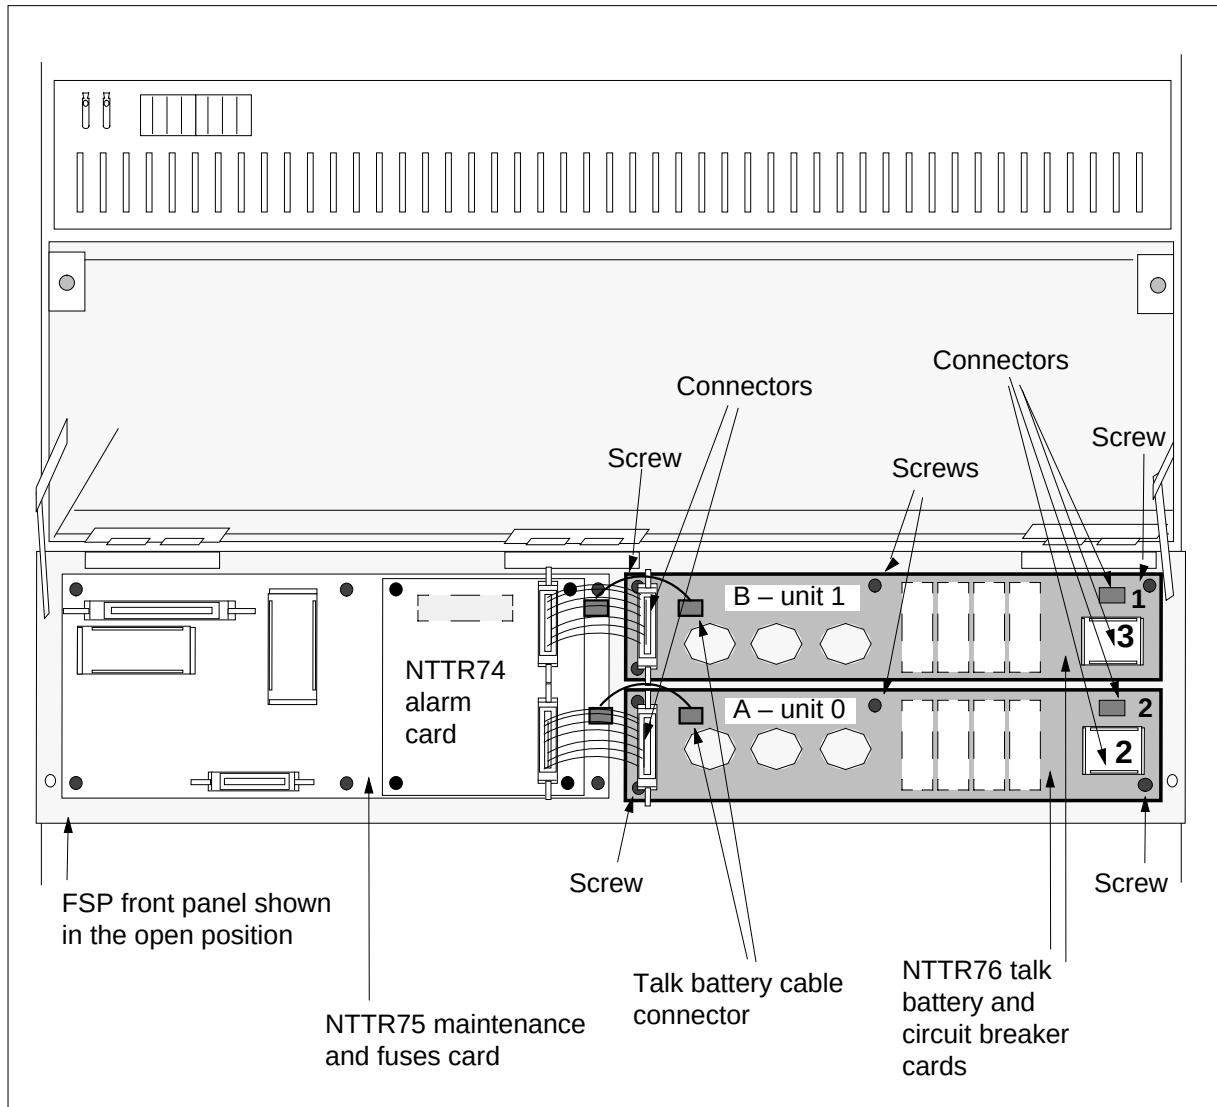

- 13** Remove the appropriate NTTR76 card by performing the following steps:
- a Disconnect the four cable connectors on the NTTR76 card.
  - b Remove the cover.



## NTTR76 in a Star (end)

- c Using a Phillips head screwdriver, unscrew the five Phillips head screws and remove the screws, lock washers, and flat washers that secure the NTTR76 card to the back of the FSP front panel.
  - d Carefully remove the NTTR76 card.
  - e Place the card you have removed in an electrostatic discharge (ESD) protective container.
  - f Ensure the replacement card has the same product equipment code (PEC), including suffix, as the card you just removed.
- 14 Install the new NTTR76 talk battery and circuit breaker card by performing the following steps:
  - a Install the new NTTR76 card.
  - b Install the five Phillips head screws, lock washers, and flat washers in the NTTR76 card to secure the card to the back of the FSP front panel. Tighten the screws after all five screws are installed.
  - c Install the cover.
  - d Reconnect the four cable connectors on the NTTR76 card that were disconnected in step 13a
- 15 Close the FSP front panel. Secure the FSP front panel by tightening the two screws that were loosened in step 10.
- 16 Connect the power from the PDC to the Star Hub by restoring the fuses to the relevant NTTR76 units.
- 17 Install the fuses in the FSP front panel that were removed in Step 9. Use the figure titled "FSP front panel" to aid in correct fuse placement.
- 18 Restore power to the unit's ringing generators, power converters, line drawers, and UMP cards by setting the circuit breakers to the On position that were turned Off in step 8. Refer to the table in step 8.
- 19 Busy the STAR unit that was offlined in steps 5 and 6 by typing  
**>BSY UNIT unit\_no**  
 and press the Enter key
- 20 Observe the fuses on the FSP front panel. Determine if there are blown fuses.

| If                       | Do      |
|--------------------------|---------|
| there are no blown fuses | step 21 |
| there are blown fuses    | step 25 |

### **At the MAP terminal**

- 21 To return to service the STAR, type  
**>RTS UNIT unit\_no**  
 and press the Enter key.  
*where*

---

**unit**  
is the STAR unit (0 or 1) that was busied in step 5

|           | <b>If RTS</b>                                                                                                                                                                                                                                      | <b>Do</b> |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|           | passes                                                                                                                                                                                                                                             | step 23   |
|           | fails and a card list appears (an alarm condition exists)                                                                                                                                                                                          | step 26   |
| <b>22</b> | Turn REX tst back on by typing<br><b>&gt;tst rex on</b><br>and press the enter key. The MAP response should be<br>STAR SHUB 00 0 REX test is ON                                                                                                    |           |
| <b>23</b> | Send any faulty cards for repair according to local procedure.                                                                                                                                                                                     |           |
| <b>24</b> | Record the following items in office records: <ul style="list-style-type: none"> <li>• date the card was replaced</li> <li>• serial number of the card</li> <li>• indications that prompted replacement of the card</li> </ul> Proceed to step 27. |           |
| <b>25</b> | Get additional help by contacting the personnel responsible for higher level of support.                                                                                                                                                           |           |
| <b>26</b> | If alarms are displayed, proceed to the appropriate alarm clearing procedure in this manual.                                                                                                                                                       |           |
| <b>27</b> | You have correctly completed this procedure.                                                                                                                                                                                                       |           |



**NTTR77  
in a STAR**

---

**Application**

Use this procedure to replace the following card in a STAR.

| PEC    | Suffixes | Name                         |
|--------|----------|------------------------------|
| NTTR77 | AA       | Remote controller pack (RCP) |

**Common procedures**

None


**Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR77 in a STAR (continued)

---

### Summary of card replacement procedure for an NTTR77 card in a STAR

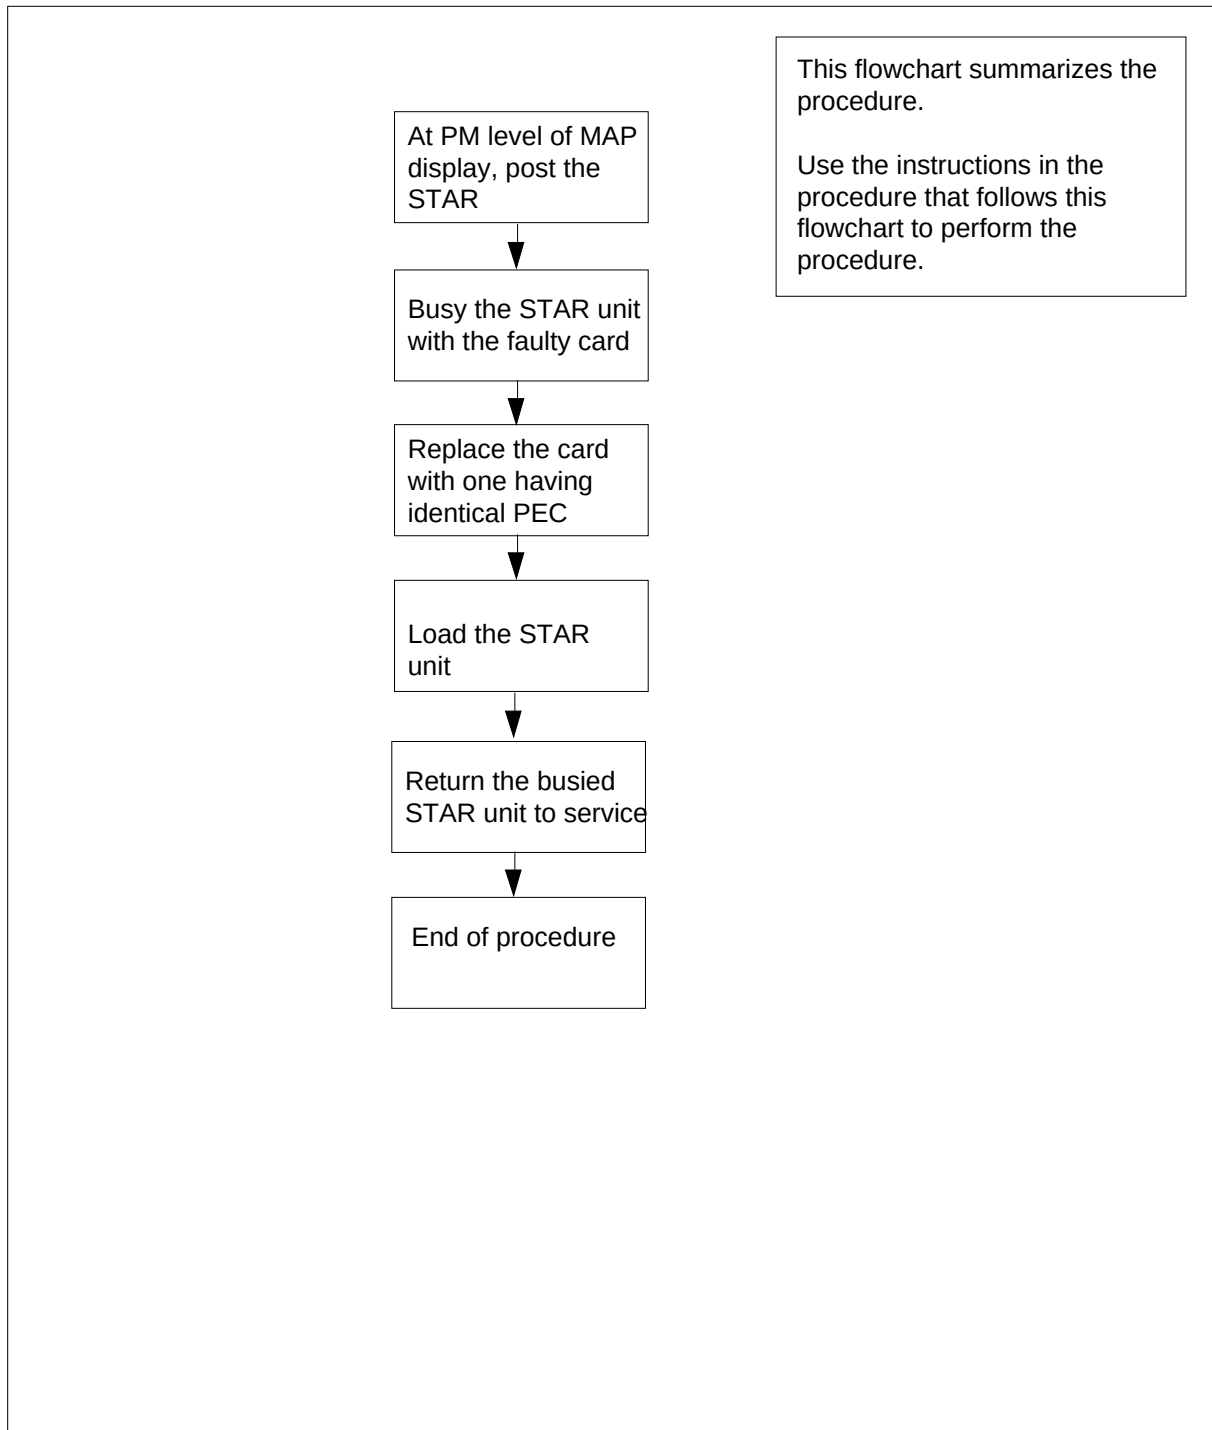

---

## NTTR77 in a STAR (continued)

---

### Replacing an NTTR77 card in a STAR

#### ATTENTION

Proceed only if you have been directed to this card replacement procedure from a step in a maintenance procedure, are using the procedure for verifying or accepting cards, or have been directed to this procedure by your maintenance support group.

#### *At your current location*

1



#### CAUTION

##### Loss of service

This procedure includes directions to manually busy one or more peripheral module (PM) units. Since manually busy-ing a PM unit can cause service degradation, perform this procedure only if necessary to restore out-of-service components. Otherwise, carry out this procedure during periods of low traffic.

Get a replacement card. Make sure the replacement card has the same product equipment code (PEC), including suffix, as the card that is to be removed.

- 2 If you were directed to this procedure from another maintenance procedure, go to step 6; otherwise, continue with step 3.

#### *At the MAP display*

- 3 To access the PM level and post the STAR, type  
**>MAPCI;MTC;PM;POST STAR site frame unit**  
and press the Enter key.  
*where*  
**site**  
is the site name of the STAR (alphanumeric)  
**frame**  
is the frame number of the STAR (0-511)  
**unit**  
is 0 for the STAR

## NTTR77 in a STAR (continued)

- 4 Determine the state of the PM unit associated with the card you are replacing.

| If the state of the PM unit is | Do      |
|--------------------------------|---------|
| SysB , CBSy, ISTb, InSv        | step 5  |
| ManB                           | step 6  |
| Offl                           | step 30 |

- 5 To busy the STAR unit containing the faulty card, type

**>BSY UNIT unit\_no**

and press the Enter key.

where

**unit\_no**

is the STAR unit to be busied (0 or 1)

**At the SRHE frame**

- 6



### **DANGER**

#### **Static electricity damage**

Wear a wrist strap connected to the wrist-strap grounding point of a frame supervisory panel (FSP) while handling circuit cards. This protects the cards against damage caused by static electricity.

Replace the NTTR77 card using the procedure "Replacing a card." When the card has been replaced, return to this point.

- 7 If you were directed to this procedure from another maintenance procedure, return now to the procedure that directed you here and continue as directed. Otherwise, continue with step 9.

- 8 To load the STAR unit, type

**>LOADPM UNIT star\_unit CC**

and press the Enter key.

where

**star\_unit**

is the STAR unit to be loaded (0 or 1)

| If                                                                     | Do      |
|------------------------------------------------------------------------|---------|
| message "loadfile not found in directory" displays at the MAP terminal | step 10 |

## NTTR77 in a STAR (continued)

|           | <b>If</b>                                                                                                                                                                                                                | <b>Do</b> |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|           | load passes                                                                                                                                                                                                              | step 9    |
|           | load fails                                                                                                                                                                                                               | step 29   |
| <b>9</b>  | To return the STAR unit to service, type<br><b>&gt;RTS UNIT unit_no</b><br>and press the Enter key.<br><i>where</i><br><b>unit_no</b><br>is the STAR busied in step 5 (0 or 1)                                           |           |
|           | <b>If RTS</b>                                                                                                                                                                                                            | <b>Do</b> |
|           | passes                                                                                                                                                                                                                   | step 27   |
|           | fails                                                                                                                                                                                                                    | step 29   |
| <b>10</b> | Determine the type of device where the PM load files are located.                                                                                                                                                        |           |
|           | <b>If load files are located on</b>                                                                                                                                                                                      | <b>Do</b> |
|           | IOC disk                                                                                                                                                                                                                 | step 17   |
|           | SLM disk                                                                                                                                                                                                                 | step 22   |
| <b>11</b> | Locate the tape that contains the PM load files.                                                                                                                                                                         |           |
|           | <b>At the IOE frame</b>                                                                                                                                                                                                  |           |
| <b>12</b> | Mount the tape on a magnetic tape drive.                                                                                                                                                                                 |           |
|           | <b>At the MAP display</b>                                                                                                                                                                                                |           |
| <b>13</b> | To download the tape, type<br><b>&gt;MOUNT tape_no</b><br>and press the Enter key.<br><i>where</i><br><b>tape_no</b><br>is the number of the tape drive containing the PM load files                                     |           |
| <b>14</b> | To list the contents of the tape in your user directory, type<br><b>&gt;LIST T tape_no</b><br>and press the Enter key.<br><i>where</i><br><b>tape_no</b><br>is the number of the tape drive containing the PM load files |           |



## NTTR77 in a STAR (continued)

---

- 15 To demount the tape drive, type  
**>DEMOUNT T tape\_no**  
and press the Enter key.  
*where*  
**tape\_no**  
is the number of the tape drive containing the PM load files
- 16 Go to step 26.
- 17 From office records, determine and note the number of the input/output controller (IOC) disk and the name of the volume that contains the PM load files.
- 18 To access the disk utility level of the MAP, type  
**>DSKUT**  
and press the Enter key.
- 19 To list the IOC file names into your user directory, type  
**>LISTVOL volume\_name ALL**  
and press the Enter key.  
*where*  
**volume\_name**  
is the name of the volume that contains the PM load files, obtained in step 17
- 20 To leave the disk utility, type  
**>QUIT**  
and press the Enter key.
- 21 Go to step 26.
- 22 From office records, determine and note the number of the system load module (SLM) disk and the name of the volume that contains the PM load files.
- 23 To access the disk utility level at the MAP display, type  
**>DISKUT**  
and press the Enter key.
- 24 To list the SLM file names into your user directory, type  
**>LV CM;LF volume\_name**  
and press the Enter key.  
*where*  
**volume\_name**  
is the name of the volume that contains the PM load files, obtained in step 22
- 25 To leave the disk utility, type  
**>QUIT**

---

**NTTR77**  
**in a STAR (end)**

---

- and press the Enter key.
- 26** To load the STAR unit, type  
**>LOADPM UNIT star\_unit CC**  
and press the Enter key.  
*where*  
**star\_unit**  
is the STAR unit to be loaded (0 or 1)
- | If          | Do      |
|-------------|---------|
| load fails  | step 29 |
| load passes | step 9  |
- 27** Send any faulty cards for repair according to local procedure.
- 28** Record the following items in office records:
- date the card was replaced
  - serial number of the card
  - indications that prompted replacement of the card
- Go to step 31.
- 29** Get additional help replacing this card by contacting the personnel responsible for a higher level of support.
- 30** Consult office personnel to determine why the component is offline. Continue as directed by office personnel.
- 31** You have correctly completed this procedure.

## **NTTR87 in a STAR**

---

### **Application**

Use this procedure to replace an NTTR87 card in a STAR.

| PEC    | Suffixes | Name                    |
|--------|----------|-------------------------|
| NTTR87 | AA       | Quad frame carrier card |

### **Common procedures**


None

### **Action**

The following flowchart is only a summary of the procedure. To replace the card, use the instructions in the step-action procedure that follows the flowchart.

## NTTR87 in a STAR (continued)

### Summary of card replacement procedure for an NTTR87 card in a STAR

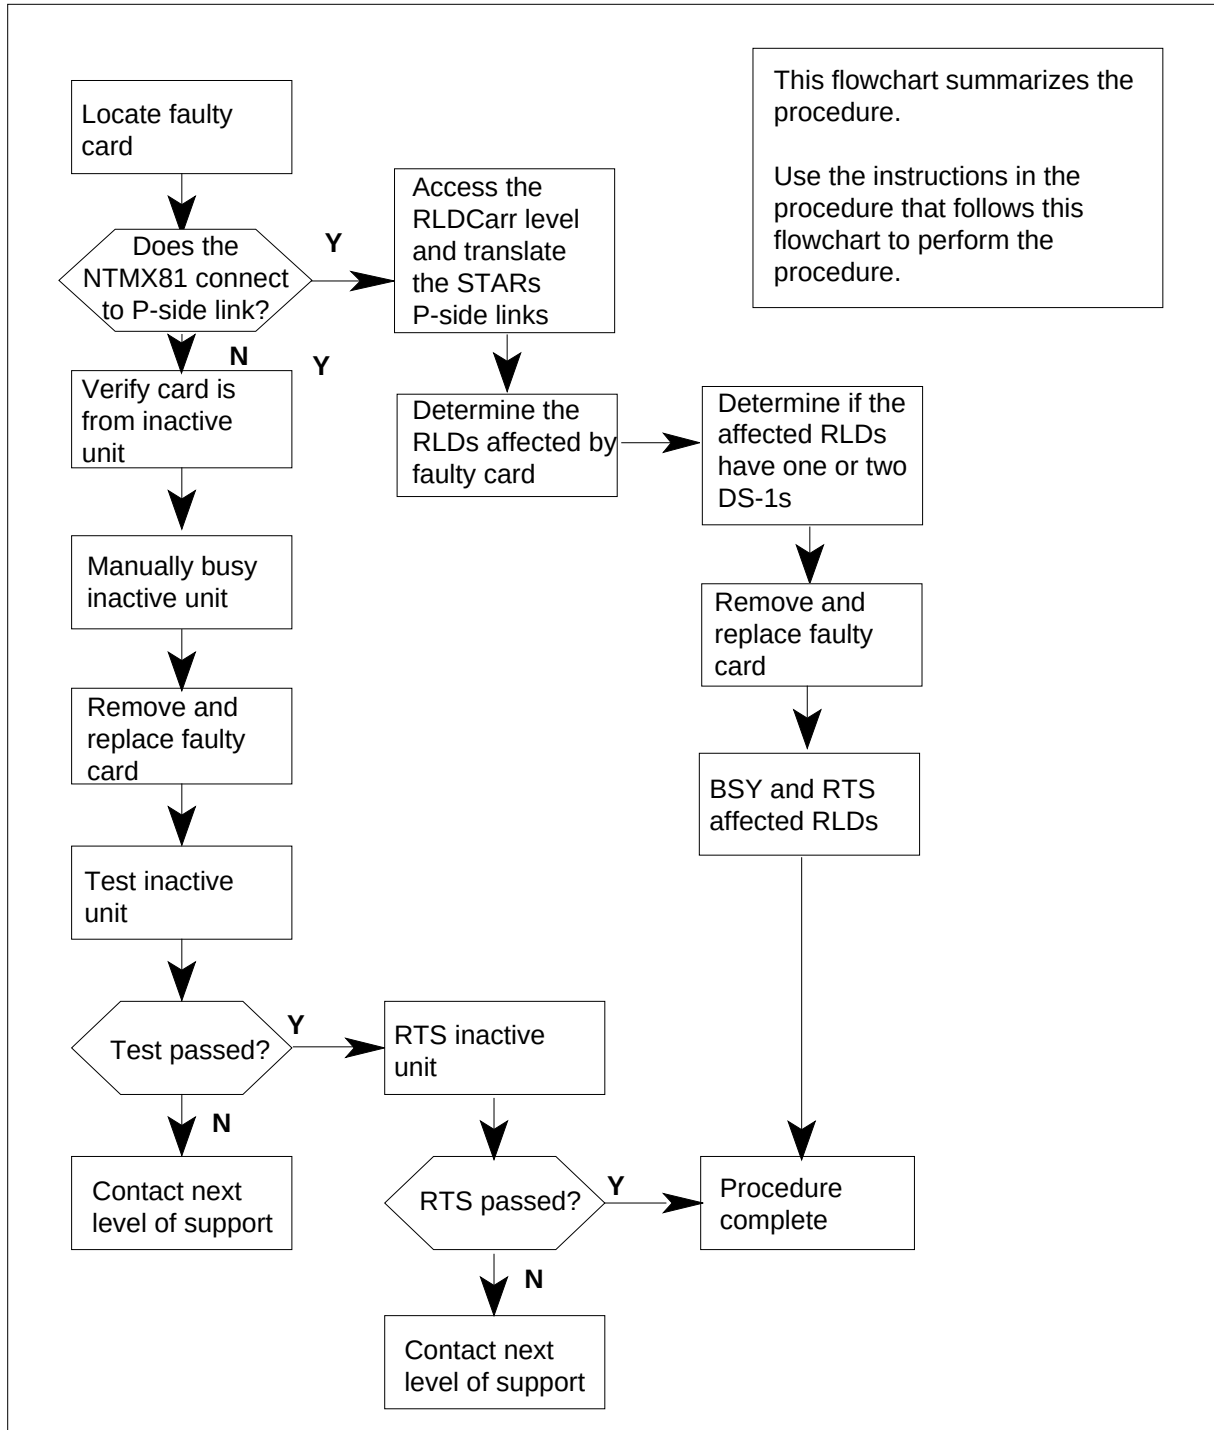



## NTTR87 in a STAR (continued)

and press the Enter key.

*Example of a MAP response*

```
LINK 0 LTC 0 0;CAP MS: STATUS SysB MSGCOND CLS RESTRICT
LINK 1 LTC 0 1;CAP S: STATUS SysB
LINK 2 LTC 0 2;CAP MS: STATUS OK MSGCOND OPN UNRESTRICT
LINK 3 LTC 0 3;CAP S: STATUS OK
LINK 4 LTC 0 4;CAP S: STATUS SysB
LINK 5 LTC 0 5;CAP S: STATUS SysB
```

- 6 To busy the inactive STAR unit, type

**>bsy unit unit\_no**

and press the Enter key.

*where*

**unit\_no**

is the number of the inactive unit (unit 0 or 1)

- 7 From the display in step 5, determine the C-side host PM where the STAR is connected. To post the host PM, type

**>POST pm\_type pm\_no**

and press the Enter key.

*where*

**pm\_type**

is the host PM type, such as LTC, LGC, RCC2

**pm\_no**

is the number of the host PM

*Example of a MAP display:*

|        | SysB  | ManB       | OffL  | CBsy | ISTb  | In |
|--------|-------|------------|-------|------|-------|----|
| PM     | 0     | 0          | 1     | 0    | 4     | 1  |
| LTC    | 0     | 0          | 2     | 0    | 2     |    |
| LTC 0  | ISTb  | Links_00S: | CSide | 0,   | PSide | 4  |
| Unit0: | Act   | InSv       |       |      |       |    |
| Unit1: | Inact | InSv       |       |      |       |    |

- 8 To display the P-side link information for the host PM, type

**>TRNSL P**

and press the Enter key.


*Example of a MAP response*

```
LINK 0: STAR REM1 00 0 0;CAP MS:STATUS OK MSGCOND: OPN
LINK 1: STAR REM1 00 0 1;CAP MS:STATUS SBsy MSGCOND: CLS
LINK 2: STAR REM1 00 0 0;CAP MS:STATUS OK MSGCOND: OPN
LINK 3: STAR REM1 00 0 1;CAP MS:STATUS OK MSGCOND: OPN
LINK 4: STAR REM1 00 0 0;CAP MS:STATUS OK MSGCOND: OPN
LINK 5: STAR REM1 00 0 1;CAP MS:STATUS OK MSGCOND: OPN
LINK 6: STAR REM1 00 0 0;CAP MS:STATUS SBsy MSGCOND: CLS
LINK 7: STAR REM1 00 0 1;CAP MS:STATUS OK MSGCOND: OPN
```

## NTTR87 in a STAR (continued)

- 9 Record the numbers of the links with status not OK.

After identifying the link with faults, use the following chart to determine which NTTR87 card to remove by matching the provisioned link number with the slot number and the packet number to the left of the table.

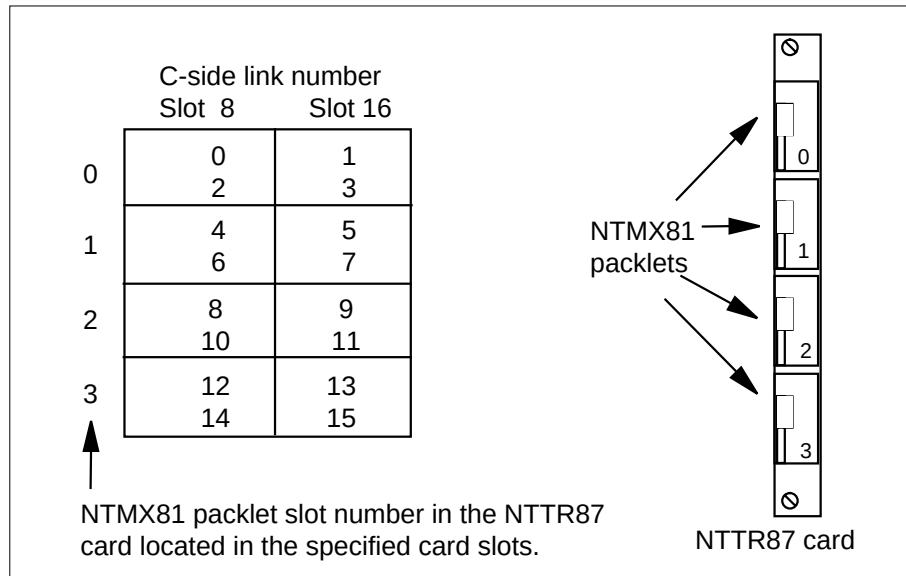

- 10 To manually busy the links connected to the NTTR87 card with faults, type  
**>BSY LINK link\_no**  
 and press the Enter key.

where

**link\_no**

is the number of the link connected to the NTTR87 card with faults

**Note:** All provisioned links in the slot must be busied.

Go to step 17.

### At the MAP terminal

- 11 To access the RLDCarr level and display the C-side links from all RLDs to the posted STAR, type

**>RLDCARR;TRNSL**

and press the Enter key.

Example of a MAP display:

## NTTR87 in a STAR (continued)

```
Port 0: Unit 0 RLD 0 0;CAP MS;STATUS: InSv
Port 1: Unit 1 RLD 0 1;CAP MS;STATUS: InSv
Port 2: Unit 0 RLD 1 0;CAP MS;STATUS: InSv
Port 3: Unit 1 RLD 1 1;CAP MS;STATUS: InSv
```

```
Port 14: Unit 0 RLD 7 0;CAP MS;STATUS: InSv
Port 15: Unit 1 RLD 7 1;CAP MS;STATUS: InSV
Port 16: Unit 0 RLD 8 0;CAP MS;STATUS: SysB
Port 17: Unit 1 RLD 8 1;CAP MS;STATUS: InSv
Port 18: Unit 0 RLD 9 0;CAP MS;STATUS: SysB
Port 19: Unit 1 RLD 9 1;CAP MS;STATUS: InSv
```

Record the RLDs with link faults that connect to the STAR posted in step 3.

- 12** To access the RLD MAP level, type

**>RLD**

and press the Enter key.

- 13** Post the first RLD. To post the RLD, type

**>POST rld\_no**

and press the Enter key.

where

**rld\_no**

is the number of the RLD with the C-side link that has faults

*Example of a MAP display:*

```

 SysB ManB OffL CBsy ISTb InSv
 PM 4 0 10 3 3 3
 STAR 0 0 0 0 1 1
STAR REM1 00 0 ISTb Links_00S: CSide 0 PSide 0 UMP 00S:0
Unit 0: ISTb /RG: 0
Unit 1: ManB /RG: 0
Drwr: 11 11 11 11 11 22 22 22 22 22 33 33 33 RG Pref 0 InSv
01 23 45 67 89 01 23 45 67 89 01 23 45 67 89 01 23 45 Stby 1 InSv
MM .M -- -- -- -- -- -0 SS -- -- -- -- -- -- -- -- -- --

REM9 RLD DRWR 8 SYSB LogDrwr: 16 17
BANK_0: Active Links_00S: 1
BANK_1: Stby RLD BDch: -
```

- 14** To display the C-side links for the posted RLD, type

**>TRNSL**

and press the Enter key.

*Example of a MAP response*

```
Port 16: HUB Owner Unit 0 RLD 8 Link 0; Cap MS; Status: SysB
Port 17: HUB Owner Unit 1 RLD 8 Link 1; Cap MS; Status: Istb
```



## NTTR87 in a STAR (continued)

- 15** Use the following table and figure to determine which NTTR87 card to remove by matching the provisioned link number with the slot number.


**Note:** When replacing an NTTR87 card, determine if the RLDs affected by the card change have one or two DS-1 links. If the RLDs have one link, then each RLD must be posted, busied, and returned to service. If the RLD has two DS-1 links, the system automatically returns to service the DS-1 link.

### Mapping Star Module ports to DS-1 slot and port numbers

| Star Module and link numbers | Star Hub DS-1 slot and port numbers | Star Hub P-side port numbers | Star Module and link numbers | Star Hub DS-1 slot and port numbers | Star Hub P-side port numbers |
|------------------------------|-------------------------------------|------------------------------|------------------------------|-------------------------------------|------------------------------|
| Module 0 link 0              | Slot 9, port 0                      | 0                            | Module 8 link 0              | Slot 10, port 8                     | 16                           |
| Module 0 link 1              | Slot 15, port 0                     | 1                            | Module 8 link 1              | Slot 14, port 8                     | 17                           |
| Module 1 link 0              | Slot 9, port 1                      | 2                            | Module 9 link 0              | Slot 10, port 9                     | 18                           |
| Module 1 link 1              | Slot 15, port 1                     | 3                            | Module 9 link 1              | Slot 14, port 9                     | 19                           |
| Module 2 link 0              | Slot 9, port 2                      | 4                            | Module 10 link 0             | Slot 10, port 10                    | 20                           |
| Module 2 link 1              | Slot 15, port 2                     | 5                            | Module 10 link 1             | Slot 14, port 10                    | 21                           |
| Module 3 link 0              | Slot 9, port 3                      | 6                            | Module 11 link 0             | Slot 10, port 11                    | 22                           |
| Module 3 link 1              | Slot 15, port 3                     | 7                            | Module 11 link 1             | Slot 14, port 11                    | 23                           |
| Module 4 link 0              | Slot 9, port 4                      | 8                            | Module 12 link 0             | Slot 10, port 12                    | 24                           |
| Module 4 link 1              | Slot 15, port 4                     | 9                            | Module 12 link 1             | Slot 14, port 12                    | 25                           |
| Module 5 link 0              | Slot 9, port 5                      | 10                           | Module 13 link 0             | Slot 10, port 13                    | 26                           |
| Module 5 link 1              | Slot 15, port 5                     | 11                           | Module 13 link 1             | Slot 14, port 13                    | 27                           |
| Module 6 link 0              | Slot 9, port 6                      | 12                           | Module 14 link 0             | Slot 10, port 14                    | 28                           |
| Module 6 link 1              | Slot 15, port 6                     | 13                           | Module 14 link 1             | Slot 14, port 14                    | 29                           |
| Module 7 link 0              | Slot 9, port 7                      | 14                           | Module 15 link 0             | Slot 10, port 15                    | 30                           |
| Module 7 link 1              | Slot 15, port 7                     | 15                           | Module 15 link 1             | Slot 14, port 15                    | 31                           |

## NTTR87 in a STAR (continued)

### Star Hub P-side links mapping

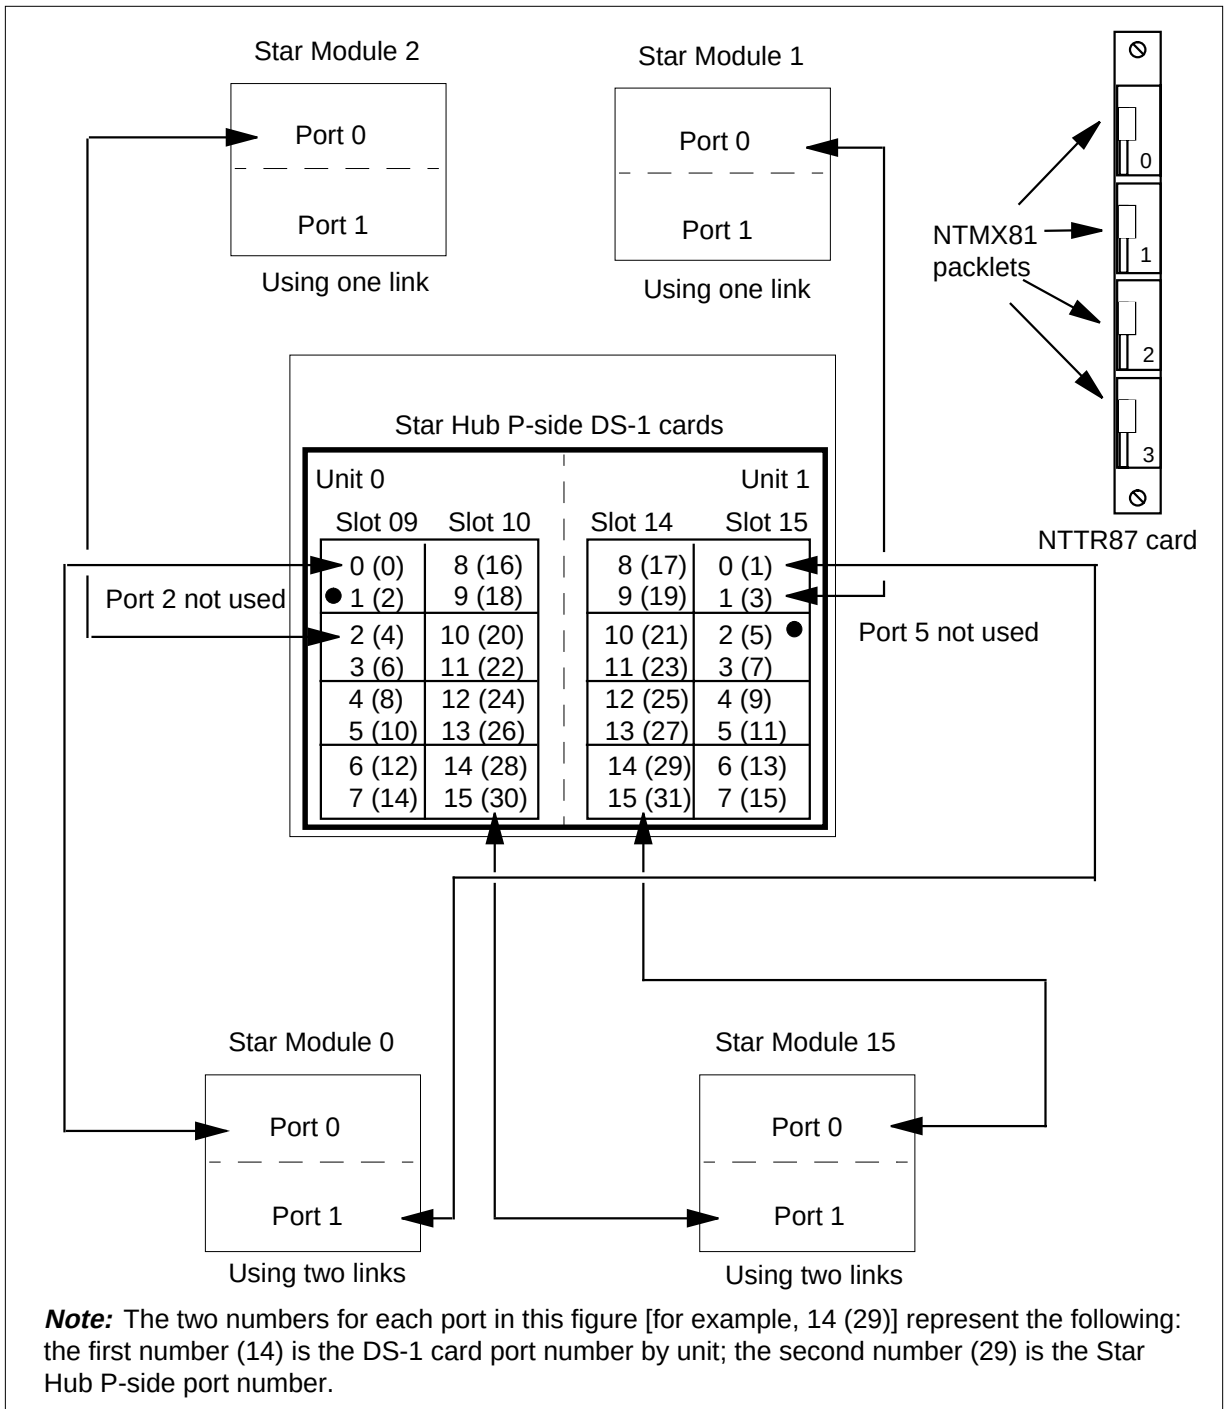

## NTTR87 in a STAR (continued)

---

- 16 Determine if additional RLDs connect to the NTTR87.

| If additional RLDs are | Do      |
|------------------------|---------|
| connected              | step 13 |
| not connected          | step 17 |

### *At the SRHE frame*

17



#### **DANGER**

##### **Static electricity damage**

Before removing any cards, put on a wrist strap and connect it to the wrist strap grounding point on the left side of the frame supervisory panel (FSP) of the STAR. This protects the equipment against damage caused by static electricity.



#### **DANGER**

##### **Equipment damage**

Take the following precautions when removing or inserting a card.


1. Do not apply direct pressure to the components.
2. Do not force the cards into the slots.

Put on a wrist strap.

Remove the NTMX81 packlets as described in the following steps:

- a Locate the NTMX81 packlets to be removed on the appropriate NTTR87 quad carrier card slot.
  - b Open the locking lever on the NTMX81 packlet. Carefully pull the packlet toward you until it clears the shelf. Repeat this step for all four packlets.
  - c Make sure the NTMX81 packlets are stored in an electrostatic discharge (ESD) container for protection of the circuit card until the packlets are installed again in the NTTR87 quad carrier card.
- 18 Using the T9908 wrist grounding strap and a T1324 screwdriver, remove the NTTR87 card. Insert the new card and tighten the screws.

**NTTR87**  
**in a STAR** (continued)

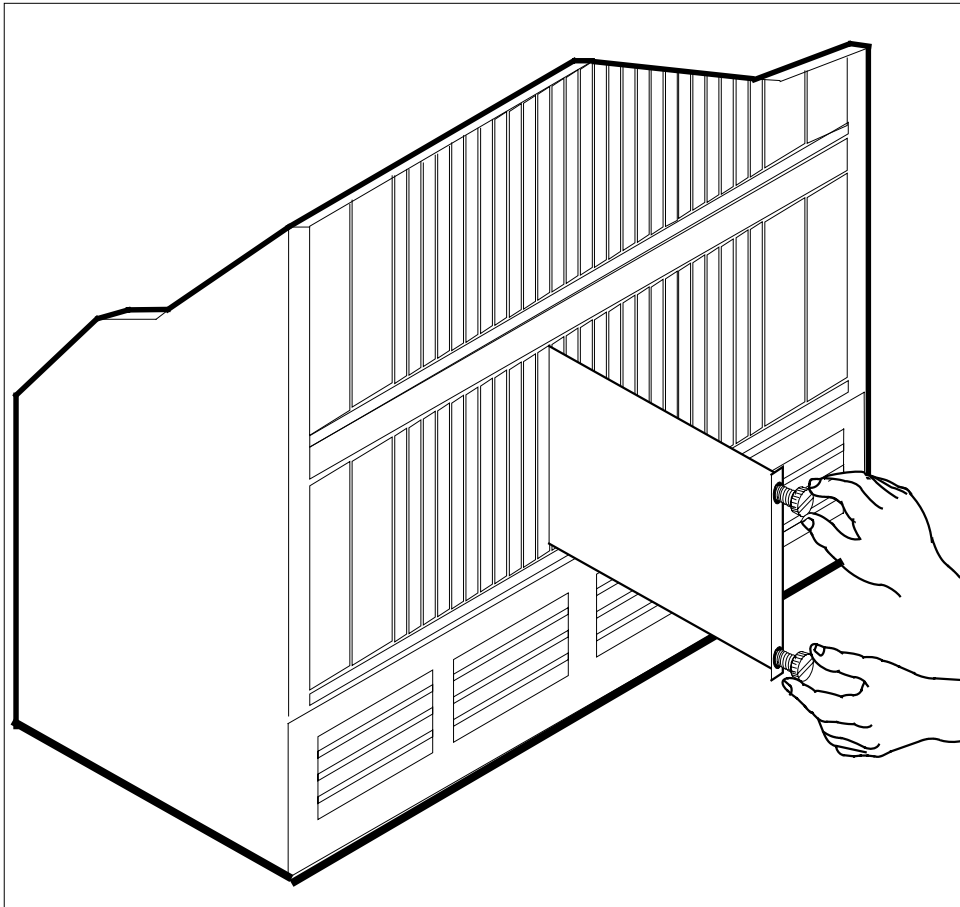

- 19** Replace the NTMX81 packlets previously removed. Align the packlet with the slots in the shelf. Carefully slide the packlet into the circuit card slot in the NTTR87 circuit card.
- 20** Seat and lock the packlet.
- a** Using your fingers or thumbs, push on the upper and lower edges of the faceplate of the packlet to ensure the packlet is fully seated in the slot.
  - b** Close the locking lever.
- 21** Use the following information to determine the next step in this procedure.

| If you entered this procedure from | Do      |
|------------------------------------|---------|
| alarm clearing procedures          | step 33 |
| other                              | step 22 |

## NTTR87 in a STAR (continued)

- 22 Use the following table to determine the next step in this procedure.

| If you replaced an NTTR87 that housed DS-1 links for the | Do      |
|----------------------------------------------------------|---------|
| Star Hub C-side                                          | step 23 |
| Star Hub P-side                                          | step 27 |

### *At the MAP terminal*

- 23 To test the busied network links from step 9, type

**>TST LINK link\_no**  
and press the Enter key.

where

**link\_no**

is the number of the link that was manually busied in step 10.

**Note 1:** This step must be performed for each manually busied link.

**Note 2:** To test the other links connected to the STAR, perform this step for each link until all links are tested.

| If TST | Do      |
|--------|---------|
| passes | step 24 |
| fails  | step 34 |

- 24 To return to service the P-side links, type

**>RTS LINK link\_no**  
and press the Enter key.

where

**link\_no**

is the number of the link manually busied in step 10.

**Note 1:** This step must be performed for each link that is manually busied.

**Note 2:** To RTS the other links connected to the STAR, perform the procedures in this step for each link until all links are returned to service.

| If RTS | Do      |
|--------|---------|
| passes | step 25 |
| fails  | step 34 |

- 25 To post the STAR where the NTTR87 card is located, type

**>POST STAR site frame unit**  
and press the Enter key.

## NTTR87 in a STAR (continued)

where

**site**

is the name of the site where the STAR is located

**frame**

is the frame number of the STAR with the card with faults (0 to 511)

**unit**

is 0 for the STAR

- 26 To return the inactive STAR unit to service, type

**>RTS UNIT unit\_no**

and press the Enter key.

where

**unit\_no**

is the number of the STAR unit busied in step 6

| If RTS | Do      |
|--------|---------|
| passes | step 31 |
| fails  | step 34 |

- 27 Determine how many DS-1 links connect to the RLD affected by the NTMX81 card replacement.

| If the RLD affected by the card replacement has                    | Do      |
|--------------------------------------------------------------------|---------|
| one DS-1 link                                                      | step 28 |
| two DS-1 links, the affected link returns to service automatically | step 31 |

**Note:** If there are two RLDs, each with one DS-1 link affected by this card change, both RLDs must be busied and returned to service.

- 28 To busy the posted RLD, type

**>BSY DRWR**

and press the Enter key.

*Example of a MAP display:*

Warning: Calls on RLD may be affected.  
Do you wish to continue?  
Please confirm ("YES", "Y", "NO", "N")

- 29 To respond affirmatively to the confirmation request, type

**>Y**

and press the Enter key.

## NTTR87

### in a STAR (end)

---

- 30** To return the RLD to service, type  
**>RTS DRWR**  
and press the Enter key.
- | If RTS                                              | Do      |
|-----------------------------------------------------|---------|
| passes and there are no more RLDs to RTS            | step 31 |
| passes and there are more RLDs to return to service | step 28 |
| fails                                               | step 34 |
- 31** Send any cards with faults for repair according to local procedure.
- 32** Record the following items in office records
- date the card was replaced
  - serial number of the card
  - indications that prompted replacement of the card
- Go to step 35.
- 33** Return to "Star Remote System alarm clearing procedures" in this manual or the other procedure that directed you to this procedure. At the point where a faulty card list was produced, identify the next faulty card on the list and go to the appropriate card replacement procedure for that card in this manual.
- 34** Get additional help in replacing this card by contacting the personnel responsible for a higher level of support.
- 35** You have correctly completed this procedure. Remove the sign from the active unit and return to the maintenance procedure that directed you to this card replacement procedure and continue as directed.

# Index

## C

### Card

- replacing Vol. 3, 9-166
- card removal and placement
  - card replacement common procedures Vol. 3, 9-19
- card replacement common procedures
  - Activating CCS7 links Vol. 3, 9-2
  - Activity switch with memory match Vol. 3, 9-11
  - card removal and placement Vol. 3, 9-19
  - Correcting a load mismatch Vol. 3, 9-32
  - Deactivating CCS7 links Vol. 3, 9-47
  - Failure to switch clock mastership Vol. 3, 9-55
  - Loading a PM Vol. 3, 9-64
  - Manually busying LIM-to-MS DS30 links Vol. 2, 6-26, Vol. 3, 9-76
  - Manually busying Series II PM C-side links Vol. 3, 9-82, Vol. 3, 9-95
  - Manually busying SMA C-side links Vol. 3, 9-89
  - Moving an XSG to a spare XLIU Vol. 3, 9-137
  - placing MP in service (integrated) Vol. 3, 5-57
  - placing MP in service (standalone) Vol. 3, 9-145
  - removing MP from service (integrated) Vol. 3, 5-62
  - removing MP from service (standalone) Vol. 3, 9-150
  - Replacing a card Vol. 3, 9-160
  - Replacing a line card Vol. 3, 9-172
  - Reseating cards in equipment shelves Vol. 3, 9-179
  - Returning LIM-to-MS DS30 links to service Vol. 2, 6-33, Vol. 3, 9-188
  - Switching the clock source Vol. 3, 9-193
  - TMS shelf layouts Vol. 3, 4-2
  - Unseating cards in equipment shelves Vol. 3, 9-200
  - Verifying load compatibility of SuperNode cards Vol. 3, 9-204
- Card replacement procedures
  - NT2X70 Vol. 4, 1-490, Vol. 4, 1-498
  - NT6X17 Vol. 4, 1-739
  - NT6X18 Vol. 4, 1-783
  - NT6X19 Vol. 4, 1-823
  - NT6X20 Vol. 4, 1-863
  - NT6X21 Vol. 4, 1-920
  - NT6X40 Vol. 5, 1-2, Vol. 5, 1-14, Vol. 5, 1-26
  - NT6X41 Vol. 5, 1-64, Vol. 5, 1-71
  - NT6X42 Vol. 5, 1-101, Vol. 5, 1-107
  - NT6X44 Vol. 5, 1-138
  - NT6X50 Vol. 5, 1-259, Vol. 5, 1-275
  - NT6X53 Vol. 5, 1-487
  - NT6X54 Vol. 5, 1-556
  - NT6X69 Vol. 5, 1-648, Vol. 5, 1-654
  - NT6X71 Vol. 5, 1-721
  - NT6X76 Vol. 5, 1-869
  - NT6X78 Vol. 5, 1-919, Vol. 5, 1-925, Vol. 5, 1-932
  - NT6X80 Vol. 5, 1-951, Vol. 5, 1-957
  - NT6X92 Vol. 6, 1-112, Vol. 6, 1-118, Vol. 6, 1-125
  - NT6X99 Vol. 6, 1-186
  - NTAX74 Vol. 6, 1-303, Vol. 6, 1-315, Vol. 6, 1-327, Vol. 6, 1-337, Vol. 6, 1-347
  - NTAX78 Vol. 6, 1-355, Vol. 6, 1-362
  - NTBX01 Vol. 6, 1-417, Vol. 6, 1-423, Vol. 6, 1-430



- NTBX02 Vol. 6, 1-508, Vol. 6, 1-515,  
Vol. 6, 1-523
- NTBX27 Vol. 6, 1-586
- NTMX71 Vol. 6, 1-916, Vol. 6, 1-924
- NTMX72 Vol. 6, 1-1002
- NTMX73 Vol. 7, 1-54
- NTMX75 Vol. 7, 1-162
- NTMX76 Vol. 7, 1-214
- NTMX79 Vol. 7, 1-390
- NTMX81 Vol. 7, 1-435, Vol. 7, 1-451
- NTRX41 Vol. 7, 1-655
  - in CDSN (cabinetized dual shelf network)  
Vol. 1, 8-197
  - in CDTO (cabinetized digital trunk controller  
offshore) Vol. 1, 8-197
  - in CIOE (cabinetized input/output  
equipment) Vol. 1, 8-197
  - in CIPE (cabinetized international peripheral  
equipment) Vol. 1, 8-197
  - in CLGO (cabinetized line group controller  
offshore) Vol. 1, 8-197
  - in CMIS (cabinetized miscellaneous  
equipment) Vol. 1, 8-197
  - in CMS7 (cabinetized message switch 7)  
Vol. 1, 8-197
  - in CTME (cabinetized trunk module  
equipment) Vol. 1, 8-197
- NTRX42 Vol. 7, 1-766
- NTRX43 Vol. 7, 1-816
- NTRX54 Vol. 7, 1-889
- NTTR46 Vol. 7, 1-902
- NTTR47 Vol. 7, 1-908
- NTTR60 Vol. 7, 1-914
- NTTR66 Vol. 7, 1-921
- NTTR67 Vol. 7, 1-927
- NTTR70 Vol. 7, 1-934
- NTTR71 Vol. 7, 1-941
- NTTR72 Vol. 7, 1-946
- NTTR73 Vol. 7, 1-952
- NTTR74 Vol. 7, 1-956
- NTTR75 Vol. 7, 1-962
- NTTR76 Vol. 7, 1-970
- NTTR77 Vol. 7, 1-979
- NTTR87 Vol. 7, 1-986
- card replacement procedures
  - EDRAM Vol. 3, 6-84
- NT0X10 Vol. 4, 1-2, Vol. 4, 1-6, Vol. 4, 1-14,  
Vol. 4, 1-18, Vol. 4, 1-25, Vol. 4, 1-31,  
Vol. 4, 1-37, Vol. 4, 1-43
  - in an RMM Vol. 4, 1-10
  - in MTM, STM Vol. 3, 6-93
  - in OAU Vol. 2, 10-7
- NT0X36
  - in an international cabinet auxiliary module  
Vol. 1, 8-74
  - in CIOE with DDU, DPP, IOC, MTD, or  
ROS Vol. 1, 8-8
  - in IOE frame Vol. 1, 8-53
- NT0X67
  - in IOC Vol. 1, 9-97
- NT0X70
  - in MTM, TM Vol. 3, 6-27
  - in OAU Vol. 2, 10-7
- NT0X91 Vol. 4, 1-61
  - in CPCE provisioned for DTC, DTCI, IDTC,  
PDTC Vol. 1, 8-98
  - in CPCE provisioned for ILGC, LGC, LGCI,  
PLGC Vol. 1, 8-98
  - in CPCE provisioned for ILTC, LTC, LTCI,  
PLTC Vol. 1, 8-98
  - in CTME with ISM, MTM, OAU, STM, or  
TM Vol. 1, 8-29
  - in DCE Vol. 1, 8-112
  - in LME Vol. 1, 8-123
  - in MS6E Vol. 1, 8-133
  - in MS7E Vol. 1, 8-147
  - in NT0X48 single-bay network Vol. 1, 8-159
  - in NT5X13 combined single-bay network  
Vol. 1, 8-159
  - in NT8X11 dual shelf network Vol. 1, 8-159
  - in ST6E, ST7E Vol. 1, 8-147
  - in TME with ISM, MTM, OAU, STM, and  
TM Vol. 1, 8-172
- NT0X91AA Vol. 4, 1-49, Vol. 4, 1-90
- NT0X91AE Vol. 4, 1-49, Vol. 4, 1-96,  
Vol. 4, 1-105
- NT1X00
  - in ISM, MTM, STM Vol. 3, 6-93
- NT1X31
  - in MTM, STM Vol. 3, 6-93
- NT1X54
  - in ISM, TM Vol. 3, 6-93
- NT1X55
  - in IOC Vol. 1, 9-10

- 
- NT1X62
    - in IOC Vol. 1, 9-97
  - NT1X67
    - in IOC Vol. 1, 9-21
  - NT1X68
    - in IOC Vol. 1, 9-10
  - NT1X75
    - in MTM with DRAM, STM with DRAM Vol. 3, 6-27
  - NT1X76
    - in DRAM Vol. 3, 6-93
    - in MTM, STM Vol. 3, 6-93
  - NT1X76 in MTM Vol. 2, 5-2
  - NT1X77
    - in DRAM Vol. 3, 6-93
    - in MTM, STM Vol. 3, 6-93
  - NT1X78
    - in dual DDU shelf Vol. 1, 9-28
    - in single DDU shelf Vol. 1, 9-28
    - in SuperNode ROS Vol. 3, 1-5
    - in SuperNode SE ROS Vol. 3, 1-5
  - NT1X79
    - in DRAM Vol. 3, 6-93
    - in MTM, STM Vol. 3, 6-93
  - NT1X80
    - in ISM, MTM, STM Vol. 3, 6-84
  - NT1X81
    - in ISM, MTM, STM Vol. 3, 6-84
  - NT1X89
    - in IOC Vol. 1, 9-37
  - NT1X90
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT2X01
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT2X02
    - in LM line drawer Vol. 2, 2-16
  - NT2X03
    - in LM line drawer Vol. 2, 2-16
  - NT2X05
    - in LM controller Vol. 2, 2-30
    - in remote line controller Vol. 2, 11-22
    - in RLM Vol. 2, 11-22
  - NT2X06 Vol. 4, 1-114, Vol. 4, 1-121, Vol. 4, 1-129, Vol. 4, 1-136, Vol. 4, 1-144, Vol. 4, 1-153, Vol. 4, 1-162
    - in DCM, DES Vol. 1, 4-47
    - in MTM, TM Vol. 3, 6-69
    - in NT0X48 single-bay network Vol. 2, 9-40
    - in OAU Vol. 2, 10-14
  - NT2X07
    - in DCM, DES Vol. 1, 4-47
    - in NT0X48 single-bay network Vol. 2, 9-40
  - NT2X09 Vol. 4, 1-171, Vol. 4, 1-178, Vol. 4, 1-186, Vol. 4, 1-194, Vol. 4, 1-202, Vol. 4, 1-211, Vol. 4, 1-220
    - in DRAM Vol. 3, 6-69
    - in EDRAM Vol. 3, 6-69
    - in MTM, TM Vol. 3, 6-69
    - in OAU Vol. 2, 10-14
  - NT2X10 Vol. 4, 1-229, Vol. 4, 1-233, Vol. 4, 1-237, Vol. 4, 1-244, Vol. 4, 1-251, Vol. 4, 1-258
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT2X11 Vol. 4, 1-265, Vol. 4, 1-270, Vol. 4, 1-278, Vol. 4, 1-282, Vol. 4, 1-289, Vol. 4, 1-298, Vol. 4, 1-307
    - in an RMM Vol. 4, 1-274
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT2X16
    - in LM line drawer Vol. 2, 2-16
  - NT2X20
    - in LM line drawer Vol. 2, 2-24, Vol. 2, 11-16
  - NT2X21
    - in LM controller Vol. 2, 2-9
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT2X22
    - in LM controller Vol. 2, 2-9
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT2X23
    - in LM controller Vol. 2, 2-9
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT2X24
    - in LM controller Vol. 2, 2-9
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT2X25
    - in LM controller Vol. 2, 2-9
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT2X26
    - in LM controller Vol. 2, 2-9
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT2X27
    - in LM controller Vol. 2, 2-9
-

- in remote line controller Vol. 2, 11-9
- in RLM Vol. 2, 11-9
- NT2X32
  - in DCM, DES Vol. 1, 4-8
- NT2X33
  - in DCM, DES Vol. 1, 4-8
  - in LM controller Vol. 2, 2-9
- NT2X34
  - in DCM, DES Vol. 1, 4-8
  - in LM controller Vol. 2, 2-9
- NT2X35
  - in DCM Vol. 1, 4-13
- NT2X36
  - in DCM Vol. 1, 4-27
  - in LM controller Vol. 2, 2-9
- NT2X37
  - in DCM, DES Vol. 1, 4-8
- NT2X38
  - in DCM, DES Vol. 1, 4-8
- NT2X41
  - in OAU Vol. 2, 10-7
- NT2X42
  - in OAU Vol. 2, 10-7
- NT2X43
  - in ISM, MTM, STM Vol. 3, 6-93
  - in OAU Vol. 2, 10-7
- NT2X45
  - in MTM, TM Vol. 3, 6-27
  - in OAU Vol. 2, 10-7
- NT2X47
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X48 Vol. 4, 1-316, Vol. 4, 1-321, Vol. 4, 1-326
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X50
  - in MTM, STM Vol. 3, 6-93
- NT2X53
  - in MTM, TM Vol. 3, 6-27
  - in OAU Vol. 2, 10-7
- NT2X55 Vol. 4, 1-331
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X56
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X57 Vol. 4, 1-338, Vol. 4, 1-342, Vol. 4, 1-350, Vol. 4, 1-355, Vol. 4, 1-362, Vol. 4, 1-369, Vol. 4, 1-376
  - in an RMM Vol. 4, 1-346
  - in ISM, MTM, STM Vol. 3, 6-93
  - in OAU Vol. 2, 10-7
- NT2X59 Vol. 4, 1-383, Vol. 4, 1-387, Vol. 4, 1-401, Vol. 4, 1-406, Vol. 4, 1-413, Vol. 4, 1-420, Vol. 4, 1-427
  - in an RMM Vol. 4, 1-394
  - in MTM, TM Vol. 3, 6-27
  - in OAU Vol. 2, 10-7
- NT2X65
  - in ISM, MTM, STM, TM Vol. 3, 6-93
- NT2X66
  - in ISM, MTM, STM, TM Vol. 3, 6-93
- NT2X70 Vol. 4, 1-434, Vol. 4, 1-441, Vol. 4, 1-464, Vol. 4, 1-478, Vol. 4, 1-506, Vol. 4, 1-517, Vol. 4, 1-526
  - in 6STA or MSB6 Vol. 2, 8-20
  - in an HIE Vol. 4, 1-455
  - in DCM, DES Vol. 1, 4-47
  - in DRAM Vol. 3, 6-69
  - in DTC, DTIC, IDTC, PDTC Vol. 3, 8-42
  - in EDRAM Vol. 3, 6-69
  - in ILGC, LGC, LGCI, PLGC Vol. 3, 8-42
  - in ILTC, LTC, LTCI, PLTC Vol. 3, 8-42
  - in IOC Vol. 1, 9-44
  - in LM controller Vol. 2, 2-36
  - in NT5X13 combined single-bay network Vol. 2, 9-40
  - in NT8X11 dual shelf network Vol. 2, 9-40
  - in remote line module Vol. 2, 11-28
  - in RLM Vol. 2, 11-28
  - in ST7G of MSB7 Vol. 2, 8-35
  - in STA7 or MSB7 Vol. 2, 8-20
  - in STCM of MSB6 Vol. 2, 8-35
  - in STM Vol. 3, 6-69
- NT2X70 in TMS Vol. 3, 4-8
- NT2X70 in TPC Vol. 3, 5-2
- NT2X71
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X72
  - in ISM, TM Vol. 3, 6-93
- NT2X75
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X77
  - in ISM, MTM, STM Vol. 3, 6-93
- NT2X78
  - in TM Vol. 3, 6-93
- NT2X80
  - in MTM, STM Vol. 3, 6-93
- NT2X81
  - in TM Vol. 3, 6-93

- 
- NT2X82
    - in ISM, TM Vol. 3, 6-93
  - NT2X83
    - in TM Vol. 3, 6-93
  - NT2X84
    - in ISM, TM Vol. 3, 6-93
  - NT2X85
    - in ISM, TM Vol. 3, 6-93
  - NT2X86
    - in ISM, TM Vol. 3, 6-93
  - NT2X88
    - in TM Vol. 3, 6-93
  - NT2X90 Vol. 4, 1-533, Vol. 4, 1-538,  
Vol. 4, 1-543, Vol. 4, 1-557, Vol. 4, 1-562,  
Vol. 4, 1-569, Vol. 4, 1-576
    - in an RMM Vol. 4, 1-551
    - in ISM, TM Vol. 3, 6-93
  - NT2X92
    - in TM Vol. 3, 6-93
  - NT2X95
    - in TM Vol. 3, 6-93
  - NT2X96
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT2X98
    - in ISM, TM Vol. 3, 6-93
  - NT3X02
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT3X03
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT3X04 Vol. 4, 1-583
    - in ISM, TM Vol. 3, 6-93
  - NT3X05
    - in MTM, STM Vol. 3, 6-93
  - NT3X06
    - in ISM, TM Vol. 3, 6-93
  - NT3X07
    - in ISM, TM Vol. 3, 6-93
  - NT3X08
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT3X08AA in MTM Vol. 3, 6-64
  - NT3X09 Vol. 4, 1-590, Vol. 4, 1-596,  
Vol. 4, 1-601, Vol. 4, 1-612, Vol. 4, 1-617,  
Vol. 4, 1-624, Vol. 4, 1-634, Vol. 4, 1-644
    - in an RMM Vol. 4, 1-607
    - in ISM, MTM, STM Vol. 3, 6-93
  - NT3X16
    - in SuperNode ROS Vol. 3, 1-14
    - in SuperNode SE ROS Vol. 3, 1-14
  - NT3X17
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X18
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X19
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X20
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X21
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X22
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X23
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X24
    - in NT0X48 single-bay network Vol. 2, 9-72
  - NT3X47
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT3X48
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT3X49
    - in remote line controller Vol. 2, 11-9
    - in RLM Vol. 2, 11-9
  - NT3X65
    - in DCM Vol. 1, 4-37
  - NT3X67
    - in MTM, STM Vol. 3, 6-93
  - NT3X67 in MTM Vol. 2, 5-10
  - NT3X68
    - in MTM, STM Vol. 3, 6-93
  - NT3X70
    - in NT5X13 combined single-bay network  
Vol. 2, 9-72
  - NT3X71
    - in NT5X13 combined single-bay network  
Vol. 2, 9-72
  - NT3X72
    - in NT5X13 combined single-bay network  
Vol. 2, 9-72
  - NT3X73
    - in NT5X13 combined single-bay network  
Vol. 2, 9-72
  - NT3X74
    - in NT5X13 combined single-bay network  
Vol. 2, 9-72
    - in NT8X11 dual-shelf network Vol. 2, 9-72
-

- NT3X75
  - in NT5X13 combined single-bay network Vol. 2, 9-72
  - in NT8X11 dual-shelf network Vol. 2, 9-72
- NT3X76
  - in NT5X13 combined single-bay network Vol. 2, 9-72
  - in NT8X11 dual-shelf network Vol. 2, 9-72
- NT3X82 Vol. 4, 1-653
  - in OAU Vol. 2, 10-7
- NT3X83 Vol. 4, 1-660
  - in OAU Vol. 2, 10-7
- NT3X84
  - in OAU Vol. 2, 10-7
- NT3X85
  - in OAU Vol. 2, 10-7
- NT3X86
  - in NT5X13 combined single-bay network Vol. 2, 9-72
- NT3X91
  - in ISM, TM Vol. 3, 6-93
- NT4X23
  - in ISM, MTM, STM Vol. 3, 6-93
- NT4X65
  - in MTM, STM, TM Vol. 3, 6-27
  - in OAU Vol. 2, 10-7
- NT4X97 Vol. 4, 1-668, Vol. 4, 1-673, Vol. 4, 1-680
  - in ISM, MTM, STM Vol. 3, 6-44
- NT4X98 Vol. 4, 1-687, Vol. 4, 1-694
  - in ISM, MTM, STM Vol. 3, 6-44
- NT5X03
  - in ISM, TM Vol. 3, 6-93
- NT5X04
  - in ISM, TM Vol. 3, 6-93
- NT5X06
  - in TM Vol. 3, 6-93
- NT5X25
  - in ISM, TM Vol. 3, 6-93
- NT5X29
  - in ISM, MTM, STM Vol. 3, 6-93
- NT5X30
  - in ISM, MTM, STM, TM Vol. 3, 6-93
- NT6X1205
  - in DTC, IDTC, PDTC Vol. 3, 8-19
  - in ILGC, LGC, PLGC Vol. 3, 8-19
  - in ILTC, LTC, PLTC Vol. 3, 8-19
- NT6X17 Vol. 4, 1-703, Vol. 4, 1-707, Vol. 4, 1-711, Vol. 4, 1-715, Vol. 4, 1-723, Vol. 4, 1-731
  - in ILCM, LCM, LCME Vol. 2, 1-39
  - in LM line drawer Vol. 2, 2-24, Vol. 2, 11-16
- NT6X18 Vol. 4, 1-743, Vol. 4, 1-747, Vol. 4, 1-751, Vol. 4, 1-755, Vol. 4, 1-759, Vol. 4, 1-767, Vol. 4, 1-775
  - in LCM, LCME Vol. 2, 1-39
  - in LM line drawer Vol. 2, 2-24, Vol. 2, 11-16
- NT6X19 Vol. 4, 1-787, Vol. 4, 1-791, Vol. 4, 1-795, Vol. 4, 1-799, Vol. 4, 1-807, Vol. 4, 1-815
  - in LCM, LCME Vol. 2, 1-39
- NT6X20 Vol. 4, 1-827, Vol. 4, 1-831, Vol. 4, 1-835, Vol. 4, 1-839, Vol. 4, 1-847, Vol. 4, 1-855
  - in LCM Vol. 2, 1-73
- NT6X21 Vol. 4, 1-867, Vol. 4, 1-871, Vol. 4, 1-875, Vol. 4, 1-883, Vol. 4, 1-893, Vol. 4, 1-902, Vol. 4, 1-911
  - in an LCM Vol. 4, 1-879
  - in LCM, LCME Vol. 2, 1-39
- NT6X23
  - in LCM Vol. 2, 1-73
- NT6X27 Vol. 4, 1-924, Vol. 4, 1-931, Vol. 4, 1-938
  - in IDTC, ILGC, ILTC Vol. 3, 8-124
  - in PDTC, PLGC, PLTC Vol. 3, 8-124
- NT6X28
  - in IDTC, ILGC, ILTC Vol. 3, 8-31
  - in IPDTC, PLGC, LTCO, PLTC Vol. 3, 8-31
- NT6X30 Vol. 4, 1-945, Vol. 4, 1-960, Vol. 4, 1-974, Vol. 4, 1-988, Vol. 4, 1-1002
  - in LCE, LCEI Vol. 2, 1-47
- NT6X33
  - in ILCM, LCM, LCME Vol. 2, 1-39
- NT6X36 Vol. 4, 1-1021, Vol. 4, 1-1031, Vol. 4, 1-1036
  - in an FSP Vol. 4, 1-1016, Vol. 4, 1-1026
  - in LCE frame Vol. 1, 8-192
  - in LCEI frame Vol. 1, 8-192
- NT6X40 Vol. 5, 1-38, Vol. 5, 1-51
  - in 6STA of MSB6 Vol. 2, 8-48
  - in DTC, DTCT, IDTC, DTCO, PDTC Vol. 3, 8-59
  - in ILGC, LGC, LGCI, LGCO, PLGC Vol. 3, 8-59

- in ILTC, LTC, LTCI, LTCO, PLTC  
Vol. 3, 8-59
- in STA7 of MSB7 Vol. 2, 8-48
- NT6X41 Vol. 5, 1-78, Vol. 5, 1-87, Vol. 5, 1-95  
in DTC, DTCL, IDTC, DTCO, PDTC  
Vol. 3, 8-31
- in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-31
- in ILTC, LTC, LTCI, LTCO, PLTC  
Vol. 3, 8-31
- NT6X42 Vol. 5, 1-114, Vol. 5, 1-122  
in DTC, DTCL, IDTC, DTCO, PDTC  
Vol. 3, 8-31
- in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-31
- in ILTC, LTC, LTCI, LTCO, PLTC  
Vol. 3, 8-31
- NT6X43  
in DTC, LGC, LTC Vol. 3, 8-31
- NT6X44 Vol. 5, 1-130, Vol. 5, 1-144,  
Vol. 5, 1-158  
in DTC, DTCL, IDTC, DTCO, PDTC  
Vol. 3, 8-31
- in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-31
- in ILTC, LTC, LTCI, LTCO, PLTC  
Vol. 3, 8-31
- NT6X45 Vol. 5, 1-166, Vol. 5, 1-172,  
Vol. 5, 1-178, Vol. 5, 1-184  
in 6STA of MSB6 Vol. 2, 8-62  
in STA7 of MSB7 Vol. 2, 8-62
- NT6X46  
in 6STA of MSB6 Vol. 2, 8-62  
in STA7 of MSB7 Vol. 2, 8-62
- NT6X47 Vol. 5, 1-190, Vol. 5, 1-196,  
Vol. 5, 1-202  
in 6STA of MSB6 Vol. 2, 8-62  
in STA7 of MSB7 Vol. 2, 8-62
- NT6X48 Vol. 3, 8-72, Vol. 3, 8-82, Vol. 5, 1-208
- NT6X50 Vol. 5, 1-216, Vol. 5, 1-223,  
Vol. 5, 1-237, Vol. 5, 1-244  
in an HIE Vol. 5, 1-230  
in DTC, DTCL, IDTC, DTCO, DTCOI  
Vol. 3, 8-124  
in ILGC, LGC, LGCI, LGCO Vol. 3, 8-124  
in ILTC, LTC, LTCI, LTCO Vol. 3, 8-124
- NT6X51 Vol. 5, 1-291, Vol. 5, 1-298,  
Vol. 5, 1-305, Vol. 5, 1-312, Vol. 5, 1-324,  
Vol. 5, 1-332, Vol. 5, 1-339, Vol. 5, 1-347  
in an LCM Vol. 5, 1-319  
in LCM, ILCM Vol. 2, 1-31
- NT6X52 Vol. 5, 1-355, Vol. 5, 1-361,  
Vol. 5, 1-367, Vol. 5, 1-373, Vol. 5, 1-384,  
Vol. 5, 1-392, Vol. 5, 1-401, Vol. 5, 1-410  
in an LCM Vol. 5, 1-379  
in LCM, ILCM Vol. 2, 1-31
- NT6X53 Vol. 5, 1-418, Vol. 5, 1-425,  
Vol. 5, 1-432, Vol. 5, 1-444, Vol. 5, 1-460,  
Vol. 5, 1-469, Vol. 5, 1-478  
in an LCM Vol. 5, 1-453  
in LCM, LCME Vol. 2, 1-79
- NT6X54 Vol. 5, 1-493, Vol. 5, 1-500,  
Vol. 5, 1-509, Vol. 5, 1-518, Vol. 5, 1-533,  
Vol. 5, 1-542, Vol. 5, 1-549  
in an LCM Vol. 5, 1-527  
in ILCM, LCM Vol. 2, 1-13
- NT6X55  
in DTC, IDTC, DTCO, PDTC Vol. 3, 8-124  
in ILGC, LGC, LGCO, PLGC Vol. 3, 8-124  
in ILTC, LTC, LTCO, PLTC Vol. 3, 8-124
- NT6X60 Vol. 5, 1-565, Vol. 5, 1-572,  
Vol. 5, 1-579, Vol. 5, 1-587
- NT6X62  
in DTC, IDTC, DTCO, PDTC Vol. 3, 8-31  
in ILGC, LGCO, PLGC Vol. 3, 8-31
- NT6X65  
in STCM of MSB6 Vol. 2, 8-70
- NT6X66  
in ST7G of MSB7 Vol. 2, 8-70
- NT6X68  
in MSB6 Vol. 2, 8-55  
in MSB7 Vol. 2, 8-55
- NT6X69 Vol. 5, 1-595, Vol. 5, 1-605,  
Vol. 5, 1-613, Vol. 5, 1-622, Vol. 5, 1-630,  
Vol. 5, 1-639, Vol. 5, 1-670, Vol. 5, 1-678  
in DTC, DTCL, IDTC, DTCO, PDTC  
Vol. 3, 8-31  
in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-31  
in ILTC, LTC, LTCI, LTCO, PLTC  
Vol. 3, 8-31
- NT6X69 in TMS Vol. 3, 4-19
- NT6X70  
in LGC, LGCI Vol. 3, 8-31  
in LTC, LTCI Vol. 3, 8-31
- NT6X71 Vol. 5, 1-684, Vol. 5, 1-688,  
Vol. 5, 1-692, Vol. 5, 1-696, Vol. 5, 1-705,  
Vol. 5, 1-713

- in LCM, LCME Vol. 2, 1-39
- NT6X72 Vol. 5, 1-725
- NT6X73 Vol. 5, 1-734, Vol. 5, 1-738,  
Vol. 5, 1-742, Vol. 5, 1-751  
in an HIE Vol. 5, 1-746
- NT6X74 Vol. 5, 1-755, Vol. 5, 1-761,  
Vol. 5, 1-775, Vol. 5, 1-782, Vol. 5, 1-790,  
Vol. 5, 1-799, Vol. 5, 1-808  
in an RMM Vol. 5, 1-768
- NT6X75 Vol. 5, 1-817, Vol. 5, 1-824,  
Vol. 5, 1-831, Vol. 5, 1-838
- NT6X76 Vol. 5, 1-845, Vol. 5, 1-853,  
Vol. 5, 1-861  
in LCM, LCME Vol. 2, 1-39
- NT6X78 Vol. 5, 1-876, Vol. 5, 1-883,  
Vol. 5, 1-891, Vol. 5, 1-898, Vol. 5, 1-905,  
Vol. 5, 1-912, Vol. 5, 1-946  
in ILGC Vol. 3, 8-90  
in ILTC Vol. 3, 8-90  
in LGC Vol. 3, 8-90  
in LGCO Vol. 3, 8-90  
in LGCOI Vol. 3, 8-90  
in LTC Vol. 3, 8-90  
in LTCO Vol. 3, 8-90  
in LTCOI Vol. 3, 8-90  
in PLGC Vol. 3, 8-90  
in PLTC Vol. 3, 8-90
- NT6X79  
in DTC, DTCO, PDTC Vol. 3, 8-31  
in LGC, LGCI Vol. 3, 8-31  
in LTC, LTCI Vol. 3, 8-31
- NT6X80 Vol. 5, 1-964, Vol. 5, 1-972,  
Vol. 5, 1-981
- NT6X85 Vol. 6, 1-2, Vol. 6, 1-13, Vol. 6, 1-24
- NT6X86 Vol. 6, 1-30, Vol. 6, 1-39
- NT6X87 Vol. 6, 1-48, Vol. 6, 1-56
- NT6X92 Vol. 6, 1-64, Vol. 6, 1-71, Vol. 6, 1-79,  
Vol. 6, 1-87, Vol. 6, 1-95, Vol. 6, 1-104,  
Vol. 6, 1-140, Vol. 6, 1-243  
in DTC, DTCI, IDTC, DTCO, PDTC  
Vol. 3, 8-31  
in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-31  
in ILTC, LTC, LTCI, LGCO, PLTC  
Vol. 3, 8-31
- NT6X93  
in ILCM, LCM Vol. 2, 1-39
- NT6X94  
in ILCM Vol. 2, 1-39
- NT6X95  
in LCME Vol. 2, 1-73
- NT6X98  
in ILCM, LCM, LCME Vol. 2, 1-39
- NT6X99 Vol. 6, 1-146, Vol. 6, 1-150,  
Vol. 6, 1-154, Vol. 6, 1-158, Vol. 6, 1-162,  
Vol. 6, 1-170, Vol. 6, 1-178  
in LCM, LCME Vol. 2, 1-39
- NT6Xseries in TMS Vol. 3, 4-17
- NT7X05 Vol. 6, 1-190, Vol. 6, 1-198,  
Vol. 6, 1-207, Vol. 6, 1-234, Vol. 6, 1-252  
in LGC, LGCI, LTC, LTCI, DTC, DTCI  
Vol. 3, 8-31
- NT8X02 Vol. 6, 1-261, Vol. 6, 1-265
- NT8X12  
in NT8X11 dual-shelf network Vol. 2, 9-72
- NT8X13  
in NT8X11 dual-shelf network Vol. 2, 9-72
- NT8X14  
in NT8X11 dual-shelf network Vol. 2, 9-72
- NT8X18 Vol. 6, 1-270
- NT8X99  
in LCM Vol. 2, 1-79
- NT9X10  
in SuperNode CM Vol. 1, 2-22  
in SuperNode SE CM/SLM Vol. 1, 3-85
- NT9X12  
in SuperNode CM Vol. 1, 2-22  
in SuperNode SE CM/SLM Vol. 1, 3-85  
in SuperNode SLM Vol. 3, 3-137
- NT9X13  
in an ELPP LIM unit Vol. 1, 5-36  
in ENET 128k Vol. 2, 9-49  
in ENET 64k Vol. 2, 9-49  
in file processor Vol. 1, 7-43  
in LIM unit of LPP Vol. 2, 3-89  
in SuperNode CM Vol. 1, 2-22  
in SuperNode MS Vol. 2, 6-39  
in SuperNode SE 16k ENET Vol. 1, 6-77  
in SuperNode SE CM/SLM Vol. 1, 3-85  
in SuperNode SE ENI shelf Vol. 1, 6-77  
in SuperNode SE MS Vol. 2, 7-25
- NT9X14  
in APU in LPP LIS Vol. 2, 3-9  
in file processor Vol. 1, 7-43  
in LIM unit of LPP Vol. 2, 3-155  
in SuperNode CM Vol. 1, 2-22  
in SuperNode MS Vol. 2, 6-39  
in SuperNode SE CM/SLM Vol. 1, 3-85

- 
- NT9X15
    - in LIM unit of ELPP Vol. 1, 5-48
    - in LIM unit of LPP Vol. 2, 3-155
    - in SuperNode MS Vol. 2, 6-39
    - in SuperNode SE MS Vol. 2, 7-25
  - NT9X17
    - in LIM unit of ELPP Vol. 1, 5-48
    - in LIM unit of LPP Vol. 2, 3-155
    - in SuperNode MS Vol. 2, 6-39
    - in SuperNode SE MS Vol. 2, 7-25
  - NT9X20
    - in SuperNode CM Vol. 1, 2-5, Vol. 3, 3-37, Vol. 3, 3-78
    - in SuperNode MS Vol. 2, 6-5
  - NT9X21
    - in file processor Vol. 1, 7-43
    - in SuperNode CM Vol. 1, 2-22
    - in SuperNode SE CM/SLM Vol. 1, 3-85
    - in SuperNode SLM Vol. 3, 3-137
  - NT9X22
    - in SuperNode CM Vol. 1, 2-22
    - in SuperNode SLM Vol. 3, 3-137
  - NT9X23
    - in LIM unit of LPP Vol. 2, 3-155
    - in SuperNode MS Vol. 2, 6-5
    - in SuperNode SE MS Vol. 2, 7-5
  - NT9X25
    - in SuperNode MS Vol. 2, 6-39
    - in SuperNode SE MS Vol. 2, 7-25
  - NT9X26
    - in ENET 128k Vol. 2, 9-49
    - in ENET 64k Vol. 2, 9-49
    - in file processor Vol. 1, 7-43
    - in LIM unit of ELPP Vol. 1, 5-48
    - in LIM unit of LPP Vol. 2, 3-155
    - in SuperNode CM Vol. 1, 2-22
    - in SuperNode MS Vol. 2, 6-39
    - in SuperNode SE 16k ENET Vol. 1, 6-77
    - in SuperNode SE CM/SLM Vol. 1, 3-85
    - in SuperNode SE ENI shelf Vol. 1, 6-77
    - in SuperNode SE MS Vol. 2, 7-25
  - NT9X27
    - in superNode CM Vol. 1, 2-22
    - in SuperNode SLM Vol. 3, 3-137
  - NT9X30
    - in ENET 128k Vol. 2, 9-49
    - in ENET 64k Vol. 2, 9-49
    - in LIM unit of ELPP Vol. 1, 5-48
    - in LIM unit of LPP Vol. 2, 3-155
    - in LPP LIS Vol. 2, 3-100
    - in SSLPP Vol. 3, 2-74
    - in SuperNode CM Vol. 1, 2-22
    - in SuperNode MS Vol. 2, 6-39
    - in SuperNode SE 16k ENET Vol. 1, 6-53
    - in SuperNode SE ENI shelf Vol. 1, 6-53
    - in SuperNode SE LIS Vol. 2, 4-64
    - in SuperNode SE MS Vol. 2, 7-25
    - in SuperNode SLM Vol. 3, 3-137
  - NT9X31
    - in ENET 128k Vol. 2, 9-49
    - in ENET 64k Vol. 2, 9-49
    - in LIM unit of ELPP Vol. 1, 5-48
    - in SSLPP Vol. 3, 2-74
    - in SuperNode CM Vol. 1, 2-22
    - in SuperNode MS Vol. 2, 6-39
    - in SuperNode SE 16k ENET Vol. 1, 6-53
    - in SuperNode SE ENI shelf Vol. 1, 6-53
    - in SuperNode SE MS Vol. 2, 7-25
  - NT9X32
    - in SuperNode MS Vol. 2, 6-39
  - NT9X35
    - in ENET 128k Vol. 2, 9-15
    - in ENET 64k Vol. 2, 9-15
    - in SuperNode SE 16k ENET Vol. 1, 6-7
    - in SuperNode SE 32k ENET Vol. 1, 6-31
    - in SuperNode SE ENI shelf Vol. 1, 6-7
  - NT9X36
    - in ENET 128K Vol. 2, 9-49
    - in ENET 64k Vol. 2, 9-49
    - in SuperNode SE 16k ENET Vol. 1, 6-77
    - in SuperNode SE ENI shelf Vol. 1, 6-77
  - NT9X40
    - in ENET 128k Vol. 2, 9-15
    - in ENET 64k Vol. 2, 9-15
    - in SuperNode SE 16k ENET Vol. 1, 6-7, Vol. 1, 6-77
    - in SuperNode SE 32k ENET Vol. 1, 6-31
    - in SuperNode SE ENI shelf Vol. 1, 6-7, Vol. 1, 6-77
  - NT9X41
    - in ENET 128k Vol. 2, 9-15
    - in ENET 64k Vol. 2, 9-15
    - in SuperNode SE 16k ENET Vol. 1, 6-7
    - in SuperNode SE 32k ENET Vol. 1, 6-31
    - in SuperNode SE ENI shelf Vol. 1, 6-7
  - NT9X44
    - in SuperNode SE CM/SLM Vol. 1, 3-5
    - in SuperNode SLM Vol. 3, 3-5
  - NT9X45
    - in ENET 128k Vol. 2, 9-15
-



- in ENET 64k Vol. 2, 9-15
- in SuperNode SE 16k ENET Vol. 1, 6-7
- in SuperNode SE 32k ENET Vol. 1, 6-31
- in SuperNode SE ENI shelf Vol. 1, 6-7
- NT9X46
  - in SuperNode SE CM/SLM Vol. 1, 3-27
  - in SuperNode SLM Vol. 3, 3-137
- NT9X47
  - in SuperNode SLM Vol. 3, 3-137
- NT9X49
  - in LIM unit of ELPP Vol. 1, 5-48
  - in LIM unit of LPP Vol. 2, 3-155
  - in SuperNode MS Vol. 2, 6-39
  - in SuperNode SE MS Vol. 2, 7-25
- NT9X52
  - in LIM unit of ELPP Vol. 1, 5-48
  - in LIM unit of LPP Vol. 2, 3-155
  - in SuperNode MS Vol. 2, 6-39
  - in SuperNode SE MS Vol. 2, 7-25
- NT9X53
  - in LIM unit of ELPP Vol. 1, 5-48
  - in LIM unit of LPP Vol. 2, 3-155
  - in SuperNode MS Vol. 2, 6-39
  - in SuperNode SE MS Vol. 2, 7-25
- NT9X54
  - in SuperNode MS Vol. 2, 6-5
  - in SuperNode SE MS Vol. 2, 7-5
- NT9X62
  - in file processor Vol. 1, 7-43
  - in LIM unit of ELPP Vol. 1, 5-48
  - in SuperNode MS Vol. 2, 6-5
  - in SuperNode SE CM/SLM Vol. 1, 3-45
  - in SuperNode SE MS Vol. 2, 7-5
- NT9X69
  - in SuperNode MS Vol. 2, 6-5
  - in SuperNode SE MS Vol. 2, 7-5
- NT9X73
  - in LIM unit of ELPP Vol. 1, 5-48
  - in LIM unit of LPP Vol. 2, 3-155
  - in SuperNode SE MS Vol. 2, 7-25
- NT9X74
  - in ELPP LIS Vol. 1, 5-9
  - in LPP LIS Vol. 2, 3-126
  - in SuperNode SE ENI shelf Vol. 2, 4-6
  - in SuperNode SE LIS Vol. 2, 4-6
- NT9X76
  - in EIU in LPP LIS Vol. 2, 3-47
  - in EIU in SSLPP Vol. 3, 2-17
  - in EIU in SuperNode SE LIS Vol. 2, 4-13
  - in LIU7 in LPP LIS Vol. 2, 3-57
- in LIU7 in SSLPP Vol. 3, 2-44
- in LIU7 in SuperNode SE ENI shelf Vol. 2, 4-38
- in LIU7 in SuperNode SE LIS Vol. 2, 4-38
- NT9X77
  - in LIU7 in LPP LIS Vol. 2, 3-57
  - in LIU7 in SSLPP Vol. 3, 2-44
  - in LIU7 in SuperNode SE ENI shelf Vol. 2, 4-38
  - in LIU7 in SuperNode SE LIS Vol. 2, 4-38
- NT9X78
  - in LIU7 in LPP LIS Vol. 2, 3-57
  - in LIU7 in SSLPP Vol. 3, 2-44
  - in LIU7 in SuperNode SE ENI shelf Vol. 2, 4-38
  - in LIU7 in SuperNode SE LIS Vol. 2, 4-38
- NT9X79
  - in ELPP LIS Vol. 1, 5-9
  - in LIM unit of ELPP Vol. 1, 5-48
  - in LIM unit of LPP Vol. 2, 3-155
  - in LPP LIS Vol. 2, 3-36
  - in SuperNode SE ENI shelf Vol. 2, 4-6
  - in SuperNode SE LIS Vol. 2, 4-6
  - in SuperNode SE MS Vol. 2, 7-5
- NT9X84
  - in EIU in LPP LIS Vol. 2, 3-47
- NT9X85
  - in EIU in LPP LIS Vol. 2, 3-47
  - in EIU in SSLPP Vol. 3, 2-17
  - in EIU in SuperNode SE LIS Vol. 2, 4-13
- NT9X86
  - in file processor Vol. 1, 7-43
  - in SuperNode SE CM/SLM Vol. 1, 3-85
- NT9X87
  - in file processor Vol. 1, 7-43
- NT9X88
  - in file processor Vol. 1, 7-43
- NT9X89
  - in file processor Vol. 1, 7-6
- NT9X90
  - in file processor Vol. 1, 7-18
- NT9X91
  - in file processor Vol. 1, 7-33
  - in SuperNode SE CM/SLM Vol. 1, 3-67
- NT9X96
  - in SSLPP Vol. 3, 2-7
- NT9X98
  - in SSLPP Vol. 3, 2-7
- NTAX74 Vol. 6, 1-281, Vol. 6, 1-292
  - in DTCL, PDTC Vol. 3, 8-147

- 
- NTAX78 Vol. 6, 1-369
    - in DTCL Vol. 3, 8-31
  - NTBX01 Vol. 6, 1-381, Vol. 6, 1-390,  
Vol. 6, 1-399, Vol. 6, 1-408, Vol. 6, 1-437
    - in DTCL, LGCI, LTCI Vol. 3, 8-147
    - in DTCL, LTCO, LGCO, PDTC, PLTC,  
PLGC Vol. 3, 8-147
  - NTBX01 in TMS Vol. 3, 4-30
  - NTBX02 Vol. 6, 1-443, Vol. 6, 1-456,  
Vol. 6, 1-469, Vol. 6, 1-482, Vol. 6, 1-495
    - LGCI, PLGC Vol. 3, 8-115
    - LTCI, PLTC Vol. 3, 8-115
  - NTBX02 in TMS Vol. 3, 4-37
  - NTBX25
    - in LCME Vol. 2, 1-39
  - NTBX26 Vol. 6, 1-538, Vol. 6, 1-546,  
Vol. 6, 1-554
    - in LCME Vol. 2, 1-39
  - NTBX27 Vol. 6, 1-562, Vol. 6, 1-570,  
Vol. 6, 1-578
    - in LCME Vol. 2, 1-39
  - NTBX34 Vol. 6, 1-593, Vol. 6, 1-601,  
Vol. 6, 1-611, Vol. 6, 1-621
    - in LCME Vol. 2, 1-31
  - NTBX35 Vol. 6, 1-630, Vol. 6, 1-638,  
Vol. 6, 1-648, Vol. 6, 1-658
    - in LCME Vol. 2, 1-31
  - NTBX36 Vol. 6, 1-667, Vol. 6, 1-677,  
Vol. 6, 1-687
    - in LCME Vol. 2, 1-13
  - NTBX71
    - in LCME Vol. 2, 1-62
  - NTBX72 Vol. 6, 1-697, Vol. 6, 1-706,  
Vol. 6, 1-715, Vol. 6, 1-724
    - in LCME Vol. 2, 1-79
  - NTCX50
    - in PDTC Vol. 3, 8-19
  - NTDX15
    - in file processor Vol. 1, 7-43
    - in SuperNode SE CM/SLM Vol. 1, 3-67
  - NTDX16
    - in LPP LIS Vol. 2, 3-140
  - NTEX17 Vol. 6, 1-733, Vol. 6, 1-743,  
Vol. 6, 1-753, Vol. 6, 1-763, Vol. 6, 1-773
    - in LCM Vol. 2, 1-39
  - NTEX20
    - in ELPP LIS Vol. 1, 5-9
    - in LPP LIS Vol. 2, 3-36
  - in SSLPP Vol. 3, 2-7
  - in SuperNode SE ENI shelf Vol. 2, 4-6
  - in SuperNode SE LIS Vol. 2, 4-6
  - NTEX22
    - in APU in LPP LIS Vol. 2, 3-9
    - in EIU in SSLPP Vol. 3, 2-17
    - in EIU in SuperNode SE LIS Vol. 2, 4-13
    - in FRIU in LPP LIS Vol. 2, 3-68
    - in FRIU in SSLPP Vol. 3, 2-29
    - in FRIU SuperNode SE LIS Vol. 2, 4-24
    - in HLIU in an ELPP LIS Vol. 1, 5-17
    - in HSLR in an ELPP LIS Vol. 1, 5-27
    - in LIU7 in LPP LIS Vol. 2, 3-57
    - in LIU7 in SSLPP Vol. 3, 2-44
    - in LIU7 in SuperNode SE ENI shelf  
Vol. 2, 4-38
    - in LIU7 in SuperNode SE LIS Vol. 2, 4-38
    - in NIU in LPP LIS Vol. 2, 3-82
    - in NIU in SSLPP Vol. 3, 2-57
    - in NIU in SuperNode SE LIS Vol. 2, 4-49
    - in VPU in LPP LIS Vol. 2, 3-168
    - in XLIU in LPP LIS Vol. 2, 3-177
    - in XLIU in SSLPP Vol. 3, 2-105
    - in XLIU in SuperNode SE LIS Vol. 2, 4-91
  - NTEX25
    - in NIU in LPP LIS Vol. 2, 3-82
    - in NIU in SSLPP Vol. 3, 2-57
    - in NIU in SuperNode SE LIS Vol. 2, 4-49
  - NTEX26
    - in LIU7 in LPP LIS Vol. 2, 3-57
    - in LIU7 in SSLPP Vol. 3, 2-44
    - in LIU7 in SuperNode SE ENI shelf  
Vol. 2, 4-38
    - in LIU7 in SuperNode SE LIS Vol. 2, 4-38
  - NTEX28
    - in NIU in LPP LIS Vol. 2, 3-145
    - in NIU in SSLPP Vol. 3, 2-57
    - in NIU in SuperNode SE LIS Vol. 2, 4-49
  - NTEX30
    - in FRIU in LPP LIS Vol. 2, 3-68
    - in FRIU in SSLPP Vol. 3, 2-29
    - in FRIU in SuperNode SE LIS Vol. 2, 4-24
  - NTEX31
    - in FRIU in LPP LIS Vol. 2, 3-68
    - in FRIU in SSLPP Vol. 3, 2-29
    - in FRIU in SuperNode SE LIS Vol. 2, 4-24
  - NTEX54 Vol. 6, 1-783, Vol. 6, 1-800,  
Vol. 6, 1-817, Vol. 6, 1-834, Vol. 6, 1-851
    - in LCM Vol. 2, 1-13
-

NTEX76  
in HLIU in an ELPP LIS Vol. 1, 5-17  
NTEX78  
in HLIU in an ELPP LIS Vol. 1, 5-17  
NTFX09  
in XLIU in LPP LIS Vol. 2, 3-177  
in XLIU in SSLPP Vol. 3, 2-105  
in XLIU in SuperNode SE LIS Vol. 2, 4-91  
NTFX10  
in XLIU in LPP LIS Vol. 2, 3-177  
in XLIU in SSLPP Vol. 3, 2-105  
in XLIU in SuperNode SE LIS Vol. 2, 4-91  
NTFX32AA  
in an ISM Vol. 1, 9-92  
NTFX42  
in ISM Vol. 3, 6-27  
NTFX43  
in ISM Vol. 3, 6-69  
NTMX45 Vol. 6, 1-898  
NTMX71 Vol. 6, 1-908, Vol. 6, 1-932,  
Vol. 6, 1-940  
in DTC, DTCL, IDTC, PDTC Vol. 3, 8-19  
in ILGC, LGC, LGCI, PLGC Vol. 3, 8-19  
in ILTC, LTC, LTCL, PLTC Vol. 3, 8-19  
NTMX72 Vol. 6, 1-949, Vol. 6, 1-957,  
Vol. 6, 1-966, Vol. 6, 1-975, Vol. 6, 1-984,  
Vol. 6, 1-993  
NTMX73 Vol. 7, 1-2, Vol. 7, 1-9, Vol. 7, 1-17,  
Vol. 7, 1-26, Vol. 7, 1-36, Vol. 7, 1-45  
NTMX74 Vol. 7, 1-60, Vol. 7, 1-69,  
Vol. 7, 1-77, Vol. 7, 1-86, Vol. 7, 1-95,  
Vol. 7, 1-104  
NTMX75 Vol. 7, 1-113, Vol. 7, 1-120,  
Vol. 7, 1-128, Vol. 7, 1-136, Vol. 7, 1-144,  
Vol. 7, 1-153  
NTMX76 Vol. 7, 1-168, Vol. 7, 1-175,  
Vol. 7, 1-182, Vol. 7, 1-188, Vol. 7, 1-195,  
Vol. 7, 1-205  
in DTC, DTCL, IDTC, DTCO, PDTC  
Vol. 3, 8-31  
in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-31  
in ILTC, LTC, LTCL, LTGO, PLTC  
Vol. 3, 8-31  
NTMX77 Vol. 7, 1-221, Vol. 7, 1-234,  
Vol. 7, 1-241, Vol. 7, 1-254, Vol. 7, 1-267,  
Vol. 7, 1-280, Vol. 7, 1-293, Vol. 7, 1-306,  
Vol. 7, 1-318

in DTC, DTCL, IDTC, DTCO, PDTC  
Vol. 3, 8-147  
in ILGC, LGC, LGCI, LGCO, PLGC  
Vol. 3, 8-147  
in ILTC, LTC, LTCL, LTGO, PLTC  
Vol. 3, 8-147  
NTMX77 in TMS Vol. 3, 4-48  
NTMX79 Vol. 7, 1-333, Vol. 7, 1-343,  
Vol. 7, 1-349, Vol. 7, 1-359, Vol. 7, 1-370,  
Vol. 7, 1-380  
NTMX81 Vol. 7, 1-397, Vol. 7, 1-409,  
Vol. 7, 1-421, Vol. 7, 1-592  
NTMX82 Vol. 7, 1-465, Vol. 7, 1-476,  
Vol. 7, 1-486, Vol. 7, 1-496  
NTMX87 Vol. 7, 1-508, Vol. 7, 1-528,  
Vol. 7, 1-548, Vol. 7, 1-571  
NTMX97  
in VPU in LPP LIS Vol. 2, 3-168  
NTMX99  
in VPU in LPP LIS Vol. 2, 3-168  
NTNX62 in TPC Vol. 3, 5-7  
NTNX63 in TPC Vol. 3, 5-12  
NTNX64 in TPC Vol. 3, 5-17  
NTNX65 in TPC Vol. 3, 5-22  
NTNX66 in TPC Vol. 3, 5-27  
NTNX68 in TPC Vol. 3, 5-33  
NTOM36 keyboard Vol. 3, 5-40  
NTOM90 in MP Vol. 3, 5-45  
NTOM92 in MP Vol. 3, 5-52  
NTRX41 Vol. 7, 1-630, Vol. 7, 1-635,  
Vol. 7, 1-640, Vol. 7, 1-650  
NTRX42 Vol. 7, 1-660, Vol. 7, 1-677,  
Vol. 7, 1-695, Vol. 7, 1-726, Vol. 7, 1-746  
NTRX43 Vol. 7, 1-778, Vol. 7, 1-785,  
Vol. 7, 1-792, Vol. 7, 1-808  
NTRX44 Vol. 7, 1-824, Vol. 7, 1-836,  
Vol. 7, 1-858  
NTRX54 Vol. 7, 1-868, Vol. 7, 1-882  
NTRX66 Vol. 7, 1-896  
NTSX06  
in LTC, LTC, DTC, LGCI, and LTCL  
Vol. 3, 8-147  
card replacement procedutes  
NTBX01 Vol. 6, 1-374  
cards  
inserting Vol. 3, 9-156  
removing Vol. 3, 9-156

**M****Maintenance**

returning cards Vol. 3, 9-184

**Media access control address**

DBIC provisioning Vol. 6, 1-785,  
Vol. 6, 1-797, Vol. 6, 1-802, Vol. 6, 1-814,  
Vol. 6, 1-819, Vol. 6, 1-831, Vol. 6, 1-836,  
Vol. 6, 1-848, Vol. 6, 1-853, Vol. 6, 1-865

**N****NT0X10**

card replacement procedures Vol. 4, 1-2,  
Vol. 4, 1-6, Vol. 4, 1-14, Vol. 4, 1-18, Vol. 4, 1-25,  
Vol. 4, 1-31, Vol. 4, 1-37, Vol. 4, 1-43

**NT0X91**

card replacement procedures Vol. 4, 1-61

**NT0X91AA**

card replacement procedures Vol. 4, 1-49,  
Vol. 4, 1-90

**NT0X91AE**

card replacement procedures Vol. 4, 1-49,  
Vol. 4, 1-96, Vol. 4, 1-105

**NT1X76 in MTM**

card replacement procedures Vol. 2, 5-2

**NT2X06**

card replacement procedures Vol. 4, 1-114,  
Vol. 4, 1-121, Vol. 4, 1-129, Vol. 4, 1-136,  
Vol. 4, 1-144, Vol. 4, 1-153, Vol. 4, 1-162

**NT2X09**

card replacement procedures Vol. 4, 1-171,  
Vol. 4, 1-178, Vol. 4, 1-186, Vol. 4, 1-194,  
Vol. 4, 1-202, Vol. 4, 1-211, Vol. 4, 1-220

**NT2X10**

card replacement procedures Vol. 4, 1-229,  
Vol. 4, 1-233, Vol. 4, 1-237, Vol. 4, 1-244,  
Vol. 4, 1-251, Vol. 4, 1-258

**NT2X11**

card replacement procedures Vol. 4, 1-265,  
Vol. 4, 1-270, Vol. 4, 1-278, Vol. 4, 1-282,  
Vol. 4, 1-289, Vol. 4, 1-298, Vol. 4, 1-307

**NT2X48**

card replacement procedures Vol. 4, 1-316,  
Vol. 4, 1-321, Vol. 4, 1-326

**NT2X55**

card replacement procedures Vol. 4, 1-331

**NT2X57**

card replacement procedures Vol. 4, 1-338,  
Vol. 4, 1-342, Vol. 4, 1-350, Vol. 4, 1-355,  
Vol. 4, 1-362, Vol. 4, 1-369, Vol. 4, 1-376

**NT2X59**

card replacement procedures Vol. 4, 1-383,  
Vol. 4, 1-387, Vol. 4, 1-401, Vol. 4, 1-406,  
Vol. 4, 1-413, Vol. 4, 1-420, Vol. 4, 1-427

**NT2X70**

card replacement procedures Vol. 4, 1-434,  
Vol. 4, 1-441, Vol. 4, 1-464, Vol. 4, 1-478,  
Vol. 4, 1-490, Vol. 4, 1-498, Vol. 4, 1-506,  
Vol. 4, 1-517, Vol. 4, 1-526

**NT2X70 in TMS**

card replacement procedures Vol. 3, 4-8

**NT2X70 in TPC**

card replacement procedures Vol. 3, 5-2

**NT2X90**

card replacement procedures Vol. 4, 1-533,  
Vol. 4, 1-538, Vol. 4, 1-543, Vol. 4, 1-557,  
Vol. 4, 1-562, Vol. 4, 1-569, Vol. 4, 1-576

**NT3X04**

card replacement procedures Vol. 4, 1-583

**NT3X08AA in MTM**

card replacement procedures Vol. 3, 6-64

**NT3X09**

card replacement procedures Vol. 4, 1-590,  
Vol. 4, 1-596, Vol. 4, 1-601, Vol. 4, 1-612,  
Vol. 4, 1-617, Vol. 4, 1-624, Vol. 4, 1-634,  
Vol. 4, 1-644

**NT3X67 in MTM**

card replacement procedures Vol. 2, 5-10

**NT3X82**

card replacement procedures Vol. 4, 1-653

**NT3X83**

card replacement procedures Vol. 4, 1-660

**NT4X97**

card replacement procedures Vol. 4, 1-668,  
Vol. 4, 1-673, Vol. 4, 1-680

**NT4X98**

card replacement procedures Vol. 4, 1-687,  
Vol. 4, 1-694

**NT6X17**

card replacement procedures Vol. 4, 1-703,  
Vol. 4, 1-707, Vol. 4, 1-711, Vol. 4, 1-715,  
Vol. 4, 1-723, Vol. 4, 1-731, Vol. 4, 1-739

- NT6X18  
card replacement procedures Vol. 4, 1-743,  
Vol. 4, 1-747, Vol. 4, 1-751, Vol. 4, 1-755,  
Vol. 4, 1-759, Vol. 4, 1-767, Vol. 4, 1-775,  
Vol. 4, 1-783
- NT6X19  
card replacement procedures Vol. 4, 1-787,  
Vol. 4, 1-791, Vol. 4, 1-795, Vol. 4, 1-799,  
Vol. 4, 1-807, Vol. 4, 1-815, Vol. 4, 1-823
- NT6X20  
card replacement procedures Vol. 4, 1-827,  
Vol. 4, 1-831, Vol. 4, 1-835, Vol. 4, 1-839,  
Vol. 4, 1-847, Vol. 4, 1-855, Vol. 4, 1-863
- NT6X21  
card replacement procedures Vol. 4, 1-867,  
Vol. 4, 1-871, Vol. 4, 1-875, Vol. 4, 1-883,  
Vol. 4, 1-893, Vol. 4, 1-902, Vol. 4, 1-911,  
Vol. 4, 1-920
- NT6X27  
card replacement procedures Vol. 4, 1-924,  
Vol. 4, 1-931, Vol. 4, 1-938
- NT6X30  
card replacement procedures Vol. 4, 1-945,  
Vol. 4, 1-960, Vol. 4, 1-974, Vol. 4, 1-988,  
Vol. 4, 1-1002
- NT6X36  
card replacement procedures Vol. 4, 1-1021,  
Vol. 4, 1-1031, Vol. 4, 1-1036
- NT6X40  
card replacement procedures Vol. 5, 1-2,  
Vol. 5, 1-14, Vol. 5, 1-26
- NT6X41  
card replacement procedures Vol. 5, 1-64,  
Vol. 5, 1-71, Vol. 5, 1-78, Vol. 5, 1-87, Vol. 5, 1-95
- NT6X42  
card replacement procedures Vol. 5, 1-101,  
Vol. 5, 1-107, Vol. 5, 1-114, Vol. 5, 1-122
- NT6X44  
card replacement procedures Vol. 5, 1-130,  
Vol. 5, 1-138, Vol. 5, 1-144, Vol. 5, 1-158
- NT6X45  
card replacement procedures Vol. 5, 1-166,  
Vol. 5, 1-172, Vol. 5, 1-178, Vol. 5, 1-184
- NT6X47  
card replacement procedures Vol. 5, 1-190,  
Vol. 5, 1-196, Vol. 5, 1-202
- NT6X48  
card replacement procedures Vol. 3, 8-72,  
Vol. 3, 8-82, Vol. 5, 1-208
- NT6X50  
card replacement procedures Vol. 5, 1-216,  
Vol. 5, 1-223, Vol. 5, 1-237, Vol. 5, 1-244,  
Vol. 5, 1-259, Vol. 5, 1-275
- NT6X51  
card replacement procedures Vol. 5, 1-291,  
Vol. 5, 1-298, Vol. 5, 1-305, Vol. 5, 1-312,  
Vol. 5, 1-324, Vol. 5, 1-332, Vol. 5, 1-339,  
Vol. 5, 1-347
- NT6X52  
card replacement procedures Vol. 5, 1-355,  
Vol. 5, 1-361, Vol. 5, 1-367, Vol. 5, 1-373,  
Vol. 5, 1-384, Vol. 5, 1-392, Vol. 5, 1-401,  
Vol. 5, 1-410
- NT6X53  
card replacement procedures Vol. 5, 1-418,  
Vol. 5, 1-425, Vol. 5, 1-432, Vol. 5, 1-444,  
Vol. 5, 1-460, Vol. 5, 1-469, Vol. 5, 1-478,  
Vol. 5, 1-487
- NT6X54  
card replacement procedures Vol. 5, 1-493,  
Vol. 5, 1-500, Vol. 5, 1-509, Vol. 5, 1-518,  
Vol. 5, 1-533, Vol. 5, 1-542, Vol. 5, 1-549,  
Vol. 5, 1-556
- NT6X60  
card replacement procedures Vol. 5, 1-565,  
Vol. 5, 1-572, Vol. 5, 1-579, Vol. 5, 1-587
- NT6X69  
card replacement procedures Vol. 5, 1-605,  
Vol. 5, 1-613, Vol. 5, 1-622, Vol. 5, 1-630,  
Vol. 5, 1-639, Vol. 5, 1-648, Vol. 5, 1-654,  
Vol. 5, 1-670, Vol. 5, 1-678
- NT6X69 in TMS  
card replacement procedures Vol. 3, 4-19
- NT6X71  
card replacement procedures Vol. 5, 1-684,  
Vol. 5, 1-688, Vol. 5, 1-692, Vol. 5, 1-696,  
Vol. 5, 1-705, Vol. 5, 1-713, Vol. 5, 1-721
- NT6X72  
card replacement procedures Vol. 5, 1-725
- NT6X73  
card replacement procedures Vol. 5, 1-734,  
Vol. 5, 1-738, Vol. 5, 1-742, Vol. 5, 1-751

- 
- NT6X74  
card replacement procedures Vol. 5, 1-755,  
Vol. 5, 1-761, Vol. 5, 1-775, Vol. 5, 1-782,  
Vol. 5, 1-790, Vol. 5, 1-799, Vol. 5, 1-808
- NT6X75  
card replacement procedures Vol. 5, 1-817,  
Vol. 5, 1-824, Vol. 5, 1-831, Vol. 5, 1-838
- NT6X76  
card replacement procedures Vol. 5, 1-845,  
Vol. 5, 1-853, Vol. 5, 1-861, Vol. 5, 1-869
- NT6X78  
card replacement procedures Vol. 5, 1-876,  
Vol. 5, 1-883, Vol. 5, 1-891, Vol. 5, 1-898,  
Vol. 5, 1-905, Vol. 5, 1-912, Vol. 5, 1-919,  
Vol. 5, 1-925, Vol. 5, 1-932, Vol. 5, 1-946
- NT6X80  
card replacement procedures Vol. 5, 1-951,  
Vol. 5, 1-957, Vol. 5, 1-964, Vol. 5, 1-972,  
Vol. 5, 1-981
- NT6X85  
card replacement procedures Vol. 6, 1-2,  
Vol. 6, 1-13, Vol. 6, 1-24
- NT6X86  
card replacement procedures Vol. 6, 1-30,  
Vol. 6, 1-39
- NT6X87  
card replacement procedures Vol. 6, 1-48,  
Vol. 6, 1-56
- NT6X92  
card replacement procedures Vol. 6, 1-64,  
Vol. 6, 1-71, Vol. 6, 1-79, Vol. 6, 1-87,  
Vol. 6, 1-95, Vol. 6, 1-104, Vol. 6, 1-112,  
Vol. 6, 1-118, Vol. 6, 1-125, Vol. 6, 1-140,  
Vol. 6, 1-243
- NT6X99  
card replacement procedures Vol. 6, 1-146,  
Vol. 6, 1-150, Vol. 6, 1-154, Vol. 6, 1-158,  
Vol. 6, 1-162, Vol. 6, 1-170, Vol. 6, 1-178,  
Vol. 6, 1-186
- NT6Xseries in TMS  
card replacement procedures Vol. 3, 4-17
- NT7X05  
card replacement procedures Vol. 6, 1-190,  
Vol. 6, 1-198, Vol. 6, 1-207, Vol. 6, 1-234,  
Vol. 6, 1-252
- NT8X02  
card replacement procedures Vol. 6, 1-261,  
Vol. 6, 1-265
- NT8X18  
card replacement procedures Vol. 6, 1-270
- NTAX74  
card replacement procedures Vol. 6, 1-281,  
Vol. 6, 1-292, Vol. 6, 1-303, Vol. 6, 1-315,  
Vol. 6, 1-327, Vol. 6, 1-337, Vol. 6, 1-347
- NTAX78  
card replacement procedures Vol. 6, 1-355,  
Vol. 6, 1-362, Vol. 6, 1-369
- NTBX01  
card replacement procedures Vol. 6, 1-374,  
Vol. 6, 1-381, Vol. 6, 1-390, Vol. 6, 1-399,  
Vol. 6, 1-408, Vol. 6, 1-417, Vol. 6, 1-423,  
Vol. 6, 1-430, Vol. 6, 1-437
- NTBX01 in TMS  
card replacement procedures Vol. 3, 4-30
- NTBX02  
card replacement procedures Vol. 6, 1-443,  
Vol. 6, 1-456, Vol. 6, 1-469, Vol. 6, 1-482,  
Vol. 6, 1-495, Vol. 6, 1-508, Vol. 6, 1-515,  
Vol. 6, 1-523
- NTBX02 in TMS  
card replacement procedures Vol. 3, 4-37
- NTBX26  
card replacement procedures Vol. 6, 1-538,  
Vol. 6, 1-546, Vol. 6, 1-554
- NTBX27  
card replacement procedures Vol. 6, 1-562,  
Vol. 6, 1-570, Vol. 6, 1-578, Vol. 6, 1-586
- NTBX34  
card replacement procedures Vol. 6, 1-593,  
Vol. 6, 1-601, Vol. 6, 1-611, Vol. 6, 1-621
- NTBX35  
card replacement procedures Vol. 6, 1-630,  
Vol. 6, 1-638, Vol. 6, 1-648, Vol. 6, 1-658
- NTBX36  
card replacement procedures Vol. 6, 1-667,  
Vol. 6, 1-677, Vol. 6, 1-687
- NTBX72  
card replacement procedures Vol. 6, 1-697,  
Vol. 6, 1-706, Vol. 6, 1-715, Vol. 6, 1-724
-

- NTEX17  
card replacement procedures Vol. 6, 1-733,  
Vol. 6, 1-743, Vol. 6, 1-753, Vol. 6, 1-763,  
Vol. 6, 1-773
- NTEX54  
card replacement procedures Vol. 6, 1-783,  
Vol. 6, 1-800, Vol. 6, 1-817, Vol. 6, 1-834,  
Vol. 6, 1-851
- NTMX45  
card replacement procedures Vol. 6, 1-898
- NTMX71  
card replacement procedures Vol. 6, 1-908,  
Vol. 6, 1-916, Vol. 6, 1-924, Vol. 6, 1-932,  
Vol. 6, 1-940
- NTMX71, Back plane cards in an XPM  
Vol. 3, 8-19
- NTMX72  
card replacement procedures Vol. 6, 1-949,  
Vol. 6, 1-957, Vol. 6, 1-966, Vol. 6, 1-975,  
Vol. 6, 1-984, Vol. 6, 1-993, Vol. 6, 1-1002
- NTMX73  
card replacement procedures Vol. 7, 1-9,  
Vol. 7, 1-17, Vol. 7, 1-26, Vol. 7, 1-36,  
Vol. 7, 1-45, Vol. 7, 1-54  
card replacement procedures Vol. 7, 1-2
- NTMX74  
card replacement procedures Vol. 7, 1-60,  
Vol. 7, 1-69, Vol. 7, 1-77, Vol. 7, 1-86,  
Vol. 7, 1-95, Vol. 7, 1-104
- NTMX75  
card replacement procedures Vol. 7, 1-113,  
Vol. 7, 1-120, Vol. 7, 1-128, Vol. 7, 1-136,  
Vol. 7, 1-144, Vol. 7, 1-153, Vol. 7, 1-162
- NTMX76  
card replacement procedures Vol. 7, 1-168,  
Vol. 7, 1-175, Vol. 7, 1-182, Vol. 7, 1-188,  
Vol. 7, 1-195, Vol. 7, 1-205, Vol. 7, 1-214
- NTMX77  
card replacement procedures Vol. 7, 1-221,  
Vol. 7, 1-234, Vol. 7, 1-241, Vol. 7, 1-254,  
Vol. 7, 1-267, Vol. 7, 1-280, Vol. 7, 1-293,  
Vol. 7, 1-306, Vol. 7, 1-318
- NTMX77 in TMS  
card replacement procedures Vol. 3, 4-48
- NTMX79  
card replacement procedures Vol. 7, 1-333,  
Vol. 7, 1-343, Vol. 7, 1-349, Vol. 7, 1-359,  
Vol. 7, 1-370, Vol. 7, 1-380, Vol. 7, 1-390
- NTMX81  
card replacement procedures Vol. 7, 1-397,  
Vol. 7, 1-409, Vol. 7, 1-421, Vol. 7, 1-435,  
Vol. 7, 1-451, Vol. 7, 1-592
- NTMX82  
card replacement procedures Vol. 7, 1-465,  
Vol. 7, 1-476, Vol. 7, 1-486, Vol. 7, 1-496
- NTMX87  
card replacement procedures Vol. 7, 1-508,  
Vol. 7, 1-528, Vol. 7, 1-548, Vol. 7, 1-571
- NTNX62 in TPC  
card replacement procedures Vol. 3, 5-7
- NTNX63 in TPC  
card replacement procedures Vol. 3, 5-12
- NTNX64 in TPC  
card replacement procedures Vol. 3, 5-17
- NTNX65 in TPC  
card replacement procedures Vol. 3, 5-22
- NTNX66 in TPC  
card replacement procedures Vol. 3, 5-27
- NTNX68 in TPC  
card replacement procedures Vol. 3, 5-33
- NTOM36 keyboard  
card replacement procedures Vol. 3, 5-40
- NTOM90 in MP  
card replacement procedures Vol. 3, 5-45
- NTOM92 in MP  
card replacement procedures Vol. 3, 5-52
- NTRX41  
card replacement procedures Vol. 7, 1-630,  
Vol. 7, 1-635, Vol. 7, 1-640, Vol. 7, 1-650,  
Vol. 7, 1-655
- NTRX42  
card replacement procedures Vol. 7, 1-660,  
Vol. 7, 1-677, Vol. 7, 1-695, Vol. 7, 1-726,  
Vol. 7, 1-746, Vol. 7, 1-766
- NTRX43  
card replacement procedures Vol. 7, 1-778,  
Vol. 7, 1-785, Vol. 7, 1-792, Vol. 7, 1-808,  
Vol. 7, 1-816
- NTRX44  
card replacement procedures Vol. 7, 1-824,  
Vol. 7, 1-836, Vol. 7, 1-858
-

NTRX54  
     card replacement procedures Vol. 7, 1-868,  
     Vol. 7, 1-882, Vol. 7, 1-889  
 NTRX66  
     card replacement procedures Vol. 7, 1-896  
 NTTR46  
     card replacement procedures Vol. 7, 1-902  
 NTTR47  
     card replacement procedures Vol. 7, 1-908  
 NTTR60  
     card replacement procedures Vol. 7, 1-914  
 NTTR66  
     card replacement procedures Vol. 7, 1-921  
 NTTR67  
     card replacement procedures Vol. 7, 1-927  
 NTTR70  
     card replacement procedures Vol. 7, 1-934  
 NTTR71  
     card replacement procedures Vol. 7, 1-941  
 NTTR72  
     card replacement procedures Vol. 7, 1-946  
 NTTR73  
     card replacement procedures Vol. 7, 1-952  
 NTTR74  
     card replacement procedures Vol. 7, 1-956  
 NTTR75  
     card replacement procedures Vol. 7, 1-962  
 NTTR76  
     card replacement procedures Vol. 7, 1-970  
 NTTR77  
     card replacement procedures Vol. 7, 1-979  
 NTTR87  
     card replacement procedures Vol. 7, 1-986

## P

placing MP in service (integrated)  
     card replacement common procedures  
     Vol. 3, 5-57  
 placing MP in service (standalone)  
     card replacement common procedures  
     Vol. 3, 9-145

## R

removing MP from service (integrated)  
     card replacement common procedures  
     Vol. 3, 5-62

removing MP from service (standalone)  
     card replacement common procedures  
     Vol. 3, 9-150  
 returning cards Vol. 3, 9-184

## S

shelf layouts  
     application processor cabinet  
         APC cabinet layout Vol. 1, 7-3  
         file processor shelf Vol. 1, 7-4  
         storage device shelf Vol. 1, 7-5  
     common peripheral controller equipment  
     frame  
         CPCE frame layout Vol. 3, 8-4  
         DTC with 2 NT6X45's Vol. 3, 8-8  
         international XPMs with 2 NT6X45's  
             Vol. 3, 8-14  
         international XPMs with 3 NT6X45's  
             Vol. 3, 8-15  
         international XPMs with NTMX77  
             Vol. 3, 8-13  
         ISDN XPMs with 2 NT6X45's Vol. 3, 8-12  
         ISDN XPMs with NTMX77 Vol. 3, 8-11  
         LGC with 2 NT6X45's Vol. 3, 8-9  
         LGC with NTMX77 Vol. 3, 8-6  
         LTC with 2 NT6X45's Vol. 3, 8-10  
         LTC with NTMX77 Vol. 3, 8-7  
         PCM30 XPMs with 2 NT6X45's Vol. 3, 8-18  
         PCM30 XPMs with NTMX77 Vol. 3, 8-16,  
             Vol. 3, 8-17  
     dual plane combined core cabinet  
         DPCC cabinet layout Vol. 2, 6-3, Vol. 3, 3-3  
         SuperNode message switch shelf Vol. 2, 6-4  
         SuperNode system load module shelf  
             Vol. 3, 3-4  
     enhanced link peripheral processor  
         ELPP cabinet layout Vol. 1, 5-4  
         link interface module showing LMS units  
             Vol. 1, 5-6  
         link interface shelf common fill Vol. 1, 5-7  
         link interface shelf for DLIUs Vol. 1, 5-8  
         triple F-bus configuration in ELPP cabinet  
             Vol. 1, 5-5  
     enhanced multipurpose cabinet  
         EMC cabinet layout Vol. 3, 2-4  
         single shelf link peripheral processor, 2-slot  
             ASUs Vol. 3, 2-6  
         single shelf link peripheral processor, ASU  
             common fill Vol. 3, 2-5



- fiber link peripheral processor (SuperNode)
  - link interface module showing LMS units Vol. 2, 3-6
- host ISDN XPMs Vol. 3, 8-3
- host XPMs Vol. 3, 8-3
- input/output equipment frame
  - dual disk drive unit shelf Vol. 1, 9-7, Vol. 1, 9-8, Vol. 1, 9-9
  - input/output controller shelf Vol. 1, 9-5
  - IOE frame layout Vol. 1, 9-4, Vol. 3, 1-3
  - remote oscillator shelf Vol. 3, 1-4
  - single disk drive unit shelf Vol. 1, 9-6
- ISDN XPMs (host) Vol. 3, 8-3
- line concentrating equipment frame
  - enhanced line concentrating module Vol. 2, 1-9
  - ISDN LCE frame layout Vol. 2, 1-5
  - ISDN line concentrating equipment frame Vol. 2, 1-3, Vol. 3, 7-3
  - LCE frame layout Vol. 2, 1-4, Vol. 3, 7-3
  - LCM line drawer Vol. 2, 1-7
  - LCME line drawer Vol. 2, 1-10
  - LCMI line drawer (international) Vol. 2, 1-8
  - line concentrating module Vol. 2, 1-6, Vol. 3, 7-4
- line module equipment frame
  - line drawer layout (metal) Vol. 2, 2-8, Vol. 2, 11-8
  - line drawer layout (plastic) Vol. 2, 2-7, Vol. 2, 11-7
  - line drawer shelf Vol. 2, 2-6, Vol. 2, 11-6
  - line module controller Vol. 2, 2-5, Vol. 2, 11-5
  - LME frame layout Vol. 2, 11-4
- link peripheral processor (SuperNode)
  - application processor unit Vol. 2, 3-8
  - CCS7 link interface unit (2-slot, channelized) Vol. 2, 3-8
  - CCS7 link interface unit (2-slot, non-channelized) Vol. 2, 3-8
  - Ethernet interface unit (2-slot) Vol. 2, 3-8
  - frame relay interface unit Vol. 2, 3-8
  - link interface module showing LMS units Vol. 2, 3-5
  - link interface shelf common fill, 2-slot ASUs Vol. 2, 3-7
  - link interface shelf for 2-slot ASUs Vol. 2, 3-8
  - LPP cabinet layout Vol. 2, 3-4
  - network interface unit Vol. 2, 3-8

- voice processor unit Vol. 2, 3-8
- X.25 link interface unit Vol. 2, 3-8
- message switch and buffer equipment frame
  - CCS6 signaling terminal array Vol. 2, 8-8
  - CCS6 signaling terminal controller array Vol. 2, 8-9
  - CCS7 signaling terminal array Vol. 2, 8-11
  - CCS7 signaling terminal group Vol. 2, 8-10
  - MS6E frame layout Vol. 2, 8-4
  - MS7E frame layout Vol. 2, 8-6
  - ST6E frame layout Vol. 2, 8-5
  - ST7E frame layout Vol. 2, 8-7
- network equipment frames
  - ENET 128K frame layout Vol. 2, 9-8
  - ENET 64K frame layout Vol. 2, 9-7
  - ENET shelf Vol. 2, 9-14
  - NT0X48 NET crosspoint shelf Vol. 2, 9-10
  - NT0X48 NET frame layout Vol. 2, 9-4
  - NT0X48 NET interface shelf Vol. 2, 9-9
  - NT5X13 NETC crosspoint shelf Vol. 2, 9-12
  - NT5X13 NETC frame layout Vol. 2, 9-5
  - NT5X13 NETC interface shelf Vol. 2, 9-11
  - NT8X11 DSN frame layout Vol. 2, 9-6
  - NX8X11 DSN shelf Vol. 2, 9-13
- office alarm unit Vol. 2, 10-3
- single core cabinet
  - enhanced network and interface shelf Vol. 1, 6-5, Vol. 1, 6-6
  - SCC cabinet layout Vol. 1, 3-3, Vol. 1, 6-3, Vol. 2, 4-3, Vol. 2, 7-3
  - SuperNode SE computing module/system load module Vol. 1, 3-4
  - SuperNode SE link interface shelf, 2-slot ASUs Vol. 2, 4-5
  - SuperNode SE link interface shelf, ASU common fill Vol. 2, 4-4
  - SuperNode SE message switch shelf Vol. 2, 7-4
- SuperNode SE 16K ENET Vol. 1, 6-5
- SuperNode SE 16k ENET Vol. 1, 6-3
- SuperNode SE 32k Vol. 1, 6-4
- trunk module equipment frame
  - digital recorded announcement machine with NT0X70 processor Vol. 3, 6-9
  - digital recorded announcement machine with NT4X65 processor Vol. 3, 6-10
  - integrated service module with NTFX42 processor Vol. 3, 6-12
  - integrated service module with single-card PMs Vol. 3, 6-13

- maintenance trunk module with NT0X70 processor Vol. 3, 6-7
- maintenance trunk module with NT4X65 processor Vol. 3, 6-8
- office alarm unit with NT0X70 processor Vol. 2, 10-5
- office alarm unit with NT4X65 processor Vol. 2, 10-6
- service trunk module Vol. 3, 6-11
- TME frame layout Vol. 2, 10-4, Vol. 3, 6-4
- trunk module with NT0X70 processor Vol. 3, 6-5
- trunk module with NT4X65 processor Vol. 3, 6-6
- XPMs (host) Vol. 3, 8-3
- Star Remote System
- Star Module
  - C-side links mapping
  - illustrated Vol. 7, 1-459, Vol. 7, 1-993

## **T**

- TMS shelf layouts
  - card replacement common procedures Vol. 3, 4-2





DMS-100 Family  
**North American DMS-100**  
Card Replacement Procedures  
Volume 7 of 7

Product Documentation - Dept. 3423  
Nortel Networks  
P.O. Box 13010  
RTP, NC 27709-3010  
Telephone: 1-877-662-5669  
email: [cits@nortelnetworks.com](mailto:cits@nortelnetworks.com)

Copyright © 1996-2001 Nortel Networks,  
All Rights Reserved

**NORTEL NETWORKS CONFIDENTIAL:** The information contained herein is the property of Nortel Networks and is strictly confidential. Except as expressly authorized in writing by Nortel Networks, the holder shall keep all information contained herein confidential, shall disclose the information only to its employees with a need to know, and shall protect the information, in whole or in part, from disclosure and dissemination to third parties with the same degree of care it uses to protect its own confidential information, but with no less than reasonable care. Except as expressly authorized in writing by Nortel Networks, the holder is granted no rights to use the information contained herein.

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant. Changes or modification to the DMS-100 without the express consent of Nortel Networks may void its warranty and void the user's authority to operate the equipment.

Nortel Networks, the Nortel Networks logo, the Globemark, How the World Shares Ideas, Unified Networks, DMS, DMS-100, Helmsman, MAP, Meridian, Nortel, Northern Telecom, NT, Supernode, and TOPS are trademarks of Nortel Networks.

Publication number: 297-8021-547  
Product release: LET0012 and up  
Document release: Standard 14.02  
Date: May 2001  
Printed in the United States of America

