

**HAND TELEPHONE SETS — 211J, L**  
**HANG-UP TYPE — COMMON BATTERY — CONNECTIONS**  
**WITH INDUCTION COIL TYPE SUBSCRIBER SETS**

**1.00 INTRODUCTION**

This section covers the combination of apparatus, circuit diagrams, and connections for the 211J and L hang-up type hand telephone sets when used with induction coil type subscriber sets for manual or dial common battery service.

**2.00 GENERAL**

**2.01** The 211J and L types may be used for all classes of service except in dial central offices where the party-on-tip station of 2-party service requires a message rate or tip party identification feature.

**2.02** The 211L type has the standard dial number plate with black letters and red numerals.



FIG. 1—211-TYPE MANUAL      FIG. 2—211-TYPE DIAL

**TABLE A**  
**COMBINATION OF APPARATUS**

Hand Tel. Set Code	Components				
	Handset	Handset Mounting	Dial or Apparatus Blank	Dial Mounting	Type Handset Cord
211J-3 (As furnished)	G1A-3	G6-3	Number Card Holder	—	H-4
211J-3 (Modified)	F4A-3				H-3
211J-3 (Modified)	F1A-3 F1G-3				H-3
211L-3 (As furnished)	G1A-3		6A	43A-3	H-4
211L-3 (Modified)	F4A-3				H-3
211L-3 (Modified)	F1A-3 F1G-3				H-3

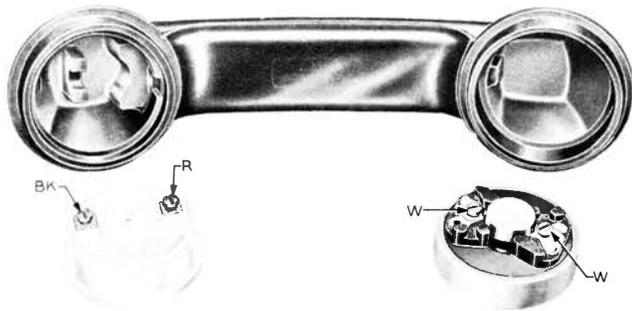


FIG. 3—G1-TYPE HANDSET




FIG. 4—6A-TYPE DIAL


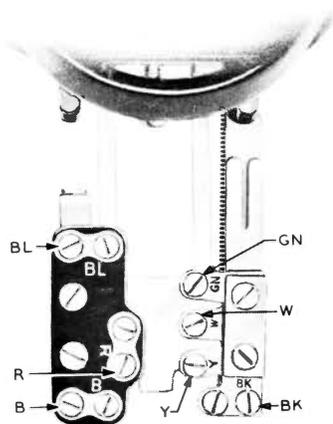


FIG. 5—G6-TYPE HANDSET MOUNTING



ASSOCIATED APPARATUS

	Class of Service	Sub. Set
<b>TABLE B</b>	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634A, BA 684A, BA
	4-Party Full Selective 8-Party Semiselective	634AT
*No message rate and tip party identification can be provided for party-on-tip stations.		
	Class of Service	Sub. Set
<b>TABLE C</b>	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634BC 684BC
	*No message rate and tip party identification can be provided for party-on-tip stations. Use only where the additional pair (R and Y) is not required in the subscriber set.	
	Class of Service	Sub. Set
<b>TABLE D</b>	Individual Lines 2-Party Flat Rate* 2-Party Message Rate (Manual and Dial Ring Party Only)* 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations	634CE
	*No message rate and tip party identification can be provided for party-on-tip stations. Use only where the additional pair (R and Y) is not required in the subscriber set.	

3.00 CIRCUIT DIAGRAMS

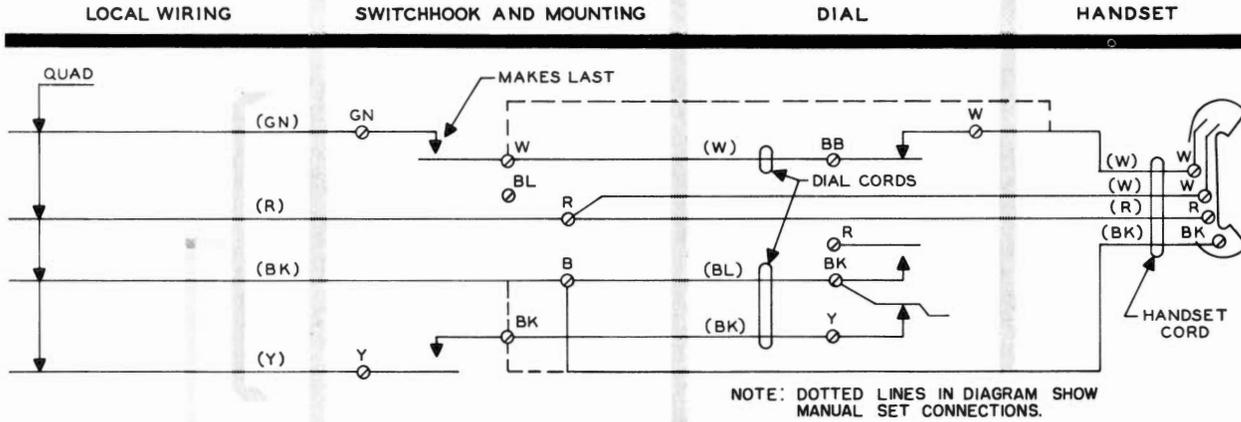

211 J AND L (REWIRED)

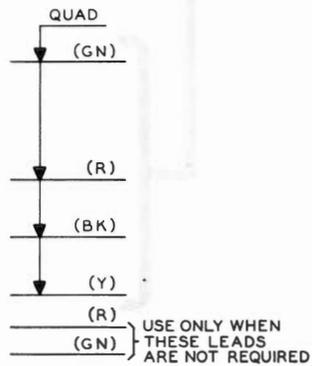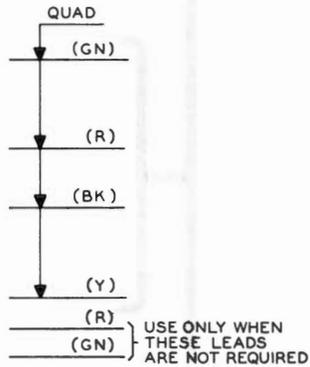

3.01 The 211-type set is arranged for, but not equipped with, a 61M filter for radio-frequency suppression. When this filter is required, remove the dial cord between Y of the dial and BK of the switchhook and connect filter as shown in Fig. 6.

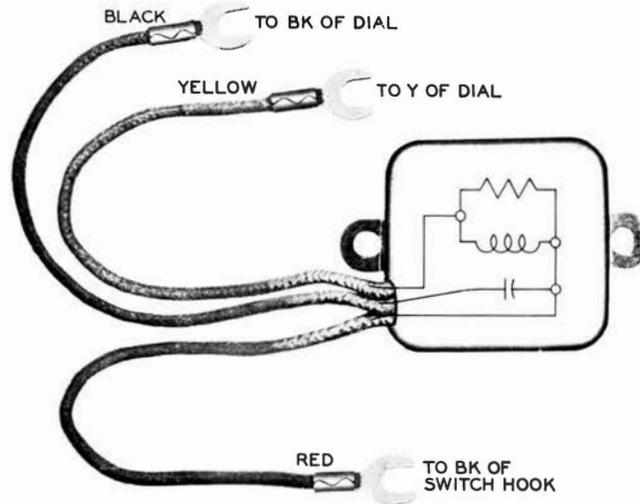


FIG. 6—61M FILTER CONNECTIONS