

1A TELEPHONE ANSWERING SET  
 STATION CONNECTIONS

1. GENERAL

1.01 This addendum, which supplements Issue 2 of the section and replaces addendum Issue B, provides additional information on connections for the 1A answering set.

1.02 Paragraph 1.01 of the section is changed to delete reference to use on 4-party lines. With the exception of 2-party selective lines, the 1A answering set is not authorized for use on party or magneto lines.

1.03 Figures 3, 5, 7, 9, 10, 11, 12, and 13 are to be disregarded as this type of party service is not normally used or offered in connection with the 1A answering set in this Area.

1.04 When the 1A answering set is connected to a PBX trunk circuit, it shall be wired as shown in Figure A.

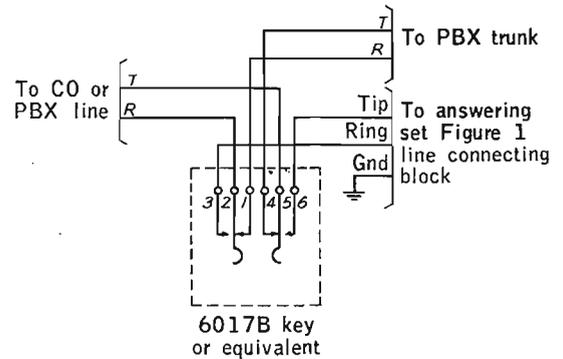


Fig. A  
 Connections for 1A Answering Set When Used With PBX Trunks.

NOTE: When Figure A is used, the answering set must be equipped with a separate telephone set.

1.05 The caption of Figure 8 for (+) Party on Tip should be changed to read (-) Party on Tip.

1.06 See Section C55.630 for connections to key telephone systems.