




# Dell Inspiron 13z N301z Memory Modules Replacement


Written By: Terrence15

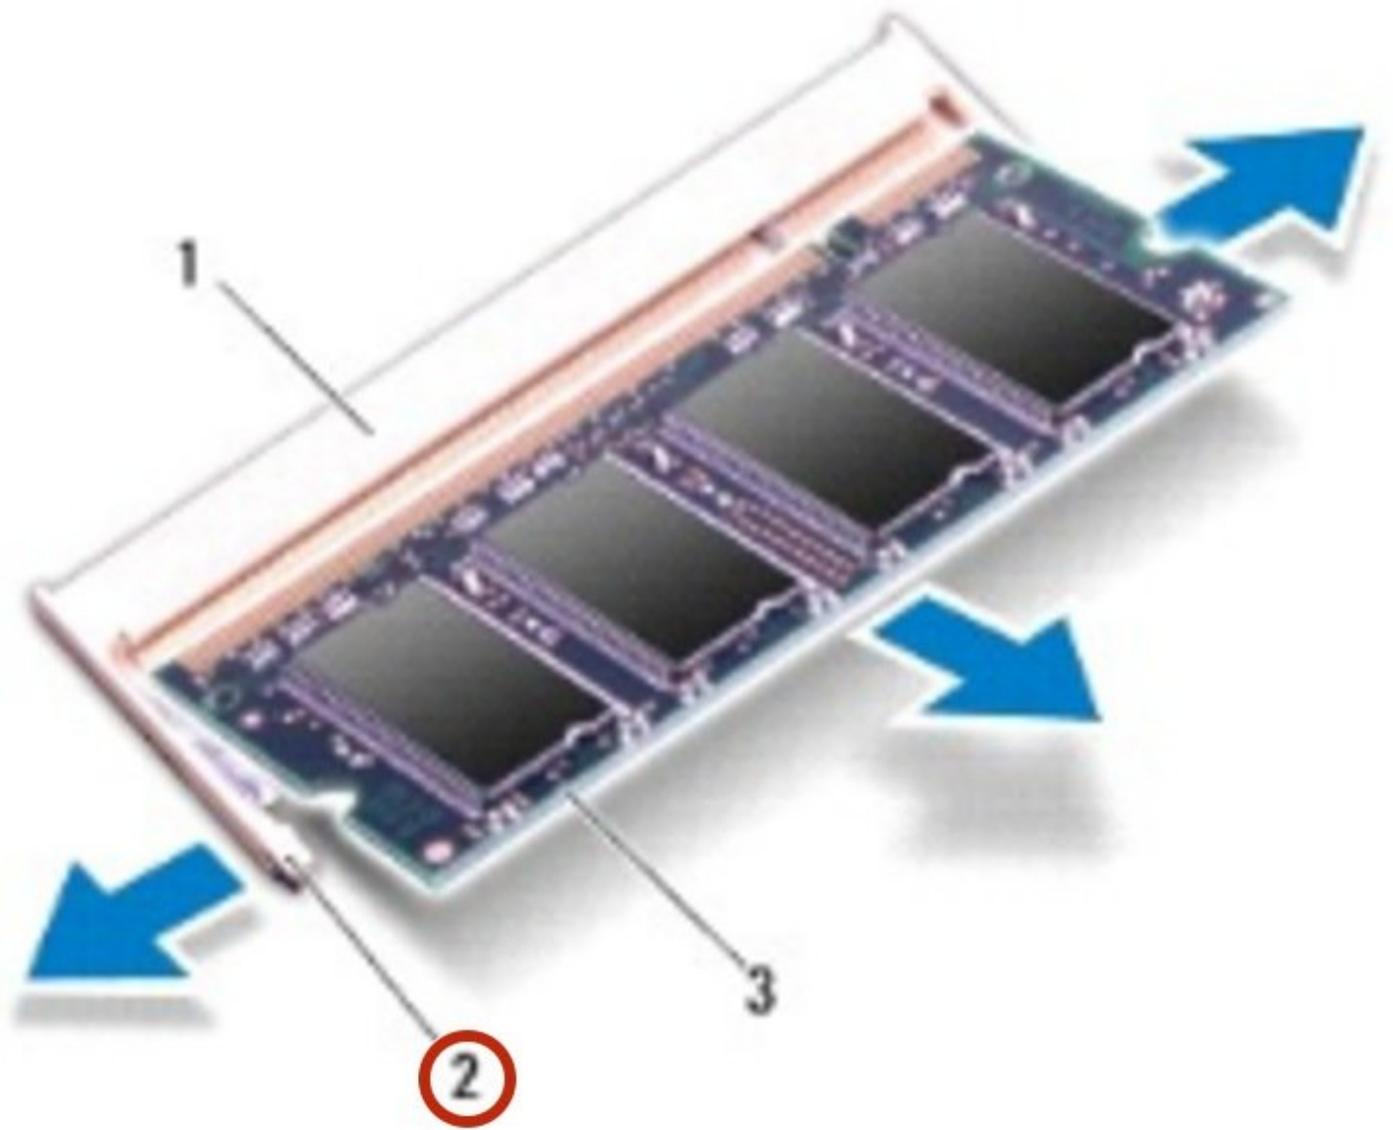

## INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.

## Step 1 — Popping up the Memory Module

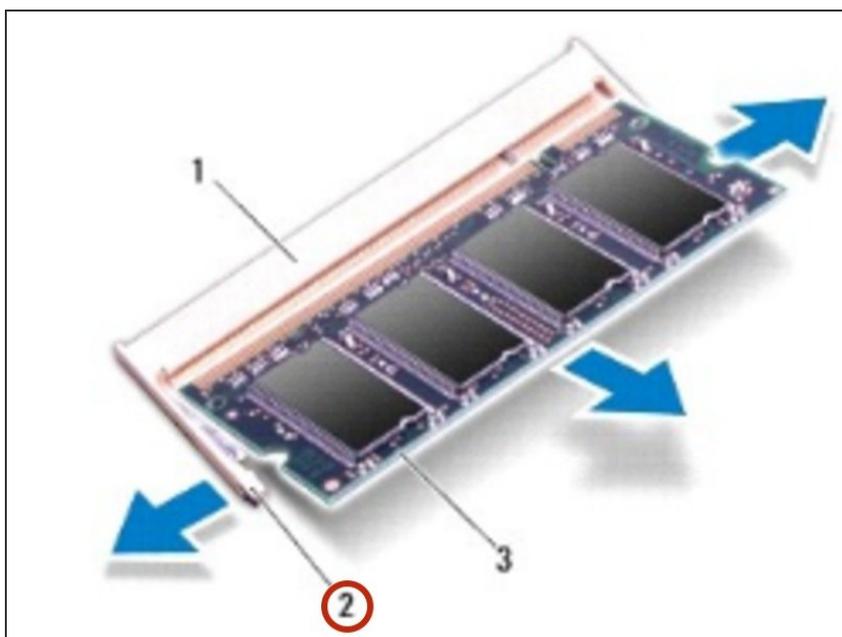



**WARNING:** Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in [Before You Begin](#).

**CAUTION:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).

**CAUTION:** To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.



- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.

## Step 2 — Removing the Memory Module

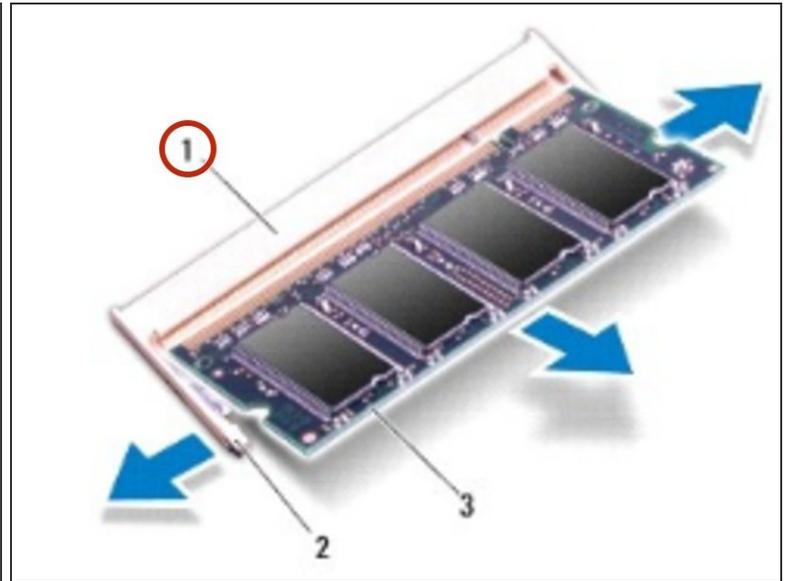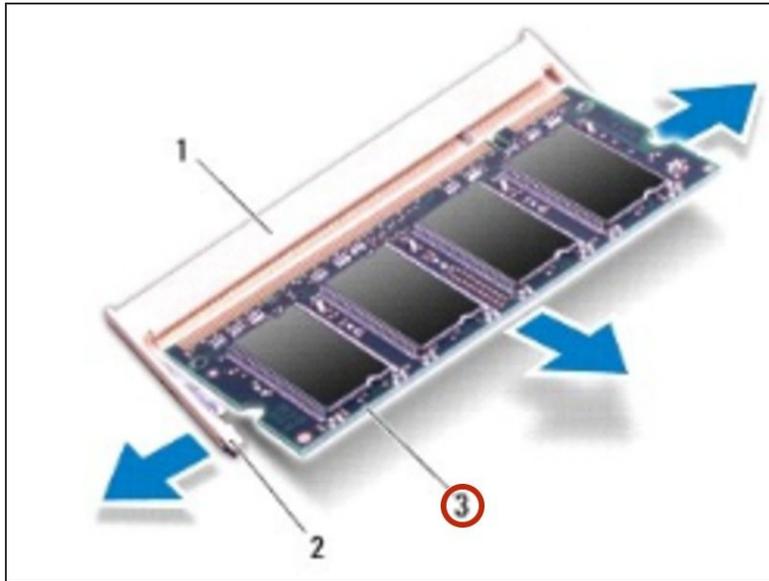


- Remove the memory module from the memory-module connector.

## Step 3 — Align the Notch

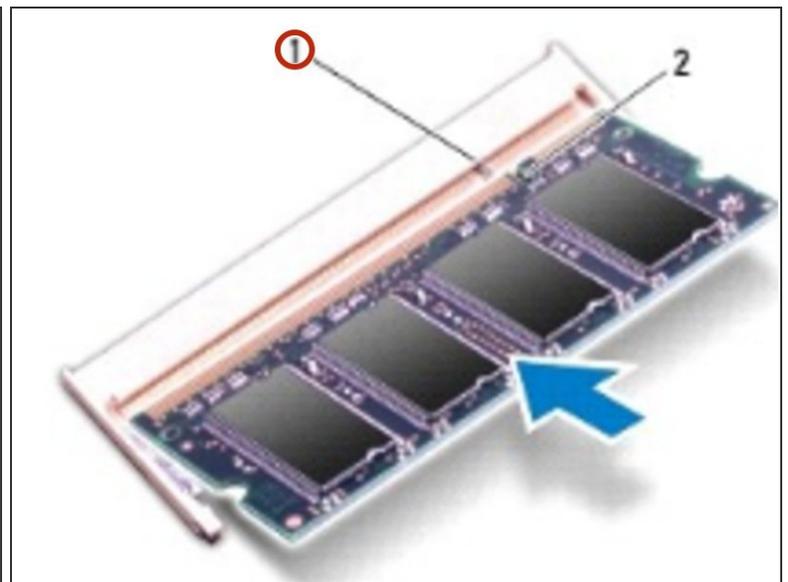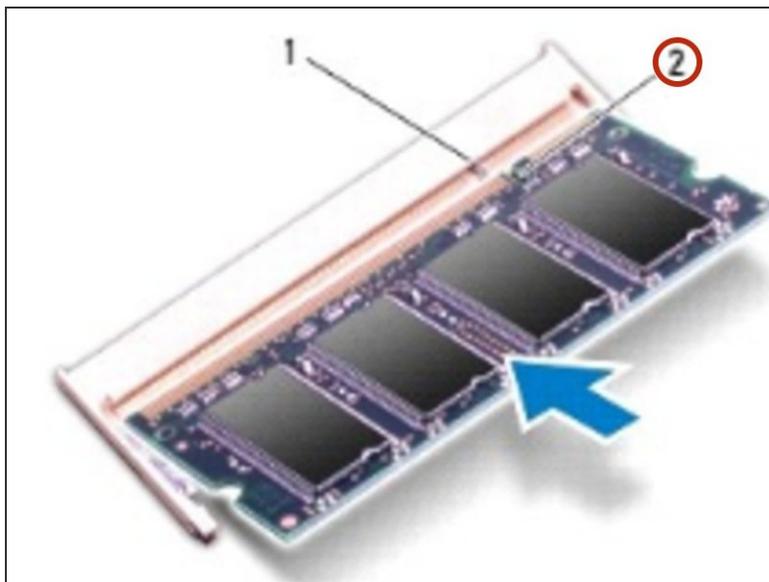

- Align the notch in the memory module with the tab in the memory module connector.

## Step 4 — Sliding the Memory Module

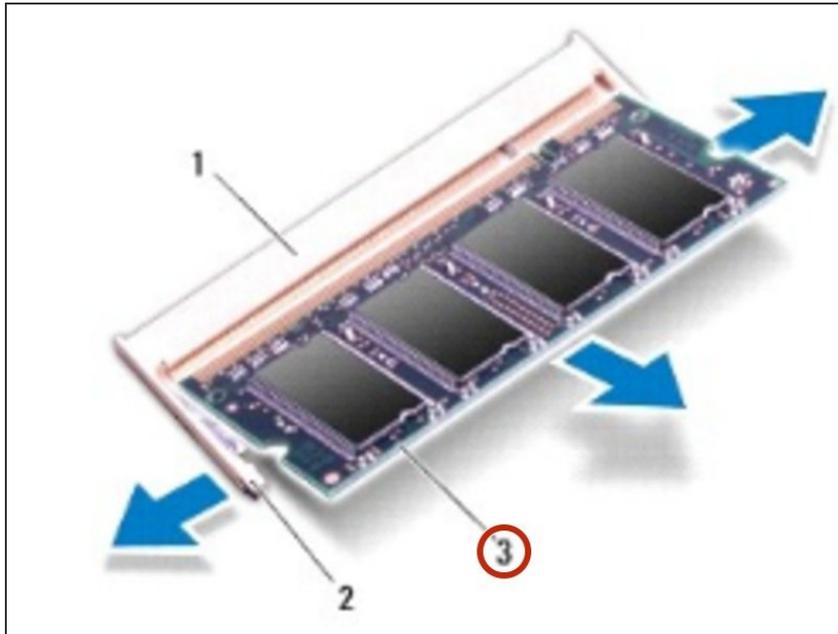

- Slide the memory module firmly into the memory-module connector at a 45-degree angle, and press the memory module down until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.

**(i)** NOTE: If the memory module is not installed properly, the computer may not boot.

To reassemble your device, follow these instructions in reverse order.