




ATT CL2940 Buttons and/or Keypad Replacement

This guide will assist users in how to replace one or multiple buttons on the keypad.

Written By: Charles Messmore

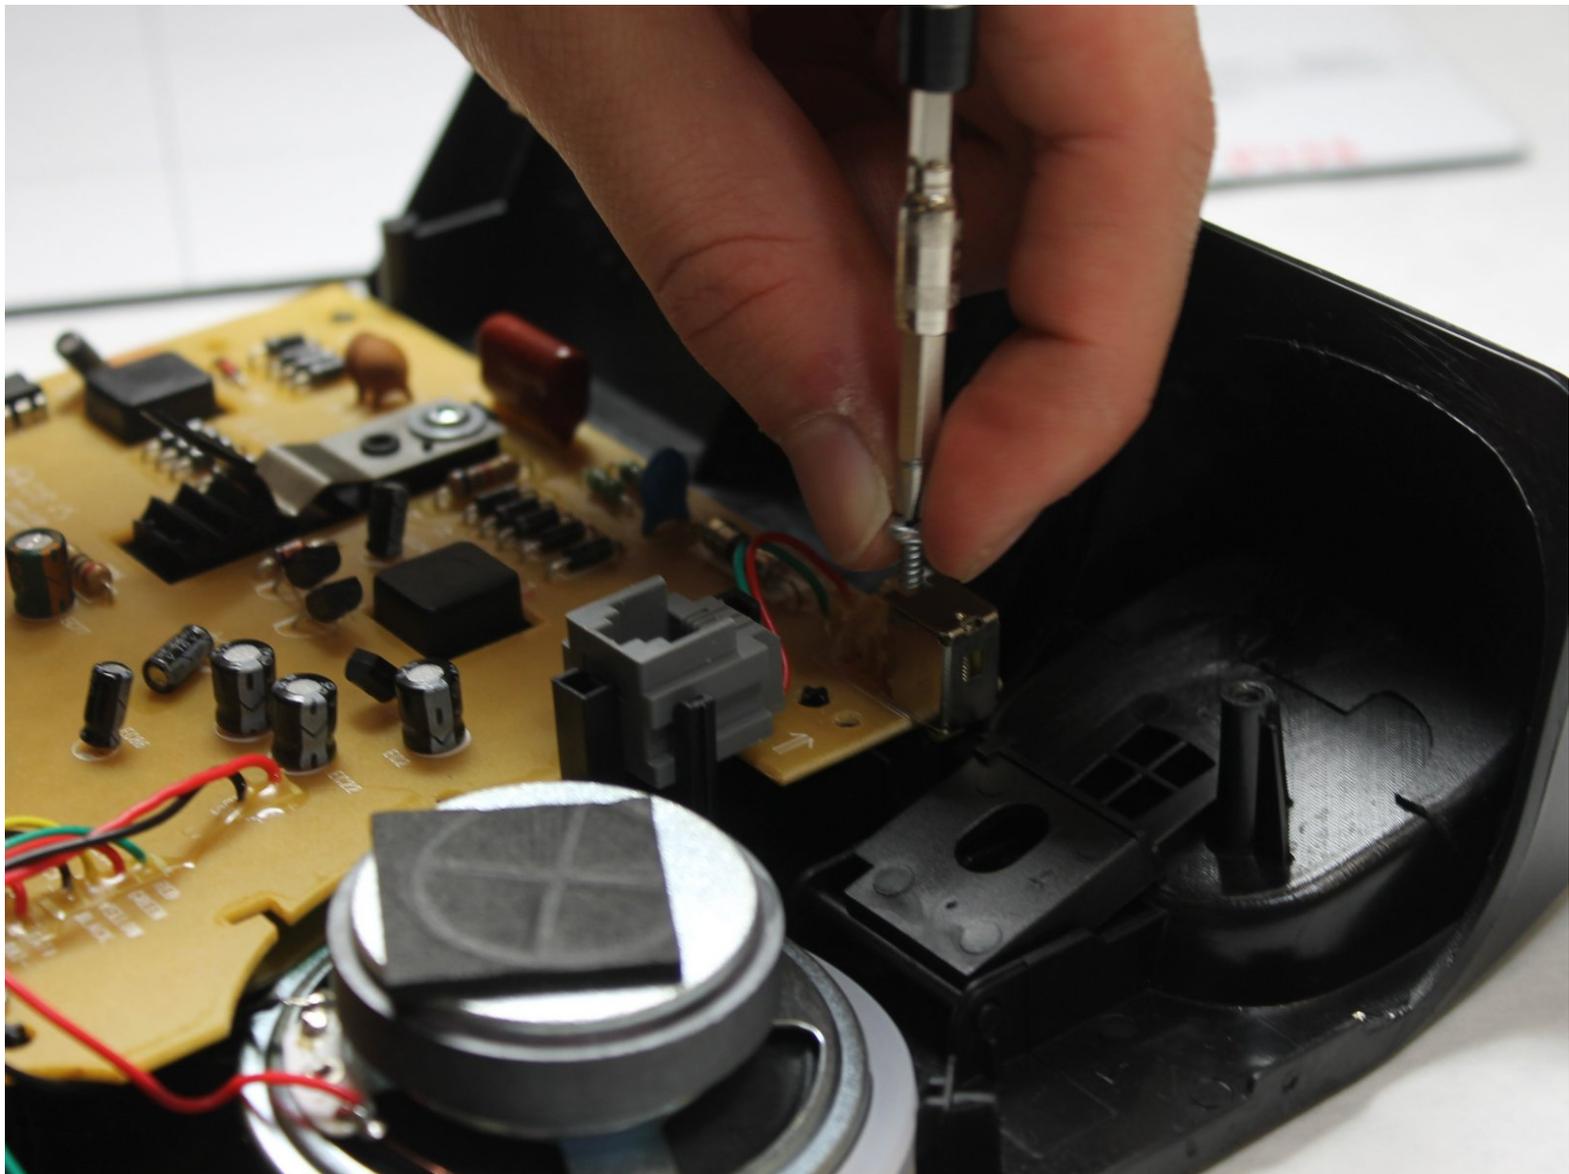

INTRODUCTION

At times, buttons can get stuck or quit working. When this happens, it may be necessary to replace the buttons.

TOOLS:

- [Metal Spudger Set](#) (1)
 - [Pro Tech Toolkit](#) (1)
-

Step 1 — Back Panel



- Remove five 9.5 mm Phillips #1 screws from the back panel of the phone.


Step 2



- Slide metal spudger into the crack around the Front Panel of the phone



⚠ Be careful not to break the clips holding the Back Panel to the Front Panel

Step 3

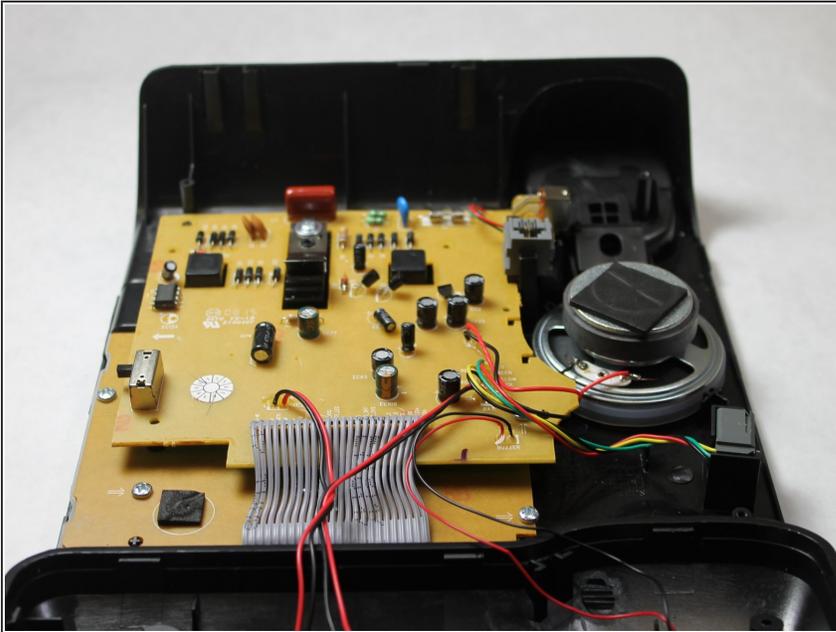


 When setting the back panel down, be careful to not rip any of the wires off of the internal components

Step 4 — Buttons and/or Keypad

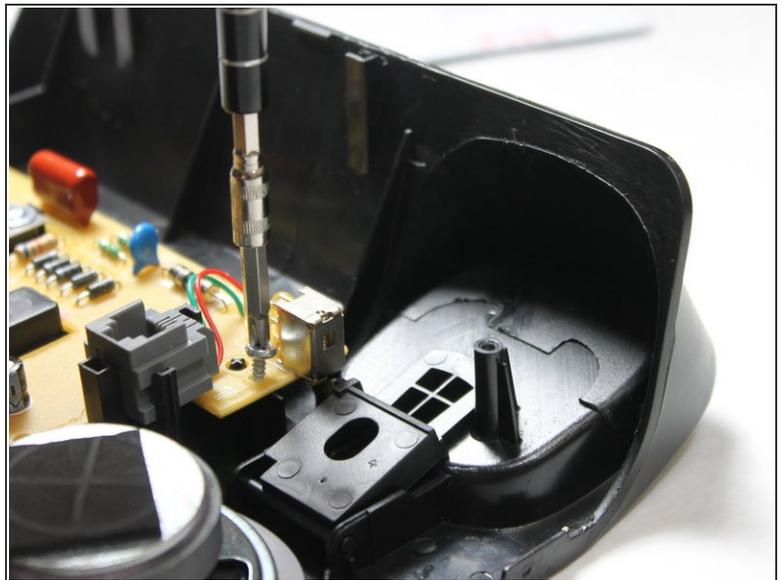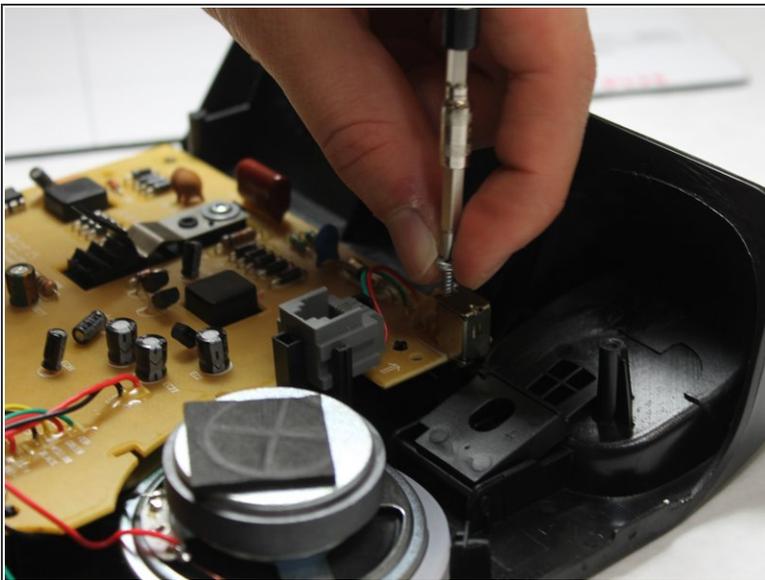


- Unscrew five 5.6 mm screws on top level, yellow motherboard.

Step 5

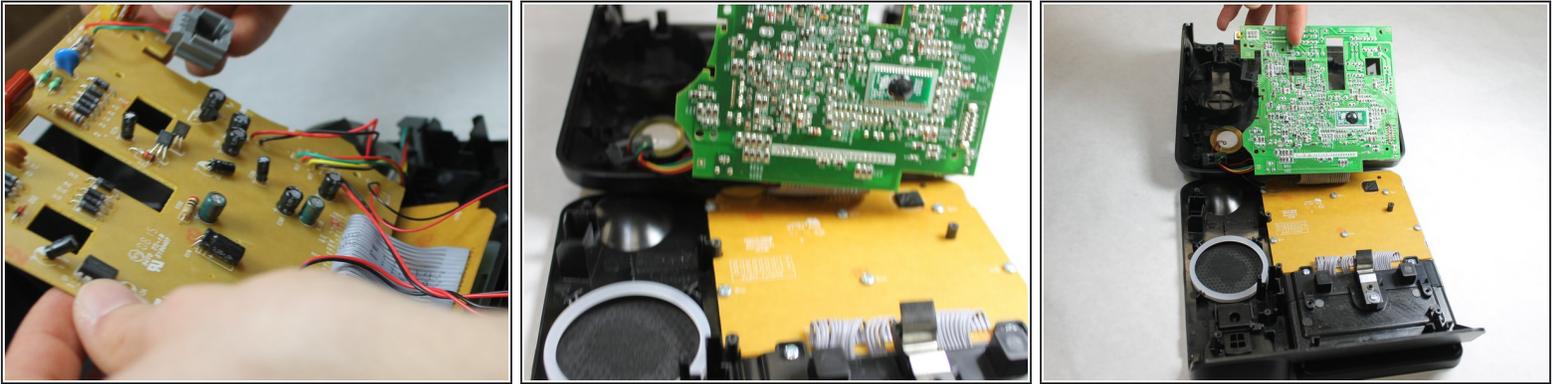


- Lift the top level Motherboard in order to get to the lower level Motherboard.

Step 6

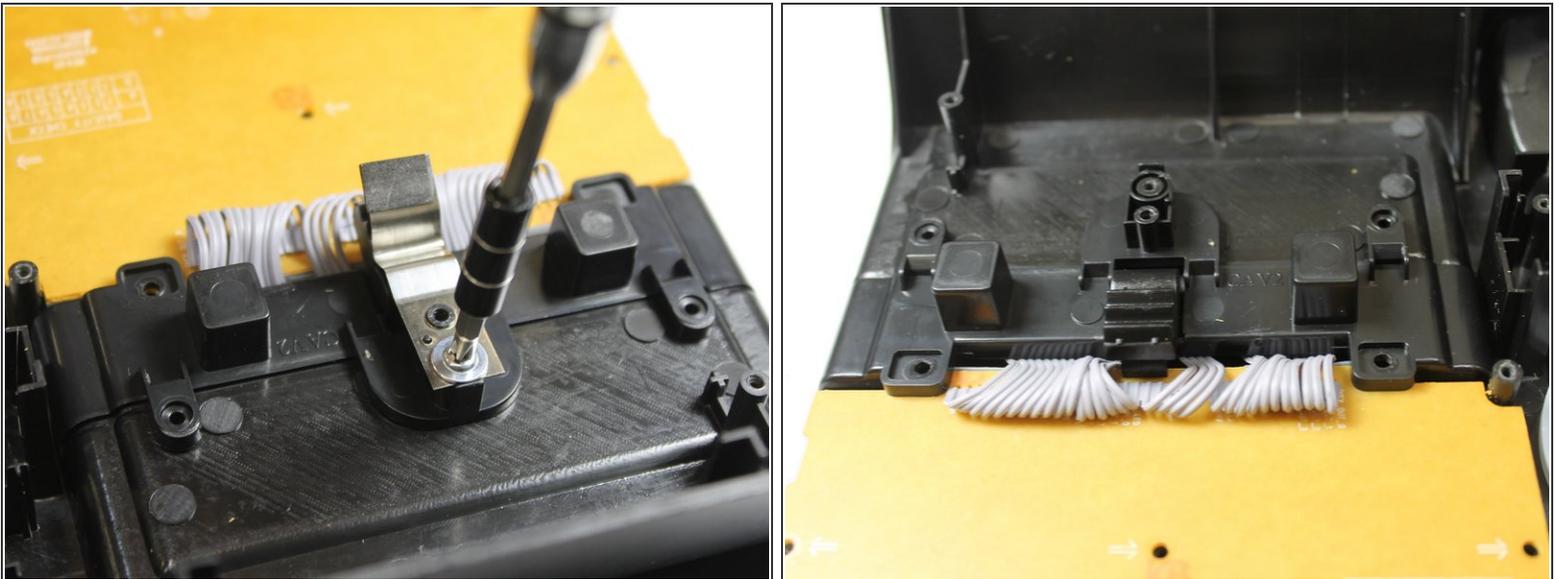

- Unscrew the 5.6 mm screw on the clip behind the Screen as shown.



Step 7

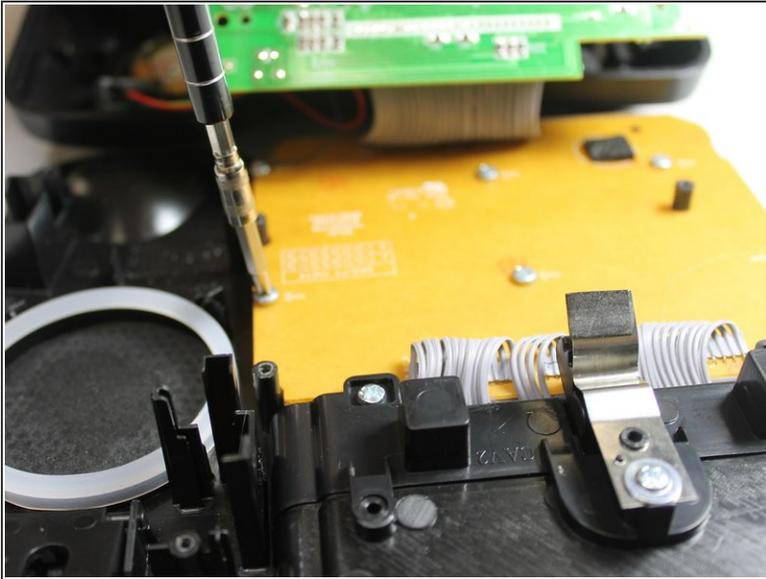

- Unscrew five 5.6 mm screws on the lower level Motherboard.


⚠ Keep the screws for the upper and lower level motherboard separated.

Step 8

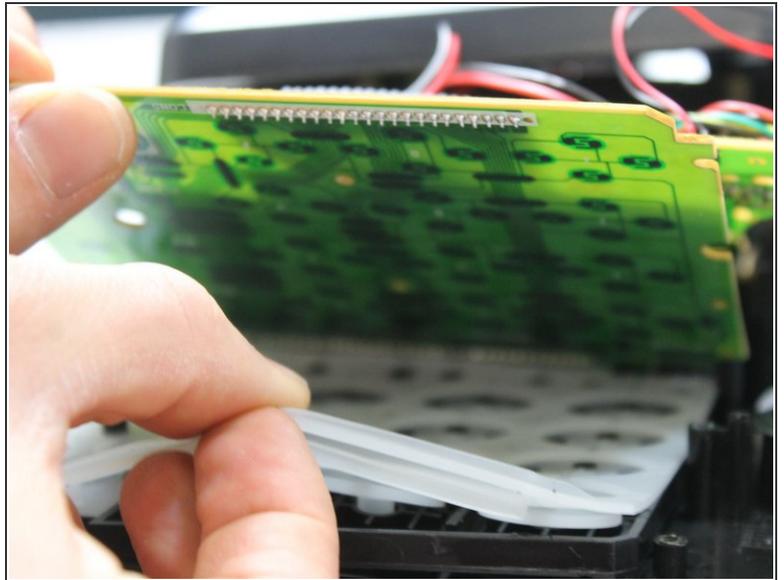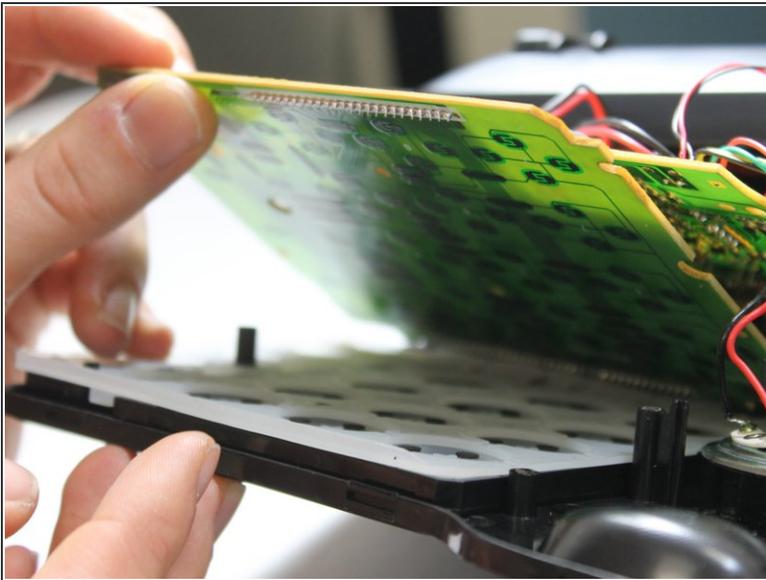

- Lift the lower level Motherboard upward.
- Remove the silicon pad above the buttons.

Step 9

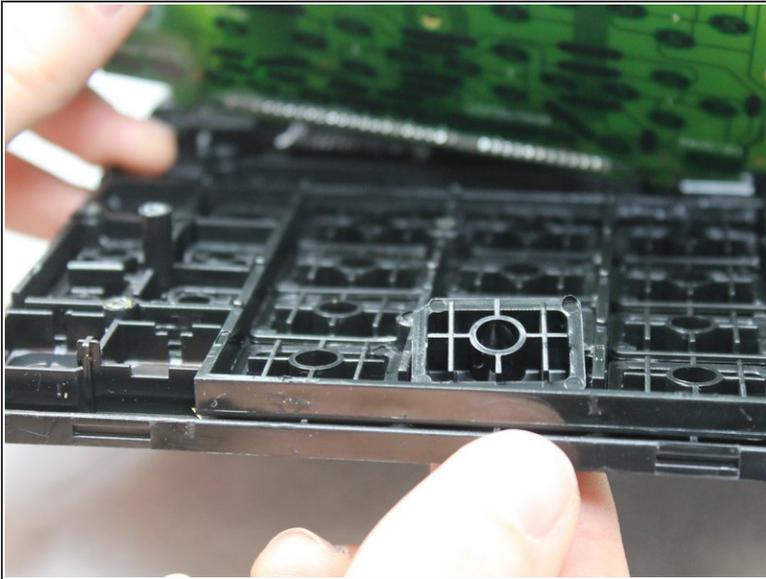

- Push the Button Panel upward and pull it out.
- Replace the entire Button Panel or a single defective button.

To reassemble your device, follow these instructions in reverse order.