




# Lenovo Yoga 910-13IKB USB Ports Replacement

How to replace the USB ports in the Lenovo Yoga 910-13IKB.

Written By: Pablo Gonzalez

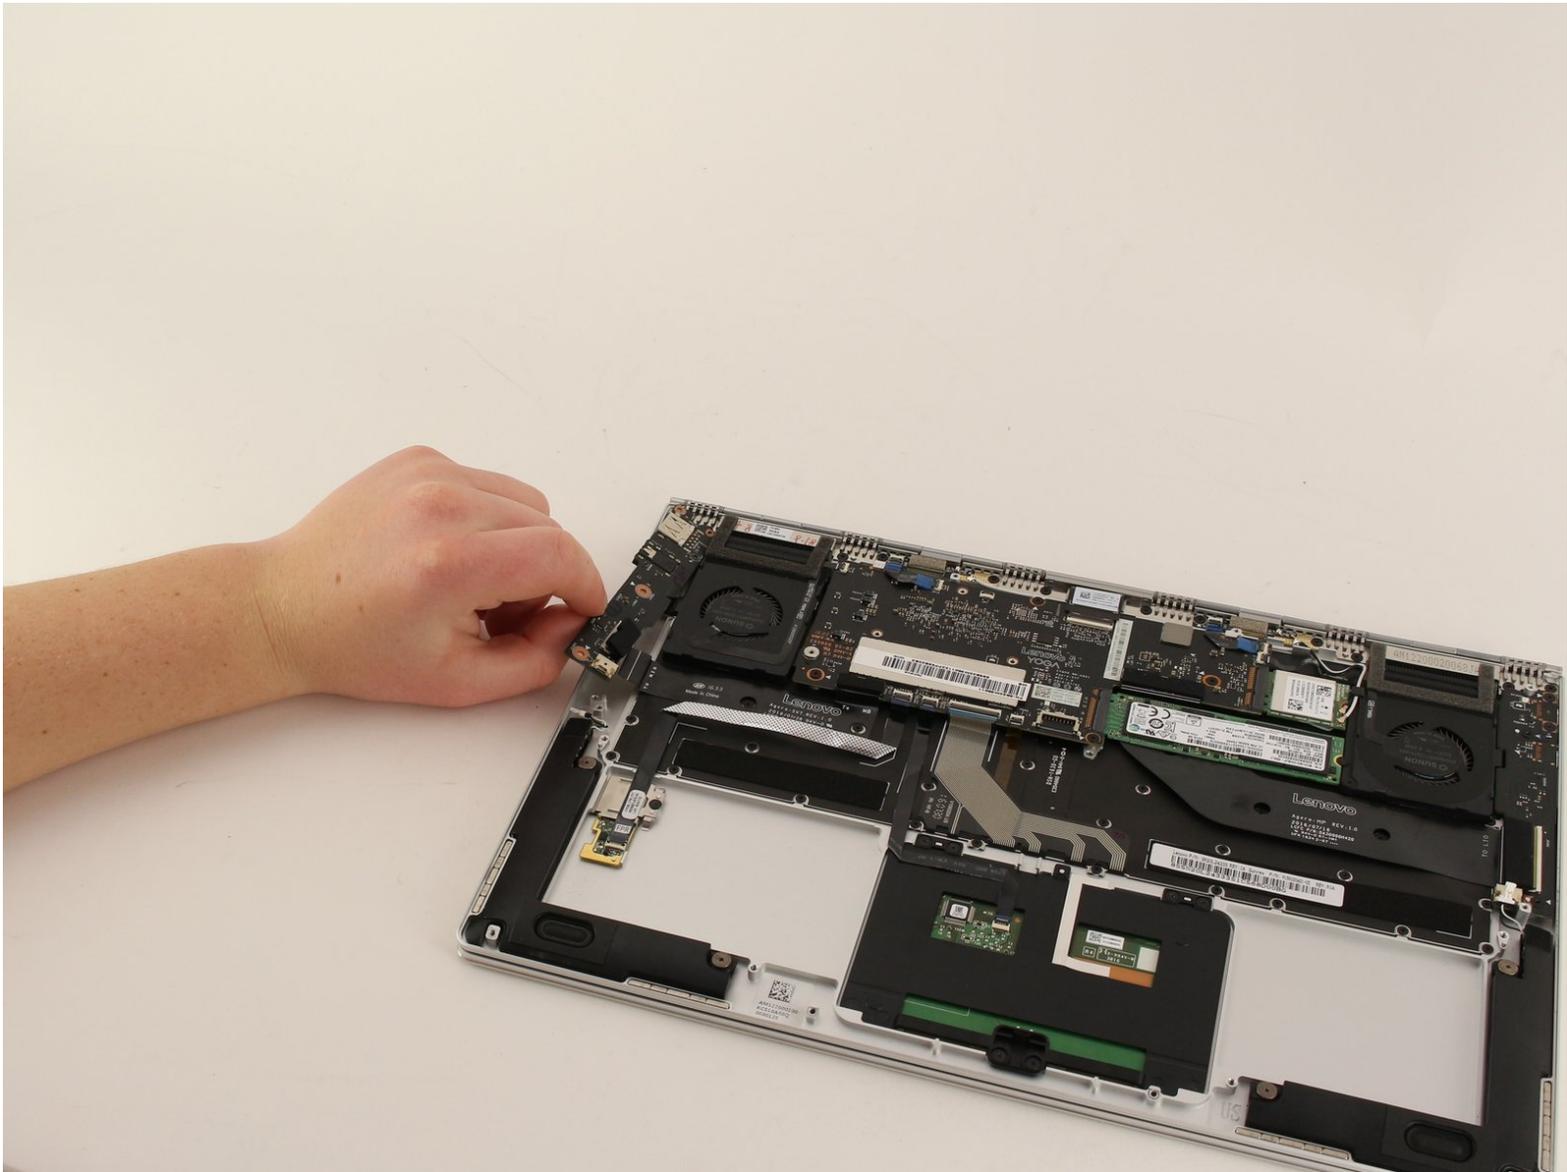

## INTRODUCTION

It is possible for your Lenovo Yoga 910-13IKB USB ports to degrade over time, resulting in low data transfer speeds or the inability to provide power through the port. If you notice these issues with the ports on your device, you may want to consider replacing them. Lenovo has made the fix quick, requiring only a JIS #00 screwdriver.



### TOOLS:


- [JIS #00 Screwdriver](#) (1)



### PARTS:


- [Lenovo Yoga 910 \(13"\) USB Type C Board](#) (1)

## Step 1 — Battery

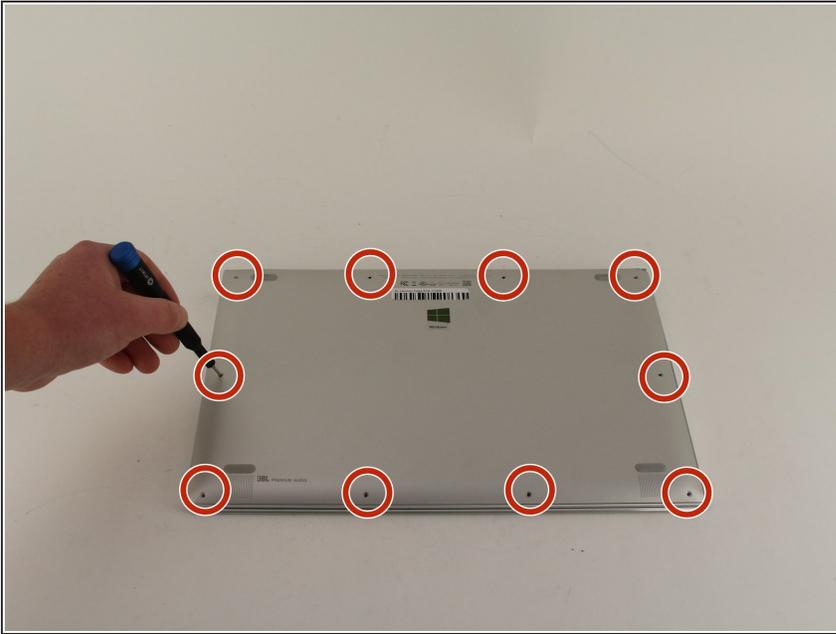

- ⚠ Completely power off the laptop and disconnect it from any power sources before beginning.
- Turn the laptop over and remove the ten 3mm JIS #00 screws along the perimeter of the bottom panel.
- Remove the panel.

## Step 2

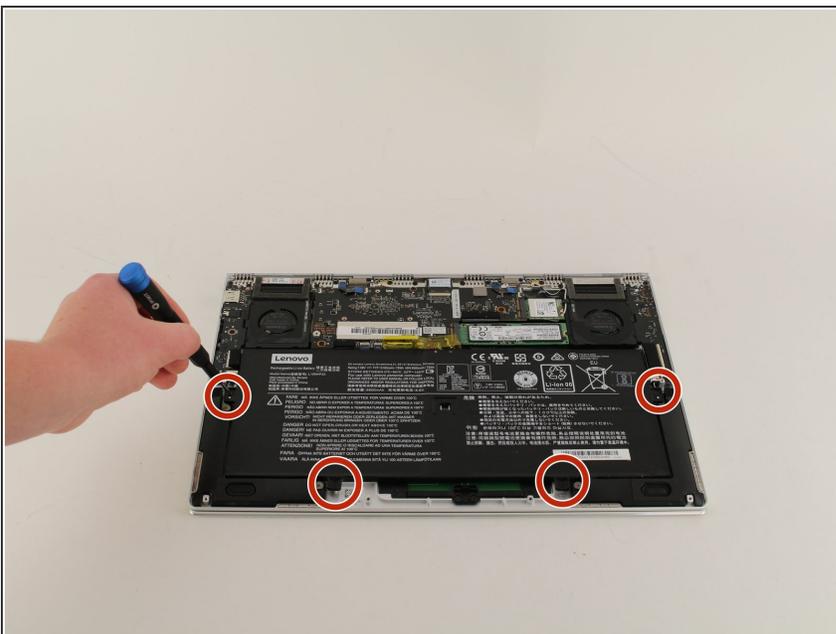


- Remove the four 3mm JIS #00 screws holding the battery in place.

## Step 3




- Disconnect the bundled cable connector that allows the battery to power the device.
- ⚠ Pull evenly on the width of the cable so that no individual wire is overly strained.
- Lift the battery out.

## Step 4 — USB Ports

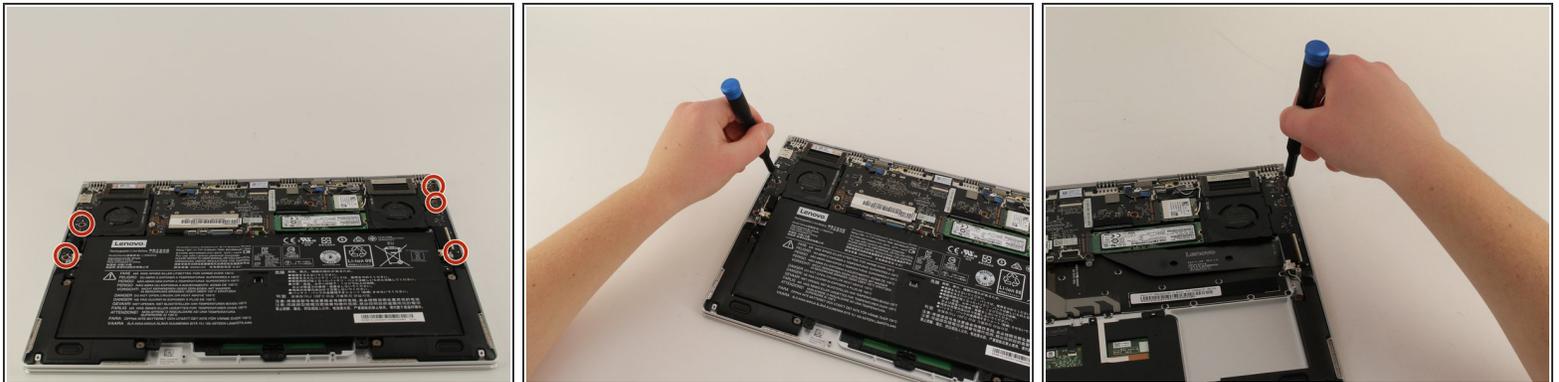


- Remove the five 3mm JIS #00 screws holding the array of ports in place.

## Step 5

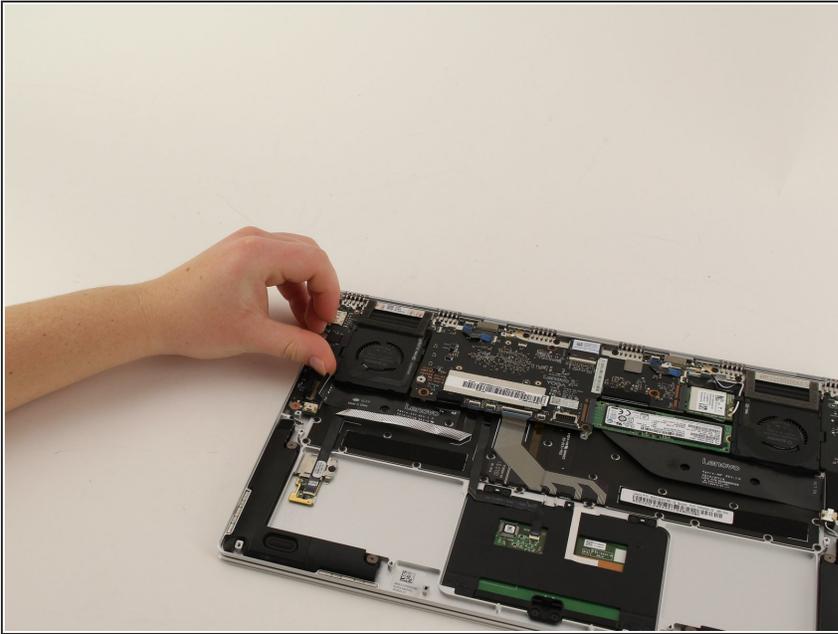


- Lift up on the cover on top of the ribbon connector and gently pull the ribbon cable out.

## Step 6

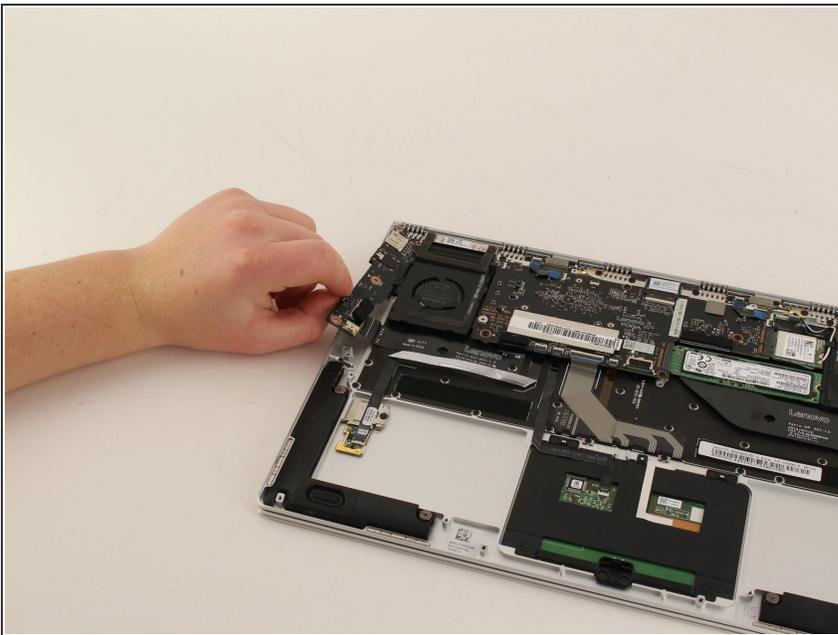


- Lift up on the component and remove it.

## Step 7

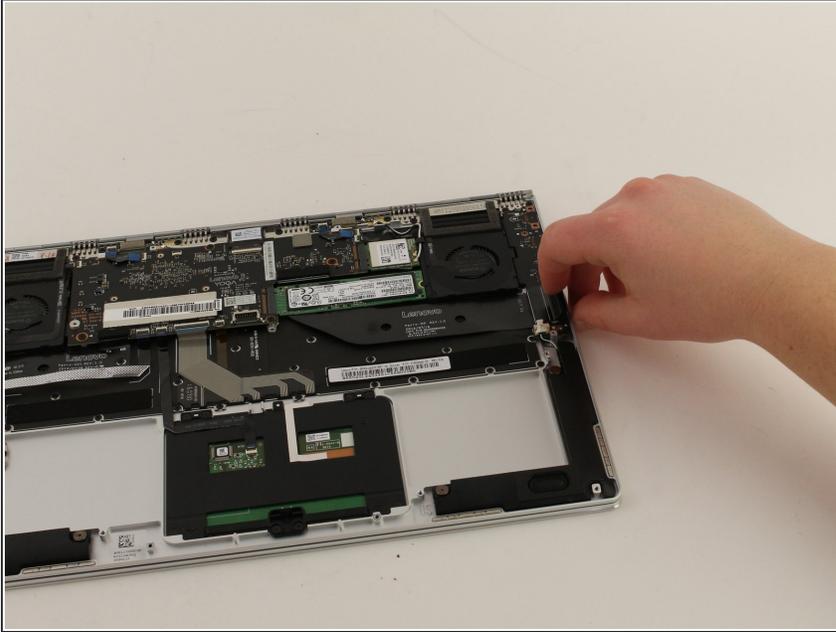

- Repeat the same process on the opposite side, lifting up on the connector cover and pulling the ribbon cable out of its place.

## Step 8

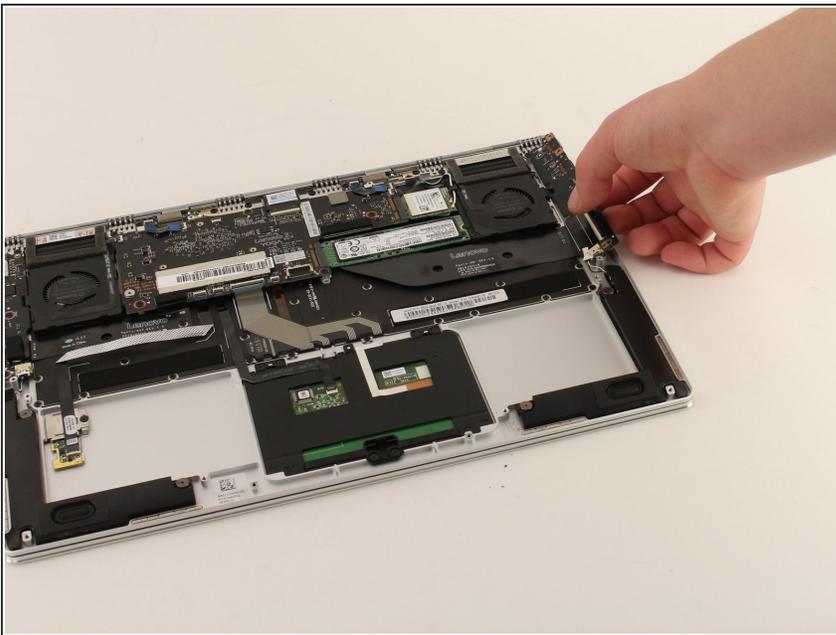

- Lift up on the set of ports and remove it from the device.

To reassemble your device, follow these instructions in reverse order.