

7A COMMUNICATION SYSTEM
(SB4000F LINE CARD - ISSUE 6)

1. GENERAL

1.001 This Addendum supplements Section 518-450-100, Issue 4, July, 1979.

1.002 This Addendum provides information for the use of the SAN/BAR 4000F Line Card in the 7A Communications Systems. For detailed information on installation and testing of the SB4000F Line Card, refer to BSP 518-215-905SW.

1.003 Issue A of this Addendum was issued to provide a means to activate the customer's equipment when COAM Paging equipment is used with the 7A Communications System.

2. CHANGES TO SECTION

Issue A Changes

2.001 A 22A-49 apparatus unit is used to Provide contact closure to COAM Paging equipment. (See Exhibit 1 for connecting arrangements)

Issue B Changes

2.002 On Page 14, at the end of paragraph 2.20, add the following:

- . The SB4000F Line Card - Issue 6 is compatible with any 570-Type KSU, with or without the music-on-hold feature (See Table)


KSU	MUSIC-ON-HOLD		LINE CIRCUIT
	WITH	451B	
570A	WITH	451B	SB 4000F - ISSUE 6
	WITHOUT		
570B	WITH	498A	
	WITHOUT		

2.003 On Page 21, at the end of 3.03 (a) Ordering Guide, add the following subparagraph:

- . (Quan) Unit, Telephone Key, SB4000F - Issue 6, CO/PBX Line Circuit order (one per line for use in 570A/B KSU).

2.004 On Page 78, at the end of paragraph 6.04, add the following sentence:
Option straps should be placed on the SB4000F - Issue 6 KTU, when used with the 7A Communication System to provide short timeout (P), lamp wink or hold (Y), and interrupted audible signal (W).

EXHIBIT 1

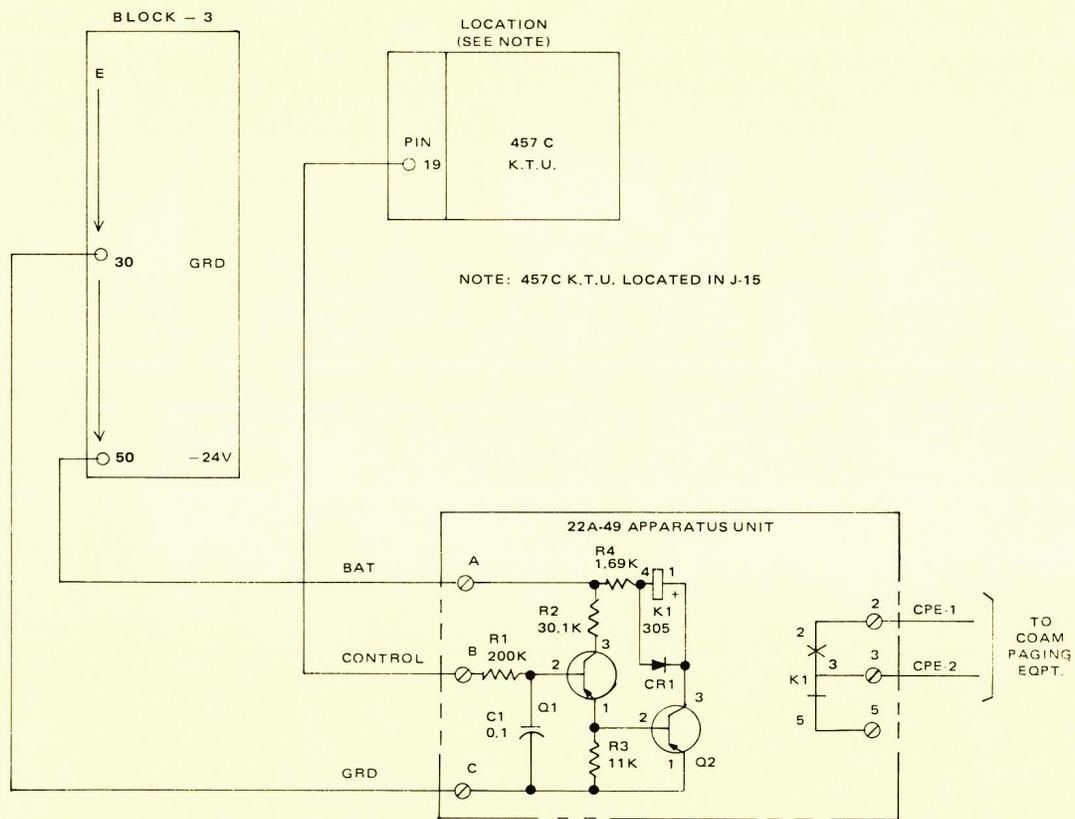

NOTE: 457C K.T.U. LOCATED IN J-15

NOTE:
THE 22A-49 APPARATUS UNIT MUST
BE MOUNTED IN A VERTICAL UPRIGHT
POSITION.

Connections for 22A-49 Apparatus Unit
on COMKEY 718 System