




Hover-1 Charger Unplugging the Battery

This guide will help you unplug the battery of your Hover-1 Charger (H1-COL).

Written By: Benji Forest

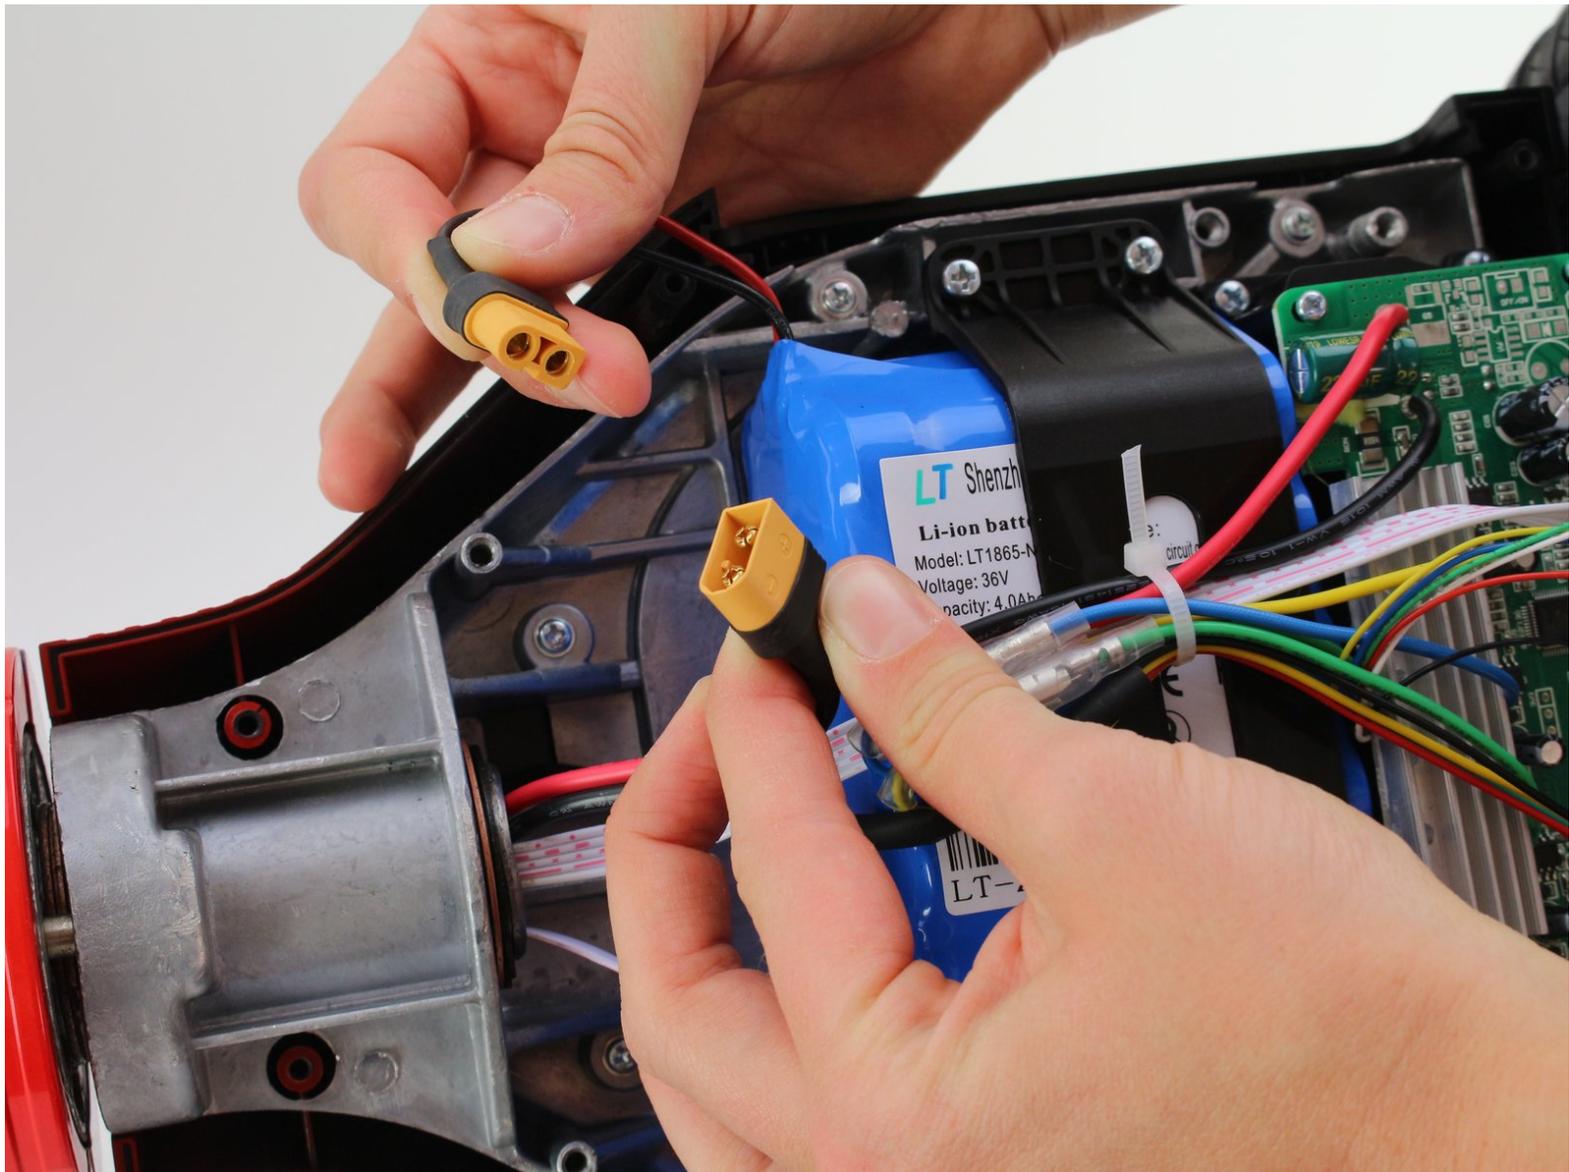

INTRODUCTION

If you need to disassemble your Hover-1 Charger (H1-COL), you should first refer to this prerequisite guide on how to disconnect the battery. To protect yourself and the hoverboard's electronics, you need to unplug the battery before you begin to disassemble any other part. This guide is used as a prerequisite guide and does not replace any component of the hoverboard.

TOOLS:


- [Anti-Static Wrist Strap](#) (1)
 - [Phillips #2 Screwdriver](#) (1)
-

Step 1 — Unplugging the Battery





- Flip the hoverboard over so that the warning label is facing up.
- Remove the twelve 12 mm screws with a Phillips #2 screwdriver.
- Remove the four 10 mm screws with a Phillips #2 screwdriver.
- ⓘ The screws nearest to the wheels may be hard to access. Be sure to use a long, thin screwdriver.

Step 2

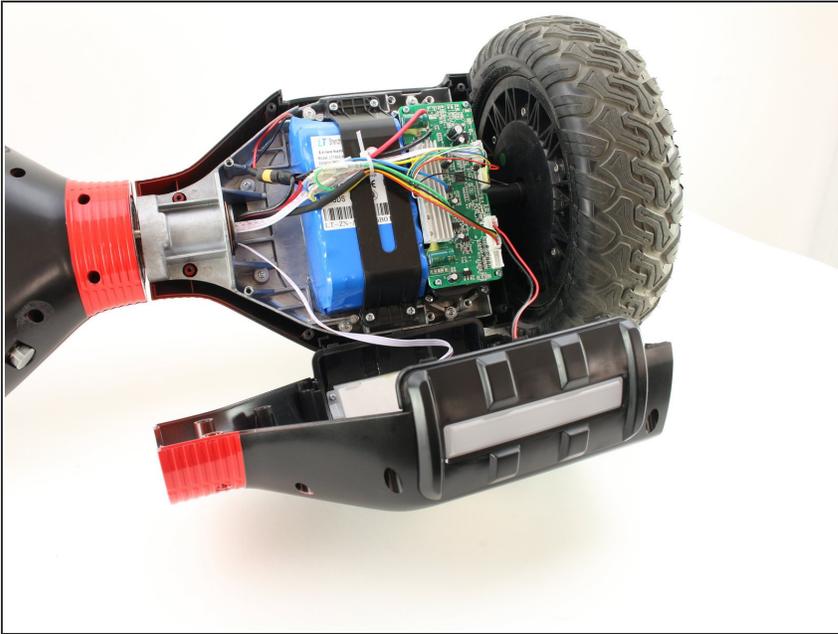


- Pull the right cover away from the hoverboard to expose the battery.

Step 3

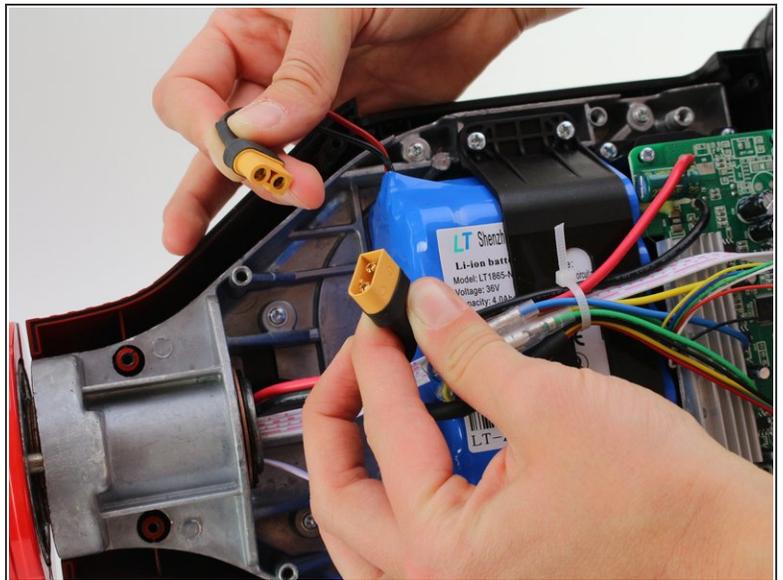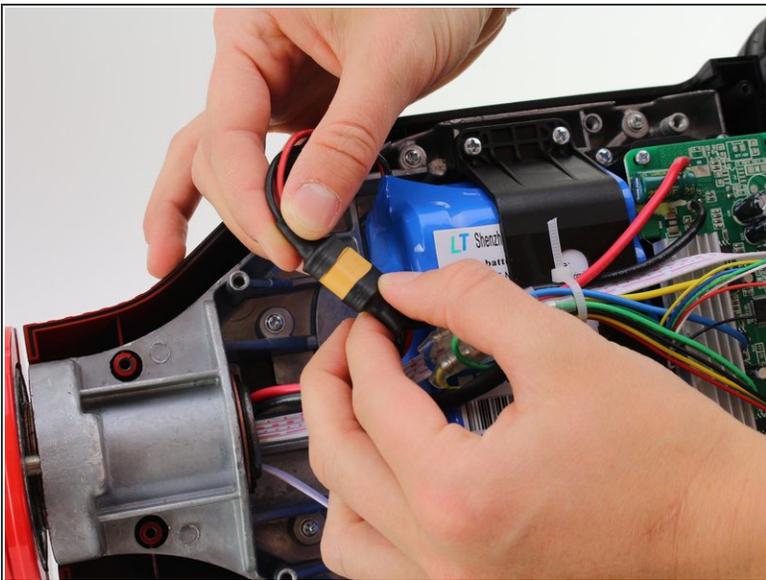



- Disconnect the two pronged black and yellow cable.

Step 4

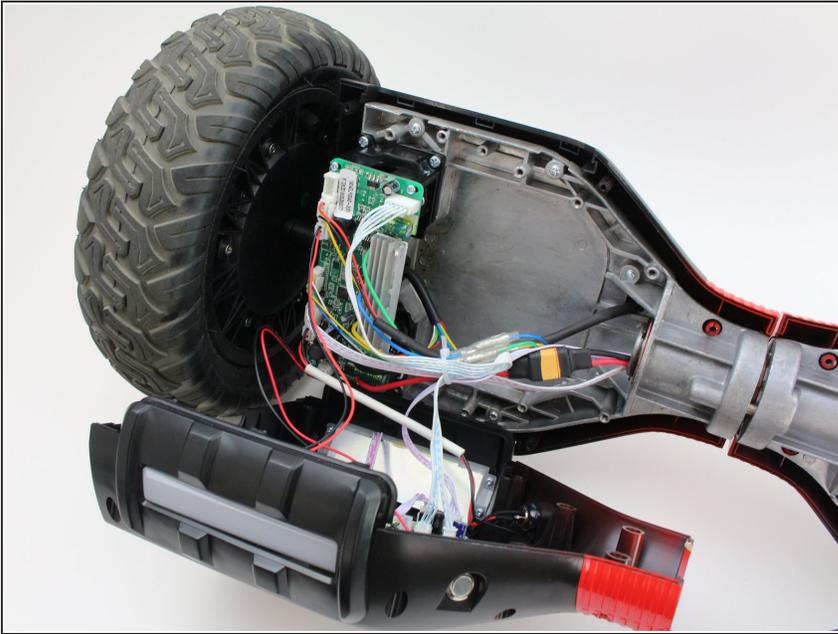

- Pull the left cover away from the hoverboard.

Step 5

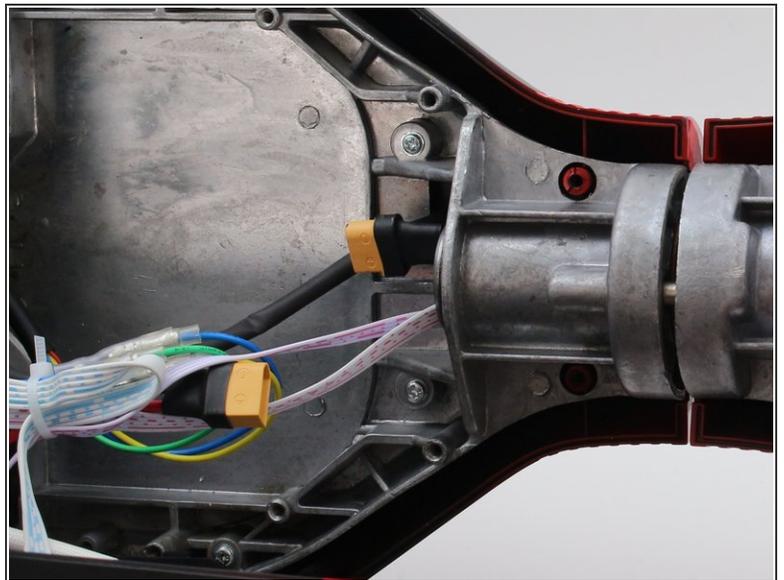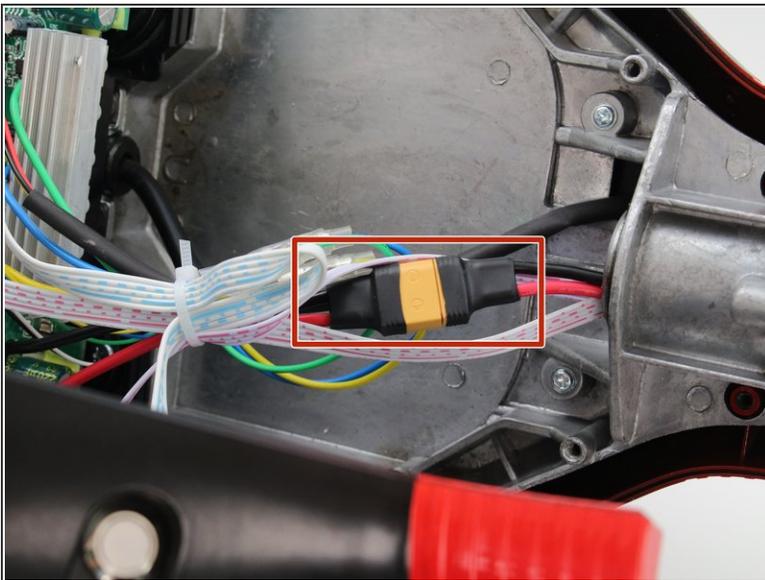

- Disconnect the two pronged black and yellow cable. The battery is now fully disconnected.

To reassemble your device, follow these instructions in reverse order.