


TOOLS

BITS—DESCRIPTION


1. GENERAL

- 1.01 This section covers noncoded bits.
- 1.02 The reason for reissuing this section is to add the R-4495 bit.
- 1.03 The information contained in this section supersedes the corresponding information in Section 074-520-101.

BIT, SCREWDRIVER

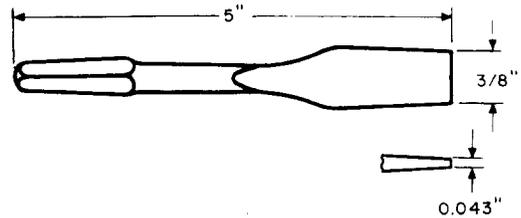

BIT, EXPANSIVE, LARGE

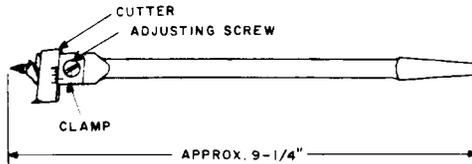

For general use. (Specification AT-6597)

BIT, SCREWDRIVER, APCO-MOSSBERG COMPANY NO. 650-4

Furnished with two cutters for boring 7/8-inch to 1-3/4 inch and 1-3/4 inch to 3-inch holes.

Replacement parts listed below may be ordered.

Small cutter	Clamp
Large cutter	Adjusting screw




For general use. (Specification AT-6394)

For use with Apco-Mossberg Company torque screwdriver B50.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

**BIT, SCREWDRIVER, 1/4-INCH HEX. DRIVE, APEX
MACHINE AND TOOL COMPANY NO. 326-3**



Refer to Section 074-256-118 for the Richmond torque screwdriver used with this tool. For use in tightening U-type relay mounting screws equipped with grommets.

**BIT, SOCKET HEAD, 1/8-INCH HEX, APCO-MOSSBERG
COMPANY NO. 185-2**




For use with Apco-Mossberg Company 825 holder.

BIT, WRAPPING, KS-16522 L1

BIT, WRAPPING, KS-16548 L1

Replaced by the KS-16734 L1 wrapping bit.

BIT, WRAPPING, KS-16734 L1



This bit is for use with 22- or 24-gauge wire and is identified with a red band. Refer to Section 074-269-113 for KS-16363 L2 and L3 wire wrapping tool and Section 074-256-141 for the KS-20963 L2 sleeve used with this tool. Replaces the KS-16522 L1 and KS-16548 L1 wrapping bits. For use in making solderless wrapped connections.

BIT, WRAPPING, KS-16903 L1

This bit is for use with 26-gauge wire and is identified by a yellow band. It is similar to the KS-16734 L1 bit which is used for 22- or 24-gauge wire. Refer to Section 074-269-113 for the KS-16363 wire wrapping tool and Section 074-256-141 for the KS-20963 L3 sleeve used with this tool. For use in making solderless wrapped connections.

BIT, WRAPPING, R-4495

This bit is for use with 20-gauge wire. To be used with sleeve KS-20963 L1.

See Section 081-745-105 for wood boring bits.