


TOOL

INTERRUPTER – DESCRIPTION

1. GENERAL

- 1.01 This section covers a noncoded Bell System interrupter tool.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Section 074-660-101.

KS-20516 L1

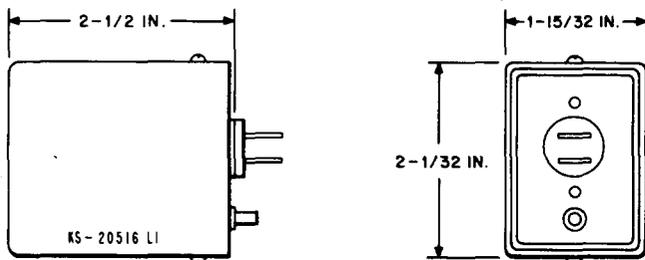

A metal enclosed, single-unit device consisting of a relay driven by a transistorized, astable multivibrator which is powered off a 48-volt dc source. Intended to provide ground pulses for rotating the number wheels of from one to three 14-type message registers at approximately 5 Hz to facilitate cleaning of the registers with a vacuum cleaner.

Note: Requires M2EL cord, W1BH cord, and 770B tool, which must be ordered separately.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement