


TOOLS

SCREW STARTERS – DESCRIPTION

1. GENERAL


- 1.01 This section covers noncoded Bell System screw-starter tools.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Section 074-765-101.

SNAP-ON TOOL CO., GA-229

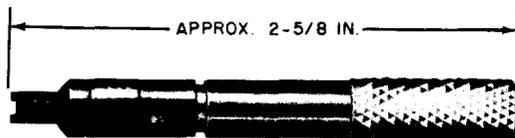


For use in replacing sleeves of 510, 511, and 512 jacks of 608-type switchboards.

QUICK-WEDGE, KEDMAN CO., 1253

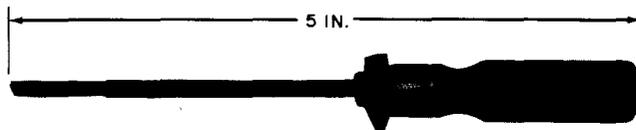


Blade width 1/8-inch and blade thickness 0.018 inch. For use on 60- and 61-type head telephone sets.

KEDMAN CO., 1736 (OR EQUIVALENT)

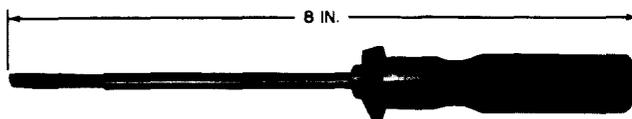

Blade width 3/16-inch and blade thickness 1/32-inch. For use in removing U-type relay mounting screws (after loosening) and starting mounting screws equipped with grommets.


QUICK-WEDGE, KEDMAN CO., 2356

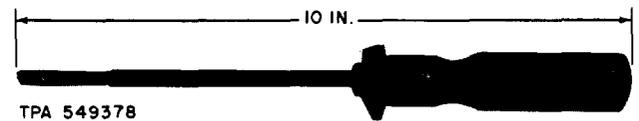

Blade thickness 0.042 inch. For use in mounting small crossbar switches.

RINCK-McILWAINE, INC.

In ordering, specify number of screw starter desired.



The 606 screw starter is 6 inches long.
The 612 screw starter is 12 inches long.
For general use.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement