
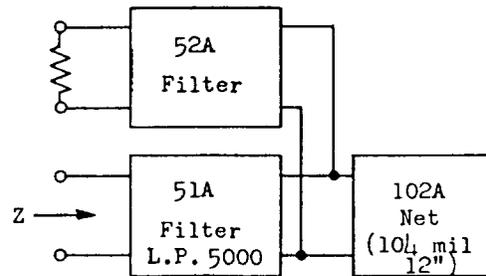


Intermediate Equipment Return Loss

36B AND 34A FILTERS  
51A AND 52A FILTERS

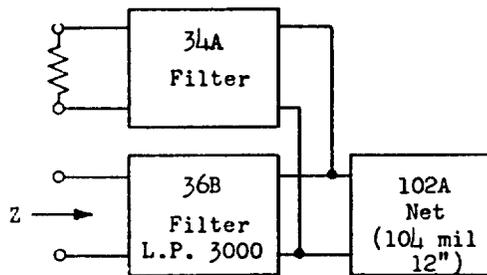

Freq.	Impedance Z	Return Loss Z vs 104-12" Imp.
200	605 / 12.7	11
300	483 / 32.6	11
500	400 / 0	9
1000	700 / 9.5	15
1500	600 / 9.6	25
2000	524 / 5.5	16
2200	605 / 7.1	18
2500	671 / 3.4	36
2500	500 / 1.7	16

Freq.	Impedance Z	Return Loss Z vs 104-12" Imp.
200	693 / 42.5	13
300	585 / 34.9	13
500	473 / 19.7	13
1000	486 / 6.5	12
1500	620 / 10.3	15
2000	711 / 0.6	23
2200	688 / 5.0	34
2500	614 / 9.0	26
2900	511 / 3.9	18
3000	504 / 1.5	17
3100	501 / 1.4	17

- Notes: (1) Table data represent measurements of typical filters.  
(2) For description and uses of these filters see Section 352-153-100.