


DESIGN	H.G. REIMERS	HGR	AM
DRAWN	M.M. FALGOUT	CM.R.	AM
ISSUE	1-29-62		
DATE	3-9-62	ISSUE-1	
ADDED CONN FROM TERM 3 TO B CONT IN QUAD A OF KEY UNIT.			
DATE	3-4-66	40501-AG	
REV			2

NOTES:

1. CONNECTIONS BETWEEN THE SPRINGS AND THE TERMINALS SHALL BE MADE WITH "H" WIRE, P-465781, 22 GA, SINGLE, BLACK.
2. ALL CONNECTIONS SHALL BE SOLDERED PER SPEC 50016, METHOD C.
3. WIRING SHALL HAVE SUFFICIENT SLACK TO PERMIT KEY UNIT TO BE REVERSED.
4. FOR INFORMATION PERTAINING TO "W" AND "Y". SEE REQUIREMENTS EXCEPTION 17B ON A165729, SHEET 7, < 29B ON LA-850016-6A >.
5. KEY UNIT VIEWED FROM TOP OF KEY.
6. < > INDICATES BTL INFORMATION. WHEN THERE IS CORRESPONDING WECO INFORMATION, IT SHALL BE USED FOR MANUFACTURING PURPOSES.

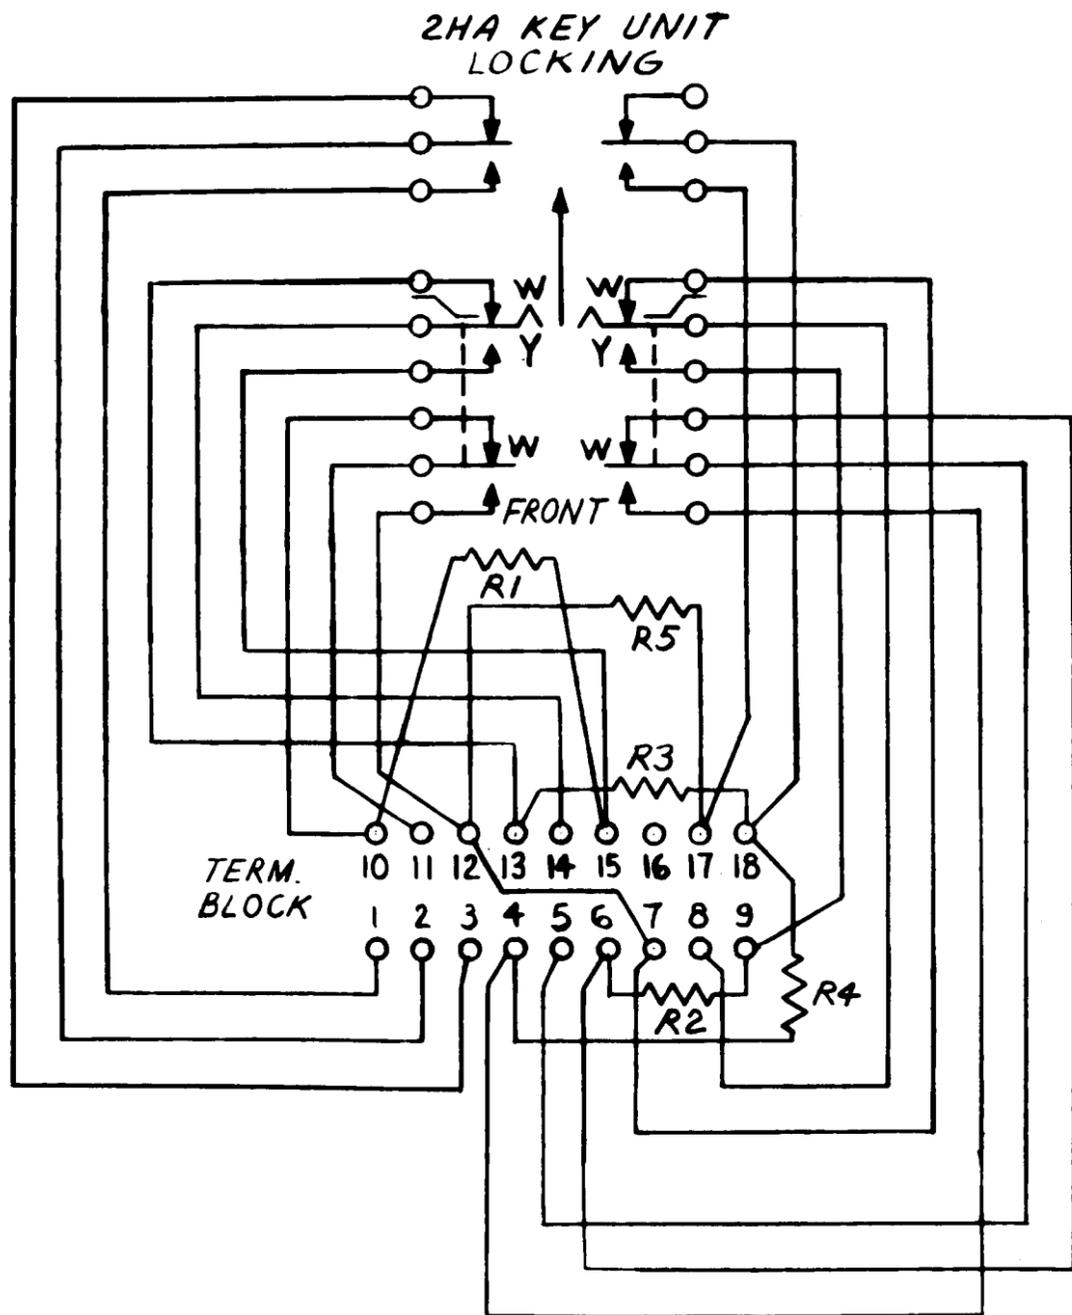

6017AP KEY A-166605
USED ON DWG

DIAGRAM OF CONNECTIONS

SCALE NONE
WESTERN ELECTRIC COMPANY, INC.
ENGINEER OF MANUFACTURE

BELL TELEPHONE LABORATORIES
INCORPORATED
CDS A-554230 SHEET

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NONLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:
TO 2 DECIMAL PLACES ± AS ANGLES ±
TO 3 DECIMAL PLACES ±
FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 16.003, PART 2, SECTION 227.

DWG. SIZE
2S