


TELEPHONE SETS—1702D
CONNECTIONS

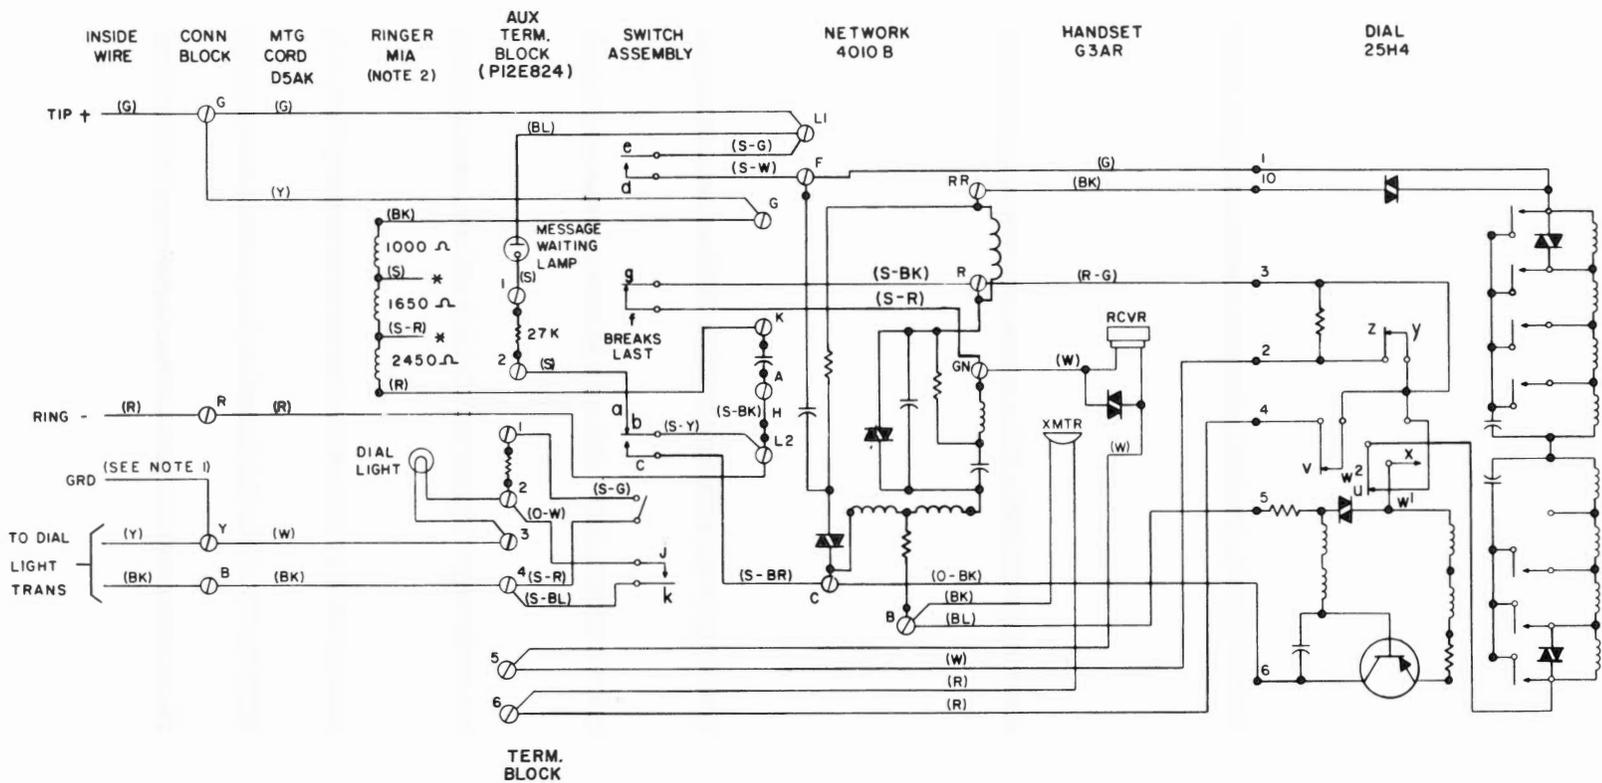

Note 1: Ground may be omitted, if not required for service. Not necessary for protection of dial light transformer.

Note 2: To permanently silence ringer, move (R) ringer lead from K to G at network.

* Insulated and stored.

Fig. 1 — 1702D Telephone Set, Connections