

Prepared by  
The Pacific Telephone and Telegraph Company  
Southern California Area

BELL SYSTEM PRACTICES  
Outside Plant Construction  
and Maintenance

ADDENDUM G10.400  
Issue B, March, 1948-S

GENERAL  
KS-8455 TEST SET

NOTES CONCERNING THIS ADDENDUM

This addendum supplements Section G10.400 and has been reissued to include instructions for the use of the 89A Test Set. It also includes all instructions contained in the former Addendum, Issue A.


The cross reference, "See Addendum" should be written in Section G10.400 at Paragraph 1.01 which is supplemented, at Paragraph 2.01 which is replaced herein and after Paragraph 9.03 to indicate additional information.

1. GENERAL

1.01 The instructions contained in Section G10.400 for the use of the KS-8455 Test Set also apply to the use of the 89A Test Set.

2. DESCRIPTION OF TEST SETS

2.01 (a) The KS-8455 Test Set and leather carrying case are illustrated below:

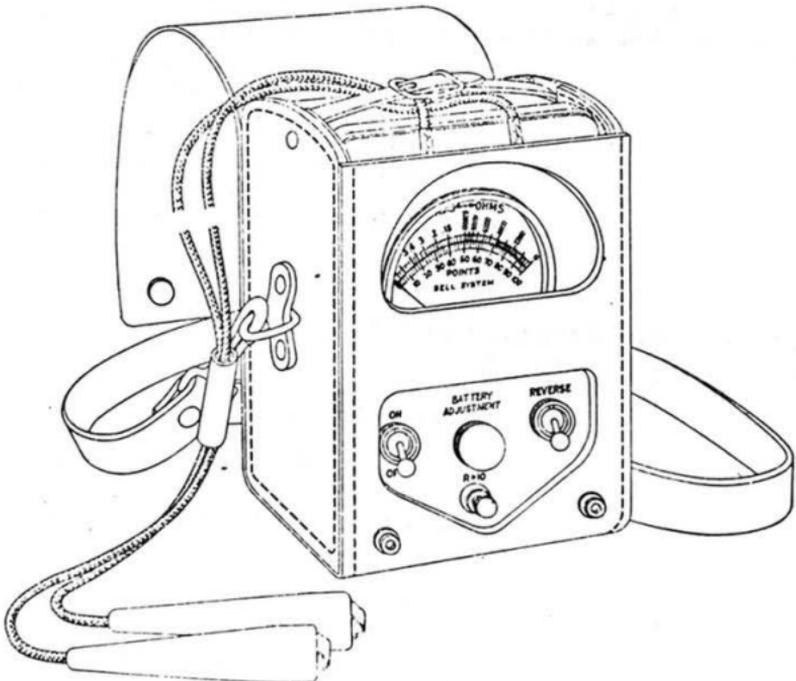

KS-8455 TEST SET

The KS-8455 Test Set is made up of the following parts:

- (1) KS-8455 Test Set, List 1 - Complete set except battery.
  - (2) KS-8455 Test Set, List 2 - Volt-Chmmeter only.
  - (3) KS-8456 Carrying Case
  - (4) Two WIAH Cords
  - (5) No. 455 Eveready Battery
- (b) The 89A Test Set consists of a complete set, except the battery, and includes the following parts:

- (1) M9A Meter
- (2) KS-13387 Carrying Test
- (3) Two WIAH Cords
- (4) KS-13632 List 1 Carrying Strap
- (5) No. 455 Eveready Battery

#### 9. MAINTENANCE OF TEST SET

9.04 If a replacement battery does not fit properly in the test set due to an increased thickness of the battery, a waterproof gasket shall be cemented to the top panel with Duco Household Cement, Pliobond Cement or their equivalent, thus providing additional space for the battery. Orders for gaskets shall be worded: (Quantity) GASKET, FOR KS-8455 TEST SET.