

SEQUENCE CHARTS



NOTES:

OS OPTION	FEATURE OR OPTION	SD OPTION	SD
A	MFR. DISC.		68222-01
B	STANDARD		
C	MFR. DISC.	YQ	
D	STANDARD	YR	
E	LOAD CONT. TIMING NOT PROVIDED	FIG. 6	
F	LOAD CONT. TIMING PROVIDED	FIG. H	
G	TR USAGE RECORDER PROVIDED	FIG. MYX	
H	TR USAGE RECORDER NOT PROVIDED	FIG. L	

2. START SIGNAL NOT RECEIVED OR OPERATOR'S ERROR. (RST) NORMAL

3. AVAILABLE CKT. FOR (CH) REL. OR (CTR) KEY OPERATED. (RST) RELAY OPERATED.

4. NO AVAILABLE CIRCUIT FOR (CH) RELAY OR (CTR) KEY NORMAL. (RST) RELAY OPERATED.

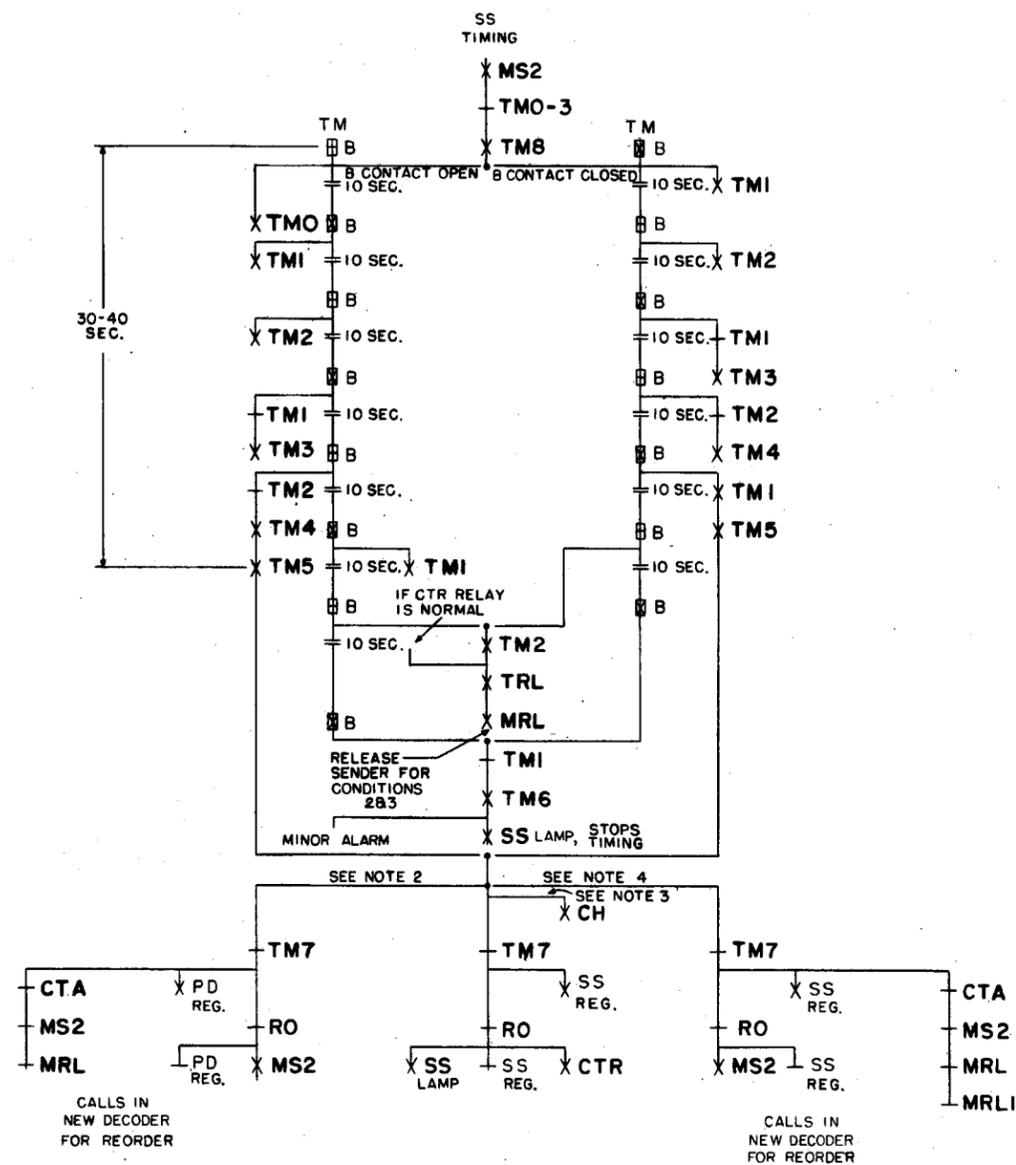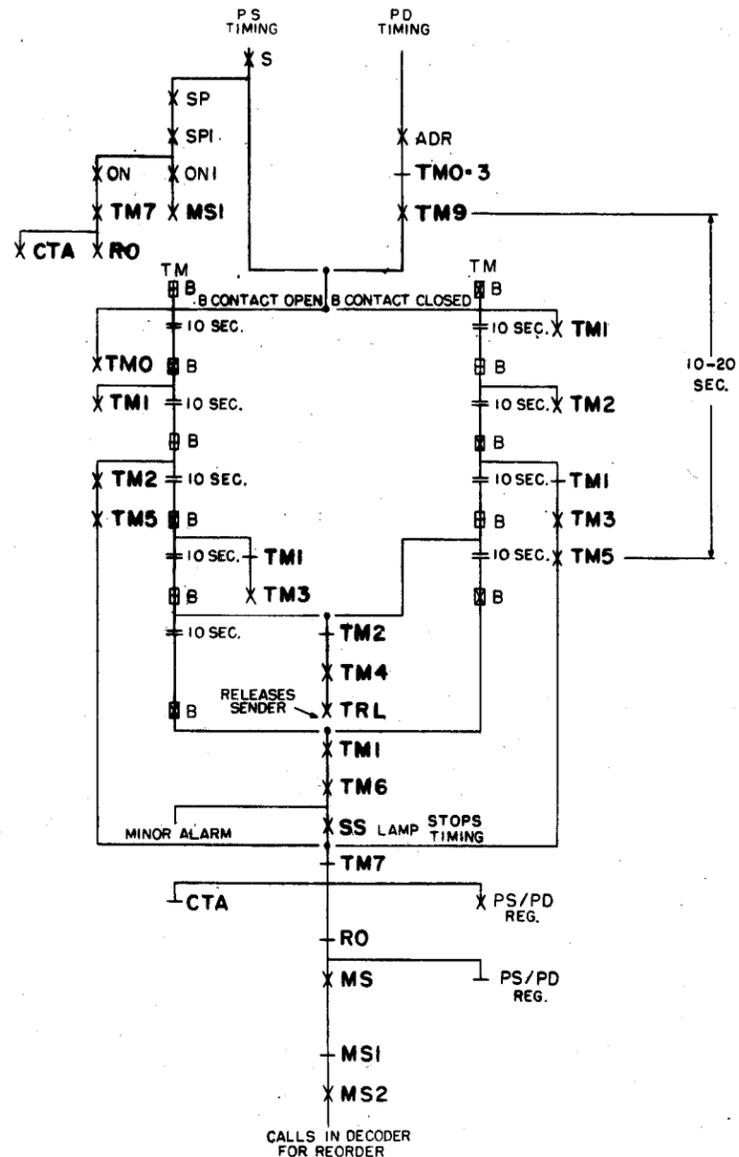

- INTERRUPTER FRAME CKT. SD-68058-01, ISS. 19
- INCOMING SENDER CKT.-MF SD-68222-01, ISS. 17
- DECODER CONNECTOR CKT. SD-68339-01, ISS. 4
- DECODER CKT. SD-68340-01, ISS. 5
- MISC. CKT.-SENDER MAKE-BUSY FRAME SD-68386-01, ISS. 5
- MARKER CKT. SD-68388-01, ISS. 5
- MISC. CKT. TROUBLE RECORDER SD-68392-01, ISS. 5
- TRAFFIC REGISTER CKT. SD-68412-01, ISS. 7

MF INCOMING SENDER
OVER-ALL TIMING AND
MISCELLANEOUS TROUBLE CONDITIONS
FIG. 4

OS 144-1

2 SHEETS, SHEET 1

NO. 4A TOLL

ORDER AS BSP ITEM MP-11763

BELL TELEPHONE LABORATORIES, INC.

PRINTED IN U. S. A.

REVISION	1	DATE	1-18-52
	2	DATE	9-1-53

2 SHEETS, SHEET 1

MP-11763

ISSUE	DATE
1	1-18-52
2	9-7-53

