
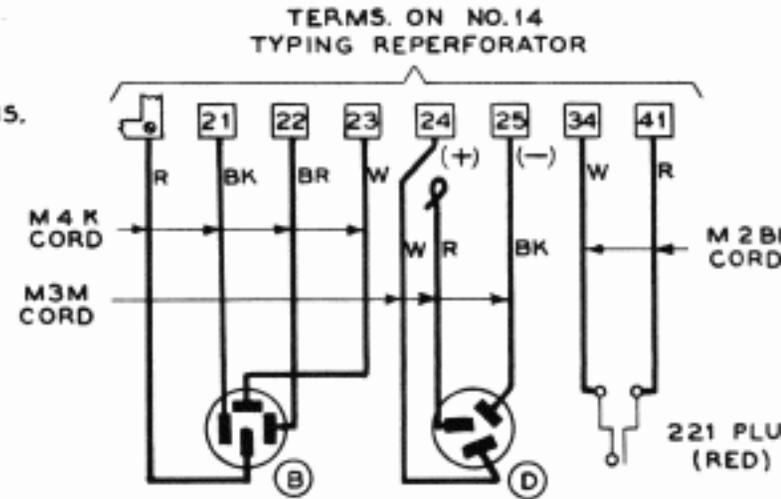


NOTES


- ① ADD ONE 12F CONN. BLOCK TO 15N TABLE
- ② REPLACE TWO CONDUCTOR BODY ON OUTPUT LEADS OF RECTIFIER BY A HUBBELL 7082 BODY.
- ③ THIS SWITCH CONTROLS AC. & DC. TO TYP. REPERF AND TRANS-DIST.
- ④ REPRODUCED FROM DWG. 20332-113.

FEATURES

- (A) 15 KSR ON 15N TABLE, 14 TYPING REPERF. AND 14 TRANS-DIST ON 19A TABLE.
- (B) KSR AND TRANS-DIST OPERATED AS A UNIT WITH BREAK ON KSR CONTROLLING TRANS-DIST.
- (C) TYPING REPERF. TO BE USED AS AN INDEPENDENT UNIT.

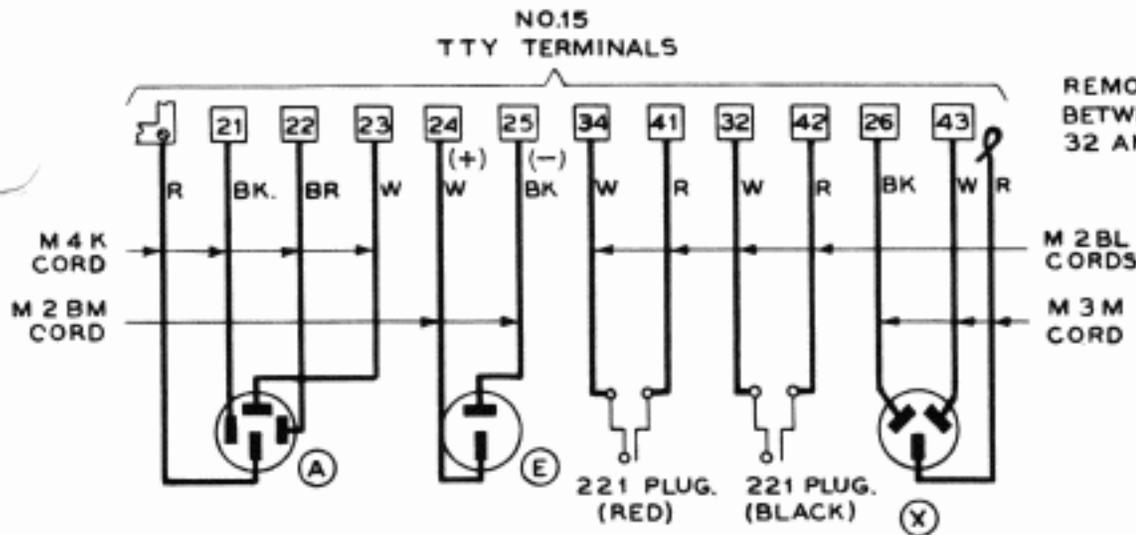

15 N TABLE P5.02

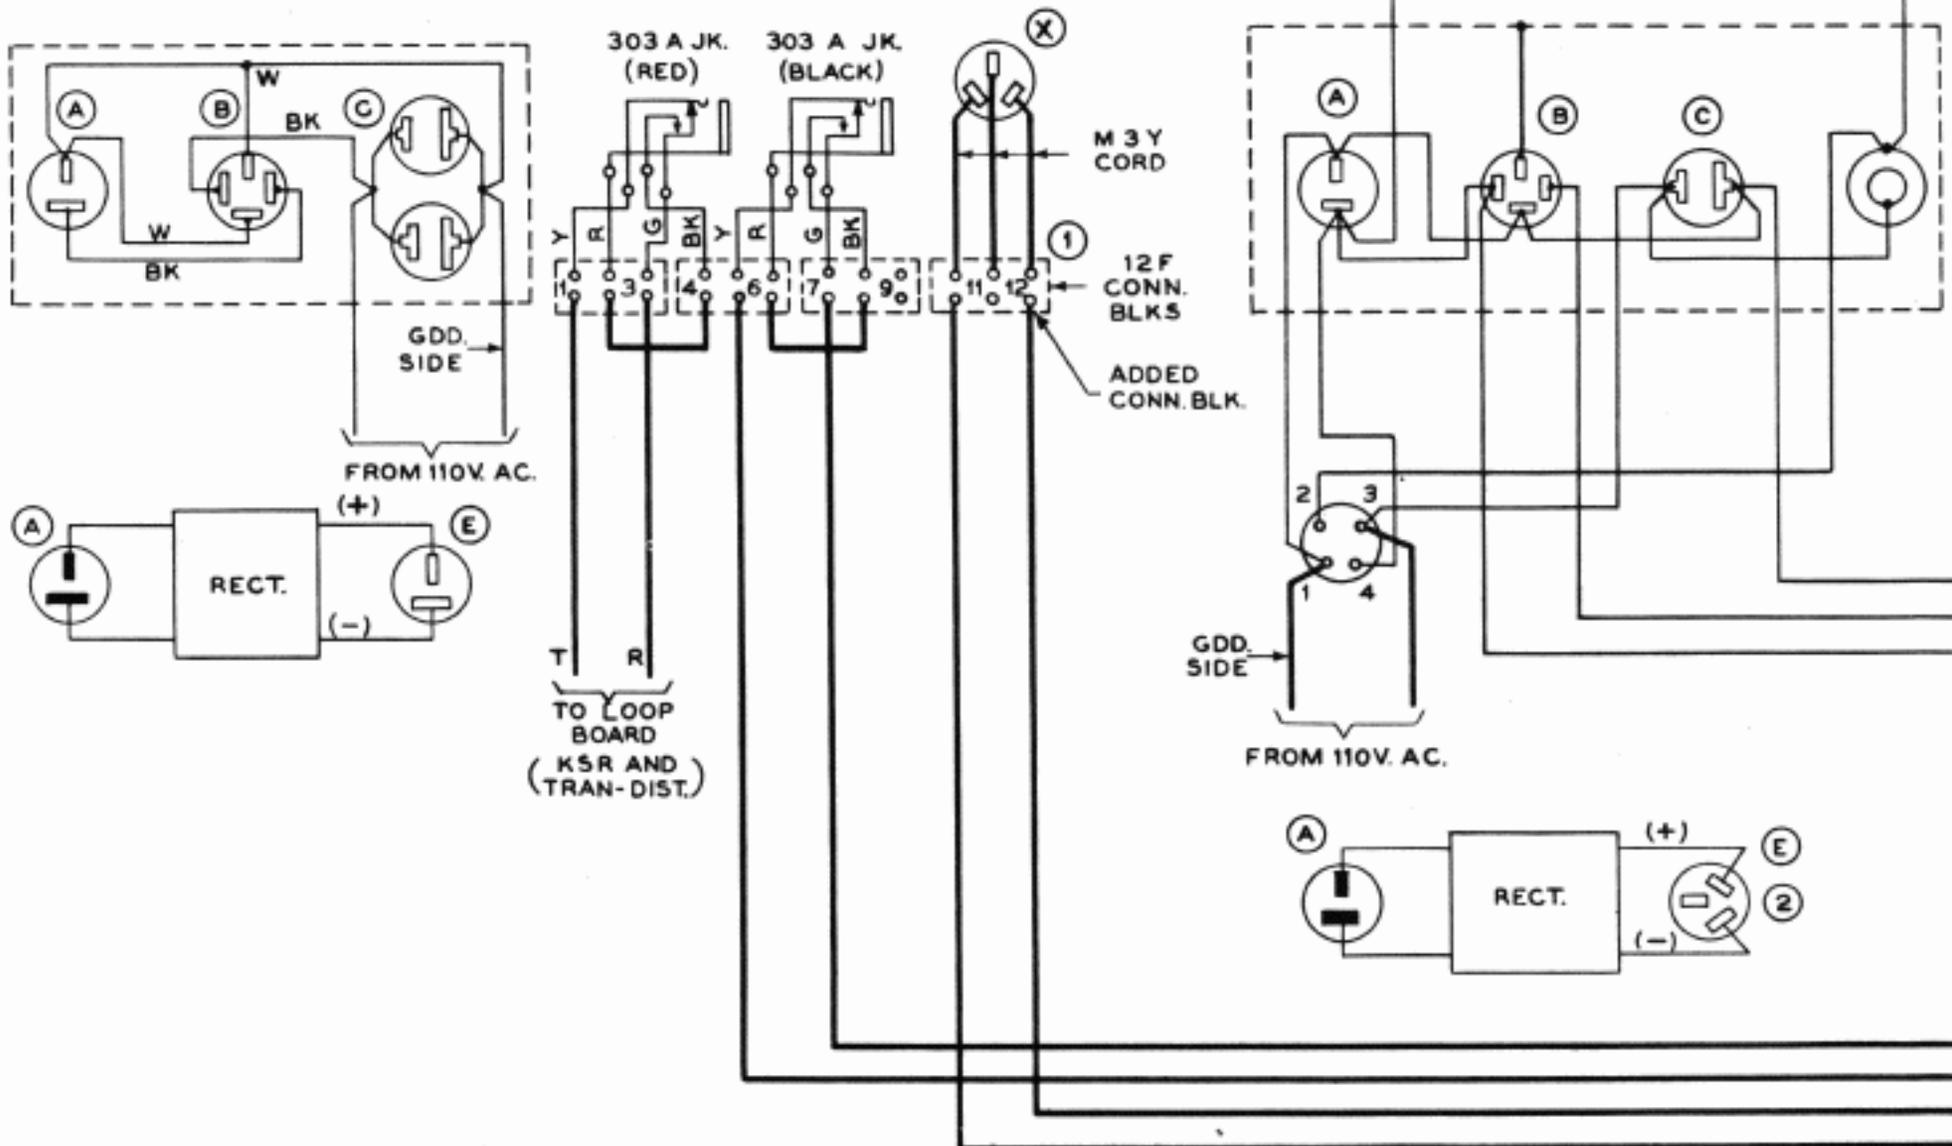


KEY

— EXISTING WIRES.
— } ADDED OR CHANGED WIRES.




BELL SYSTEM PRACTICES
TELETYPEWRITER STATION
INSTALLATION AND MAINTENANCE

SECTION P 90.907
ISSUE B JUNE 1941
LONG LINES DEPT.

Dist. Class. 600AC

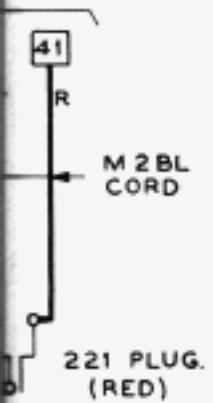

19-A TABLE
SEE CIRCUIT LABEL

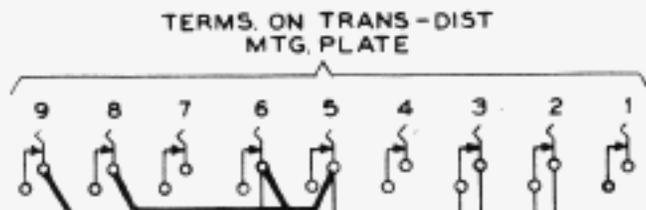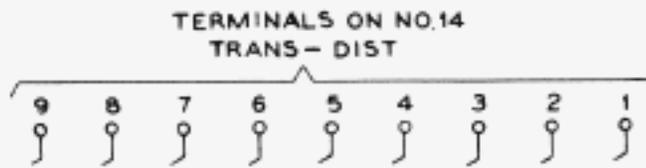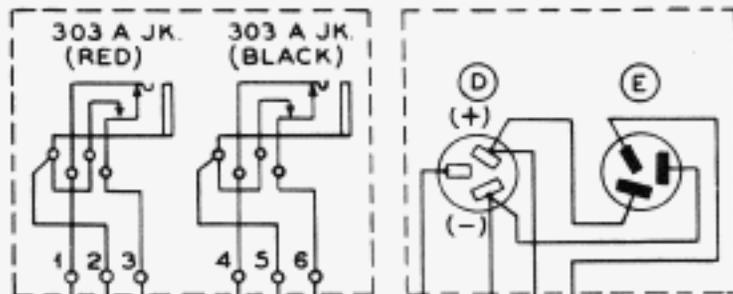

REMOVE AND TAPE SEPARATELY

TO LOOP BOARD (TYP. REP)

REMOVE AND TAPE

12 F CONN. BLKS.

TELETYPEWRITER SERVICE
15-N AND 19-A TABLE

15 KSR 14 TYPING REPERF AND 14 TRANS-DIST
110 VOLT AC.