

NASA  
CR  
99263  
c.1

N69-16506

PROBLEMS IN RADIATION DOSE CALCULATIONS IN  
SPACECRAFT, I: ELECTRONS - ELECTRON DOSE  
SHIELDING

Bellecomm, Incorporated  
Washington, D.C.

23 August 1968

LOAN COPY: RETURN TO  
AFWL (WLIL-2)  
KIRTLAND AFB, N MEX

TECH LIBRARY KAFB, NM  
0069336



DISTRIBUTED BY:

**CLEARINGHOUSE**  
FOR FEDERAL SCIENTIFIC AND TECHNICAL INFORMATION

U. S. DEPARTMENT OF COMMERCE / NATIONAL BUREAU OF STANDARDS



## REPORT selection aids

*Pinpointing R & D reports for industry*

Clearinghouse, Springfield, Va. 22151

**U.S. GOVERNMENT RESEARCH AND DEVELOPMENT REPORTS (USGRDR)**---SEMI-MONTHLY JOURNAL ANNOUNCING R&D REPORTS. ANNUAL SUBSCRIPTION \$30.00 (\$37.50 FOREIGN MAILING). SINGLE COPY \$3.00.

**U.S. GOVERNMENT RESEARCH AND DEVELOPMENT REPORTS INDEX**---SEMI-MONTHLY INDEX TO U.S. GOVERNMENT RESEARCH AND DEVELOPMENT REPORTS. ANNUAL SUBSCRIPTION \$22.00 (\$27.50 FOREIGN MAILING). SINGLE COPY \$3.00.

**FAST ANNOUNCEMENT SERVICE**---SUMMARIES OF SELECTED R&D REPORTS COMPILED AND MAILED BY SUBJECT CATEGORIES. ANNUAL SUBSCRIPTION \$5.00, TWO YEARS: \$9.00, AND THREE YEARS: \$12.00. WRITE FOR AN APPLICATION FORM.

**DOCUMENT PRICES**---ALMOST ALL OF THE DOCUMENTS IN THE CLEARINGHOUSE COLLECTION ARE PRICED AT \$3.00 FOR PAPER COPIES AND 65 CENTS FOR COPIES IN MICROFICHE.

**COUPONS**---THE CLEARINGHOUSE PREPAID DOCUMENT COUPON SALES SYSTEM FOR PURCHASING PAPER COPIES AND MICROFICHE PROVIDES FASTER, MORE EFFICIENT SERVICE ON DOCUMENT REQUESTS. THE PREPAID COUPON IS A TABULATING CARD WITH A FACE VALUE OF THE PURCHASE PRICE OF A CLEARINGHOUSE DOCUMENT (\$3.00 PAPER COPY OR 65 CENTS MICROFICHE). IT IS YOUR METHOD OF PAYMENT, ORDER FORM, SHIPPING LABEL, AND RECEIPT OF SALE.

COUPONS FOR PAPER COPY (HC) DOCUMENTS ARE AVAILABLE AT \$3.00 EACH OR IN BOOKS OF 10 COUPONS FOR \$30.00. COUPONS FOR MICROFICHE COPIES OF CLEARINGHOUSE DOCUMENTS ARE AVAILABLE IN BOOKS OF 50 COUPONS FOR \$32.50. WRITE FOR A COUPON ORDER FORM.

BELLCOMM. INC.

1100 SEVENTEENTH STREET, N.W. WASHINGTON, D.C. 20036

COVER SHEET FOR TECHNICAL MEMORANDUM

TITLE- Problems in Radiation Dose Calculations  
in Spacecraft, I: Electrons

TM- 68-1011-3

DATE- August 23, 1968

FILING CASE NO(S)- 340

AUTHOR(S)- J.S. Ingley

FILING SUBJECT(S)- Radiation  
(ASSIGNED BY AUTHOR(S)- Electron Dose  
Shielding)

ABSTRACT

The problem of calculating the radiation dose in earth orbit produced by energetic electrons and their associated bremsstrahlung is considered. Two methods of electron dose calculation are described, and areas where improvement could be made in either input data or calculational techniques are pointed out. It is concluded that bremsstrahlung calculations are sufficiently accurate for present purposes but that additional Monte Carlo calculations of electron penetration of thick shields (thickness greater than 70% of the electron range) are needed for accurate electron dose calculations.

For the 250 nautical mile orbit phase of Apollo Mission E, present calculations predict an electron dose of 2.2 rad/day in the lunar module and .012 rad/day in the command module. This assumes the predicted decay rate of the artificially injected Starfish electrons is correct. These doses are approximately a factor of two higher than results obtained with earlier Monte Carlo transmission data. Comparison with estimated proton skin doses of .20 rad/day and .07 rad/day for the LM and CM respectively indicates that electrons will be the major contributor to skin dose in the lunar module. Electron bremsstrahlung is not a problem at these flux levels.

FACILITY FORM 602

N 69-16506

(ACCESSION NUMBER)

(THRU)

45

(PAGES)

1

(CODE)

PC-79263  
(NASA CR OR TMX OR AD NUMBER)

04  
(CATEGORY)

BELLCOMM. INC.

1100 Seventeenth Street, N.W. Washington, D.C. 20036

SUBJECT: Problems in Radiation Dose  
Calculations in Spacecraft,  
I: Electrons - Case 340

DATE: August 23, 1968

FROM: J.S. Ingley

TECHNICAL MEMORANDUM

I. INTRODUCTION

The problem of radiation shielding in space can be divided into three categories: 1. Shielding against heavy charged particles, mainly protons; 2. Shielding against electrons; 3. Shielding against secondary radiation (e.g. bremsstrahlung) produced by energetic electrons and protons. The relative importance of these radiation sources in determining the radiation dose depends on the spacecraft's location in space and the amount of shielding available. Outside of the Earth's trapped radiation belts solar flare and solar wind protons and alpha particles are the predominant radiation sources. In the radiation belt environment both protons and electrons can contribute to the dose, with the electron contribution becoming relatively less important as the shielding thickness increases. For Apollo Mission E electrons contribute over 90% of the skin dose in the LM and only 15% in the CM. Secondary bremsstrahlung, being much more penetrating than the primary charged particles, sets a lower limit on the shielded radiation dose. In this study the problem of calculating radiation dose due to energetic electrons and their associated bremsstrahlung is considered. Therefore, the results will be particularly applicable to space flights in the Earth's radiation belts in relatively thin-walled spacecraft such as the lunar module. However, it should be kept in mind that proton doses, which are not considered here, can be an appreciable if not predominant factor in many cases. Rather than produce an entirely new electron dose code, the purpose of this study is to investigate various methods of electron dose calculation in order to point up possible areas where improvement could be made in either input data or calculational techniques.

Electron dose calculations are complicated by the fact that the analytic solutions to the problem of electron transport in matter are not possible without drastic simplifying assumptions. (1) As a result Monte Carlo techniques have been extensively developed as a means of approaching the problem. However, because of the great amount of computer time needed for a sophisticated Monte Carlo code to solve a given problem, it is not possible for large scale radiation dose studies to be done in this

SEE REVERSE SIDE FOR DISTRIBUTION LIST



TECH LIBRARY KAFB, NM

0069336

manner. What is done, therefore, is to generate solutions for simple geometries and a limited number of materials using Monte Carlo techniques, and then generalize the results so that they can be used to calculate the dose for more complicated geometries. In this way a variety of shielding configurations and external electron environments can be studied for a minimum investment in computer time.

The most extensive set of Monte Carlo electron transport calculations have been carried out by Berger and Seltzer. Their code has been described in detail elsewhere<sup>(2)</sup> and will not be discussed here. Their results give the fraction of incident electrons of initial kinetic energy,  $E$ , penetrating an aluminum slab of thickness  $z$  ( $\text{gm}/\text{cm}^2$ )<sup>\*</sup> as a function of the reduced thickness,

$x = \frac{z}{R_0(E)}$ , where  $R_0(E)$  is the extrapolated range of the incident electrons in aluminum. Tables of number transmission coefficients are given for various incident electron energies and angles, and for isotropic ( $dN(\theta) = N_0 \cos \theta d\theta$ ) incidence. In addition tables of energy transmission coefficients are also given; i.e., the fraction of incident energy that is transmitted through a slab of reduced thickness  $x$ . Recently Berger and Seltzer have also calculated the fraction of incident electron energy that appears as forward bremsstrahlung from aluminum slabs of varying thicknesses.<sup>(3)</sup> These results can be used to calculate the bremsstrahlung contribution to the electron dose.

In the next section methods of calculating the primary electron dose are described, and the limitations of the calculations are discussed in section III. Section IV is concerned with the calculation of the bremsstrahlung dose. Section V contains dose calculations for Apollo Mission E and compares these results with previous work. Section VI summarizes the results of this study and makes recommendations for further study in this area. The appendix contains a complete description of the code, BEDOSE, which was used to do the calculations, including input-output format and a listing.

## II. ELECTRON DOSE

Consider a semi-infinite aluminum slab of thickness  $z$  ( $\text{gm}/\text{cm}^2$ ) irradiated on one face by an isotropic electron flux  $\phi(E, t)$  whose time integrated value is  $\phi(E)$  (electrons/ $\text{cm}^2\text{-MeV}$ ) (see Figure 1). The electron number and energy transmission coefficients of Berger and Seltzer are defined as follows:

<sup>\*</sup> $z(\text{g}/\text{cm}^2) = \rho(\text{g}/\text{cm}^3) \times t(\text{cm})$  is called the areal density and is the quantity usually used to describe shielding thicknesses. Ranges expressed in this unit for a given particle vary much less from one material to another than if expressed in centimeters.

$$T_N(E_0, z) = \frac{\# \text{ of electrons of initial energy } E_0 \text{ penetrating slab}}{\# \text{ of electrons of energy } E_0 \text{ incident on slab}}$$

$$T_E(E_0, z) = \frac{\text{total energy of electrons of initial energy } E_0 \text{ that penetrates slab}}{\text{total energy incident on slab due to electrons of initial energy } E_0}$$

These coefficients can be used in two ways to calculate the electron dose delivered to a material on the shielded side of the slab.

Using the number transmission coefficient, the number of electrons of initial energy  $E$  penetrating the slab per  $\text{cm}^2$  is simply  $\phi(E) T_N(E, z) dE$ . The skin dose in rads produced by these electrons will be

$$dD_e(z) = 1.6 \times 10^{-8} \frac{dE'}{dz} \phi(E) T_N(E, z) dE \quad (1)$$

$\frac{dE'}{dz}$  is the average energy per unit depth ( $\text{MeV}/\text{gm}/\text{cm}^2$ ) deposited by the electrons of initial energy  $E$  after penetrating the slab, where the averaging is done over the emergent electron spectrum. The constant  $1.6 \times 10^{-8}$  converts from ( $\text{MeV}/\text{gm}/\text{cm}^2$ ) to rads (100 ergs/gm). Since electrons in the trapped radiation belts have a wide spectrum of energies equation (1) must be integrated over energy to obtain the total electron dose,

$$D_e(z) = 1.6 \times 10^{-8} \int_0^{\infty} \phi(E) T_N(E, z) \frac{dE'}{dz} (E, z) dE \quad (2)$$

$\phi(E)$  can be obtained from models of the space electron environment and  $T_N$  from Berger's work.  $\frac{dE'}{dz}$  is a little more difficult. It is not simply calculated from the absolute value of the stopping power of the material in question for two reasons. The electrons do not travel in straight paths and they enter the material at a variety of angles. Therefore, the actual distance traveled by the electrons is greater than their depth of penetration. Calculations with  $T_E(E, z)$  (the next method to be discussed) show that  $\frac{dE'}{dz}$  is actually 2-3 times times the absolute value of the stopping power. However, these calculations also show that  $\frac{dE'}{dz}$  is a fairly insensitive function of  $E$  and  $z$ , as might be expected from the insensitivity of the stopping power to variations in energy between 0.5 and 10 MeV.<sup>(4)</sup> Therefore, we can replace  $\frac{dE'}{dz}$  by an average value  $\langle \frac{dE'}{dz} \rangle$  to give us

$$D_e(z) = 1.6 \times 10^{-8} \langle \frac{dE'}{dz} \rangle \int_0^{\infty} \phi(E) T_N(E, z) dE \quad (2a)$$

Because of the considerable amount of computer time required to obtain values of the number coefficient, values at more than a few energies have only recently become available. It turns out that if  $z$  is replaced by the reduced width  $x = x/R_0$ , the values of  $T_N(E, x)$  are fairly insensitive to variations in  $E$ . This enables one to use a universal function  $T_N(x)$  in place of  $T_N(E, z)$  in equation (2a). In the past  $T_N(x)$  has been constructed from Monte Carlo runs using 1 MeV incident energy electrons, giving the dose equation.

$$D_e(z) = 1.6 \times 10^{-8} \left\langle \frac{dT_N}{dx} \right\rangle \int_0^{\infty} \phi(E) T_N(1, x) dE \quad (2b)$$

In actual practice upper and lower limits are set on the energy range of integration, above which there is assumed to be a negligible number of electrons and below which it is assumed no electrons penetrate the slab. We will come back to this point and the question of using a universal transmission function after developing the second method of electron dose calculation.

The second method of calculating the electron dose makes use of the energy transmission coefficients of Berger and Seltzer. It was first brought to this writer's attention in a paper (unpublished) by M. Burrell and J. Wright of MSFC, (7) although the arguments advanced here differ from theirs in certain respects. We will assume for the present that we have a universal energy transmission curve  $T_E(x)$ . Consider the effect of increasing the slab thickness from  $x$  to  $x+\Delta x$ . The quantity  $T_E(x+\Delta x) - T_E(x)$  will be equal to the fraction of the incident energy deposited in  $\Delta z = R_0 \Delta x$ . In making this argument we tacitly assume that the fraction of energy reflected backward is negligible or more appropriately that in the limit of vanishingly small  $\Delta z$  this reflected energy is compensated for by backscattered energy from material farther on. Therefore, the dose delivered to  $\Delta z$  is

$$D_{\Delta z} = \frac{1.6 \times 10^{-8} (T_E(x+\Delta x) - T_E(x))}{R_0(E) \Delta x} \phi(E) E dE$$

where  $R_0(E) \Delta x = \Delta z$ . For skin or surface dose in any material on the shielded side of the aluminum slab we let  $\Delta x \rightarrow 0$  and integrate over  $E$  to obtain

$$D_e(z) = 1.6 \times 10^{-8} \int_0^{\infty} \phi(E) E \frac{dT_E(x)}{dx} \frac{1}{R'_0(E)} dE \quad (3)$$

where we have replaced  $R_0(E)$  by  $R'_0(E)$ , the electron range for the material in question, and  $x = \frac{z}{R'_0(E)}$  is the reduced thickness for the aluminum slab.  $\phi(E)$  can be obtained from models of the space electron environment,  $\frac{dT_E(x)}{dx}$  can be calculated from the transmission data of Berger and Seltzer, and  $R_0(E)$  and  $R'_0(E)$  can be obtained from the range-energy tables of Berger and Seltzer. (4) Equation (3) can be used to calculate the dose directly, whereas in equation (2b) it was necessary to estimate  $\left\langle \frac{dT_N}{dx} \right\rangle$ . In fact equation (3) will later be used to determine  $\left\langle \frac{dT_N}{dx} \right\rangle$  for various spectra and slab thicknesses. As before, limits must be put on the integral in equation (3) in order to numerically integrate it. The calculations indicated in equations (2b) and (3) are carried out by the code BEPOSE (Bremsstrahlung-Electron Dose). This code is described in detail in the appendix including input and output formats and a listing of the program. Since it is to be expected that any radiation dose code intended for space applications will be used for a wide variety of environmental conditions, it is necessary to clearly understand the limitations of such a code in order to correctly interpret the results. In the next section the electron dose calculation described above is examined in detail.

### III. LIMITATIONS

To properly apply equations (3) or (2b) to the calculation of electron doses in space, it is necessary to understand both the limitations of the calculations and the limitations of the inputs which go into the calculations. In this section the following problems will be discussed:

1. The variation of the transmission curves with incident electron energy.
2. Lack of transmission data for values of  $x$  between 0.7 and 1.
3. Choice of a low energy cutoff for the integration.

4. Lack of electron spectral data at high energy.
5. Choice of a high energy cutoff for the integration.

Problems 2 and 3 and problems 4 and 5 are of course related.

In order to illustrate various problems discussed below, two sample electron spectra will be used in equation (2b) or (3); a so called soft spectrum represented by

$$\phi(E) = 2e^{-2E} \text{ (MeV}^{-1}\text{)}$$

and a hard or fission spectrum (taken from Reference 2) given by

$$\phi(E) = 0.71e^{-.575E} - .055E^2 \text{ (MeV}^{-1}\text{)}$$

Both spectra are normalized so that  $\int_0^\infty \phi(E)dE = 1$  and are shown

in Figure 1a. The latter spectrum is typical of regions in the trapped radiation belts where electrons from the Starfish high altitude nuclear explosions still predominate while the former is more typical of the natural electron environment in earth orbit.

Recent calculations indicate that the transmission curves cannot be considered to be independent of energy, especially for values of the reduced thickness greater than 0.5. Figure 2 shows the number transmission curves for 1 MeV and 6 MeV electrons isotropically incident on an aluminum slab. These curves are taken from Monte Carlo calculations of Berger and Seltzer.(3) If a significant fraction of a particular electron dose is due to electrons that have penetrated a reduced thickness greater than about 3.5, the result of the calculation will depend on which curve is used. Figures 3a and 3b show the variation of the energy and number transmission coefficients with energy for various values of the reduced thickness. A good fit to this energy variation can be obtained with the following formulas:

$$T_E(E,x) = T_E(2,x) \left(\frac{E}{2}\right)^{0.91 \ln \frac{T_E(6,x)}{T_E(2,x)}} \quad \text{for } E \leq 6 \text{ MeV,} \quad (4)$$

$$T_N(E,x) = T_N(2,x) \left(\frac{E}{2}\right)^{0.91 \ln \frac{T_N(6,x)}{T_N(2,x)}} \quad \text{for } E \leq 6 \text{ MeV.} \quad (5)$$

For  $E < 1$  MeV or  $E > 6$  MeV one should use the 1 MeV and 6 MeV transmission curves respectively.

Table I illustrates the effect of the variation in the two transmission curves. Electron dose in aluminum is listed versus slab thickness for the hard and soft electron spectra. The calculations have been normalized to give a dose of one rad with the 1 MeV transmission curves at each shield thickness.  $T_E(6,x)$  and  $T_E(1,x)$  were used in equation (3) to obtain the numbers in Table I. The difference in dose produced by the two transmission curves increases with shield thickness and is greater for the soft spectrum than the hard spectrum. This is to be expected since for thicker shields and/or softer spectra, the electrons contributing to the dose will have penetrated greater reduced thicknesses, and the variation in the transmission curves increases with increasing  $x$ . The dose calculations in Section V use  $T_E(6,x)$  and  $T_N(6,x)$  since these curves give the most conservative answers.

As can be seen in Figure 2, the transmission coefficients have been calculated only for  $x < 0.7$ . This is due in part to the fact that large amounts of computer time are needed to obtain statistical accuracy for thick slabs. Although energy and number transmission coefficients are quite small for higher values of  $x$ , this region may be the main contributor to the dose for electron spectra that decrease rapidly with energy. Figure 4 shows  $T_E(6,x)$  for isotropically incident electrons, and compares it to the analytic fit to the calculations used in equation (3). The minimum energy cutoff used in the integration in equation (3) will determine how far the transmission curve must be extrapolated. Figures 5a and 5b are histograms of the contributions to the electron dose as a function of the incident electron energy for the 2.0 and 4.0 gm/cm<sup>2</sup> slabs in Table I. The minimum energy for the integration was chosen so that  $x < 1.0$ . The histogram area is normalized to unity, and results for both the hard and soft electron spectra are shown. The energy points at which  $x = 0.7$  and 1.0 are marked by arrows.

It is easily seen that a significant portion of the dose is due to electrons that have penetrated reduced thicknesses greater than 0.7. Furthermore this percentage increases with shield thickness and spectrum softness. For the case of the soft spectra incident on the 4.0 gm/cm<sup>2</sup> slab over 95% of the dose is produced by electrons for which  $x$  is greater than 0.7, and for the 2.0 gm/cm<sup>2</sup> slab over 50% of the dose is produced in this manner.

TABLE I  
EFFECT OF TRANSMISSION CURVE VARIATION ON DOSE

SHIELD THICKNESS ( $\text{gm/cm}^2$ )	SOFT SPECTRUM		HARD SPECTRUM	
	$T(6,x)$	$T(1,x)$	$T(6,x)$	$T(1,x)$
0.5	1.2 RAD	1 RAD	1.1 RAD	1 RAD
2.0	1.7 RAD	1 RAD	1.5 RAD	1 RAD
4.0	2.4 RAD	1 RAD	2.1 RAD	1 RAD

It is not unlikely that the extrapolation in Figure 4 could be off by as much as a factor of 10 at  $x=1$ . Monte Carlo calculations at  $x = 0.8, 0.9$  are necessary for dose calculations in situations where thick shields are required.

Figures 5a and 5b also illustrate another point that must be considered in the dose calculation. As the slab thickness increases and/or the spectrum hardens, the dose contribution comes from increasingly higher energy electrons. The maximum energy cut-off used in the integral of equation (3) was 10 MeV for the graphs in Figures 5a and 5b. However, for the  $4.0 \text{ gm/cm}^2$  slab contributions from electrons with  $E > 10 \text{ MeV}$  would not be negligible ( $\sim 10\%$  for the hard spectrum). Measurements of electron spectra in space have not been made in this energy range. All that is usually available is an integral measurement above 4 or 5 MeV and these are limited in number. The spectrum shape below this value is then extrapolated out to higher energies. This is a further source of possible errors in the calculations if the actual spectral shape encountered differs considerably from the extrapolated shape.

The use of a 6 MeV transmission curve in cases where most of the dose contribution is coming from electrons of 7 MeV or more, such as the  $4.0 \text{ gm/cm}^2$  slab, is a further uncertainty. Transmission calculations for 10 MeV incident electrons are needed for dose calculations involving high energy electrons.

It has been shown in this section that the calculation of electron dose can involve the use of data which has been extrapolated a considerable distance from either measured or calculated values. This is true of both the electron spectral shape and the electron transmission coefficients. In the next section the calculation of the secondary electron bremsstrahlung dose is undertaken and shown to be in reasonably good shape.

#### IV. BREMSSTRAHLUNG DOSE

Berger and Seltzer have also calculated the forward bremsstrahlung\* efficiency for electrons isotropically incident on aluminum slabs. This is the fraction of incident electron energy that appears as forward directed bremsstrahlung on the shielded side of the slab. They express this fraction as

$$Y = 10^{-4} a(z,E)ZE, \quad (6)$$

where  $Z$  is the atomic number (13 in the case of aluminum),  $E$  the kinetic energy of the incident electrons, and  $Y$  is the forward bremsstrahlung efficiency. When expressed this way, "a" is a slowly varying function of  $E$  and  $z$  (the slab thickness) having a nominal value of about 4. Two graphs of  $Y$  vs  $z/R_0$  for different values of  $E$  (Reference (3)) are shown in Figure 6.

\*Bremsstrahlung, or "braking radiation" consists of electromagnetic radiation (x-rays) with energies up to that of the electron producing it, which is produced in the slowing down of the energetic electrons.

Using equation (6) the bremsstrahlung energy flux emerging from the slab is given by

$$F_b(z) = \int_0^{\infty} 10^{-4} Z \phi(E) a(z,E) E^2 dE \text{ (MeV/cm}^2\text{)}, \quad (7)$$

The bremsstrahlung dose for material adjacent to the slab is simply  $[1.6 \times 10^{-8} \langle \sigma_a \rangle F_b(z)]$  where  $\langle \sigma_a \rangle$  is the mass absorption coefficient for the material in question averaged of the emerging bremsstrahlung energy spectrum. For the bremsstrahlung energies encountered in space applications  $\langle \sigma_a \rangle$  for tissue is approximately  $.031 \text{ cm}^2/\text{gm}$ , and the dose is given by

$$D_b(z) = 6.45 \times 10^{-13} \int_0^{\infty} \phi(E) E^2 a(x,E) dE, \quad (8)$$

where we have replaced  $a(z,E)$  by  $a(x,E)$ , making it a function of the reduced thickness to agree with the tabulated data in Reference (3). An analytic fit to Berger and Seltzer's tabulations of  $a(x,E)$  gives

$$a(x,E) = 44 e^{-\frac{.125E^{.321}(x-0.6)}{R_0(E)}} \quad x \geq 0.6, \quad (9a)$$

$$a(x,E) = 24.3 x^{1.13} e^{-1.88x} \quad x < 0.6, \quad (9b)$$

where  $R_0(E)$  is again the electron range in aluminum and  $x = \frac{z}{R_0}$ . Limits on the integration are not critical for equation (8) because the behavior of the integral is determined by the  $\phi(E)E^2$  term which is sharply peaked at an energy  $E = \frac{2}{b}$  for a spectral shape  $e^{-bE}$ .

A graph of bremsstrahlung dose versus slab thickness is shown in Figure 7 for the hard and soft electron spectra. The code BEDOSE using equations (8), (9a) and (9b) was used to do the calculation. The doses have been normalized to one electron per  $\text{cm}^2$  striking the slab. A histogram of dose contributions versus electron energy for the hard spectrum incident on a  $4.0 \text{ gm/cm}^2$  slab is presented in Figure 8. The dotted line is a plot of  $\phi(E)E^2$ . The deviation at low energies is due to the decrease in  $a(x,E)$  at low energy because of absorption of the low energy bremsstrahlung in the aluminum slab.

Although the values of  $a(x,E)$  used in equation (8) strictly apply only to bremsstrahlung from aluminum slabs, estimates for bremsstrahlung doses from other materials can be obtained simply by scaling equation (8) by  $\frac{Z}{13}$ , the atomic number ratio.

As shown above the electron bremsstrahlung calculation is a straightforward procedure and does not require extrapolation of Monte Carlo or spectral data to any great degree. As a result, estimates of bremsstrahlung dose produced by primary electrons is of sufficient accuracy for any anticipated space applications.

#### V. APOLLO RADIATION DOSES

The calculation of radiation dose for a specific mission requires combining the mission profile with a suitable model of the space radiation environment to produce an average omnidirectional electron flux environment for the spacecraft. Although the electron flux at various points in space can be highly directional, the assumption is usually made that random orientation of the spacecraft produces an average flux that is isotropically incident on the spacecraft. Vette et al have calculated average omnidirectional fluxes for a variety of circular orbits at inclination from  $0$  to  $90^\circ$  based on their model AE2 electron environment.(5) This environment is constructed from experimental measurements made in the 1962-64 time period. Orbital fluxes for a projected December 1968 electron environment based on observed time decay of the fluxes from the Starfish nuclear detonation have also been calculated.

Figure 9 shows the average electron flux spectrum which would be encountered in a 300 nautical mile altitude,  $30^\circ$  inclination circular orbit. Both the 1964 flux and the projected December 1968 flux are shown. The softening of the spectrum between 1964 and 1968 is due to decay of the Starfish electrons.

Part of the mission profile for Apollo Mission E calls for a 250 nautical mile earth orbit for up to two weeks with extended occupation of the lunar module (LM). Since the spectral shape is independent of altitude in this region, the 300 nautical mile fluxes may be used to calculate dose in the command module (CM) and the LM, and the results scaled to the 250 nautical mile altitude. Figure 10 is a plot of the electron flux above 0.5 MeV versus altitude for  $30^\circ$  inclination circular orbits. The fluxes are taken from reference (5). The 250 nautical mile flux is 0.41 of the 300 nautical mile flux for both the 1964 and predicted 1968 data.

The differential spectra given by Vette extend from 0 to 7 MeV with an integral value given for the total number of electrons above 7 MeV. In carrying out the dose calculations these electrons were handled in two ways. One set of calculations was carried out with the differential spectrum decreasing exponentially:

$$\int_7^{\infty} \phi(7)e^{-a(E-7)} dE = \text{number of electrons above 7 MeV.}$$

A second set of calculations was carried out with the differential spectrum assumed to be constant out to a value  $E_{\text{max}}$  and zero thereafter so that

$$\phi(7)[E_{\text{Max}} - 7] = \text{number of electrons above 7 MeV.}$$

These two cases are shown by the dotted lines in Figure 9 and represent hard and soft extremes of spectral behavior. For the shield thickness of interest, the differences in dose were less than 10%. The more conservative (i.e. higher dose) exponential spectrum was used for the doses presented here. It should be pointed out that all spectral behavior above 4 MeV is based on extrapolation even though integral numbers may be available experimentally.

The electron and bremsstrahlung doses as a function of slab thickness are shown in Figure 11 for the 1964, and projected 1968 spectra. The doses are normalized to one electron per  $\text{cm}^2$  striking the slab. In order to apply these results to a spacecraft geometry the following line of reasoning is used. The electron dose received by an astronaut will be a skin dose because of the limited penetrating ability of the electrons. The astronaut's body will shield his skin from all electron radiation except that coming from in front of the area under consideration. The maximum skin dose will be produced over that area of the astronaut's body that faces the thinnest part of the spacecraft. The maximum skin dose that can be produced by the electrons in a spacecraft geometry can therefore be obtained from the slab results of Figure 11 using a slab thickness corresponding to the thinnest portion of the spacecraft. If the astronaut is moving about so that different parts of his body face the thin portions of the spacecraft at different times, then the total skin dose received by any portion of his body will be less than the maximum possible values calculated here.

The dose curves in Figure 11 are normalized to one electron/ $\text{cm}^2$  striking the slab (i.e., spacecraft), and the dose values given must therefore be multiplied by the number of electrons per  $\text{cm}^2$  striking the spacecraft in order to obtain the electron dose. If we consider the electron flux to be isotropic, the number of electrons per  $\text{cm}^2$  striking the spacecraft's surface will be equal to 1/4 of the omnidirectional flux, or  $\frac{1}{4}$  (see e.g., Reference (9)).

For the penetrating bremsstrahlung radiation, the entire spacecraft will contribute to the dose. Moreover, the dose will be essentially a whole body dose since little attenuation is provided by the astronaut's body. Considering the spacecraft as a thin spherical shell, the bremsstrahlung dose is given to a good approximation by the slab results with an incident flux on the slab of  $\frac{1}{2}$  or  $\frac{1}{2}$  the omnidirectional flux.

Doses for the CM and LM are given in Table II for 1964 and 1968 electron fluxes. The 300 n.mi. results have been multiplied by 0.41 to convert them to a 250 n.mi. orbit. A minimum thickness of 2.5 gms/ $\text{cm}^2$  and 0.2 gms/ $\text{cm}^2$  were assumed for the CM and LM respectively in determining the maximum electron dose. The bremsstrahlung dose assumed average aluminum thicknesses of 5 and 1 gm/ $\text{cm}^2$  for the CM and LM respectively. Also listed in Table II are the values of  $\langle \frac{dE'}{dz} \rangle$  required to make equation (2b)

agree with equation (3). The straight ahead value (i.e., the value

TABLE II  
ELECTRON AND BREMSSTRAHLUNG DOSE FOR APOLLO MISSION E

	Electron Spectra	Electron Dose (rad/day)	Bremsstrahlung Dose (rad/day)	$\langle \frac{dE'}{dz} \rangle$ (MeV/gm/ $\text{cm}^2$ )
Command Module	1964	.10	.0072	5.7
	1968	.012	.0002	5.0
Lunar Module	1964	.59 (59)	.018	5.1
	1968	2.2 (1.7)	.0003	5.0

large values of  $x$ . The degree of difference between the old and new doses is directly related to percentage of the dose contributed by electrons with large values of  $x$ .

TABLE IV

ELECTRON DOSES USING OLD TRANSMISSION COEFFICIENTS

		Dose (rad/day)	Dose Ratio (Table II/Table IV)
CM	1964	.031	3.2
	1968	.008	1.5
LM	1964	45	1.3
	1968	1.0	2.2

In order to assess the relative importance of the electron dose calculation to the overall question of radiation dose determination, it is necessary to estimate the magnitude of the proton dose. Using the proton fluxes in Reference (10) and the proton transport calculations of Reference (11), the skin dose due to protons is estimated to be approximately .070 rad/day for the CM (compared to .012 rad/day from electrons) and .20 rad/day for the LM (compared to 2.2 rad/day from electrons). The proton doses are in approximate agreement with calculations of R.H. Hilberg Reference (12). Thus electrons contribute over 90% of the skin dose in the LM and 15% in the CM using the 1968 electron environment. If the 1964 electron environment is used, the electron contribution to skin dose in the CM increases to 60%.

The critical phase of Apollo Mission E, for radiation dose is the occupation of the LM. Although the predicted 1968 dose is within the allowable limits, the 1964 dose is not. More up to date measurements of the electron environment would certainly be of great value in verifying the factor of 30 decrease in dose that is predicted from decay of the high energy Starfish electrons. CM doses are low enough that no hazard should result either from errors in radiation environment prediction or electron penetration calculations. Bremsstrahlung is not a problem at these flux levels and shield thicknesses.


VI. SUMMARY

The problem of determining electron radiation dose in spacecraft has been investigated in detail and several areas of weakness in the calculations have been found. Of particular

concern, is the lack of transmission coefficient calculations for shield thickness nearly equal to the extrapolated electron range, and lack of electron spectral information above 4 or 5 MeV. This information would be needed to calculate electron dose behind the moderately thick shields required for high altitude orbiting laboratories. In addition, the increase in the transmission coefficients with incident electron energy was shown to increase significantly the calculated dose over that obtained with the old 1 MeV transmission curves. Electron bremsstrahlung dose calculations were also studied. The accuracy of this rather straightforward calculation is sufficient for radiation dose predictions.

Radiation dose calculations for the 250 n. mi. orbit phase of Apollo Mission E showed the LM electron dose estimates to be within acceptable levels if the 1964 to 1968 electron flux decay is as predicted. Since the 1964 dose would not have been within acceptable limits, it would be wise to measure at least partially the 1968 environment prior to Apollo Mission E. Bremsstrahlung dose was not a problem at these flux levels.

1011-JSI-b1


  
J.S. Ingley

## Attachments

Appendix A

Listing and sample output for code BEDOSE

Figures 1 through 13

## REFERENCES

1. Terby, C.D., and Keller, F.L.: Electron Transport Theory, Calculations, and Experiments. Nuclear Science and Engineering, 27 190-218 (1967).
2. Berger, Martin J. Monte Carlo Calculation of the Penetration and Diffusion of Fast Charged Particles. Methods in Computation Physics, Volume 1 (B. Alder, S. Fernbach, M. Rotenberg, Editors), Academic Press, New York, 1963.
3. Berger, M.J. and Seltzer, S.M.: Penetration of Electrons and Associated Bremsstrahlung Through Aluminum Targets. NBS Report 9566, July 3, 1967.
4. Berger, M.J. and Seltzer, S.M., Tables of Energy Losses and Ranges of Electrons and Positrons. NASA SP-3012, 1964.
5. Vette, J.I., Lucero, A.B. and Wright J.A., Models of the Trapped Radiation Environment, Volume II: Inner and Outer Zone Electrons. NASA SP-3024, 1966.
6. Berger, M.J., Transmission and Reflection of Electrons by Aluminum Foils, NBS TN187, April 1, 1963.
7. Burrell, M.O. and Wright J.J., (Private Communication through R.H. Hilberg).
8. Keller, F.L. and Pruett, R.G., Second Symposium on Protection Against Radiations in Space (Paper No. 33). NASA SP-71, 1965.
9. Keller, J.W., Shieldings Techniques. Radiation Trapped in the Earth's Magnetic Field (B.M. McCormac, Ed.), 1966.
10. Vette, J.I., Models of the Trapped Radiation Environment, Volume I: Inner Zone Protons and Electrons. NASA SP-3024, 1966.
11. Shipley, E.N., Radiation Dose Calculations. Bellcomm TM-64-1012-2.
12. Hilberg, R.H., Radiation Levels on A5-503 Missions. Bellcomm, Memorandum for File, July 11, 1966.

## APPENDIX

Computer Code BEDOSE

## I. GENERAL DESCRIPTION

BEDOSE (Bremsstrahlung-Electron Dose) calculates the radiation dose delivered to the surface of a slab of material shielded by various thicknesses of aluminum slabs from electrons of varying energy incident on the slab. It is patterned after a similar code developed at MSFC (Reference (7)). Both the dose due to electrons that penetrate the slab and bremsstrahlung from the electron slowing down process are included in the calculation. In order to calculate the dose, the code makes use of electron transmission coefficients and bremsstrahlung efficiency coefficients previously calculated by much more involved Monte Carlo procedures. The electron dose in rads is calculated by numerical integration of the following equation:

$$D_e(z) = A_k \int_{E_{\min}}^{E_{\max}} E \phi(E) \frac{dT_E(E,x)}{dx} \frac{dE}{R'_0(E)} \quad (A1)$$

- $\phi(E)$  is the differential flux of electrons of energy E incident on the slab per  $\text{cm}^2$  ( $\text{MeV}^{-1}\text{cm}^{-2}$ ).
- $T_E(E,x)$  is the fraction of the incident electron energy flux,  $E\phi(E)dE$ , that is transmitted through a reduced thickness, x (determined from Monte Carlo calculations).
- x is the reduced thickness,  $\frac{z}{R'_0(E)}$ .
- z is the slab thickness in  $\text{gm}/\text{cm}^2$ .
- $R'_0(E)$  is the extrapolated range ( $\text{gm}/\text{cm}^2$ ) in aluminum of electrons of incident energy E.
- $R'_0(E)$  is the corresponding range in the material being irradiated (e.g., tissue).
- $E_{\max}$  is the upper energy cutoff in MeV above which it is assumed no electrons contribute to the dose.
- $E_{\min}$  is the lower energy cutoff in MeV below which all electrons are assumed to be stopped in the slab.
- $A_k$  is a constant which converts from  $\text{MeV}/\text{gm}$  to units of dose (usually rads).

## Appendix

$D_e(z)$  is the surface or skin dose in rads which would be delivered to a slab of material adjacent to the aluminum slab. The derivation of equation (A1) is given in the text.

BEDOSE also calculates the transmitted flux  $N_e(z)$  given by

$$N_e(z) = \int_{E_{\min}}^{E_{\max}} \phi(E) T_N(E,x) dE. \quad (A2)$$

$T_N(E,x)$  is the fraction of incident electrons with energy between  $E$  and  $E+dE$ ,  $\phi(E)dE$ , that are transmitted through a reduced thickness,  $x$ .

$N_e(z)$  is the total number of electrons per  $\text{cm}^2$  penetrating the slab, and  $\frac{D_e(z)}{A_k N_e(z)}$  is equal to  $\langle \frac{dE'}{dz} \rangle$ , the average

energy deposition per unit depth produced by the transmitted electrons in the irradiated material.

The bremsstrahlung dose is calculated from the equation

$$D_b(z) = A_k \langle \sigma_a \rangle Z (10^{-4}) \int_{E_{\min}}^{E_{\max}} E^2 \phi(E) a(z,E) dE, \quad (A3)$$

the derivation of which is given in the text.  $Z$  is the atomic number of the shielding material,  $a(z,E)$  is the coefficient in the forward bremsstrahlung efficiency formula (determined from Monte Carlo calculations), and  $\langle \sigma_a \rangle$  is the average mass absorption coefficient of the irradiated material for the incident bremsstrahlung energy spectrum.

The quantities  $\phi(E)$ ,  $T_E(E,x)$ ,  $T_N(E,x)$ ,  $z$ ,

and  $A_k$  are given as input, while the quantities  $R_o(E)$ ,  $R'_o(E)$ ,  $\langle \sigma_a \rangle$ ,  $Z$ , and  $a(z,E)$  are fixed in the code.  $\phi(E)$  can either be specified explicitly at various energies and the code will assume exponential behavior in between, or it can be specified

## Appendix

by the analytic form  $A_o e^{-FE-GE^2}$  ( $E$  in MeV).  $T_E$  and  $T_N$  are specified by analytic fits of the form,  $Ae^{-(Bx+Cx^2+Dx^3)}$ , to the Monte Carlo transmission calculations.  $E_{\min}$  for the electron dose is determined by the requirement that  $x < CTF$ , where CTF is specified in the input.  $E_{\min}$  for the bremsstrahlung dose is fixed in the code at a value of  $(\frac{3}{2} Z)^{0.6}$ .

## II. INPUT FORMAT

The input quantities, their meaning, and the input format are listed in the table below.

TABLE A1  
INPUT INFORMATION

Card Number	Item(s)	Format	Purpose
1	CTF	E14.7	$T_N$ and $T_E$ set equal to zero for $x > CTF$ .
2*	$A_0, F, G$	3E14.7	$\phi(E) = A_0 e^{-FE - GE^2}$ if analytic form is specified for flux.
3	$Az, z_{min}, z_{max}$	3E14.7	Code will compute doses for slab thickness equal to $z_{min}, z_{min} + Az, \dots, z_{max}$ .
4	N	I5	Number of energy region cards to follow.
5a, 5b, etc.	$E_1, n_1$	E14.7, I5	The $\int_0^{E_{max}}$ is divided into N regions. The number of steps in the integration from $E_{i-1}$ to $E_i$ is equal to $n_i; E_{max} = E_N, E_0 = 0$ . Maximum number of entries = 20.
6	$A_k$	E14.7	Converts MeV/gm to units of dose. $A_k = 1.6 \times 10^8$ for rads.
7	A, B, C, D	4E14.7	Coefficients for $T_N(x) = A e^{-(Bx + Cx^2 + Dx^3)}$
8	$A_1, B_1, C_1, D_1$	4E14.7	Coefficients for $T_E(x) = A_1 e^{-(B_1 x + C_1 x^2 + D_1 x^3)}$

TABLE A1 CONT'D  
INPUT INFORMATION

Card Number	Item(s)	Format	Purpose
9	IFLX, IDE Control Sentinels	2I5	If IDE = 1, code will edit after every $E_1$ given on cards 5a, 5b, etc. If IDE = 0, code will edit at end of calculation. If IFLX = 0, $\phi(E)$ is to be specified by input table. If IFLX = 1, $\phi(E)$ given in analytic form on card 2.
10**	KMAX	I5	Number of flux cards to follow.
11a, 11b, etc**	$E_k, \phi(E_k)$ $K = (1, KMAX)$	2E14.5	Specifies $\phi(E)$ at energy $E_k$ . Code interpolates logarithmically from $E_{k-1}$ to $E_k$ . $E_1 = 0$ . Maximum number of entries = 40.

\*This card must be in deck, but is ignored if IFLX = 0  
\*\*Must not be used if IFLX = 1  
Total number of Input Cards = 8+N (if IFLX = 1)  
9+N+KMAX (if IFLX = 0)

## Appendix

III. OUTPUT FORMAT

The output consists of two parts; a section containing the input information and a section containing the code output. The input information is clearly labeled and is given in the following order:

1. The scale factor,  $A_k$ .
2. The integration edit intervals and number of integration steps,  $E_1$  and  $n_1$ .
3.  $A_1, B_1, C_1, D_1$
4. A, B, C, D.
5. CTF,  $A_0, F, G$ .
6. The flux energy spectrum, if given,  $E_k$  and  $\phi(E_k)$ .
7.  $\int_0^{\infty} \phi(E) dE$  which is labeled normalization.

The code output information is listed in 5 columns. Column 1 labeled, Z, is the slab thickness in gm/cm<sup>2</sup>. Column 2 labeled, Electron Dose, is the skin dose in whatever units are used for  $A_k$  (usually rads). If IDE = 1, the code will print accumulated dose after every  $E_1$  ( $i = 1, N$ ) given in the input deck. With this option, the user can determine which regions of the electron energy spectrum are contributing to the dose. Column 3, labeled Electron Number, gives the number of electrons penetrating the slab per cm<sup>2</sup>. The same option applies for IDE = 1. Column 4 labeled, E, (DE/DX), gives  $E_1$  when IDE = 1, except for the last entry which is  $\langle \frac{dE'}{dz} \rangle$  the average energy deposition per gm/cm<sup>2</sup> for the electrons that penetrate the slab. When IDE = 0 only  $\langle \frac{dE'}{dz} \rangle$  is given in this column.

Column 5 labeled, Brem Dose, is the bremsstrahlung dose produced by the electron bremsstrahlung. The units are the same as the electron dose. The option IDE = 1 again produces an edit after every  $E_1$ .

## Appendix

IV. ADDITIONAL COMMENTS

1. The code calculates radiation dose in a slab of material behind an aluminum slab shield. Care must be taken in applying the results to other materials and spacecraft geometries (see text).
2. The transmission coefficients are energy independent in the present version of the code. Use a transmission curve for an incident energy close to that which contributes most to the dose.
3. The angular distribution of the incident flux need not be isotropic, but the transmission curves should be determined for whatever angular distribution is assumed for the flux.
4. If  $E_{MAX}$  is higher than  $E_{KMAX}$ , the code will exponentially extrapolate  $\phi(E)$  out to  $E_{MAX}$ . The slope will be the same as the slope from  $E_{KMAX-1}$  to  $E_{KMAX}$ .
5. The  $R'_0(E)$  presently in the code is for muscle.
6. Generation time + Running time = 6 seconds on Univac 1108 for five slab thicknesses and 200 integration points per slab.
7. A listing with sample output follows below.

```

1      HDG      BREMSSTRAHLUNG-ELECTRON DOSE (INGLEY/BELLCOMM)
**IT   FOR      REDOSE,REDOSE
        DIMENSION FF(40),FL(40),FNR(20),INR(20)
        IWR=6
        IRF=5
        READ (IRF,25)CTF,A0,F,G
        READ (IRF,101)D7,ZFRT,ZMAX
        M=0
        N=(ZMAX-ZFRT)/D7+1
        READ (IRF,700)NUR,(FNR(I),INR(I),I=1,NUR)
        READ (IRF,29)AK,A,B,C,D,A1,B1,C1,D1
        WRITE(IWR,20)AK,(FNR(I),INR(I),I=1,NUR)
        WRITE(IWR,21)A1,B1,C1,D1
        WRITE(IWR,22)A,B,C,D
        WRITE(IWR,23)CTF,A0,F,G
        READ(IRF,30)IFLX,IDE
        IF(IFLX-1)1,31,31
1      READ (IRF,2)KMAX,(FF(K),FL(K),K=1,KMAX)
        WRITE (IWR,708)
        IF (FF(KMAX)-FNR(NUR))2000,2001,2001
2000   KMAX=KMAX+1
        FF(KMAX)=FNR(NUR)
        FL(KMAX)=EXP(ALOG(FL(KMAX-1))+(FF(KMAX)-FF(KMAX-1))/(FF(KMAX-1)-FF
1(KMAX-2))*(ALOG(FL(KMAX-1)/FL(KMAX-2))))
2001   DO 5 K=1,KMAX
        WRITE (IWR,1000)FF(K),FL(K)
5      FL(K)=ALOG(FL(K))
        K=1
        SUM3=0.
100   SUM3=SUM3+(EXP(FL(K+1))-EXP(FL(K)))/((FL(K+1)-FL(K))/(FF(K+1)-FF
1(K)))
        K=K+1
        IF (K-KMAX)100,110,110
31    DE=FNR(NUR)/200.
        SUM3=0.
        FN=DE*.5
        DO 32 IA=1,200
        SUM3=SUM3+A0*DE*EXP(-(F*FN+G*FN**2))
32    FN=FN+DE
110   WRITE (IWR,800)SUM3
        WRITE (IWR,4)
        Z=ZFRT
        DO 6 J=1,N
        SUM1=0.
        SUM2=0.
        SUM4=0.
        K=1
        FMIN=(Z/32.)**.6
        FMIN2=SQRT((CTF*Z)*(CTF*Z+.2378)/(1.4364-.0128*CTF*Z))
        L=1
704   IF (FMIN-FNR(L))701,702,703
703   IF (1-NUR)705,600,1
705   L=L+1
        GO TO 704
702   IF (1-NUR)706,600,1

```

```

706 L=L+1
701 FL=FMIN
DO 707 KA=L,NUB
AIR=INR(KA)
DF=(FNR(KA)-EL)/AIR
FN=FL-DF
NFA=INP(KA)+1
300 DO 7 J=1,NFA
FN=FN+DF
P=SQRT(.4379*FN**2+.01415)-.1180-.0064*FN**2
PI=.7*P
X=7/P
DN=0.
DP=0.
IF(X-.6)16,17,17
16 ARRFM=24.3*(X**1.13)*EXP(-1.18*X)
GO TO 18
17 ARRFM=4.4*EXP(-(.125*(FN**.321)*(X-.61/P))
18 IF(FN-FMIN)11,51,51
51 DN=A*EXP(-(R*X+C*X**2+D*X**3))
DP=A1*(B1+2.*C1*X+3.*D1*X**2)*EXP(-(B1*X+C1*X**2+D1*X**3))/P1
11 IF(IFLX-1)33,34,34
33 IF(FN-FF(K))8,9,10
10 K=K+1
IF(K-KMAX)11,11,12
12 K=KMAX
9 FU=EXP(FL(K))
GO TO 13
8 IF(K-1)1,9,14
14 FU=EXP((FN-FF(K-1))*(FL(K)-FL(K-1))/(FF(N)-FF(K-1))+FL(K-1))
GO TO 13
34 FU=A0*EXP(-(F*FN+G*FN**2))
13 IF(I-1)40,40,41
40 SIMPC=1.
GO TO 46
41 IF(M-1)42,43,43
42 SIMPC=4.
M=3
GO TO 44
43 SIMPC=2.
M=0
44 IF(I-NFA)46,45,45
45 SIMPC=1.
M=0
46 SUM1=SUM1+FU*DP*FN*DF*SIMPC/3.
SUM2=SUM2+FU*DN*SIMPC*DF/3.
7 SUM4=SUM4+FU*ARRFM*(FN**2)*SIMPC*DF/3.
FL=FNR(KA)
IF(IDF-1)707,35,35
35 SUM1P=SUM1*AK
SUM4P=SUM4*AK*(4.03F-05)
WRITE(IWR,15)7,SUM1P,SUM2,FL,SUM4P
707 FL=FNR(KA)
600 DFDX=SUM1/SUM2
SUM1=SUM1*AK

```

```

SUM4=SUM4*AK*(4.03E-05)
WRITE(IWR,36)Z,SUM1,SUM2,DEDX,SUM4
6   Z=Z*.D7
    WRITE(IWR,37)
    CALL EXIT
2   FORMAT (I5/(2E14.8))
3   FORMAT(3H A=F14.7/3H B=F14.7/3H C=F14.7/3H D=F14.7)
4   FORMAT(/75H  Z (GM/CM2)  ELECTRON DOSE  ELECTRON NUMBER  F,(DE
1/DX)  BREM DOSE  )
15  FORMAT(5F15.6)
20  FORMAT(22H INTEGRATION CONSTANT=F14.7/18H INTEGRATION STEPS/
110X,6HFENERGY,7X,12HNO. OF STEPS/(F20.7,I10))
21  FORMAT( //4H A1=F14.7/4H B1=F14.7/4H C1=F14.7/4H D1=F14.7)
23  FORMAT(5H CTF=F14.7/4H AD=F14.7/3H F=F14.7/3H G=F14.7)
25  FORMAT(F14.7/(3F14.7))
29  FORMAT(F14.7/(4F14.7))
30  FORMAT(2I5)
36  FORMAT(/5F15.6/)
37  FORMAT(17H PROBLEM FINISHED)
101 FORMAT(3F14.8)
700 FORMAT (I5/(F14.7,I5))
708 FORMAT (/79H SPECTRUM/10X,6HFENERGY,15X,4HFLUX)
800 FORMAT(15H NORMALIZATION=F14.7)
1000 FORMAT (2F20.7)
    END

```

	XQT	REDUSE		
1.0				
	7.1F12.575		.055	
	.5	.5	2.5	
10				
.5		50		
1.		50		
1.5		25		
2.		25		
3.		20		
4.		10		
5.		10		
6.		10		
7.		10		
8.		10		
	1.6-08			
1.072		2.80	-6.237	11.96
1.058		3.99	-4.66	11.1
0	1			
6				
0.		4.67F11		
1.5		3.27F6		
2.		2.36F6		
3.		1.65F6		
7.		5.45F5		
20.		3.5F4		

INTEGRATION CONSTANT= .1600000-07  
 INTEGRATION STEPS

ENERGY	NO. OF STEPS
.5000000-00	50
.1000000+01	50
.1500000+01	25
.2000000+01	25
.3000000+01	20
.4000000+01	10
.5000000+01	10
.6000000+01	10
.7000000+01	10
.8000000+01	10

A1= .1058000+01  
 B1= .3990000+01  
 C1= -.4660000+01  
 D1= .1110000+02  
 A= .1072000+01  
 B= .2800000+01  
 C= -.6237000+01  
 D= .1196000+02  
 CTF= .1000000+01  
 AC= .7100000+13  
 F= .5750000-00  
 G= .5500000-01

SPECTRUM

ENERGY	FLUX
.0000000	.4670000+12
.1500000+01	.3270000+07
.2000000+01	.2360000+07
.3000000+01	.1650000+07
.7000000+01	.5450000+06
.2000000+02	.3500000+05

NORMALIZATION= .5902720+11

Z (GM/CM2)	ELECTRON DOSE	ELECTRON NUMBER	E, (DE/DX)	BRFM DOSE
.500000-00	.000000	.000000	.500000-00	.469378-03
.500000-00	.199939-02	.117874+05	.100000+01	.133649-02
.500000-00	.655573-01	.439178+06	.150000+01	.140944-02
.500000-00	.113535+00	.838160+06	.200000+01	.142576-02
.500000-00	.219298-00	.188101+07	.300000+01	.146307-02
.500000-00	.310604-00	.284046+07	.400000+01	.150366-02
.500000-00	.388246-00	.364168+07	.500000+01	.154443-02
.500000-00	.453066-00	.428515+07	.600000+01	.158286-02
.500000-00	.506350-00	.479290+07	.700000+01	.161768-02
.500000-00	.550996-00	.520230+07	.800000+01	.164942-02
.500000-00	.550996-00	.520230+07	.661963+01	.164942-02
.100000+01	.000000	.000000	.500000-00	.110476-03
.100000+01	.000000	.000000	.100000+01	.627776-03
.100000+01	.000000	.000000	.150000+01	.689093-03
.100000+01	.225989-03	.147084+04	.200000+01	.700287-03

•100000+01	•213211-01	•160919+06	•300000+01	•739172-03
•100000+01	•736830-01	•618725+06	•400000+01	•806350-03
•100000+01	•128354-00	•115151+07	•500000+01	•878173-03
•100000+01	•175398-00	•163507+07	•600000+01	•948569-03
•100000+01	•214094-00	•203906+07	•700000+01	•101409-02
•100000+01	•246510-00	•237547+07	•800000+01	•107498-02
•100000+01	•246510-00	•237547+07	•648583+01	•107498-02
•150000+01	•000000	•000000	•500000-00	•311317-04
•150000+01	•000000	•000000	•100000+01	•351317-03
•150000+01	•000000	•000000	•150000+01	•403329-03
•150000+01	•000000	•000000	•200000+01	•413749-03
•150000+01	•360002-03	•240767+04	•300000+01	•447009-03
•150000+01	•105547-01	•772421+05	•400000+01	•496300-03
•150000+01	•379631-01	•299978+06	•500000+01	•582595-03
•150000+01	•710424-01	•594559+06	•600000+01	•675771-03
•150000+01	•101665+00	•885831+06	•700000+01	•764834-03
•150000+01	•128339-00	•115007+07	•800000+01	•849218-03
•150000+01	•128339-00	•115007+07	•697449+01	•849218-03
•200000+01	•000000	•000000	•500000-00	•954008-05
•200000+01	•000000	•000000	•100000+01	•214400-03
•200000+01	•000000	•000000	•150000+01	•258559-03
•200000+01	•000000	•000000	•200000+01	•268259-03
•200000+01	•000000	•000000	•300000+01	•300297-03
•200000+01	•398422-03	•268554+04	•400000+01	•348573-03
•200000+01	•608672-02	•436243+05	•500000+01	•410339-03
•200000+01	•209747-01	•159032+06	•600000+01	•496514-03
•200000+01	•406683-01	•323069+06	•700000+01	•602496-03
•200000+01	•609687-01	•502664+06	•800000+01	•704877-03
•200000+01	•609687-01	•502664+06	•758070+01	•704877-03
•250000+01	•000000	•000000	•500000-00	•307123-05
•250000+01	•000000	•000000	•100000+01	•137996-03
•250000+01	•000000	•000000	•150000+01	•175521-03
•250000+01	•000000	•000000	•200000+01	•184553-03
•250000+01	•000000	•000000	•300000+01	•215416-03
•250000+01	•000000	•000000	•400000+01	•262697-03
•250000+01	•384402-03	•258912+04	•500000+01	•323628-03
•250000+01	•375916-02	•264857+05	•600000+01	•393615-03
•250000+01	•121411-01	•892640+05	•700000+01	•469642-03
•250000+01	•242375-01	•185134+06	•818243+01	•585124-03

BLEM FINISHED

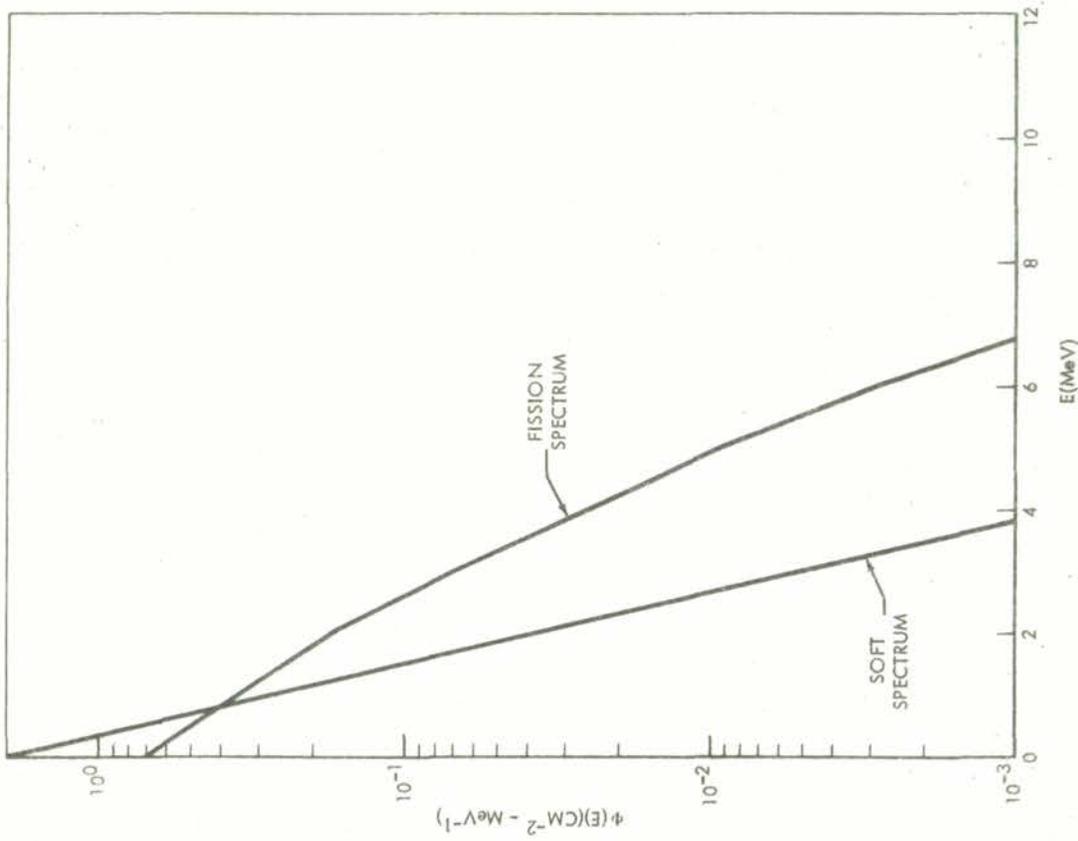


FIGURE 1a - MODEL ELECTRON SPECTRA FOR RADIATION DOSE CALCULATIONS

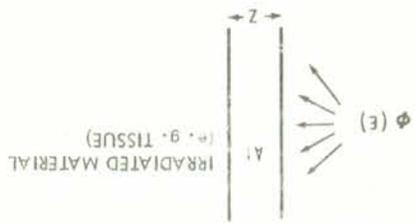


FIGURE 1 - ELECTRON DOSE MODEL

FIGURE 3b - VARIATION OF NUMBER TRANSMISSION COEFFICIENT WITH INCIDENT ELECTRON ENERGY

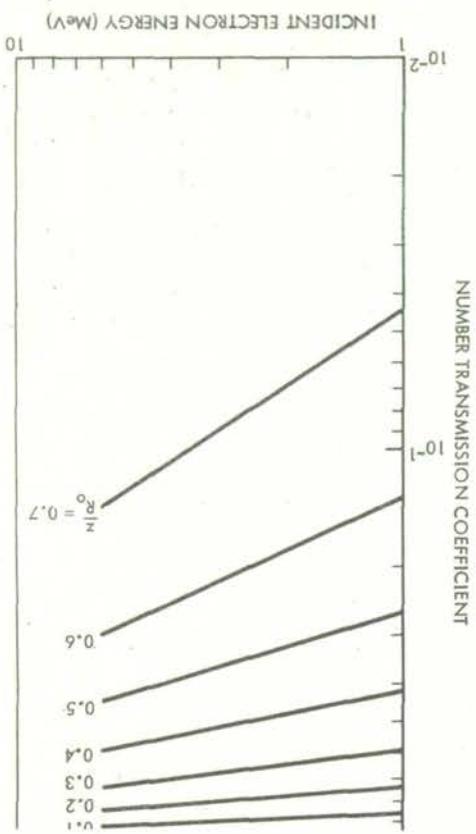


FIGURE 3a - VARIATION OF ENERGY TRANSMISSION COEFFICIENT WITH INCIDENT ELECTRON ENERGY

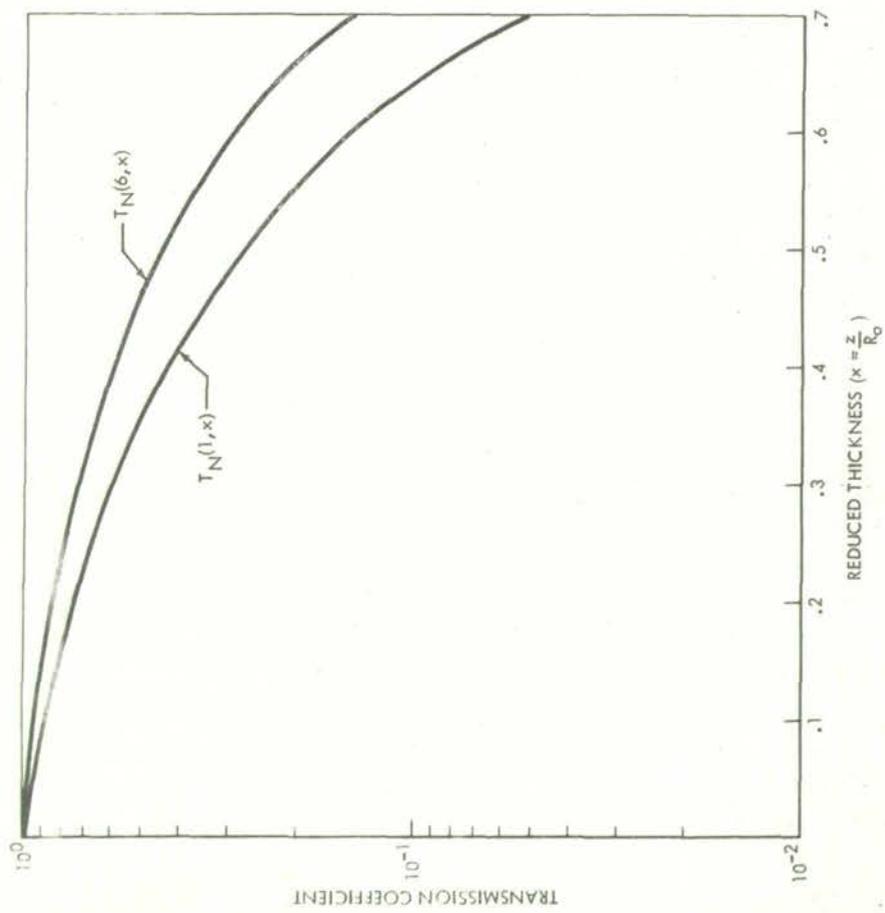
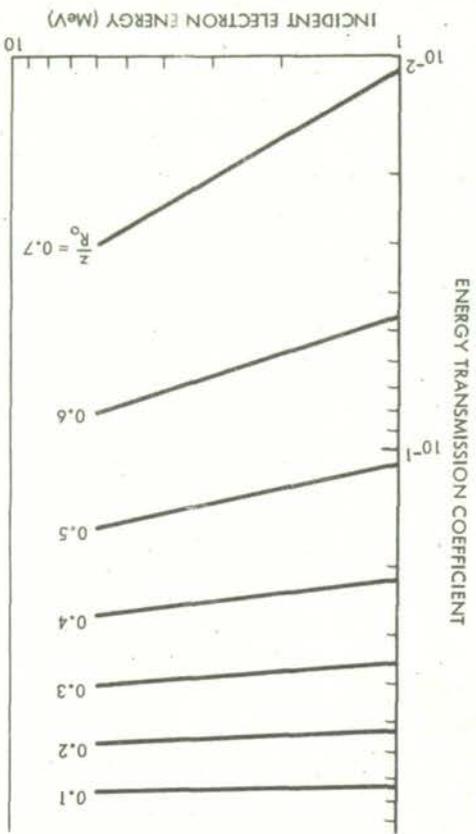


FIGURE 2 - NUMBER TRANSMISSION COEFFICIENT vs REDUCED THICKNESS FOR INCIDENT ELECTRON ENERGIES OF 1 AND 6 MeV

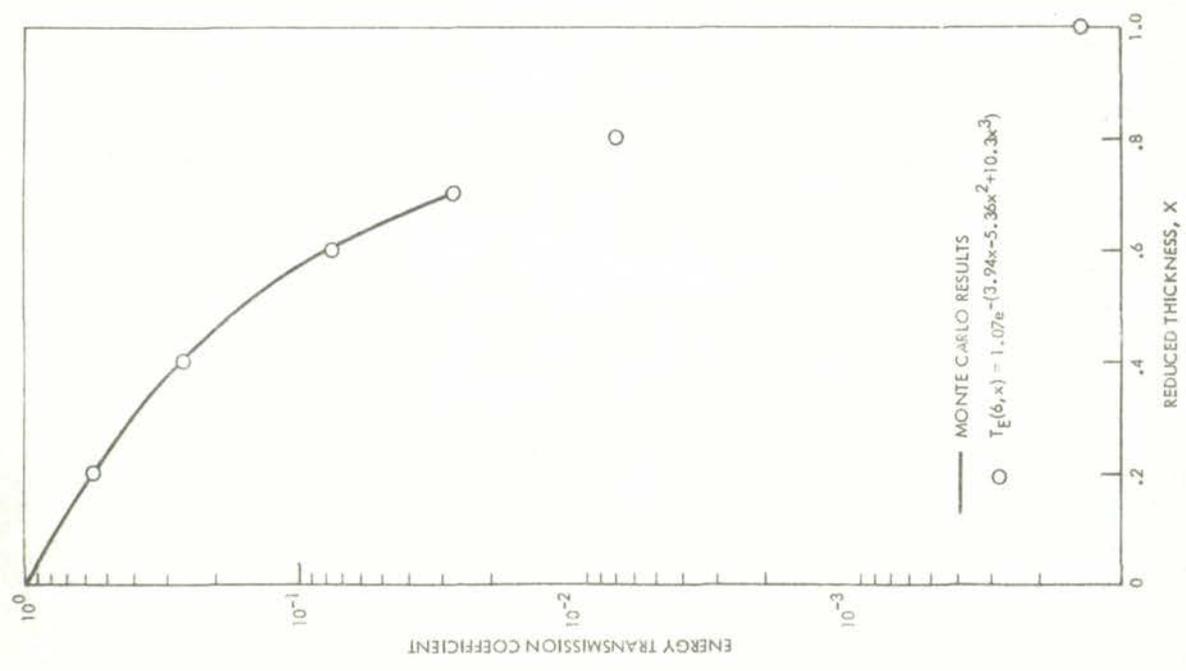
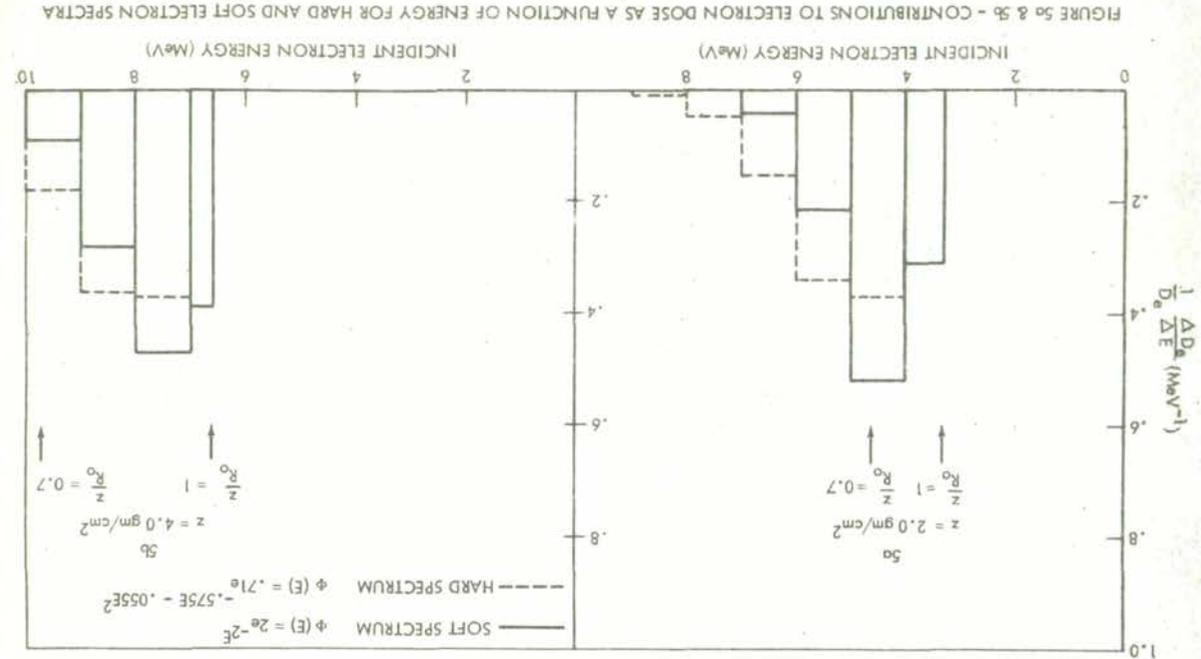


FIGURE 4 - ANALYTIC FIT TO MONTE CARLO CALCULATIONS FOR  $T_E(\delta, x)$ .

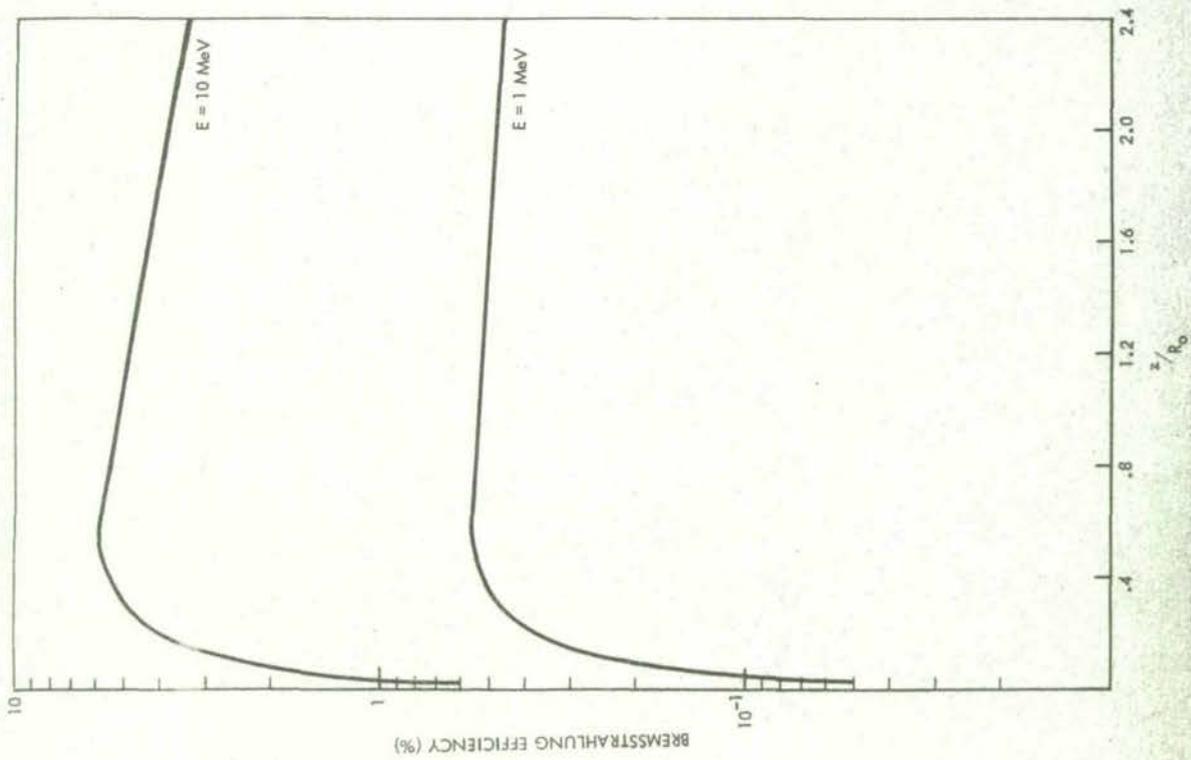


FIGURE 6 - BREMSSTRAHLUNG EFFICIENCY vs REDUCED THICKNESS AT 1 AND 10 MeV

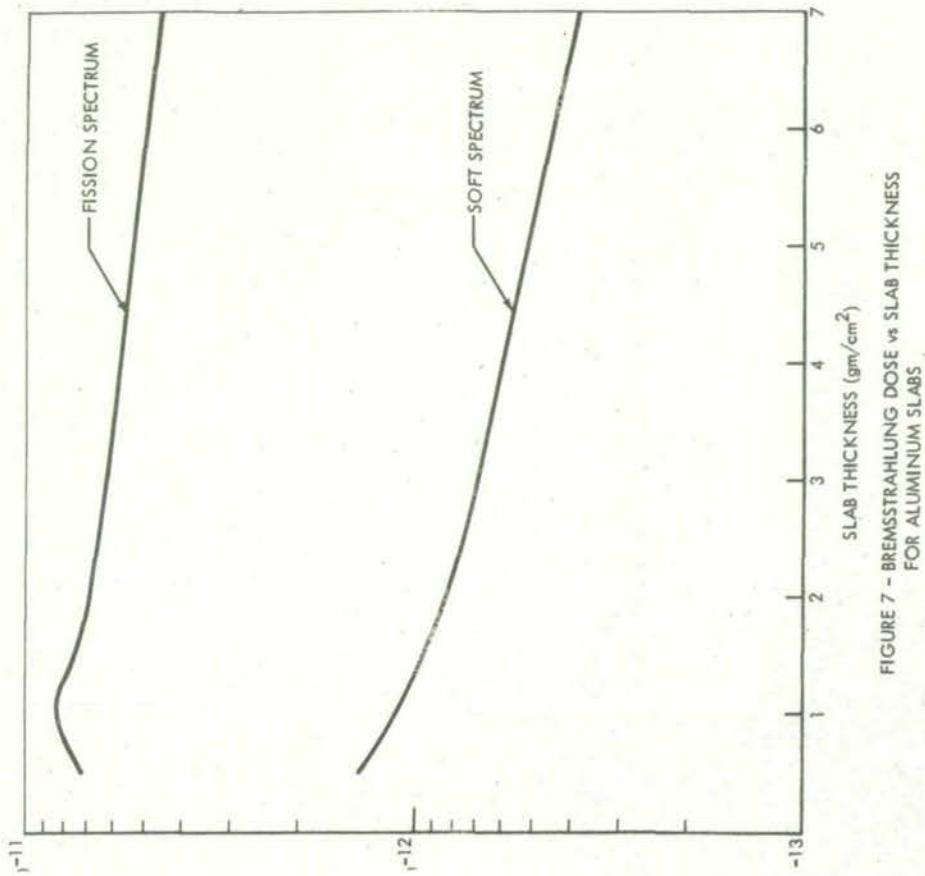


FIGURE 7 - BREMSSTRAHLUNG DOSE vs SLAB THICKNESS FOR ALUMINUM SLABS

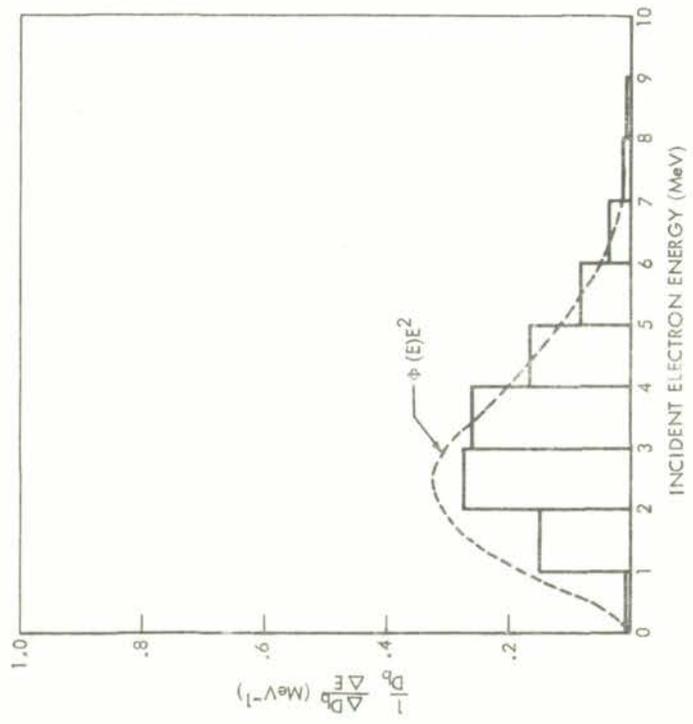


FIGURE 8 - ENERGY CONTRIBUTIONS TO BREMSSTRAHLUNG DOSE  
 $z = 4.0 \text{ gm/cm}^2$   
 FISSION ELECTRON SPECTRUM

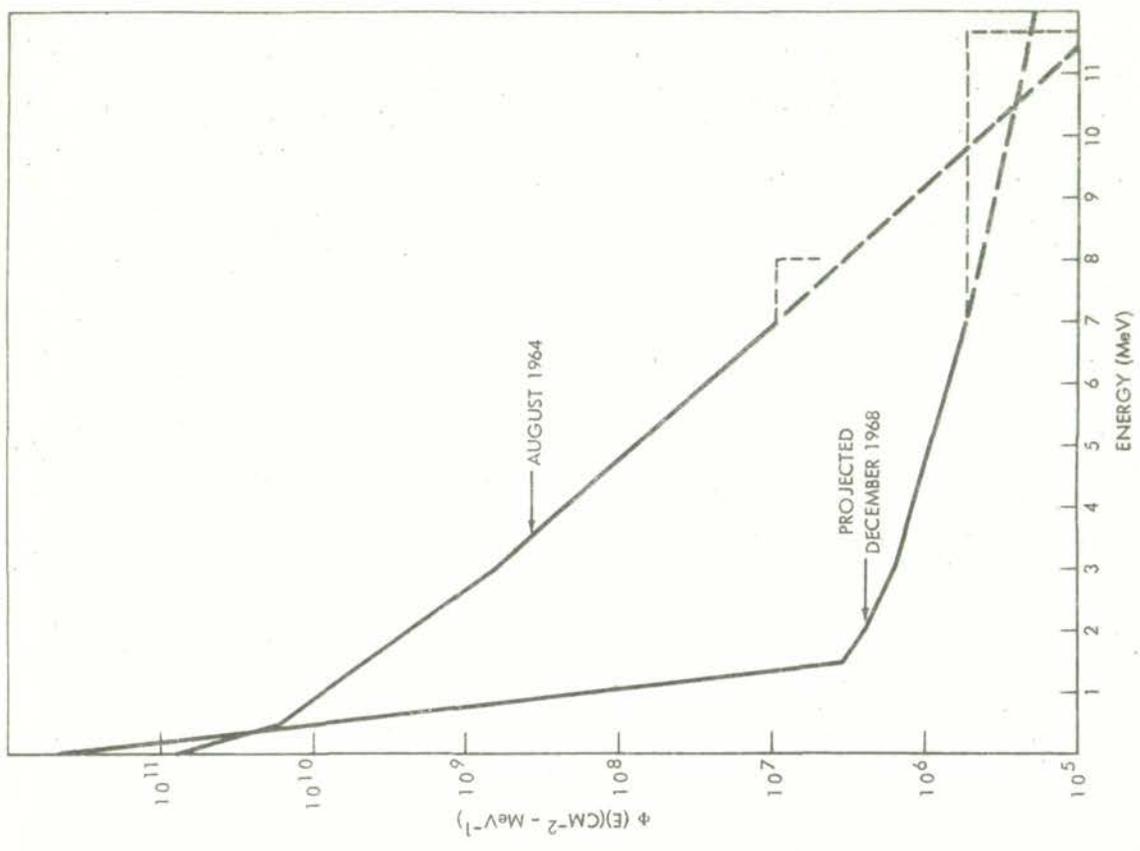


FIGURE 9 - MODEL AE2 ELECTRON SPECTRA FOR 300 NM -30°  
 INCLINATION CIRCULAR ORBIT

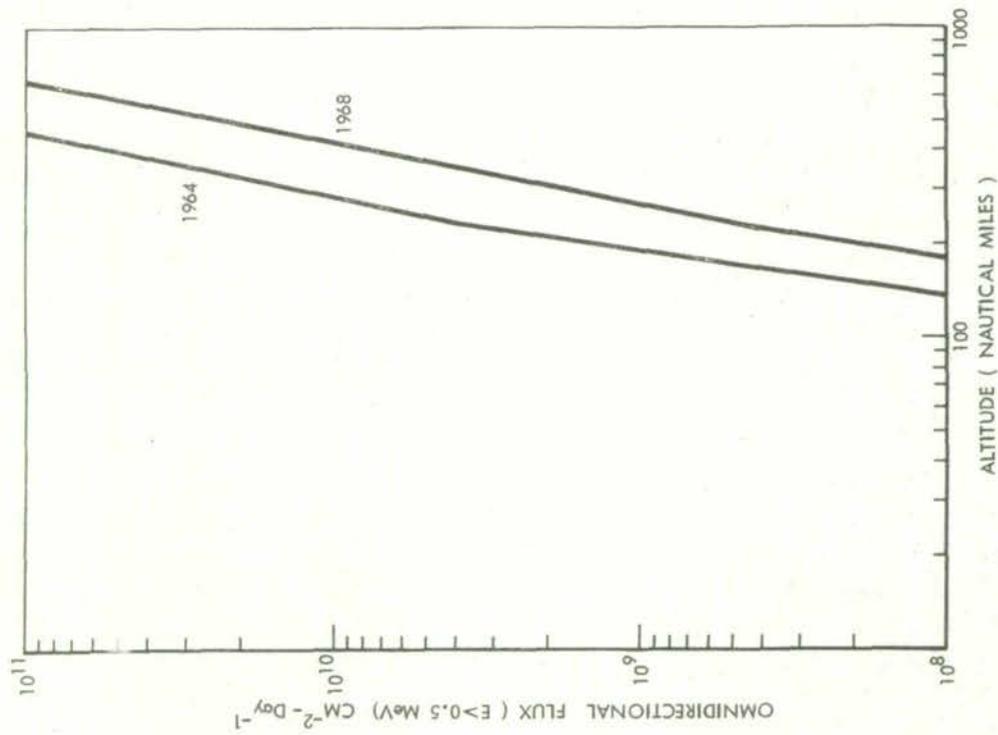


FIGURE 10 - OMNIDIRECTIONAL ELECTRON FLUX VS. ALTITUDE FOR CIRCULAR ORBITS AT 30° INCLINATION

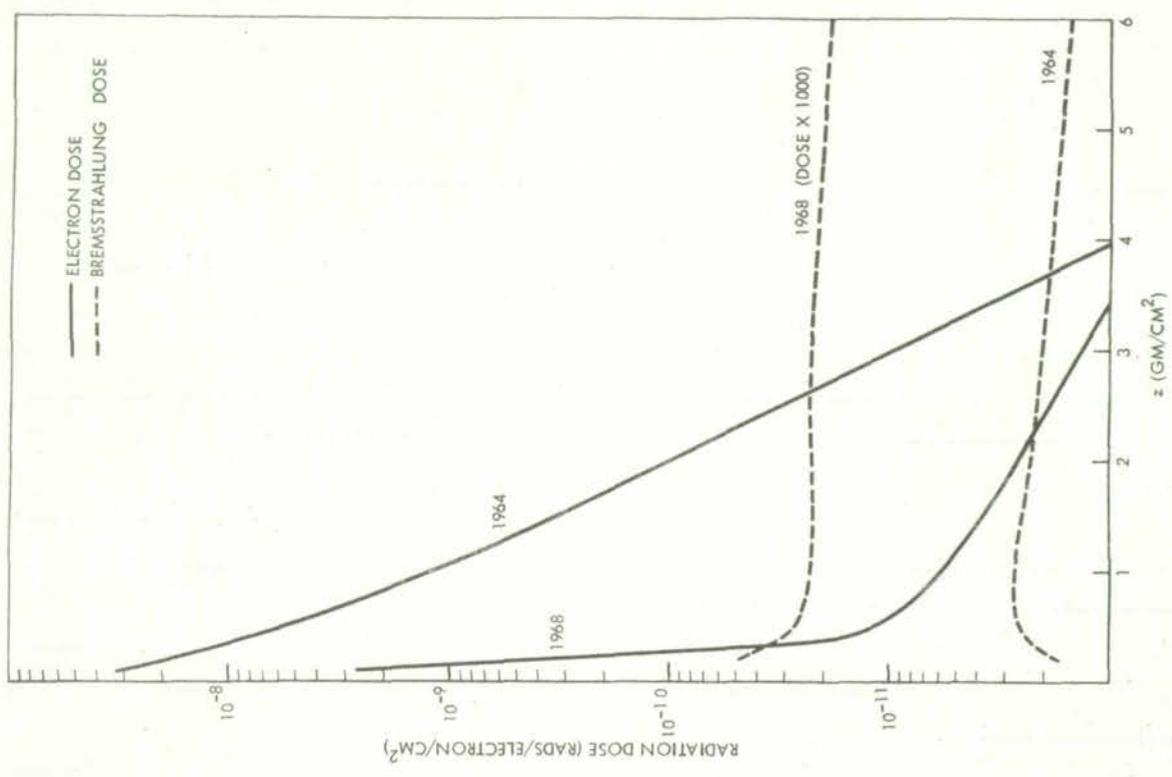


FIGURE 11 - NORMALIZED ELECTRON AND BREMSSTRAHLUNG DOSES FOR AEZ MODEL SPECTRA vs SLAB THICKNESS.

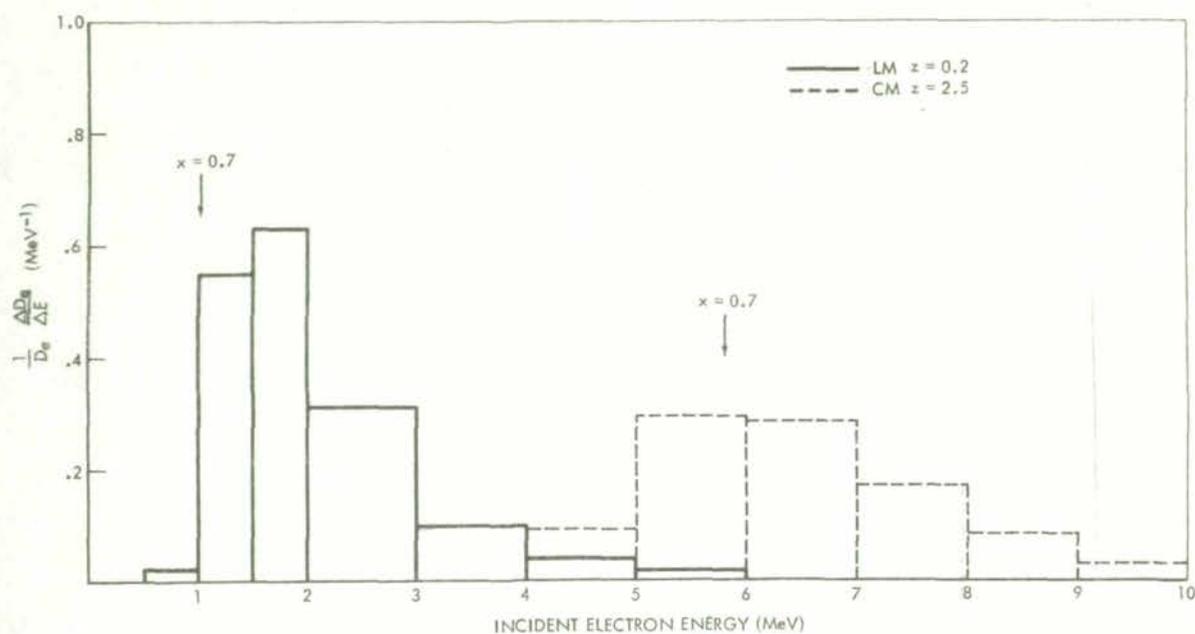


FIGURE 12 - ENERGY CONTRIBUTION TO DOSE FOR 1964 SPECTRUM

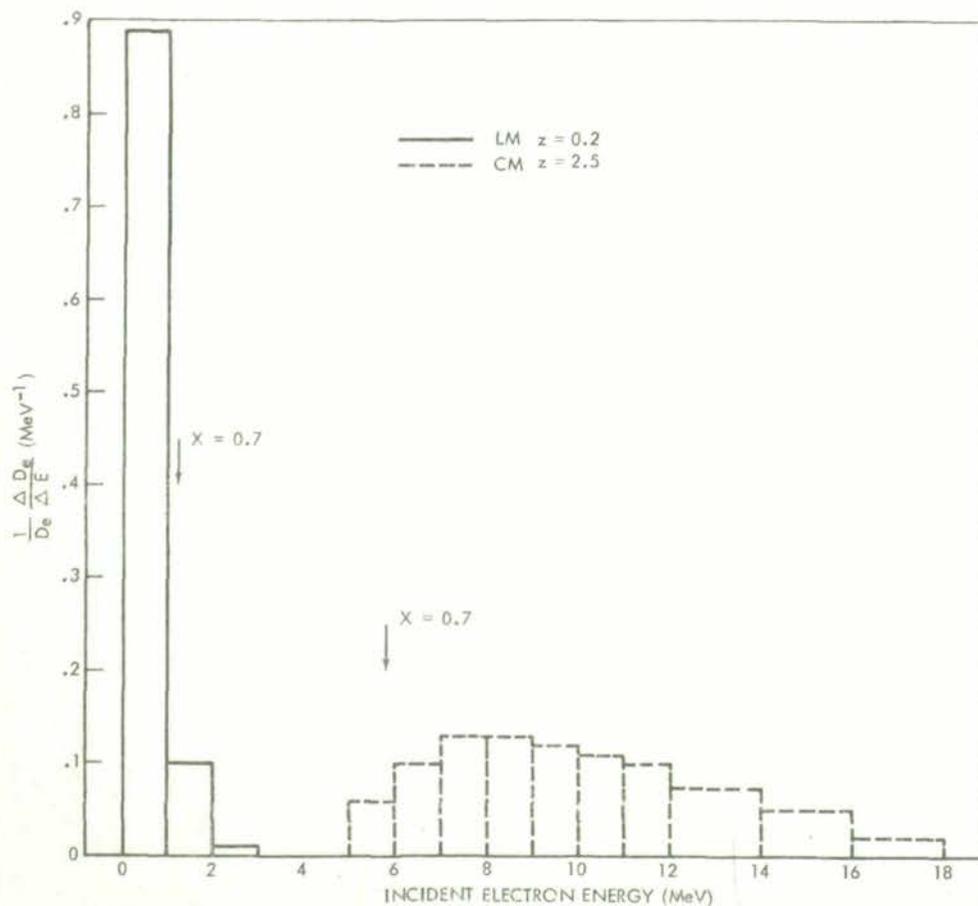


FIGURE 13 - ENERGY CONTRIBUTION TO DOSE FOR 1968 SPECTRUM