




ASUS Q302L Battery Replacement

How to replace the battery on you ASUS Q302L if it no longer can hold a charge.

Written By: khalifa

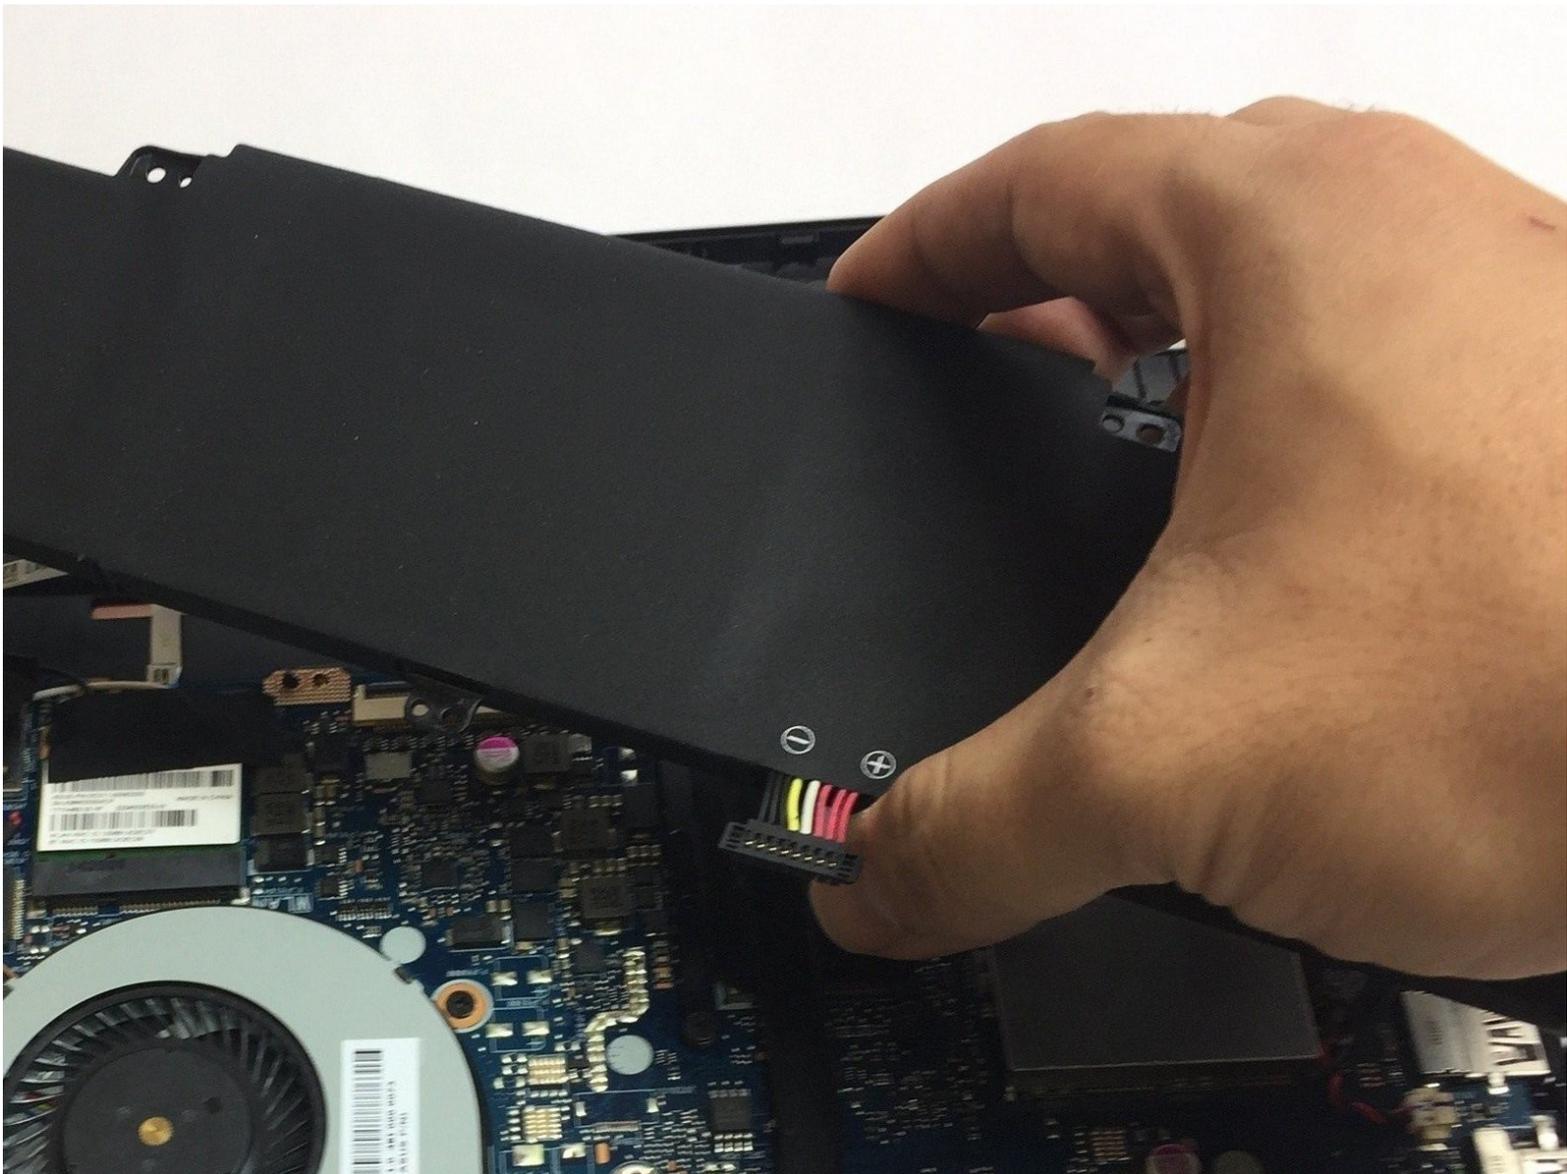

INTRODUCTION

This guide will take you through the steps of replacing your faulty battery on your ASUS Q302L.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [Asus C31N1339 Replacement Battery](#) (1)

Step 1 — Back Case

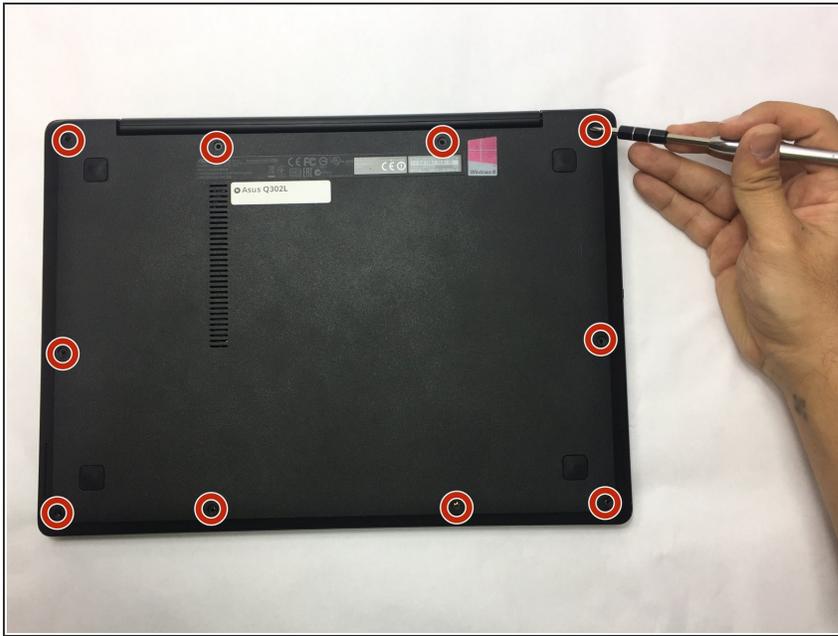

- ⚠ Make sure the laptop is disconnected from a power supply and is **TURNED OFF**.
- Use a Phillips #0 screw driver to remove all ten 10 mm screws around the back of the laptop.

Step 2



- Wedge a plastic opening tool under the rear case near the hinge.
- Pry around the outer edge to release the plastic clips holding the rear case to the laptop.

Step 3




- Once the cover is free from all the clips, remove the cover from the laptop.

Step 4 — Battery




- Use a Phillips #0 screwdriver and remove all five 5 mm screws securing the battery.

Step 5

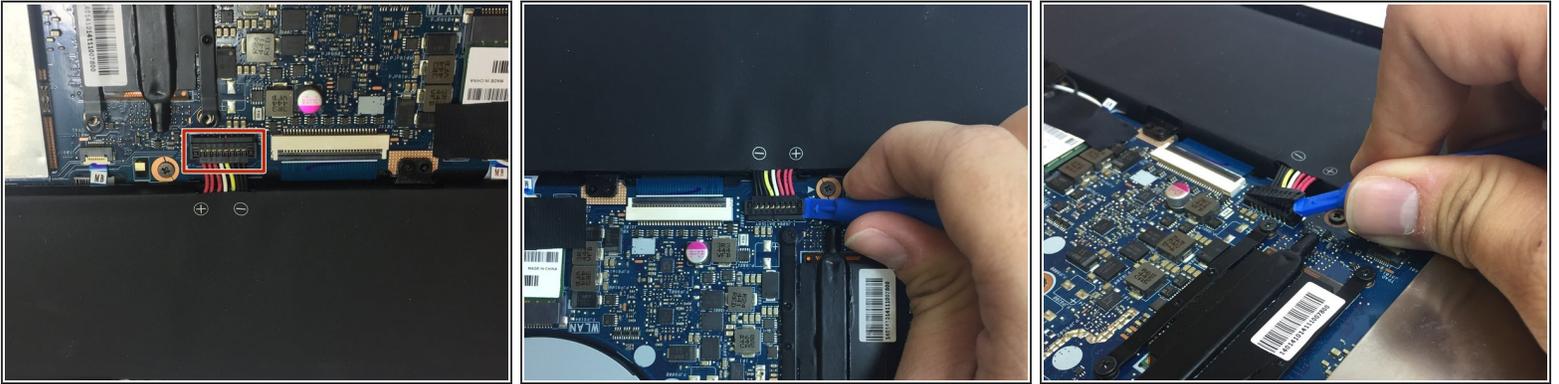

- Gently wedge a plastic opening tool under the connector.
- ⚠️ Pry only on the connector not the socket itself or you risk damage to the motherboard.
- Carefully lift the connector up away from the socket to disconnect it.

Step 6

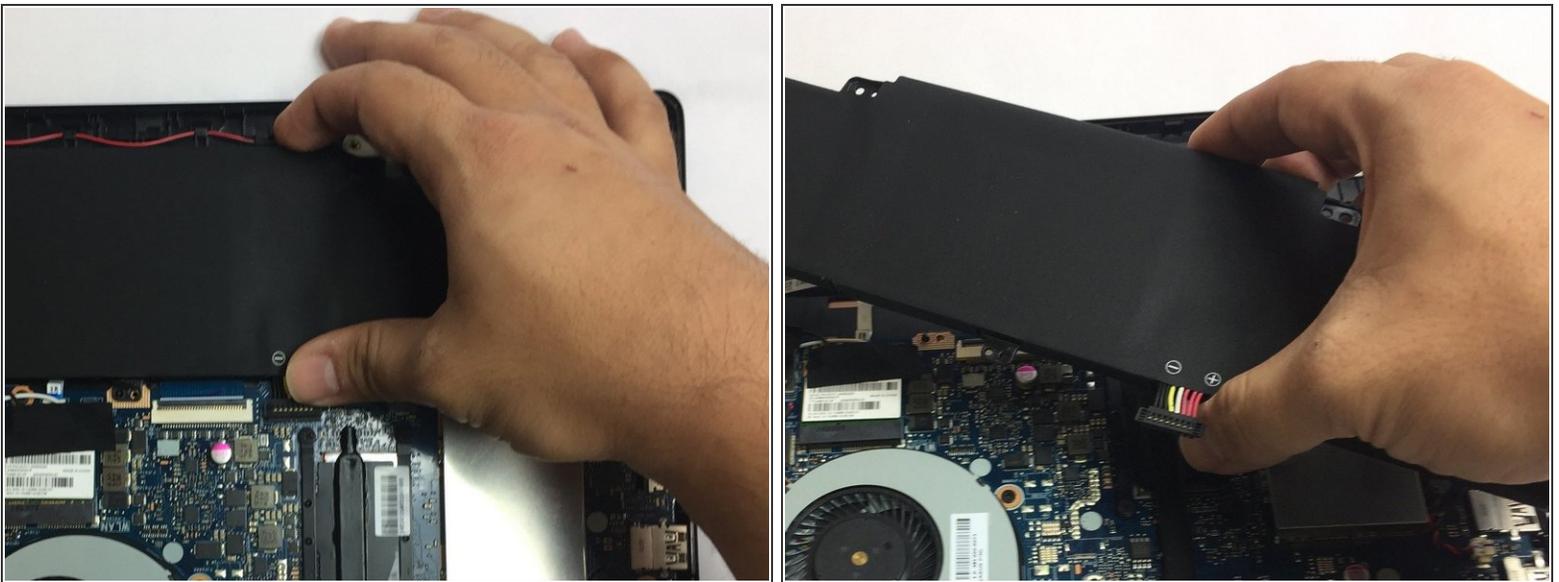

- Once the screws and connector are removed, simply pull out the battery from its place.

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

