



ATT Trek HD Battery Replacement

This guide will show you how to replace the battery in an ATT Trek HD.

Written By: Hunter Barger



INTRODUCTION

This guide will show how to replace the battery in the device. The battery may need to be replaced if it will not charge, or if it keeps dying rapidly. There should be no problems when replacing the battery. The tools that will be needed for replacing the battery are a plastic opening tool and the Phillips #00 screwdriver.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Cover



- To separate the screen from the back panel, run the plastic opening tool along the outer edge of the device.

Step 2




- Pull the screen away from the back panel.

Step 3 — Battery



- Use a Phillips #00 screwdriver to remove the six 2.5 mm screws located around the perimeter of the battery.

Step 4

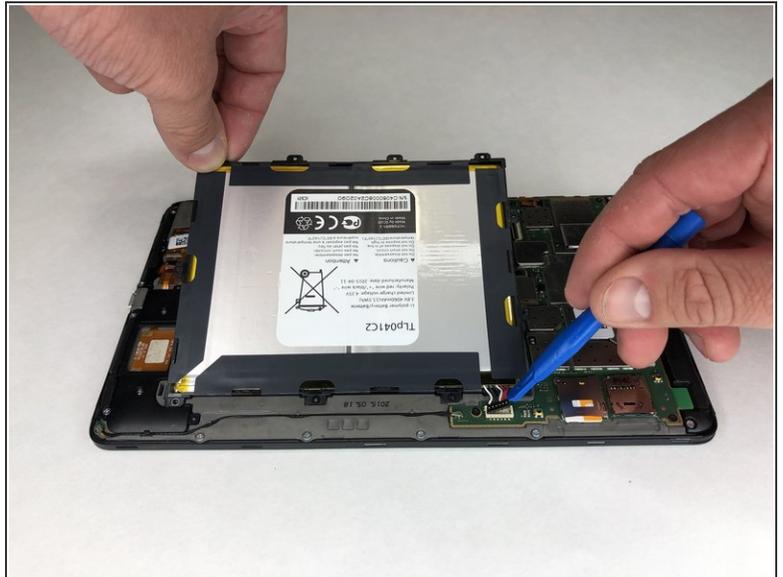

- Use the plastic opening tool to disconnect the black battery connector.
- Gently lift the battery out of the device.

To reassemble your device, follow these instructions in reverse order.