



Acer Aspire V5-571-6889 Display Assembly Replacement

This guide will talk about replacing the display assembly of Acer Aspire V5-571-6889

Written By: Mohd Yuthly



INTRODUCTION

This is a guide for the replacement for the display assemble of Acer V5-571-6889.

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
- [Prying and Opening Tool Assortment \(1\)](#)

PARTS:


- [Acer Aspire V5-571 1TB 5400RPM 2.5" 9.5mm height Laptop hard drive \(1\)](#)
- [Acer Aspire V5-571-6889 Display Assembly \(1\)](#)

Step 1 — Hard Drive




- Flip laptop over so that the back is facing upward.
- Push switch to the right.
- Pull battery away from the laptop.

Step 2

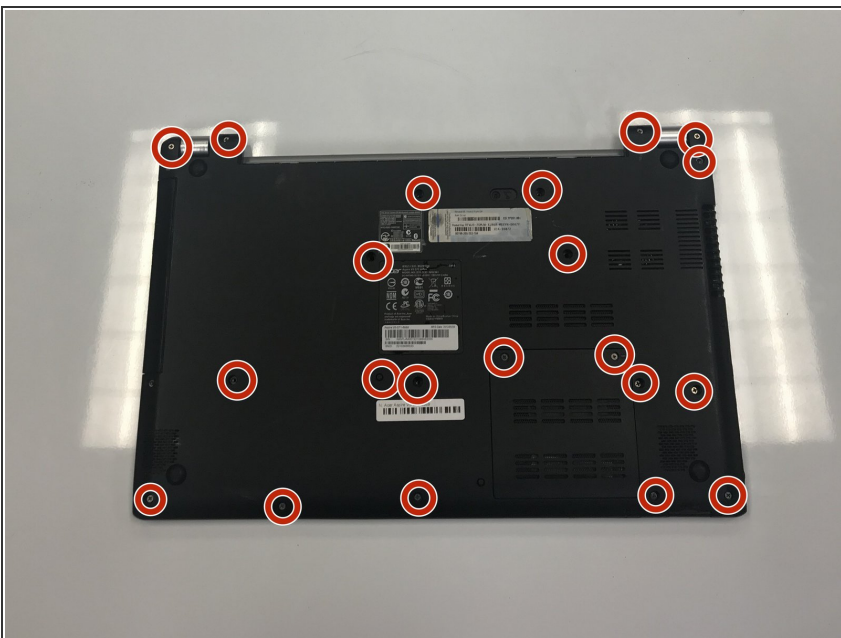

- Use a #0 Phillips head screw driver to remove all of the screws.

Step 3

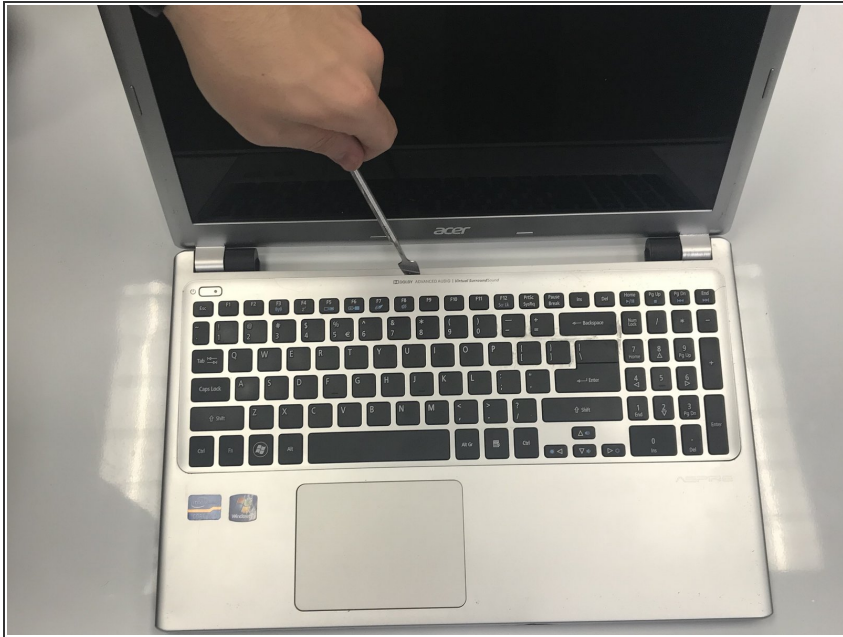

- Flip laptop back over.
 - Open the laptop.
 - Wedge a prying tool between the keyboard and laptop body seam to remove keyboard.
- i** Be careful not to bend the keyboard too much or break the tabs that connect the keyboard to the laptop.

Step 4




- Gently lift keyboard.
- Disconnect keyboard from the laptop.

Step 5




- Use a prying tool to remove the upper cover.

Step 6

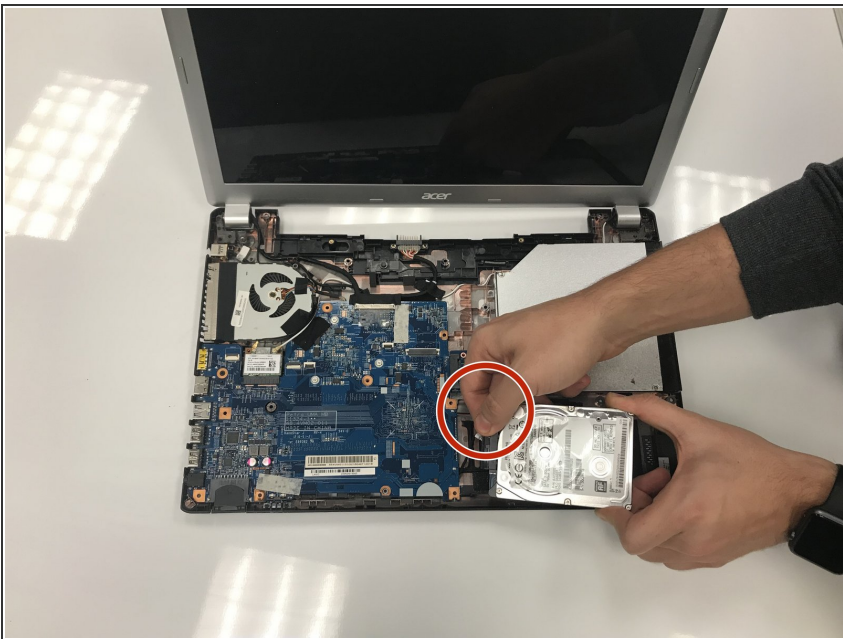

- Locate the hard drive.
- Lift the hard drive.
- Disconnect hard drive.

Step 7 — Display Assembly

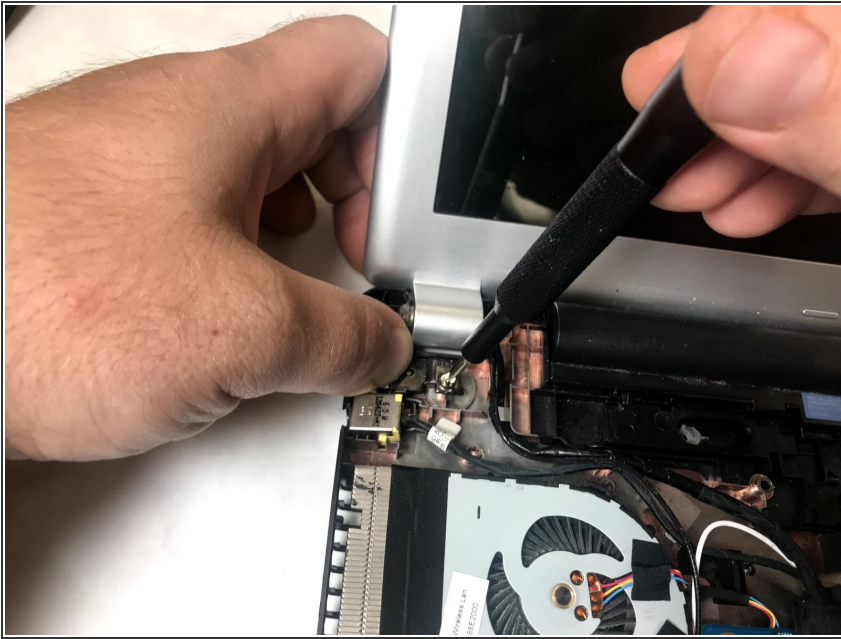

- Remove the top left screw that is connecting the display assembly and the body of the laptop.
- Remove the 2.5 mm by 5 mm screw by using #0 Phillips head screw driver.

Step 8



- Using a #0 Phillips screw driver, remove the other 2.5 mm by 5 mm phillips screw that holds the display assembly.

Step 9




- Gently disconnect the display cable connector between the display assembly and the motherboard.

Step 10



- Remove the tape holding down the display cable that connects it to the motherboard.

Step 11

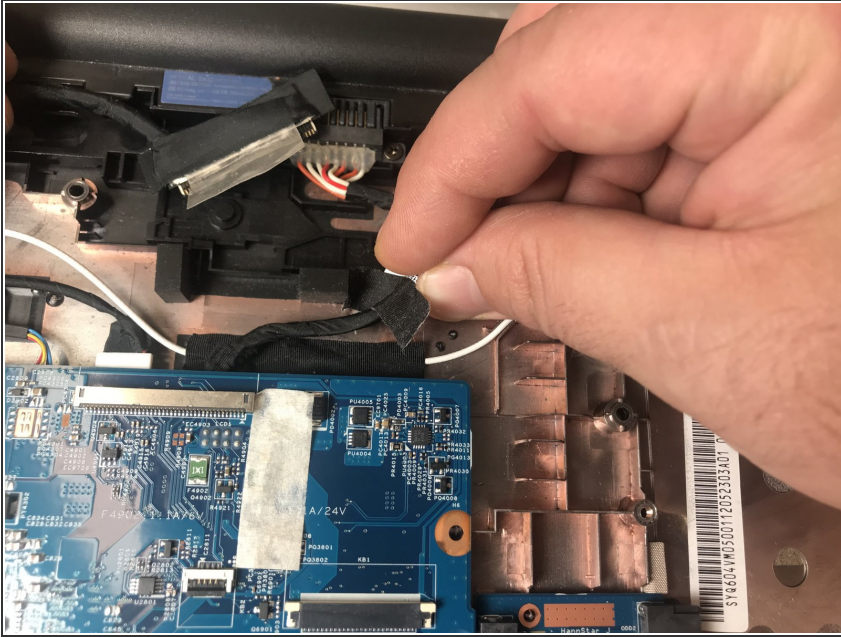

- Disconnect the tape that is holding the white antenna cable to the motherboard.

Step 12



- Take the display assembly off and replace it with a new one.

To reassemble your device, follow these instructions in reverse order.