



Asus Q503UA Battery Replacement

This guide will show you how to remove and replace the battery in the Asus Q503UA.

Written By: Roberto Apodaca



INTRODUCTION

The ASUS Q503UA-BSI5T17 is a 2 in 1 portable PC with a 15.6-inch screen. The device's design is a sleek black look with rubber feel to it. The ASUS logo on the top of the device glows white. In this guide, you will see how to disconnect and remove the battery. It is best practice to remove the battery before working on any other parts as a safety precaution.

TOOLS:


- [Magnetic Project Mat](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Cover



- Flip over the computer. In order to ensure that the correct side is up, you should be able to legibly read the stickers that indicate the model number and other information.

Step 2

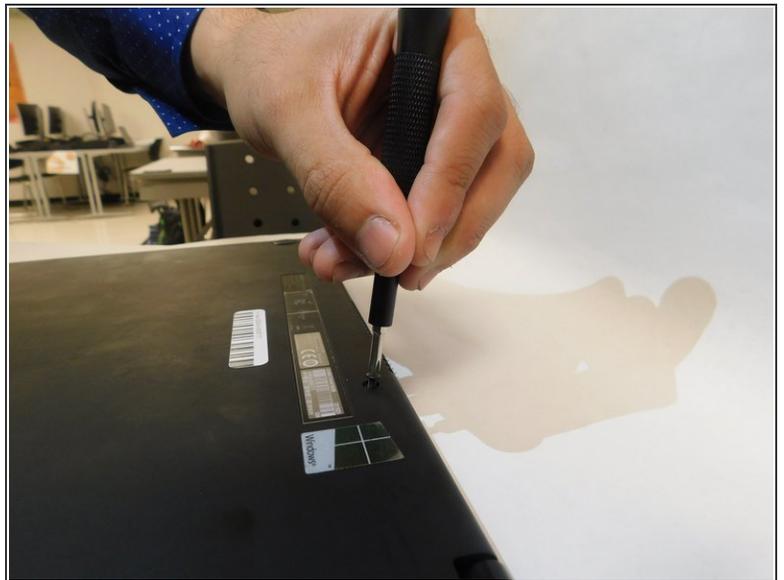


- Remove the ten screws from the back case with a Phillips #0 screwdriver.

Step 3




- Use a plastic opening tool to pry the frame upwards towards you, starting from the top right corner.
- ⓘ You should feel it coming loose. If necessary, use spacers to keep the frame from locking back into place.
- Continue prying all around the frame.
- Remove the back cover.

Step 4 — Battery

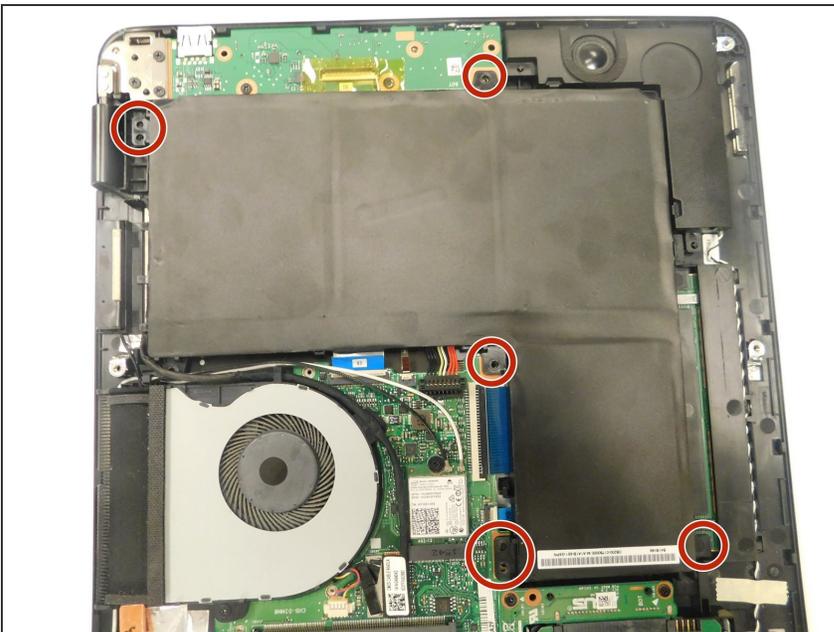


- Remove the five screws holding the battery in place using a Phillips #0 screwdriver.
- ⚠ Screw locations are approximate. If you find screws to be located elsewhere, please [update this step](#) with their correct locations.

Step 5

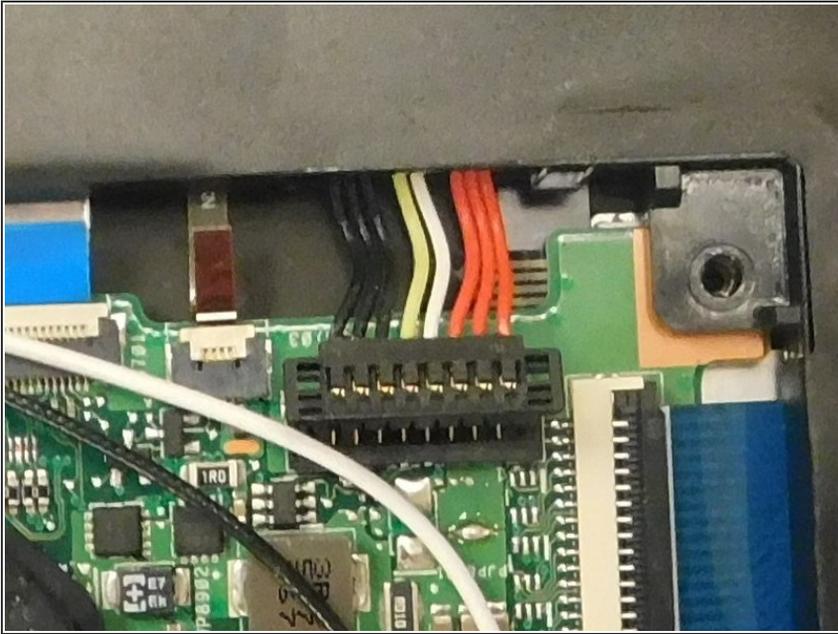

- Disconnect the battery connection.

Step 6

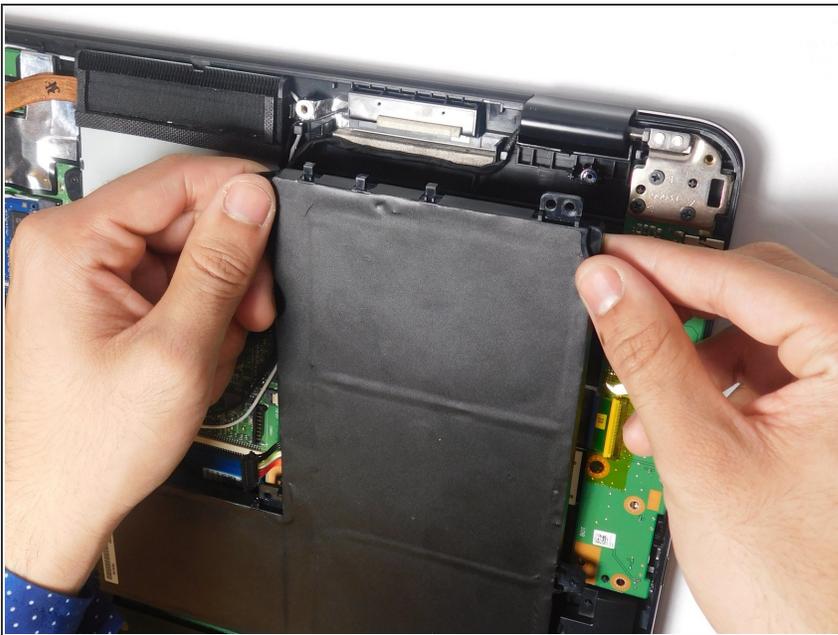

- Grab and lift the battery from the top right-hand side.
- ⓘ If all screws are removed, it should come out with no struggle at all.

To reassemble your device, follow these instructions in reverse order.