Canon Powershot A70 Rear Exterior Panel Replacement

Written By: Shalan Ertis

INTRODUCTION

This guide explains the location of exterior screws and the process to remove the rear panel.

🔧 TOOLS:

- iFixit Opening Tools (1)
- Phillips #00 Screwdriver (1)
- Spudger (1)

This document was generated on 2020-03-29 04:45:18 PM (MST).

Step 1 — Rear Exterior Panel

- Unscrew the three small screws on the bottom of the camera.
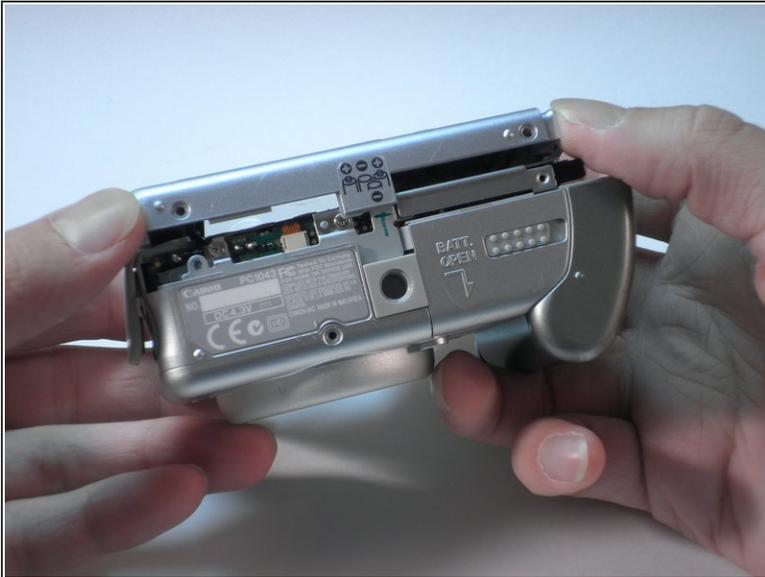
- Remove the wrist strap.

Step 2

- Remove the screw in the CF compartment.

This document was generated on 2020-03-29 04:45:18 PM (MST).
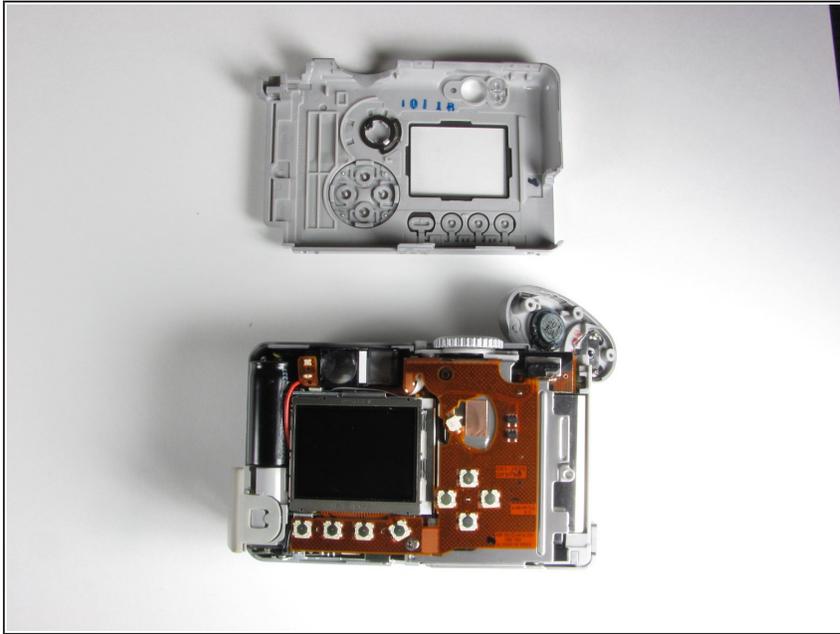
Step 3

- Open the rubber Digital AV Out compartment flap.

  - Pry the battery with the IFIXIT opening tool.

  - Carefully pull out the battery with two fingers.

    - Remove the two screws that are now visible.

Step 4

- Starting from the bottom, carefully pull the casing off.

- The casing will now pivot at the top.
  - There are three catches that hold the back casing to the body.

  - (i) You may have to pull with some force. The rear panel will make a snapping noise when it separates from the body.

Step 5

- The interior of the camera should look like this.

To reassemble your device, follow these instructions in reverse order.