




Dell Inspiron 15 3567 Hard Drive Replacement

Written By: Terrence15

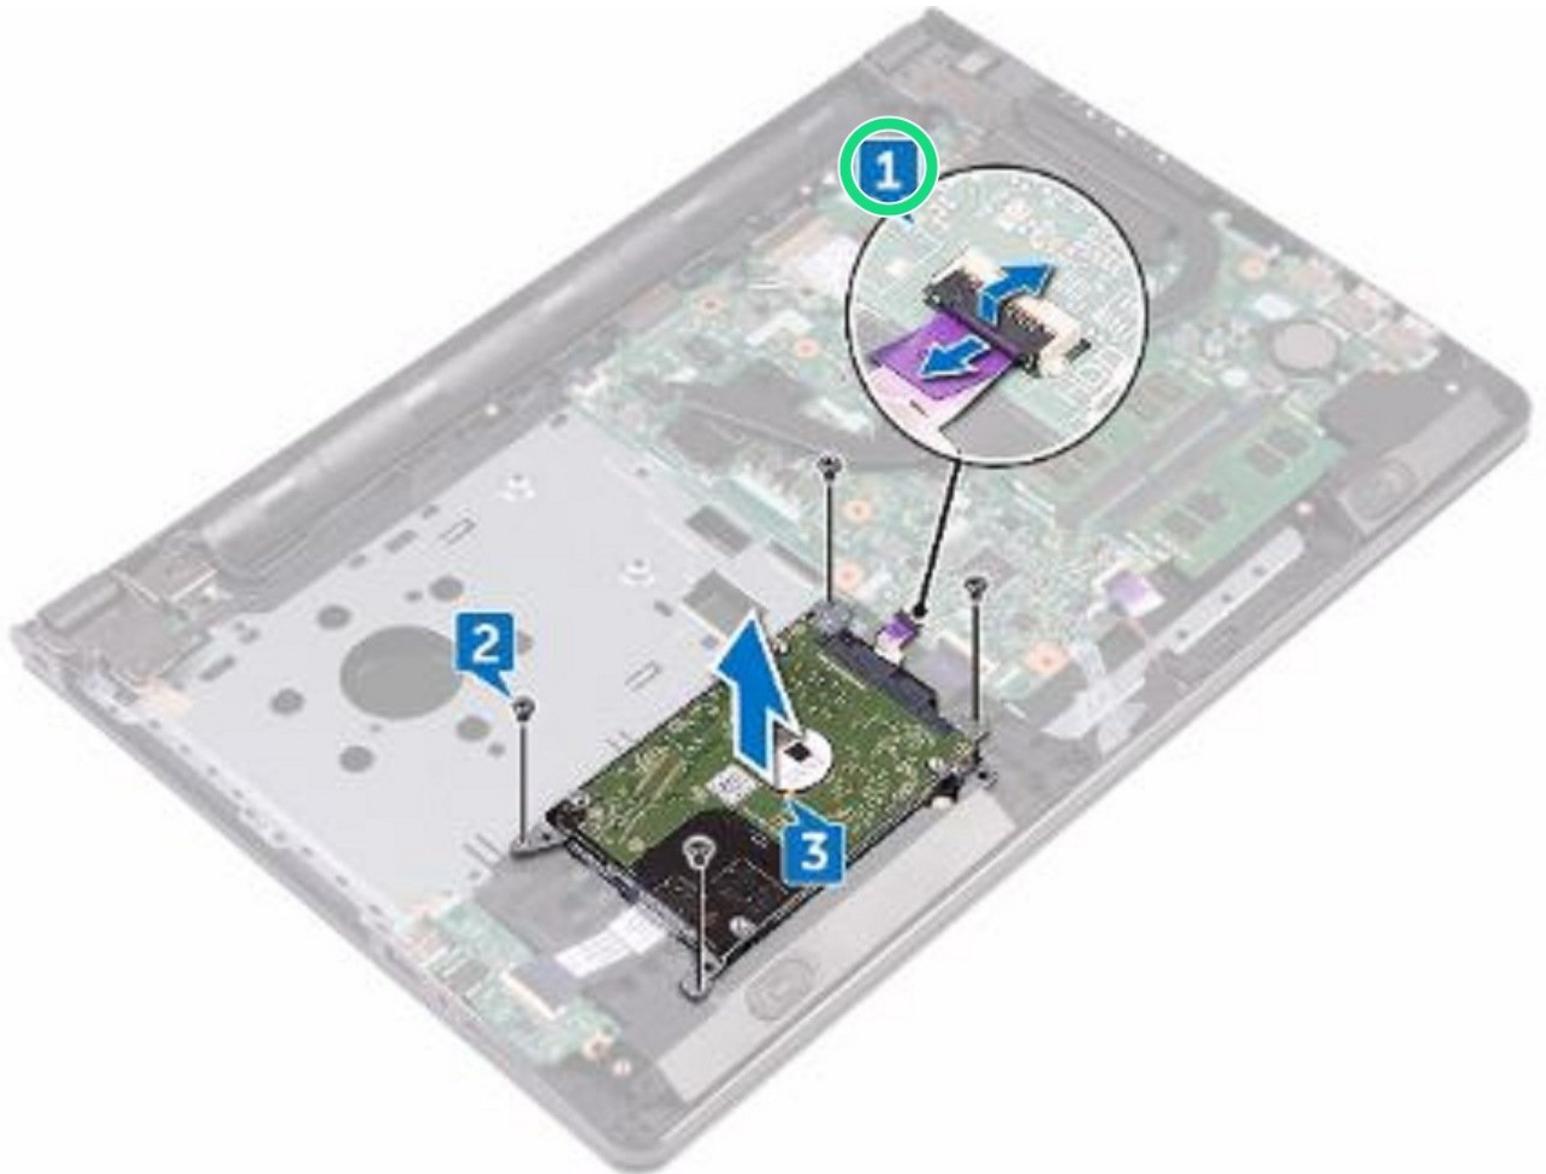

INTRODUCTION

In this guide, we will be showing you how to remove and replace the Hard Drive.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)



PARTS:

- [1 TB SSD / Upgrade Bundle](#) (1)
- [250 GB SSD / Upgrade Bundle](#) (1)
- [500 GB SSD / Upgrade Bundle](#) (1)
- [2 TB SSD / Upgrade Bundle](#) (1)

Step 1 — Open the Latch

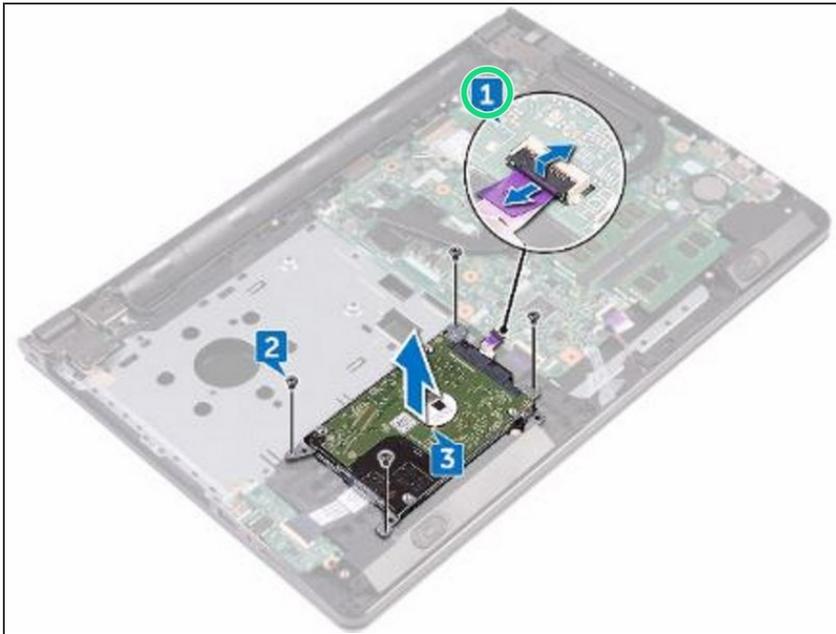


⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).

⚠ CAUTION: Hard drives are fragile. Exercise care when handling the hard drive.


- Open the latch and disconnect the hard-drive cable from the system board.

Step 2 — Remove the Screws

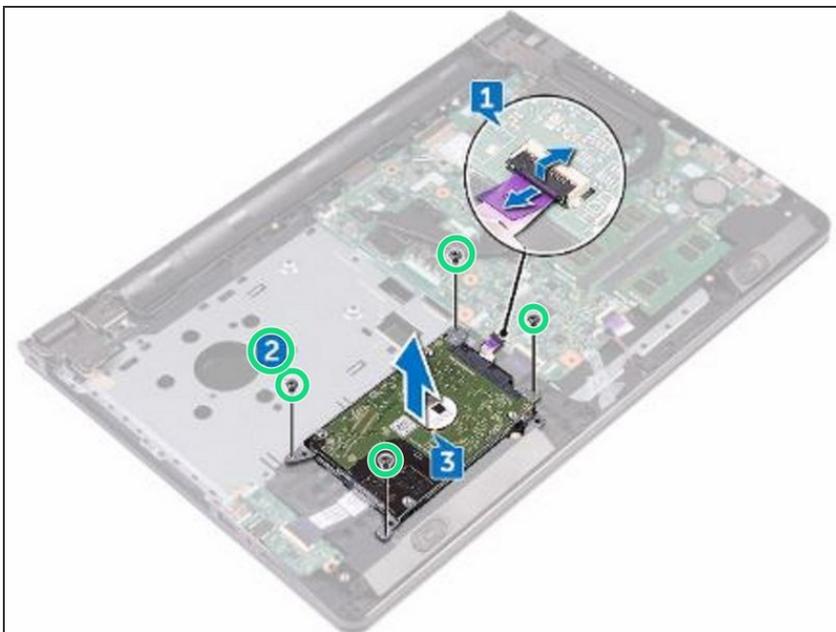

- Remove the four screws (M2x3) that secure the hard-drive assembly to the palm-rest assembly.

Step 3 — Lifting the Hard-Drive Assembly

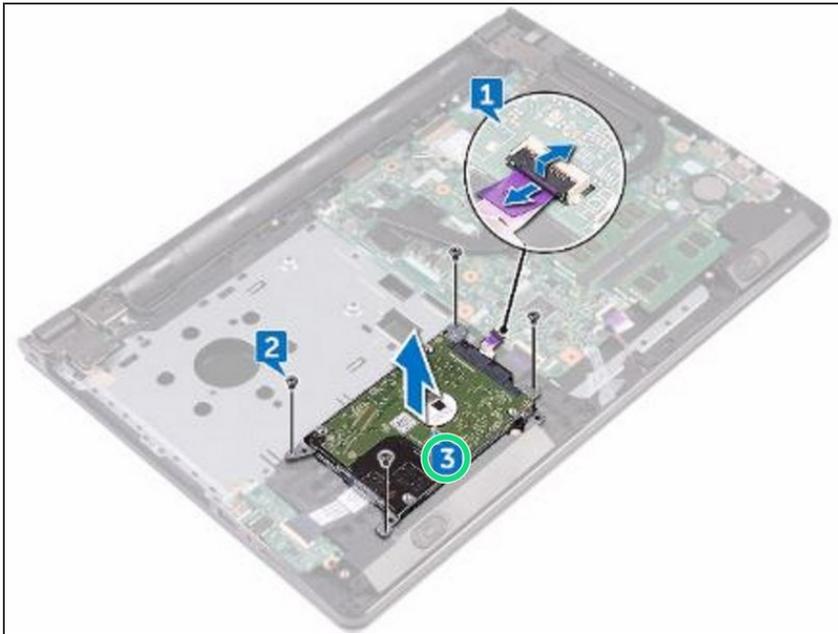


- Lift the hard-drive assembly off the palm-rest assembly.

Step 4 — Disconnect the Interposer



- Disconnect the interposer from the hard-drive assembly.

Step 5 — Remove the Screws

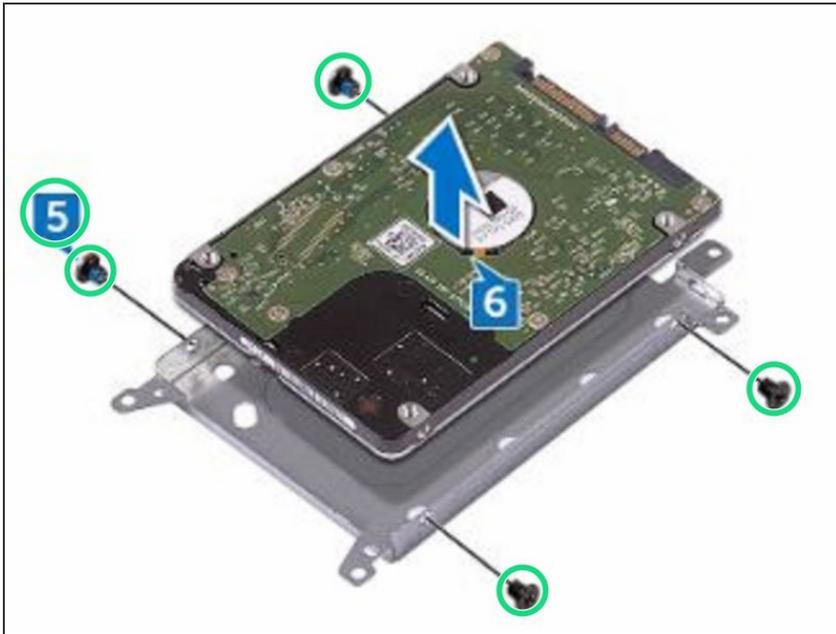


- Remove the four screws (M3x3) that secure the hard-drive bracket to the hard drive.

Step 6 — Lifting the Hard Drive




- Lift the hard drive off the hard-drive bracket.

Step 7 — Align the Screw Holes

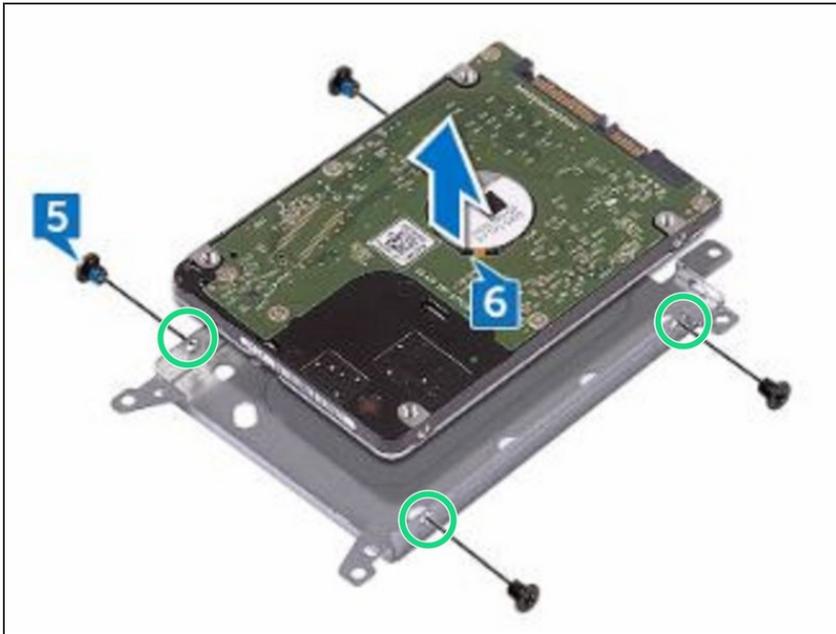

- Align the screw holes on the hard-drive bracket with the screw holes on the **NEW** hard drive.

Step 8 — Replace the Screws

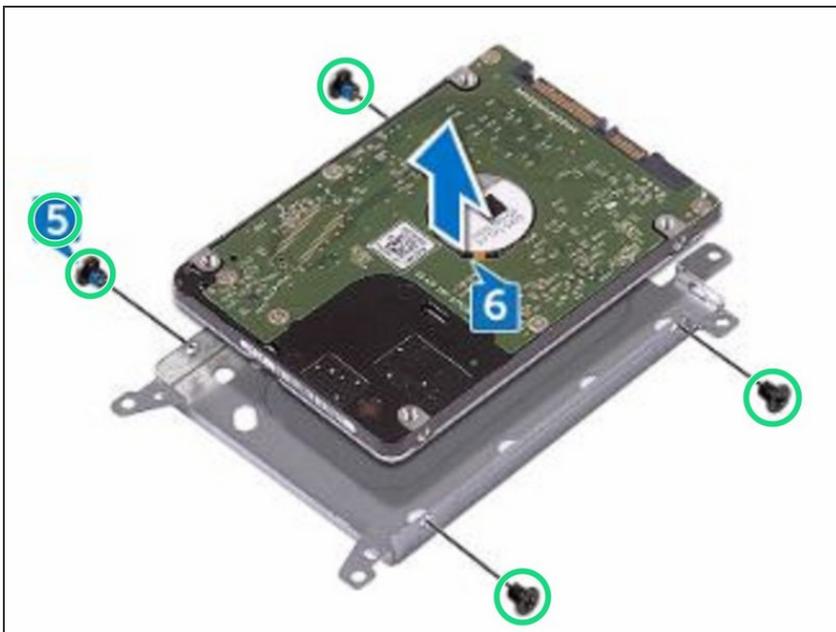


- Replace the four screws (M3x3) that secure the hard-drive bracket to the hard drive.

Step 9 — Connect the Interposer




- Connect the interposer to the hard drive.

Step 10 — Placing the Hard-Drive Assembly

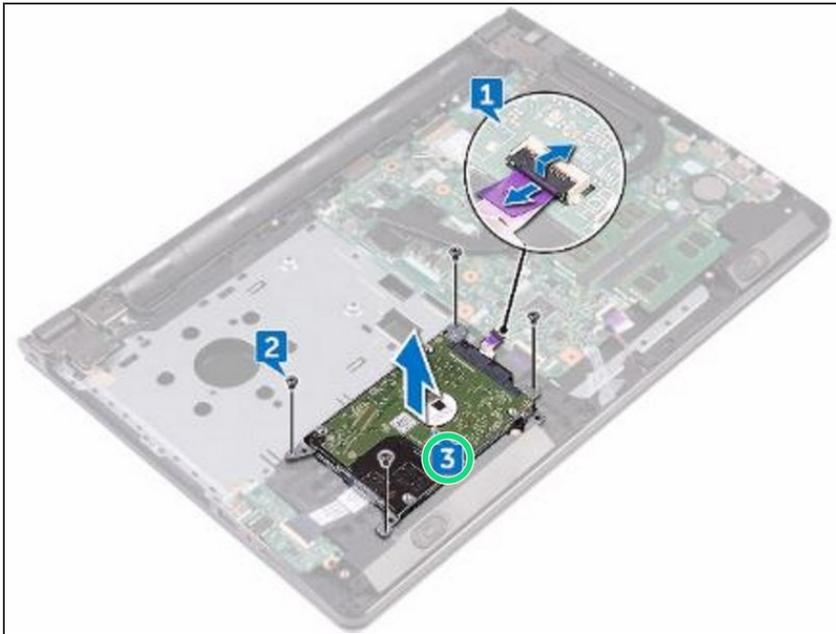


- Place the hard-drive assembly in the palm-rest assembly and align the screw holes on the hard-drive assembly with the screw holes on the palm-rest assembly.

Step 11 — Replace the Screws

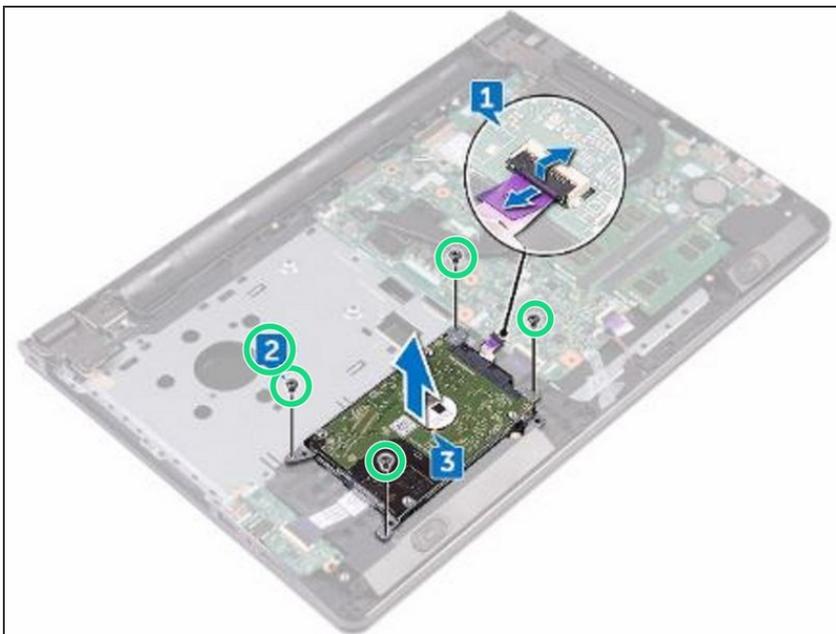

- Replace the four screws (M2x3) that secure the hard-drive assembly to the palm-rest assembly.

Step 12 — Sliding the Hard Drive Cable

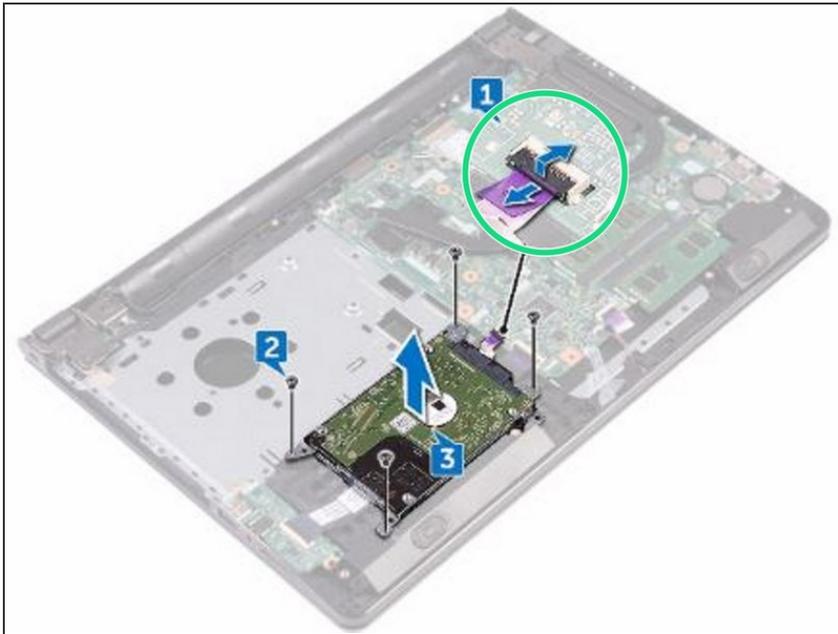

- Slide the hard-drive cable into its connector on the system board and close the latch to secure the cable.