




# Dell XPS 13 L322X Base Cover and Power Light Board Replacement

How to remove the base (bottom) cover and power light board, which must be removed to access the battery.

Written By: William Daniels

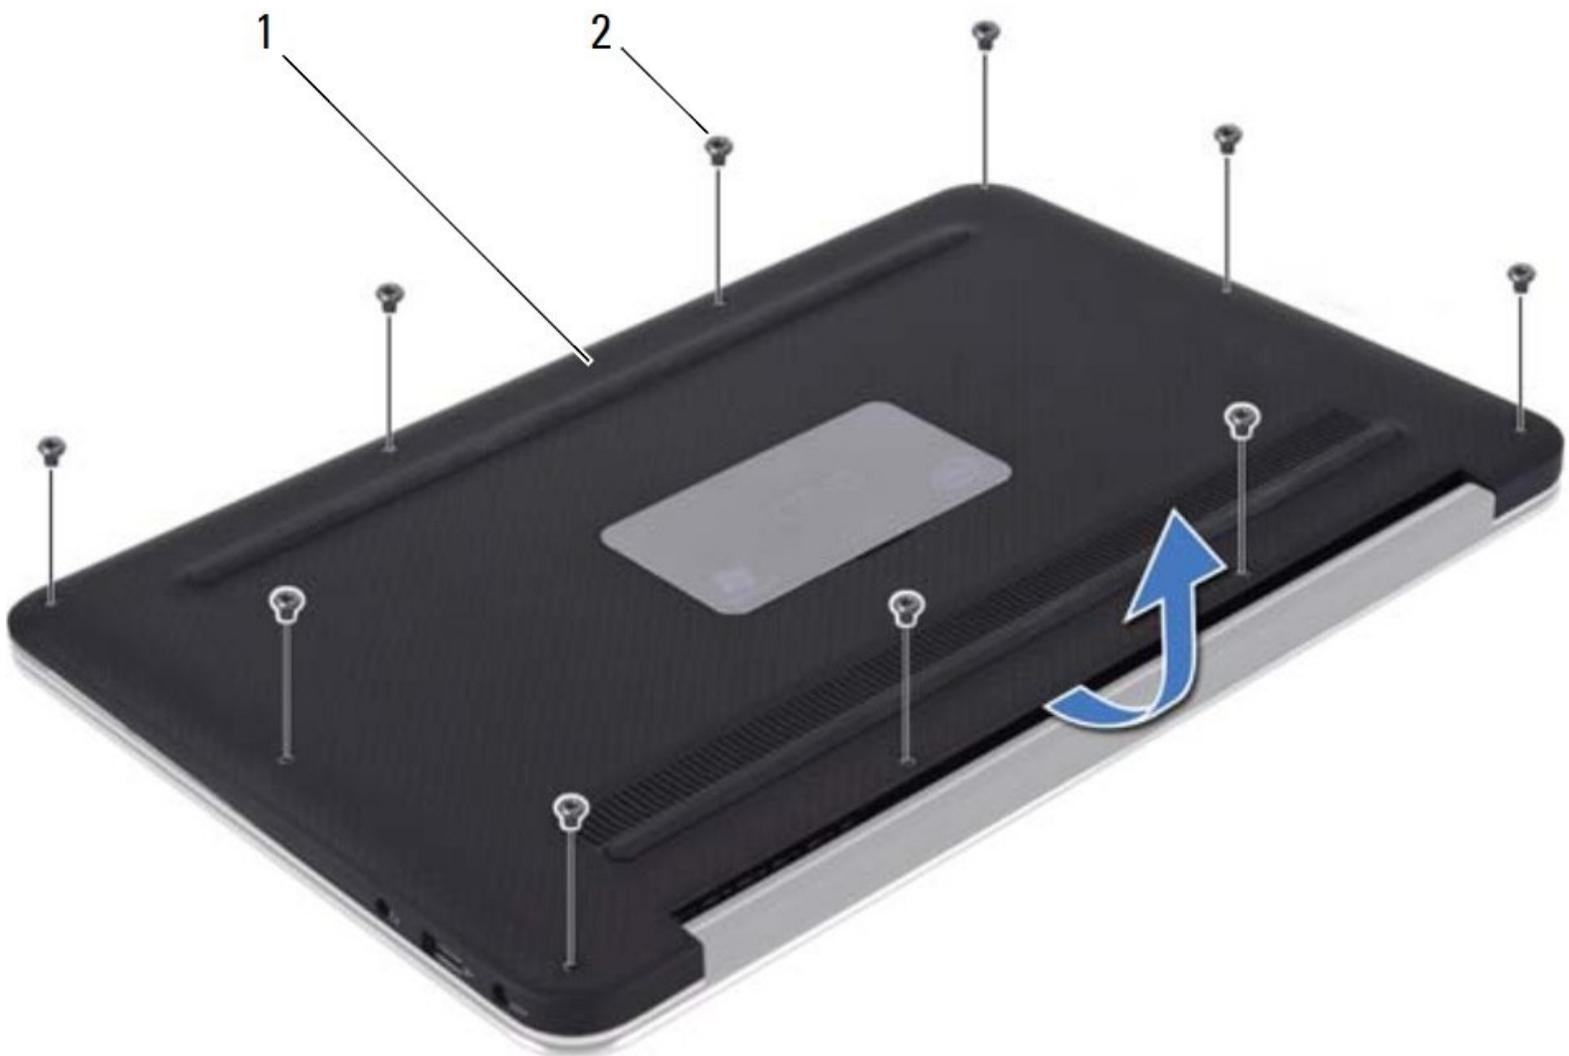

---

## INTRODUCTION


How to remove the base (bottom) cover and power light board, which must be removed to access the battery. The images and information in this guide were taken from this computer's service manual, which can be found on the product page.

---

### TOOLS:


- [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Removing the Base Cover

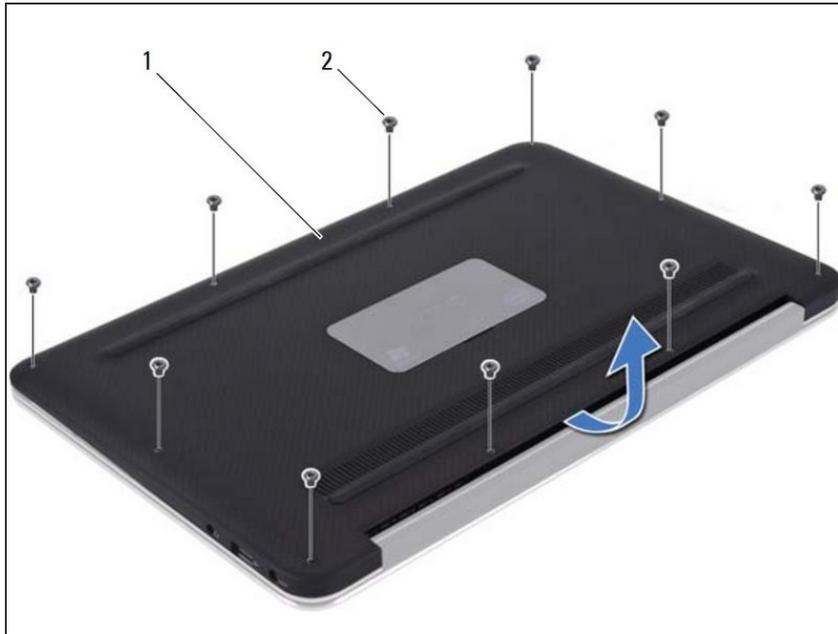

- After turning off the computer, use a Torx 5 screwdriver to remove the 10 screws (#2) from the computer's base.
- Using a prying tool or a fingernail, lift up the base cover (#1).

## Step 2 — Removing the Power-Light Board

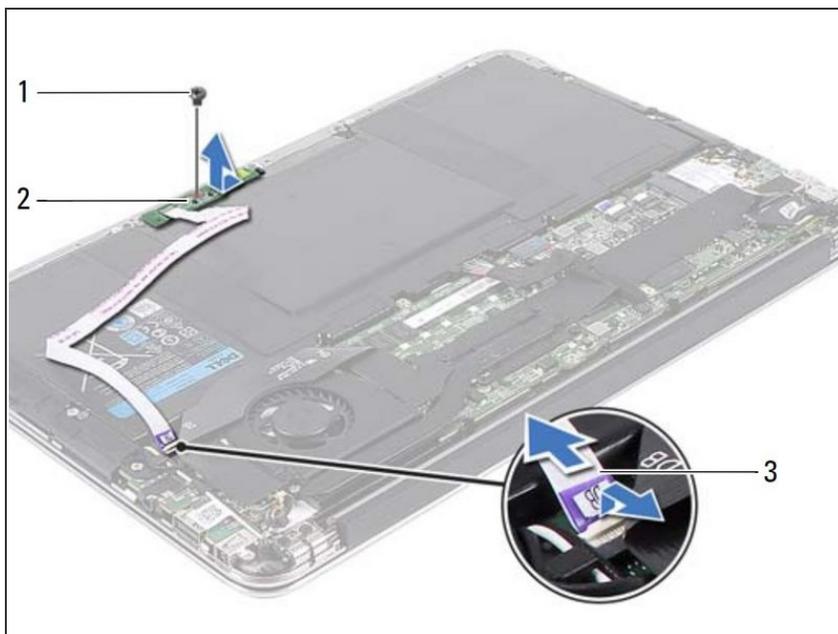

- Lift up the small latch which holds down the power-light board cable (#3) down. Remove the cable by pulling out sideways.
- After removing the Philips screw which holds down the power-light board (#1), remove the power light board (#2) and its cable.

To reassemble your device, follow these instructions in reverse order.