



# Dreamax DMX-ST7A Speaker Replacement

Replace the speaker.

Written By: Stacey Mattila



---

## INTRODUCTION

Replace the speaker via soldering.

---

### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Solder](#) (1)
  - [Portable Soldering Iron](#) (1)
-

## Step 1 — Back Cover



- Position the tablet so the ports and screws are facing you.

## Step 2

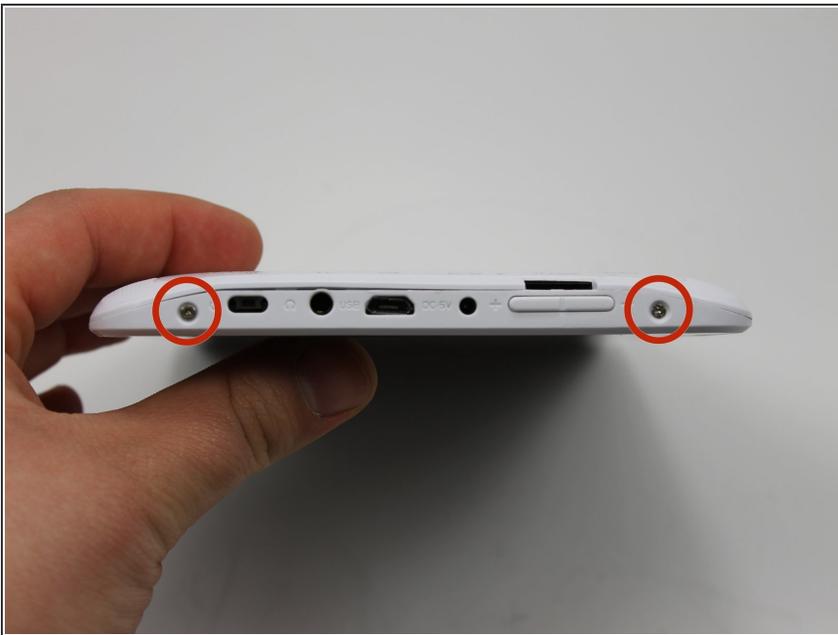

- Remove the two 2.5mm screws using the Phillips #00 precision screwdriver.

### Step 3




- Use the plastic opening tool to assist in removing the back cover.

### Step 4



- Upon removing the back cover position the tablet as seen in the picture.

## Step 5 — Speaker

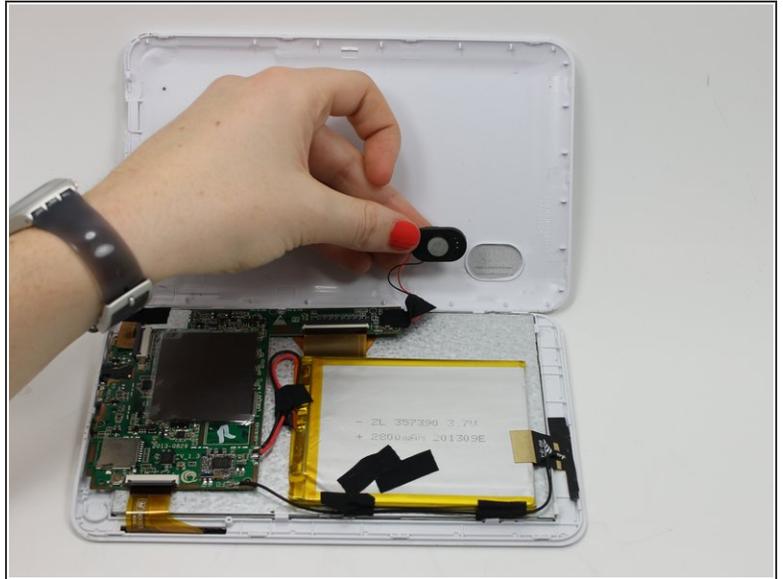


- Remove the speaker from the back cover.

## Step 6



- Remove the black and red wire from the Motherboard.

## Step 7

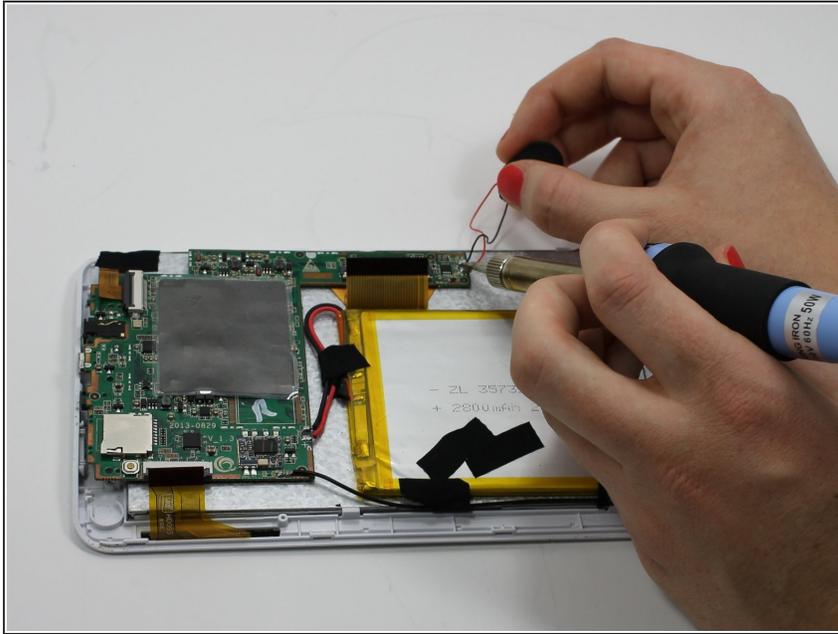

- Install the new speaker by soldering the wires to the motherboard. For additional soldering instructions please view this page: [How To Solder and Desolder Connections](#)

To reassemble your device, follow these instructions in reverse order.