



# Escort Passport 9500IX Speaker Replacement

How to replace a Escort Passport 9500IX speaker.

Written By: Kennedy Morales



---

## INTRODUCTION

Is the sound being produced by the radar staticky or no sound is being produced at all? If so, follow these steps to replace your radar's speakers.

---

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Back Panel





- Remove the three 1.2 mm Phillips #1 screws on the back of the device.

## Step 2



- Pry off the back panel of the radar using the nylon spudger.

### Step 3 — Speaker

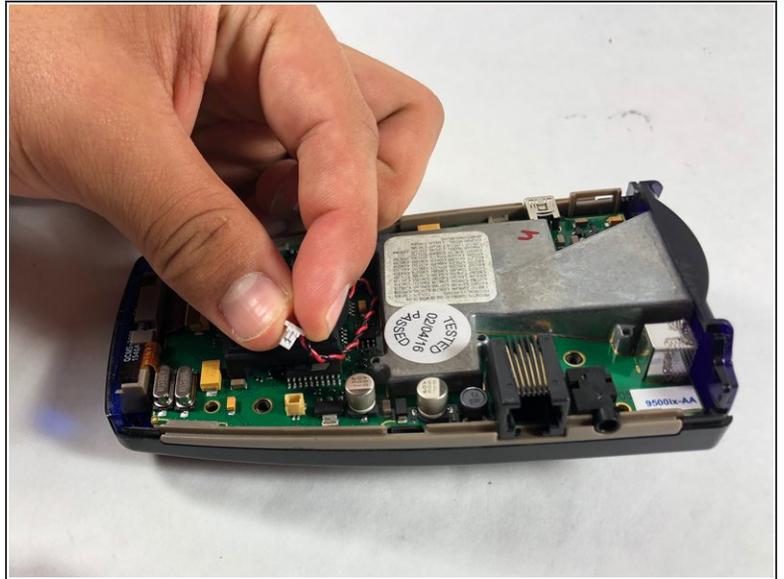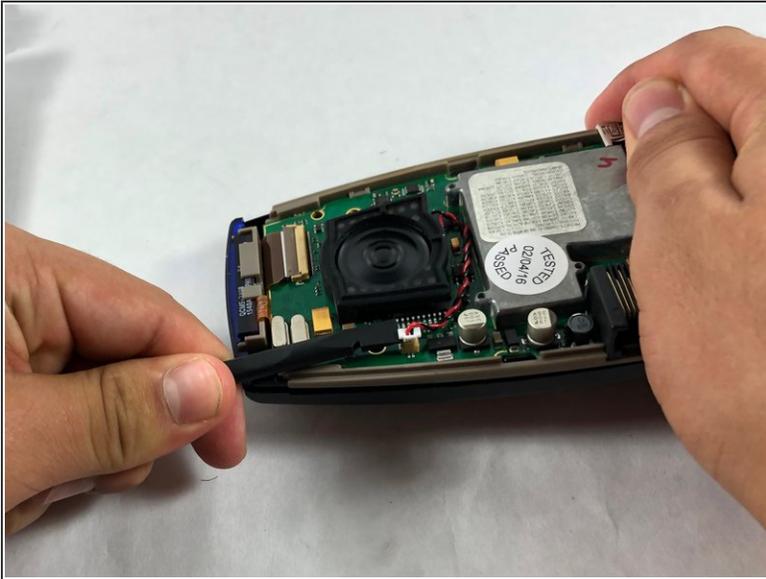

- Carefully unplug the speaker wire from the motherboard.

### Step 4



- Pull the speaker holder out of the motherboard.

To reassemble your device, follow these instructions in reverse order.