




# Fujitsu LIFEBOOK P7010D Hard Drive Replacement

How to install the Fujitsu LIFEBOOK P7010D hard drive

Written By: Nicholas Ross

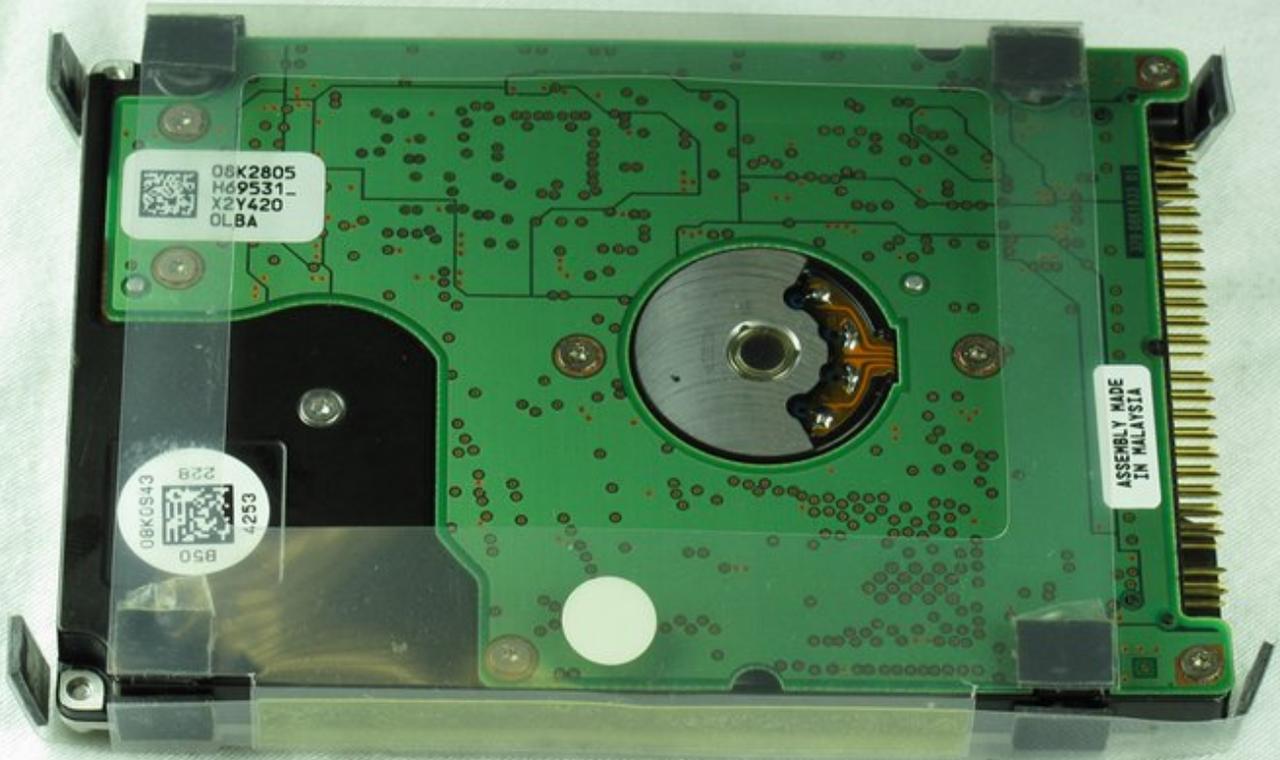

 **TOOLS:**


- [Anti-Static Wrist Strap](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery




- Place the laptop upside down on a table.

## Step 2

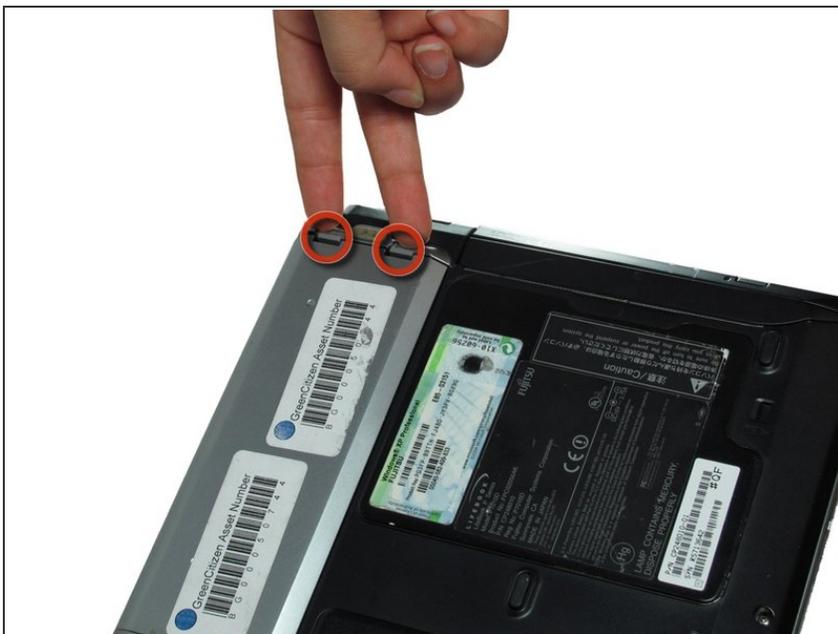

- Locate the battery (the grey block). Find the two tabs on one end of the battery near the side of the laptop.
- Using your fingers, press both tabs down at once until they are fully depressed.

### Step 3

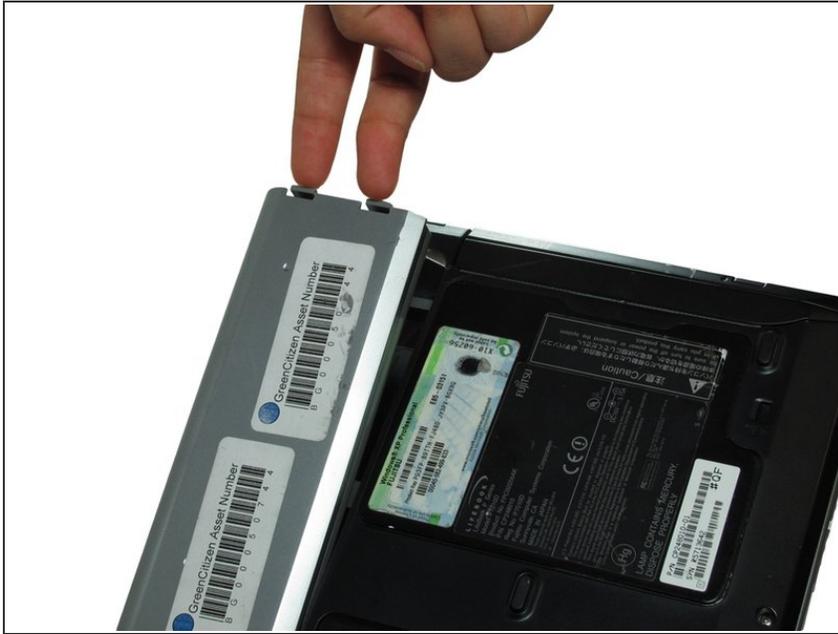


- While holding the tabs down, slowly pivot the battery up.
- The battery is now free and safe to pull out.

### Step 4 — Disc Drive





- Push the tab down as far as possible using your finger or plastic opening tool to unlock the disc drive.
- While still holding the tab down, use your other hand to pull out the disc drive straight out of its place.

## Step 5 — Hard Drive

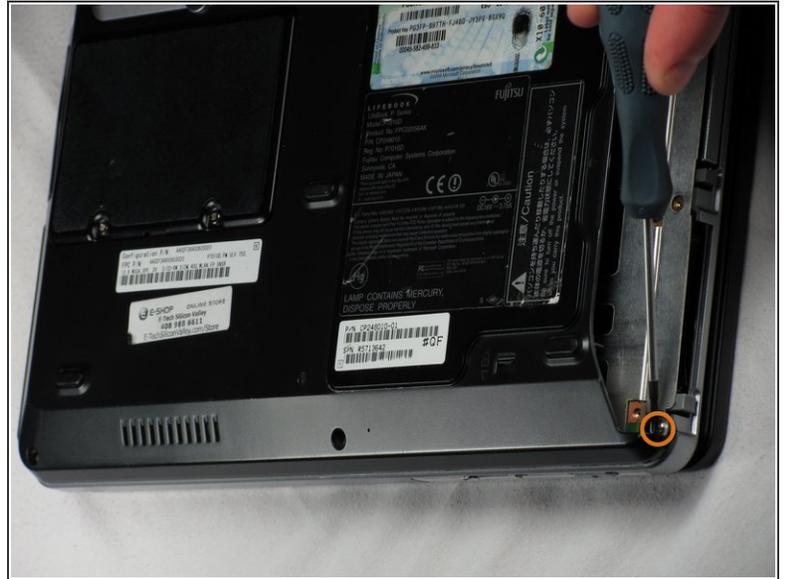


- Unscrew two 2.4mm screws at the bottom using a Phillips #0.
- Also unscrew another 2.4mm screw in the same line as the first two, located at the disc drive's opening and closest to the bottom right corner.

## Step 6

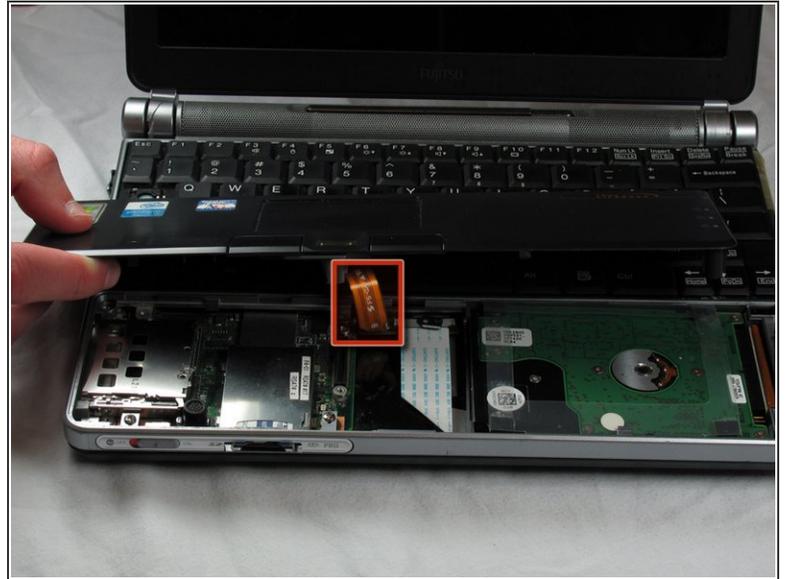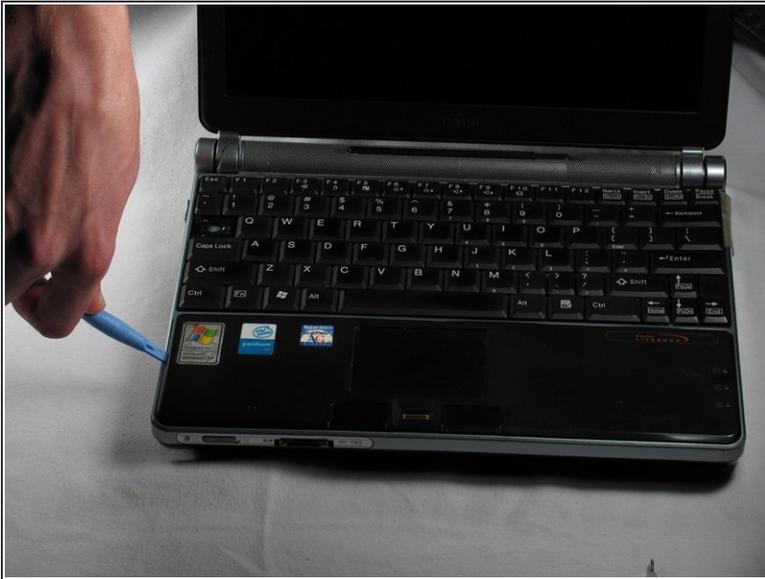

- Flip the computer so that the top is facing upwards.
- Open the computer
- ⚠ The cover is connected to a strip at the bottom, be careful not to yank the cover out.
- Use a spudger to lift the bottom black cover on both sides at any point.
- ⓘ For the proceeding steps, put on your anti-static wrist strap on and clip the metal clip to something metal and grounded to protect the delicate circuitry inside the computer.

## Step 7

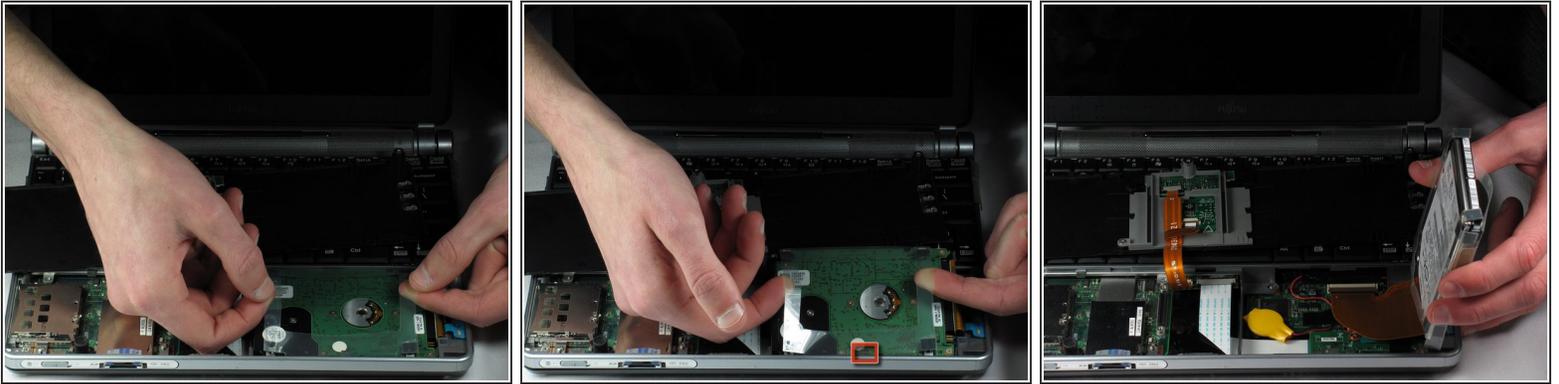

- Flip the cover over and sit it on the keyboard.
- ⚠ The hard drive is also connected with a strip, do not yank it out.
- Mind the tab at the bottom when pulling it out.
- Lift the hard drive towards you and pull it out like you did with the battery.

## Step 8



- Flip the hard drive to the side.
- ⚠ The pins that connect hard drive are extremely fragile. Take care in handling the next few steps.
- Hold the hard drive and use a spudger, preferably a wider one, to remove the black pin holder at the side where it touches the hard drive.
- Wiggle the black pin holder little by little on each side until the holder comes off.

To reassemble your device, follow these instructions in reverse order.