



# Garmin Nuvi 680 Antenna Replacement

A step-by-step guide to replacing the antenna in the Garmin Nuvi 680.

Written By: Chris Marzano



---

## INTRODUCTION


A step-by-step guide to replacing the antenna in the Garmin Nuvi 680.

---

### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Outer Case

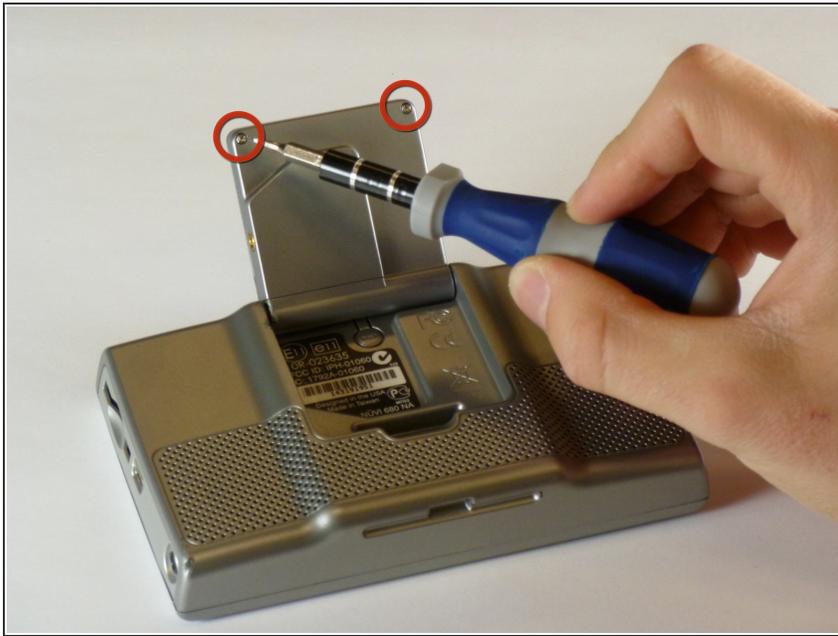


- Flip open the antenna on the back of the device.
- Remove the two screws on the antenna cover using a T5 Torx screwdriver.
- These screws are 4.42 mm long.

## Step 2





- Remove the antenna cover.

## Step 3

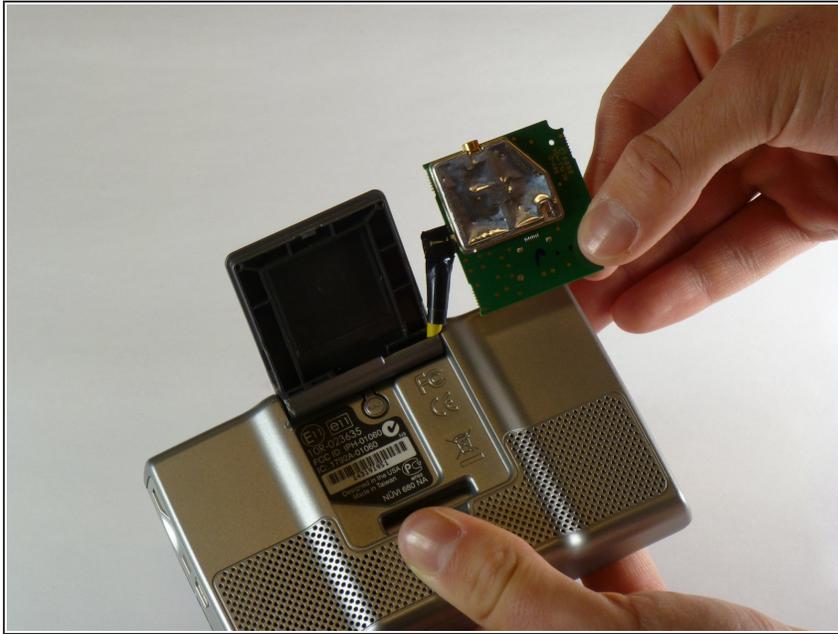


- ⚠** The yellow wire is connected to the motherboard, so you cannot disconnect it until you finish opening the device.
- Pull the antenna circuit board out of its case.

## Step 4

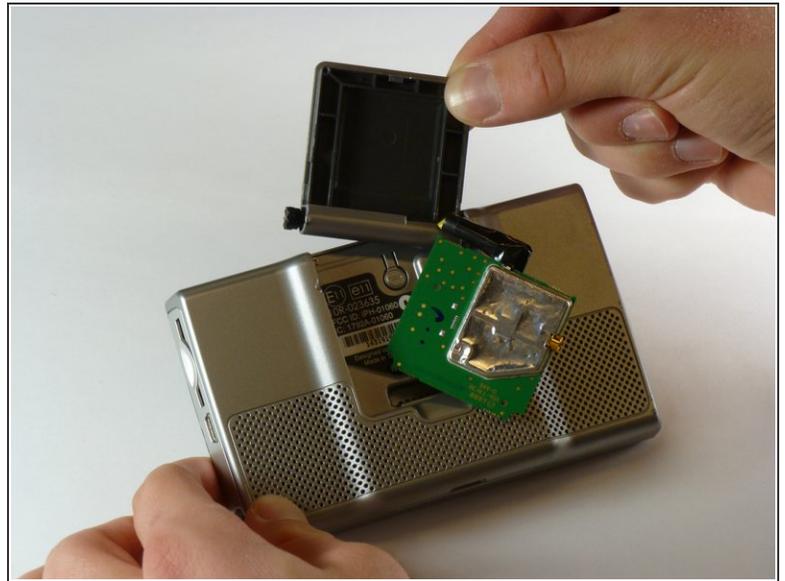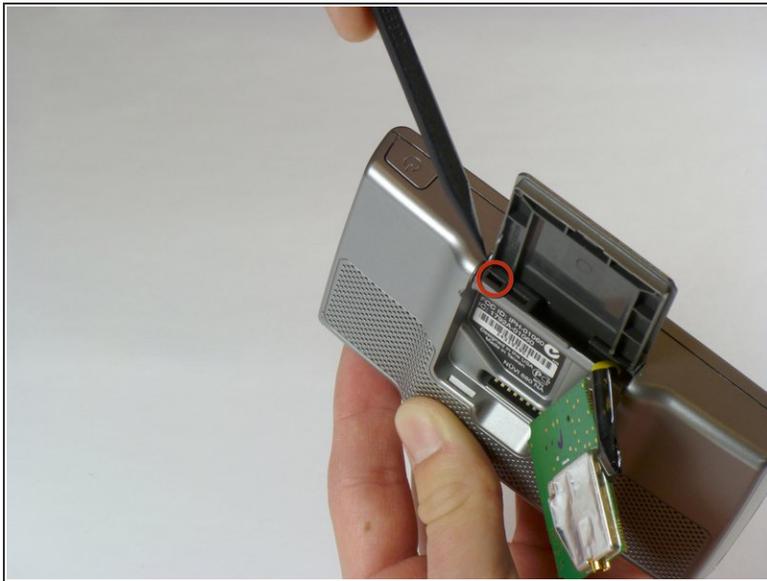

- Insert the pointed end of a spudger into the leftmost slit of the antenna case.
- Push the spudger to the right.
- ⚠ Slide the antenna case out slowly or you may lose the antenna's spring. The spring is inside the black plastic that holds the antenna case to the device.
- Slide the antenna case out of the device.
- 📌 Reinstallation tip: first reassemble the antenna casing (place antenna back into its plastic cover), and then re-insert the entire assembly back into the GPS body.

## Step 5

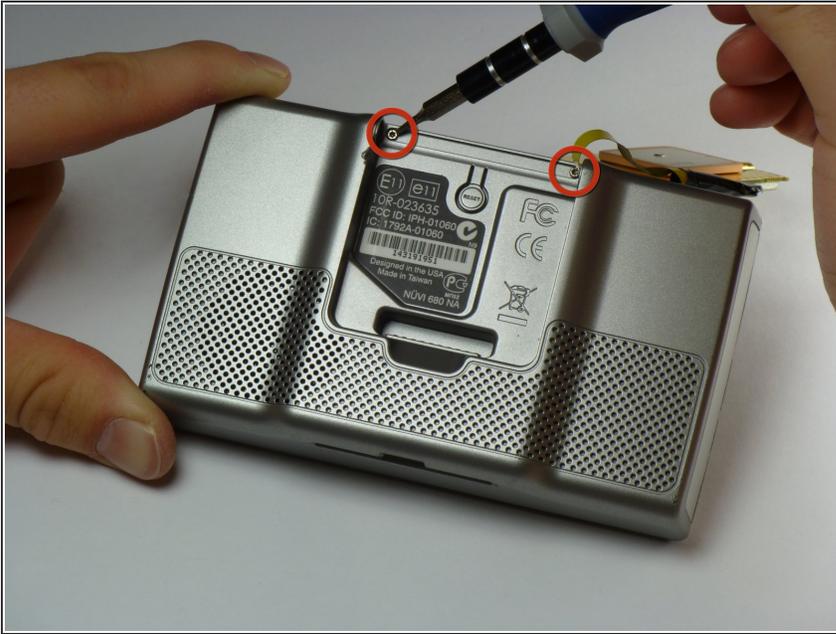

- Remove the two screws on the back of the outer case using a T5 Torx screwdriver.
- These screws are 10.82 mm long.



## Step 6



 Gently pull apart the front and back of the device. The front and back are still connected by ribbon cables.

- Starting along the top, separate the front and back of the device by pushing an iPod-opening tool into the crack along each side of the case.

## Step 7 — Antenna

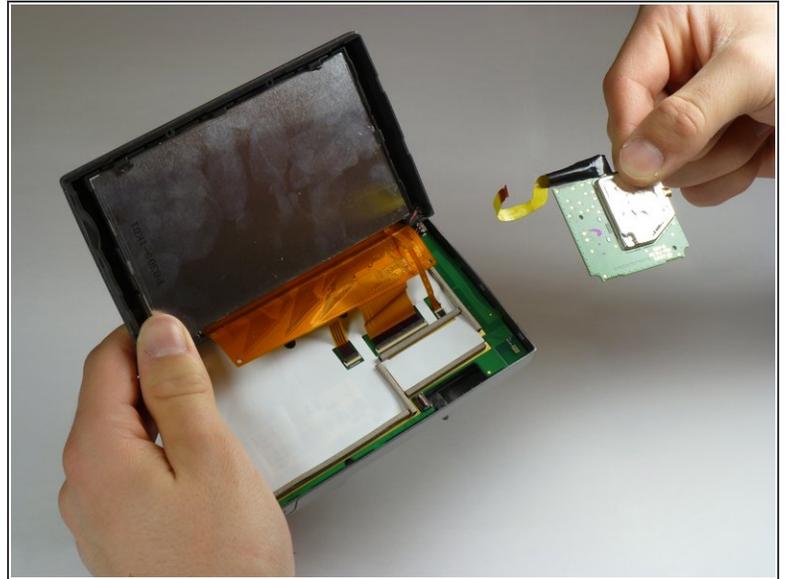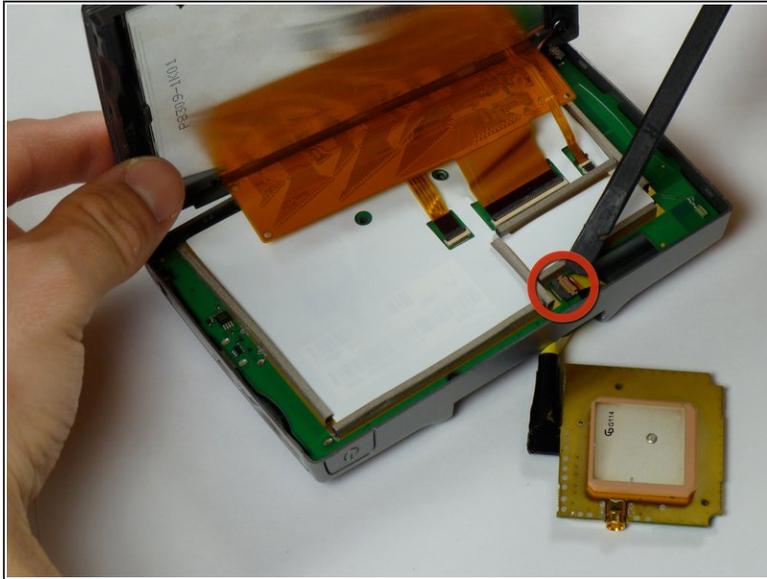

- Use a spudger to disconnect the yellow antenna wire from the ZIF connector on the back of the motherboard.
- Remove the antenna.

To reassemble your device, follow these instructions in reverse order.