



# HP 15-ac121dx Screen Replacement

This guide provides a step by step process for screen replacement

Written By: Keefe White




---

 **TOOLS:**

- [Phillips #000 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery

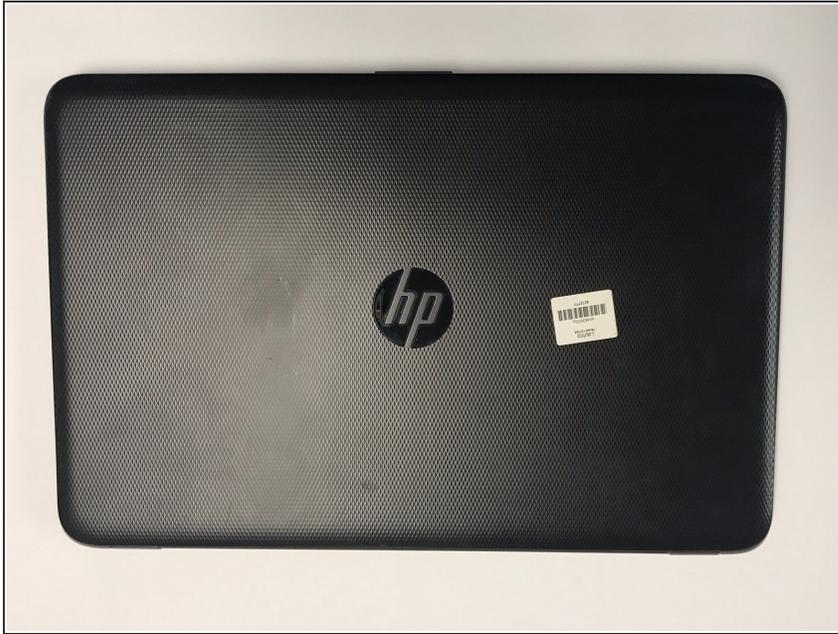


- Remove all external devices from the computer.
- Remove the charging cord from the computer.

## Step 2



- Turn off the computer by holding the power button.

### Step 3

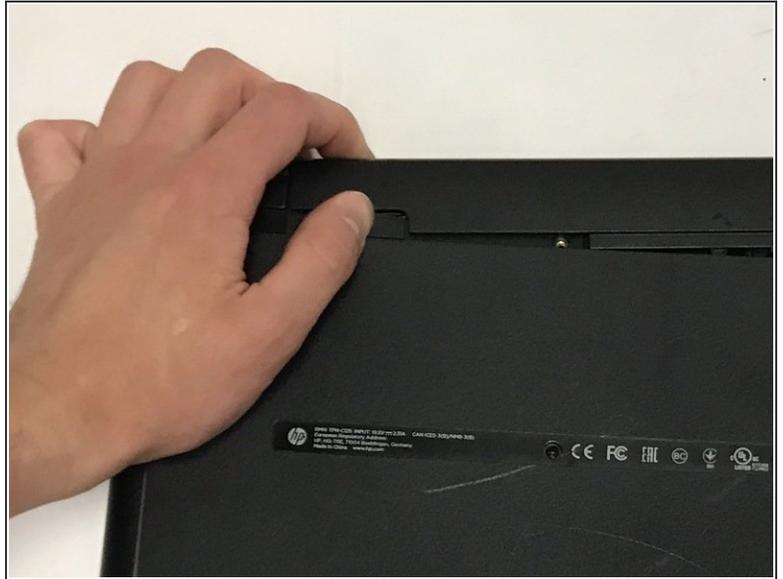

- To remove the battery, slide the left slider on the back to the unlocked position.

### Step 4



- Push the right slider inwards.
- Remove the battery out by pulling straight out and to the right.

## Step 5 — Screen




- Open the laptop so that the screen is facing you.

## Step 6




- With the screen facing you, use the plastic opening tool to remove the liner around the screen

## Step 7

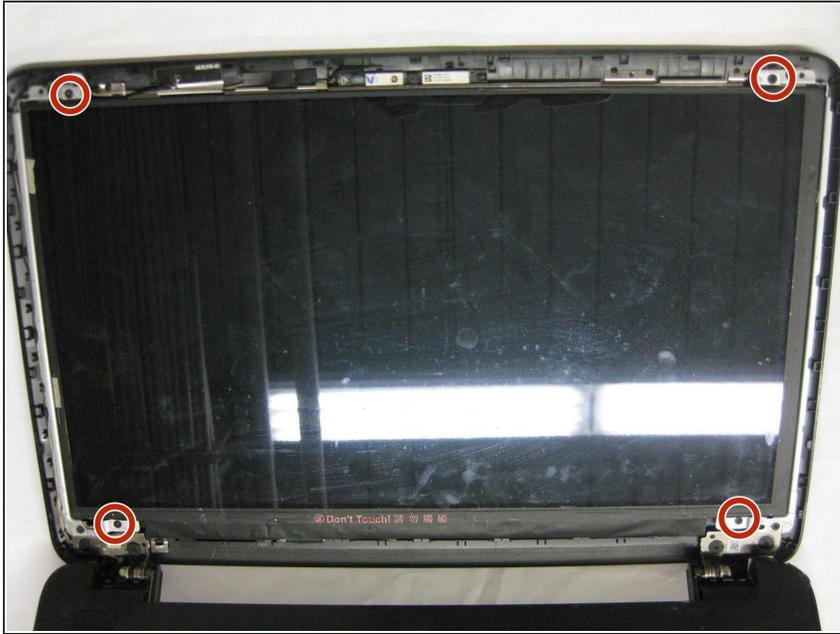

- Using a Phillips #000 screwdriver, remove all four 2mm screws in each corner of the screen.


## Step 8

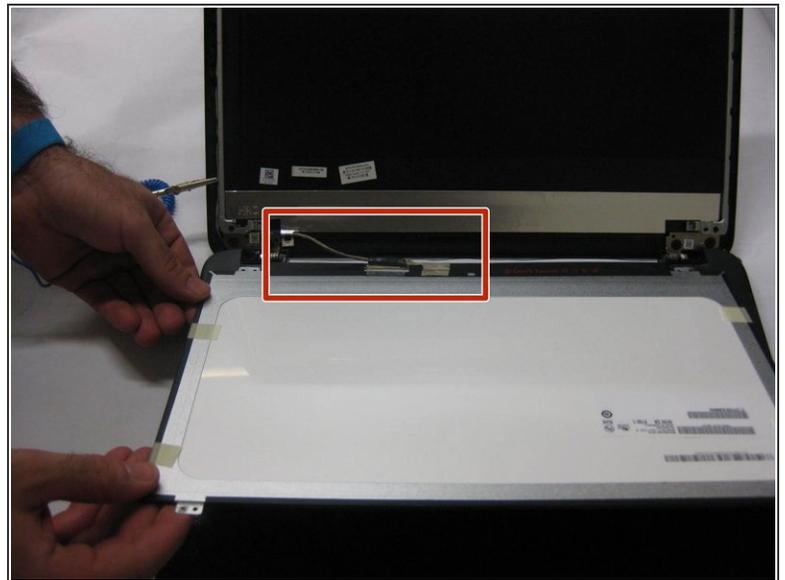

- Carefully remove the screen and place it face down on the keyboard.

**⚠** Do not pull the screen away from the front panel assembly, as this would damage the cord connecting the screen to the front panel assembly.

## Step 9

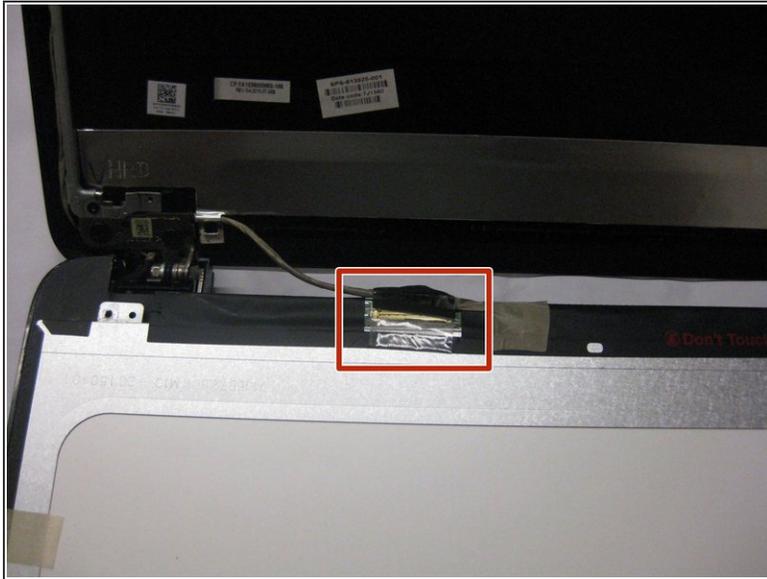

- With the screen faced down on the keyboard, remove the grounding tape adhered to the back of the screen.
- ⓘ You should see a 36-pin plug underneath the grounding tape.
- Carefully remove the 36-pin plug, not to damage the grounding tape or the plug.

To reassemble your device, follow these instructions in reverse order.