




HP Mini 110-3131dx Hard Drive Replacement

Replace your old corrupt hard drive with a new hard drive for your HP Mini 110-3131dx

Written By: aarondcollege

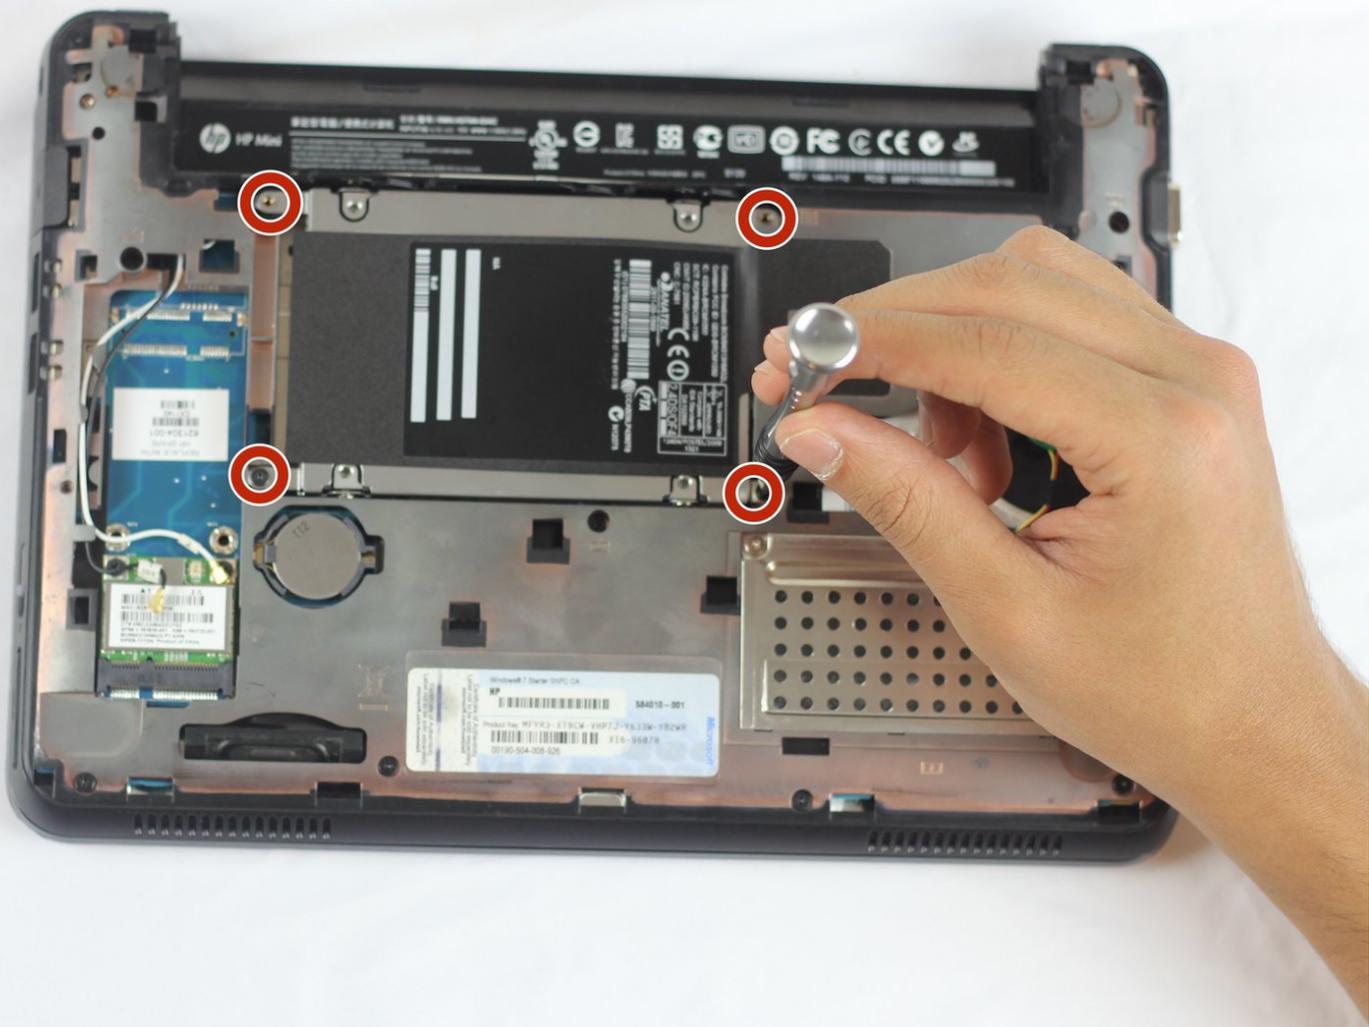

 **TOOLS:**

- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Battery



- Completely turn off the laptop before trying to remove the battery.
- Turn the laptop upside down, and find the sliding tabs located on the battery.
- Slide both tabs in an inward direction then slide the battery away from the laptop

Step 2 — Back Cover





- To remove the bottom cover pull the orange tab to the right until it clicks.
- Carefully disconnect the clips as you lift the bottom cover

Step 3 — Hard Drive



- Remove the four screws holding down the hard drive.
- Use a Phillips PH1 screwdriver for the four black screws around the hard drive

Step 4

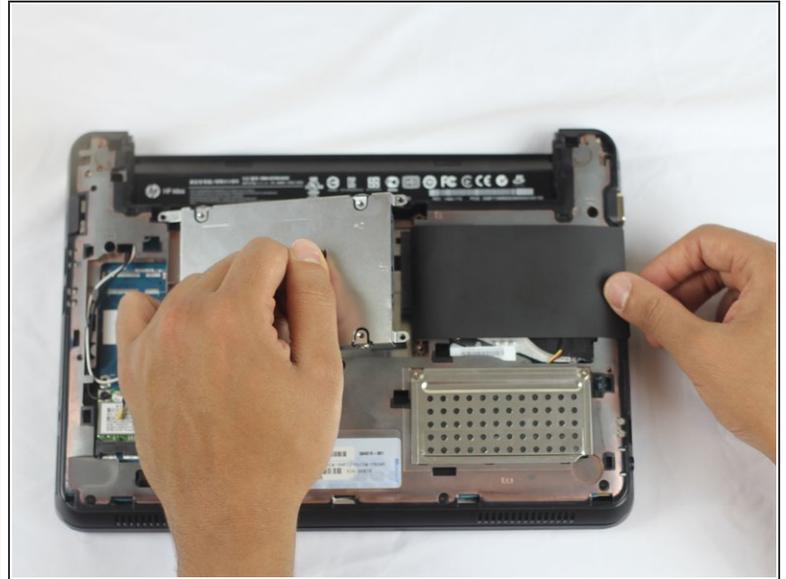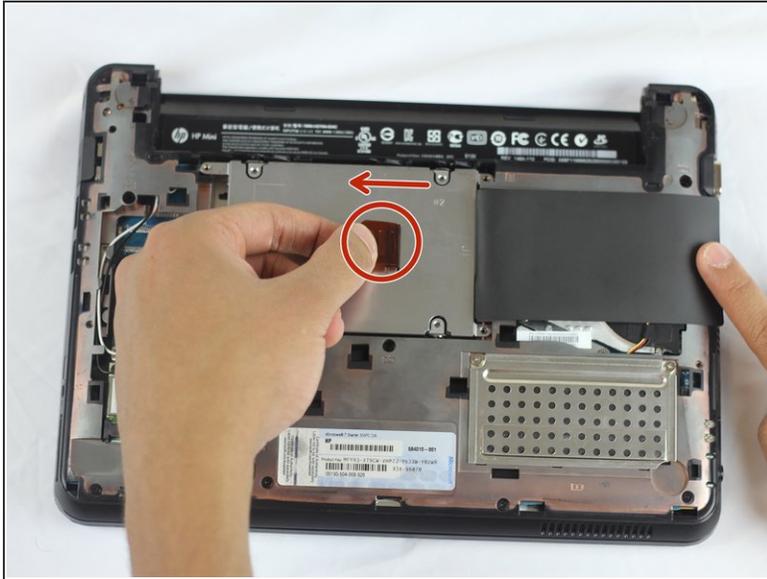

- Lift the black flap covering the hard drive then slide it towards the left using the orange tab until it's released from its receptacle.
 - ⚠ Do not pull out until disconnected
- Pull the hard drive out of the laptop.
 - ⓘ Put the hard drive in an anti-static bag to decrease the likelihood of harming it with static electricity.

To reinstall a new or old hard drive, follow these instructions in reverse order.