



LG CG225 Screen Replacement

Replace the screen on your LG CG225.

Written By: Mackenzie



INTRODUCTION

Use this guide to replace the screen on the LG CG225.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Screen




- Pry off and set aside all rubber screw covers from back and inside of phone.

Step 2



- Remove all screws from back and inside of phone using small Phillips screwdriver.

Step 3

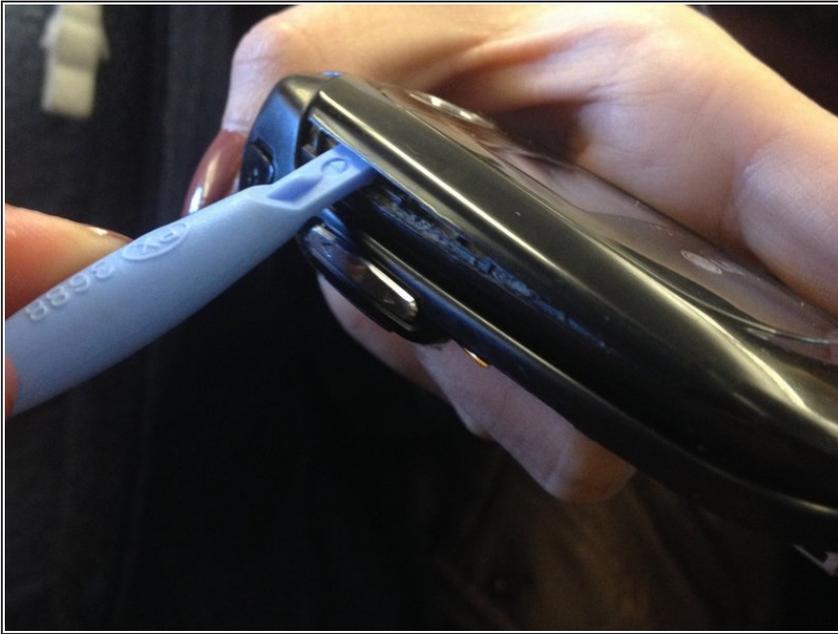

- Remove faceplate of phone using the plastic pry tool.

Step 4



- Detach round, magnetic batteries from their circular frames.

Step 5




- Carefully remove screen from it's holding frame.

Step 6



- You can now insert the replacement screen in the holding frame.

Step 7

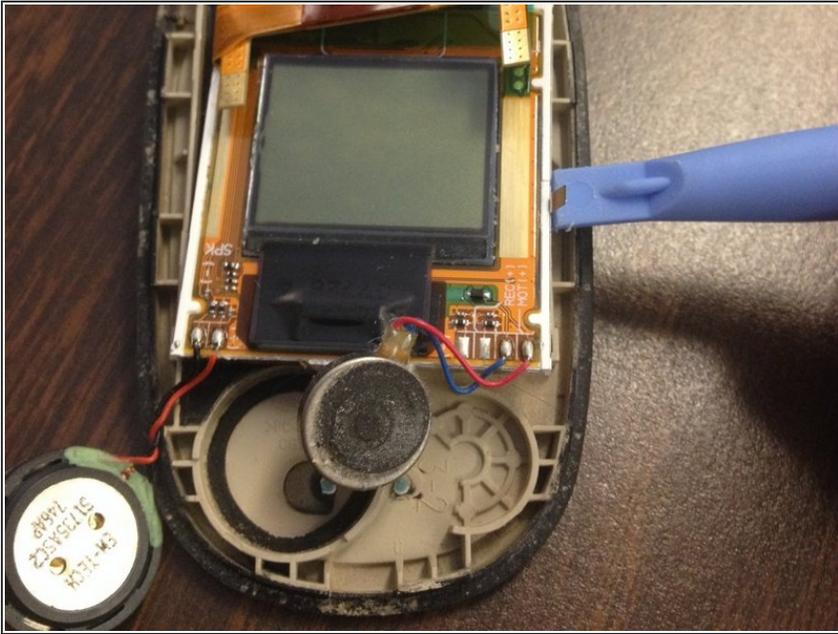

- Place round batteries in their respective circular frames.

Step 8



- Replace the faceplate.

Step 9



- Replace screws using small Phillips screwdriver.

Step 10



- Replace rubber screw covers and insert over the screws.

To reassemble your device, follow these instructions in reverse order.