



LeapFrog LeapPad Platinum Battery Replacement

This guide will show you how to replace the built-in, lithium-ion battery in your LeapPad Platinum.

Written By: Brittney Cooper



INTRODUCTION

Use this guide to remove the back cover of your tablet and replace the battery. Make sure your tablet is turned off before disassembling your device.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

PARTS:

- [Rechargeable 3.7V Li-Polymer battery](#) (1)

Step 1 — Battery




- Place your tablet on a flat surface with the screen facing down.

Step 2



- Using a plastic opening tool, pry off the plastic border by inserting it in the space between the green bumper and the white plastic on the edge of the tablet.
- ⓘ The border snaps into place, so don't be too worried if you hear a cracking noise while prying it off.

Step 3

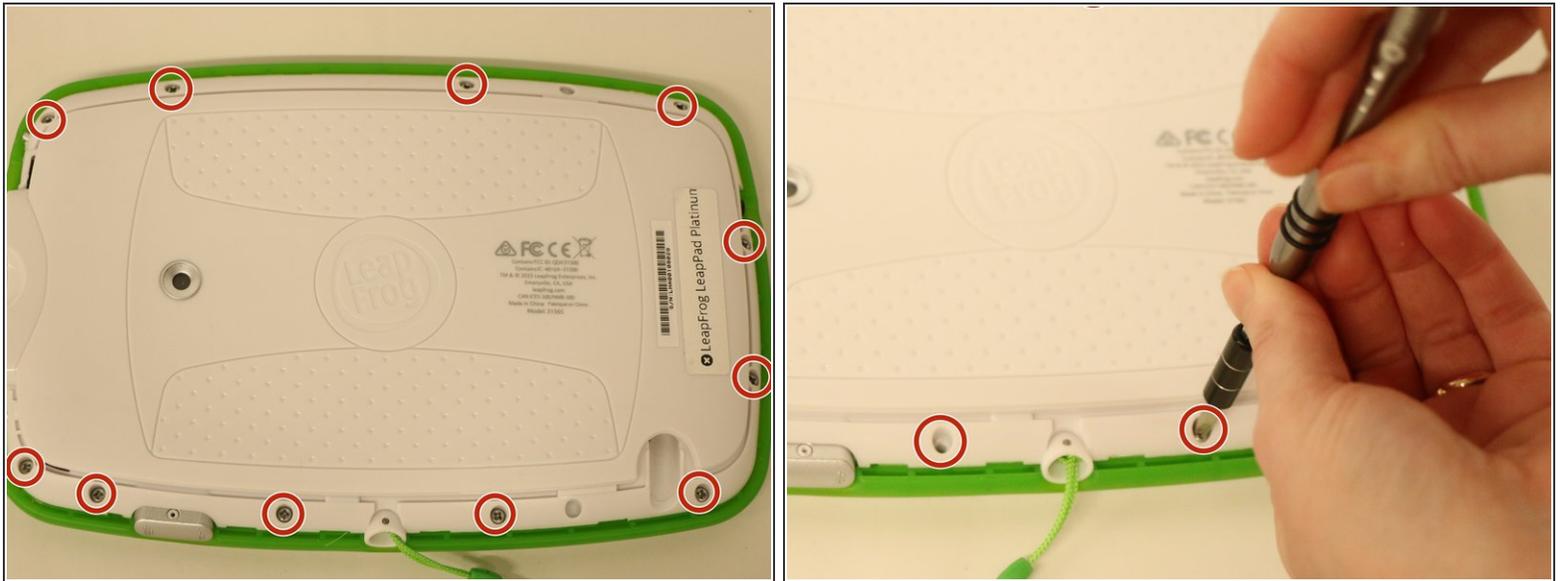

- Remove the 11 Phillips screws (8.0 mm) located around the edge of the back cover with a Phillips screwdriver.

Step 4




- Pull the back cover off of your device.

Step 5



- Wedge a plastic opening tool underneath the battery and lift the battery up.
- ⓘ The battery is held in place by an adhesive strip, so it can be difficult to pry off.

Step 6

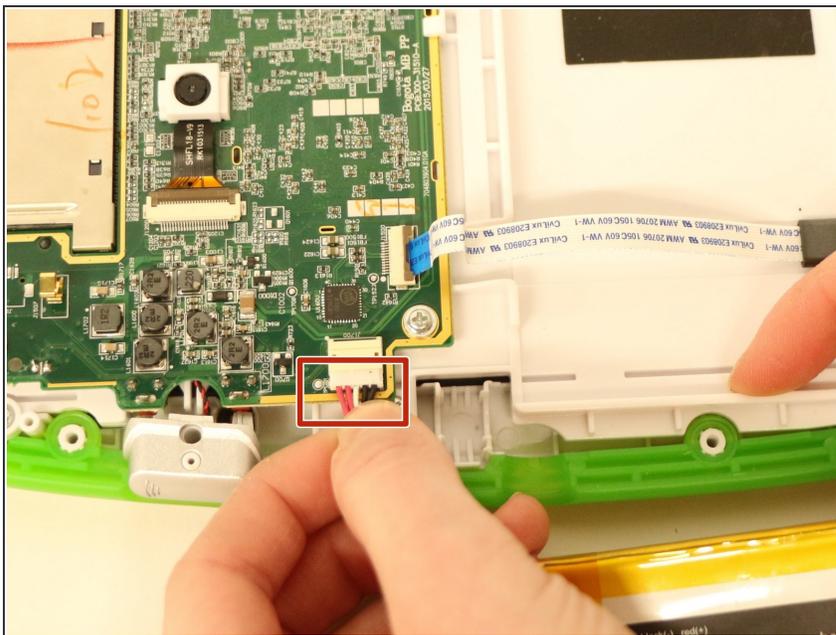

- The battery has red, black, and white wires that are all connected to the motherboard through a plastic clip. Unplug this plastic clip to fully remove the battery from your device.

To reassemble your device, follow these instructions in reverse order.