



MacBook Pro 15" Unibody Late 2008 and Early 2009 Display Assembly Replacement

Use this guide to replace a broken display on your MacBook Pro Unibody.

Written By: Walter Galan



INTRODUCTION

Use this guide to replace a broken display on your MacBook Pro Unibody.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)



PARTS:

- [MacBook Pro 15" Unibody \(Late 2008/Early 2009\) Display Assembly](#) (1)

Step 1 — Access Door



- With the case closed, place the Unibody top-side down on a flat surface.
- Depress the grooved side of the access door release latch enough to grab the free end. Lift the release latch until it is vertical.

Step 2



- The access door should now be raised enough to lift it up and out of the Unibody.

Step 3 — Battery



- ⓘ Be sure the access door release latch is vertical before proceeding.
- Grab the translucent plastic tab and pull the battery up and out of the Unibody.
- If the latch is depressed it will lock the battery in place.

Step 4 — Lower Case




- Remove the following eight screws securing the lower case to the chassis:
 - One 5.4 mm Phillips screw.
 - Three 14 mm Phillips screws.
 - Four 3.5 mm Phillips screws.

Step 5




- Using both hands, lift and remove the lower case off the upper case.

Step 6 — Display Assembly

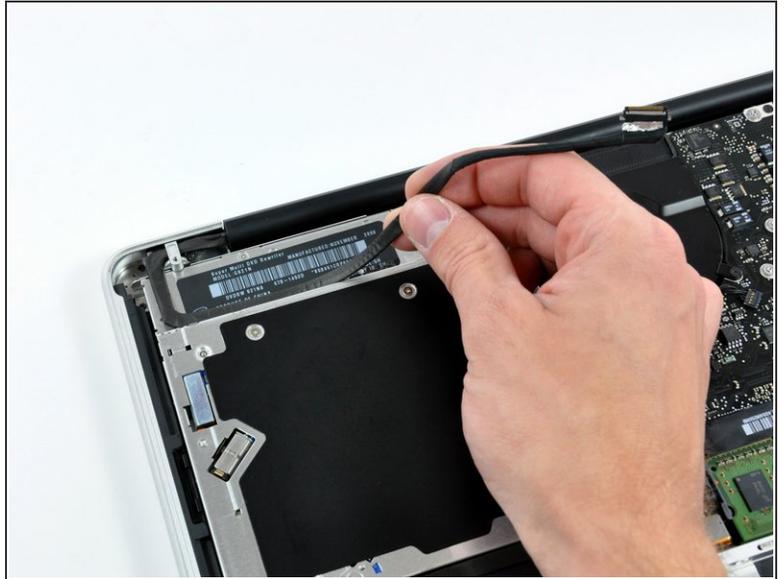


- ⓘ If necessary, peel the EMI gasket off the camera cable connector.
- Disconnect the camera cable by pulling the male end straight away from its socket toward the optical drive opening.
- ⚠ Do not try to lift this connector straight up off the board. Pull the connector parallel to the face of the logic board.
- Deroute the camera data cable from the channel in the optical drive.

Step 7

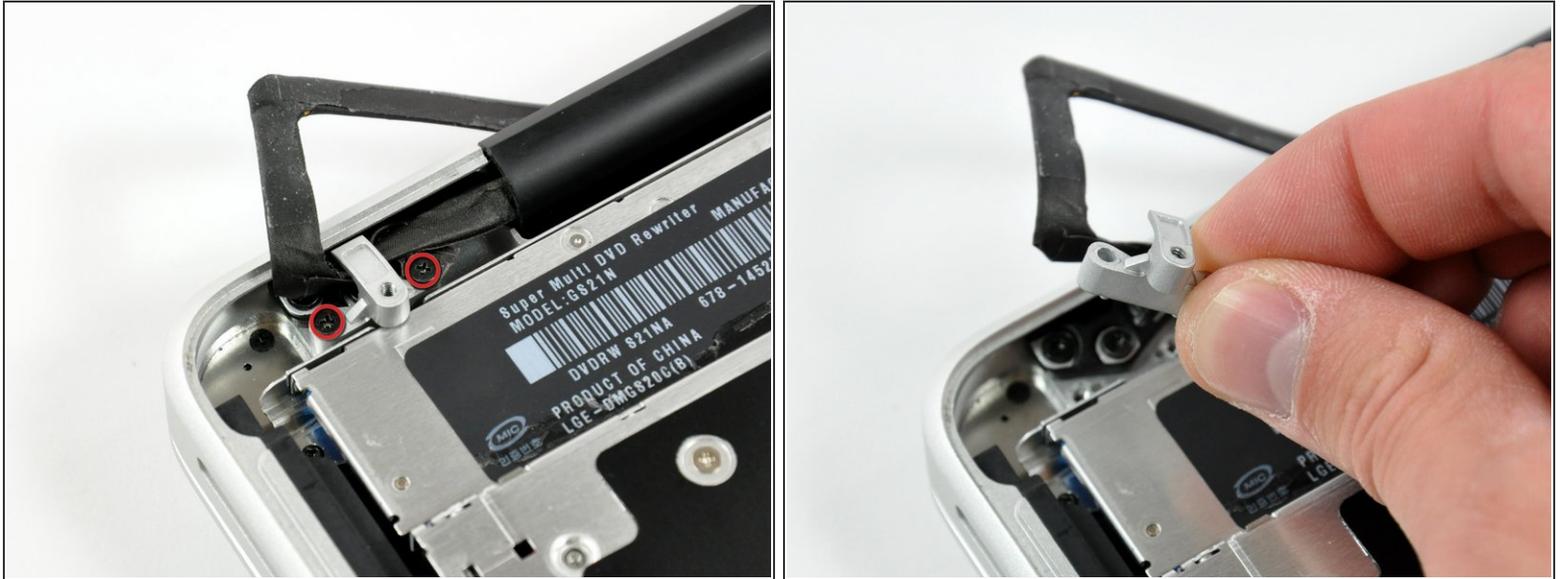



- Remove the two Phillips screws securing the camera cable bracket to the upper case.
- ⓘ The leftmost screw may remain captive in the camera cable.
- Separate the camera cable bracket from the camera cable and remove it from the computer.

Step 8

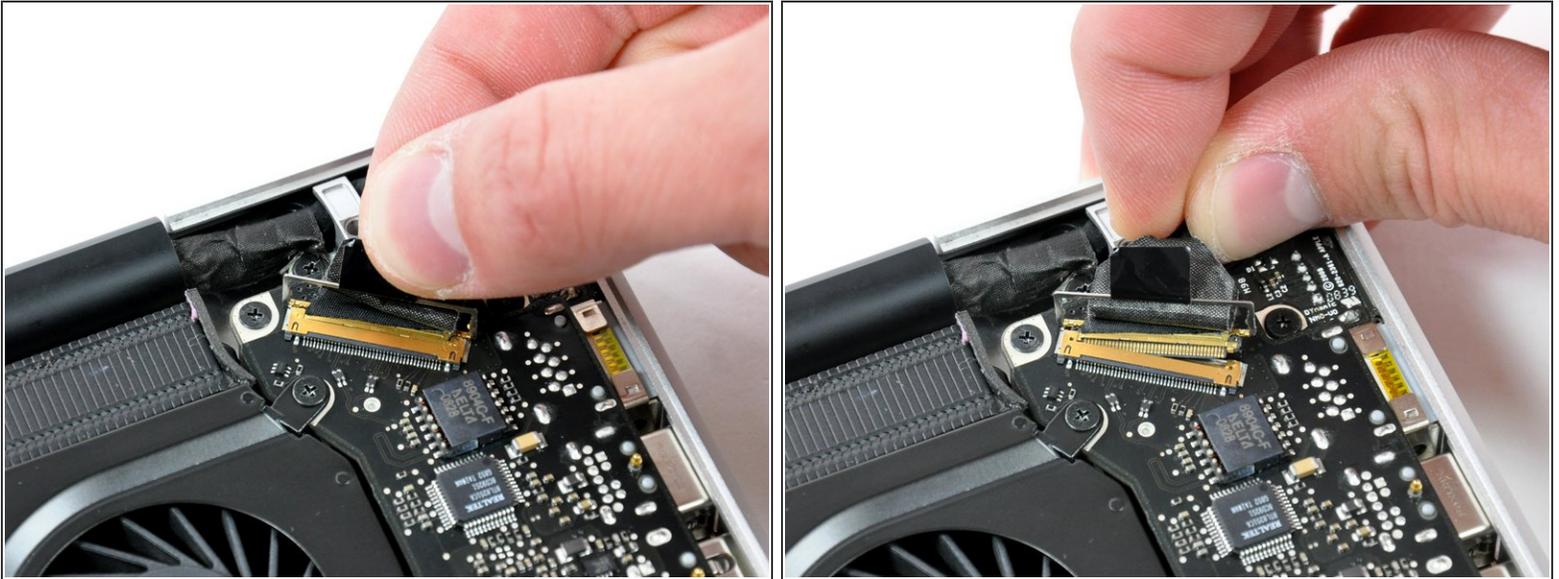


- Grab the plastic pull tab secured to the LVDS cable lock and rotate it toward the DC-in side of the computer.
 - Pull the LVDS connector straight away from its socket.
- i** When disconnecting the LVDS cable, do not pull on the black tab secured to the LVDS cable lock. We recommend wiggling the cable while applying tension to slowly "walk" the connector out of its socket.

Step 9

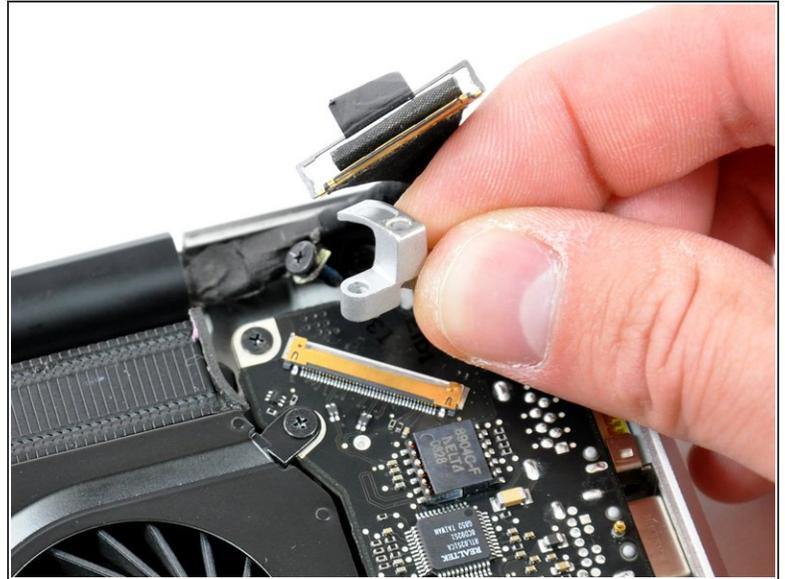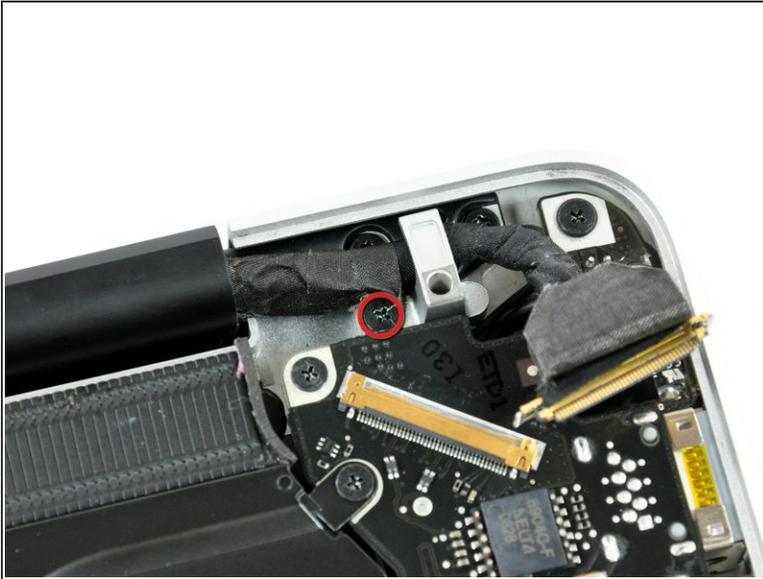

- Remove the 7 mm Phillips screw from the LVDS cable bracket.
- ⓘ This screw may remain captive in the LVDS cable.
- Lift the LVDS cable bracket out of the upper case.

Step 10

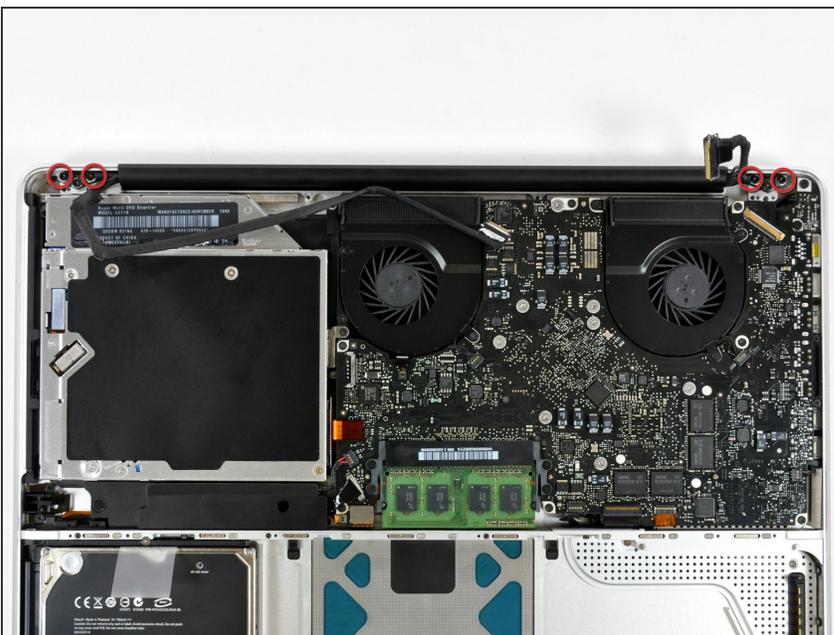

- Remove the two outer 6 mm Torx screws securing each side of the display to the upper case (four screws total).

Step 11



- Open your MacBook Pro so the display is perpendicular to the upper case.
- Place your opened MacBook Pro on a table as pictured.
- While holding the display and upper case together with your other hand, remove the 6 mm Torx screw from the lower display bracket.

Step 12



⚠ Be sure to hold the display and upper case together with your other hand. Failure to do so may cause the freed display/upper case to fall, potentially damaging each component.

- Remove the last remaining 6 mm Torx screw securing the display to the upper case.

Step 13



- Grab the upper case with your right hand and rotate it slightly toward the top of the display so the upper display bracket clears the edge of the upper case.
- Rotate the display slightly away from the upper case.
- Lift the display away from the upper case, minding any brackets or cables that may get caught.

To reassemble your device, follow these instructions in reverse order.