



Motorola Moto E4 Plus Back Plate and Battery Replacement

This guide shows you how to remove and replace the Motorola Moto E4 Plus battery and the necessary steps to do so.

Written By: Jack Haseman



INTRODUCTION

For the official iFixit guide, [click here](#). This guide is archived for historical purposes.

If there is any problem with the phone that you plan to repair, removing the battery is the first step in completing the repairs and is critical for safety while working on the phone.

If your battery is swollen, [take appropriate precautions](#).

TOOLS:

- [Spudger](#) (1)
- [T4 Torx Screwdriver](#) (1)

PARTS:


- [Moto E4 Plus Replacement Battery](#) (1)
- [Moto E4 Plus Battery Adhesive Strips](#) (1)

Step 1 — Back Plate and Battery



- Insert the spudger into the notch on the corner of the phone and lift up to remove the back case.

Step 2

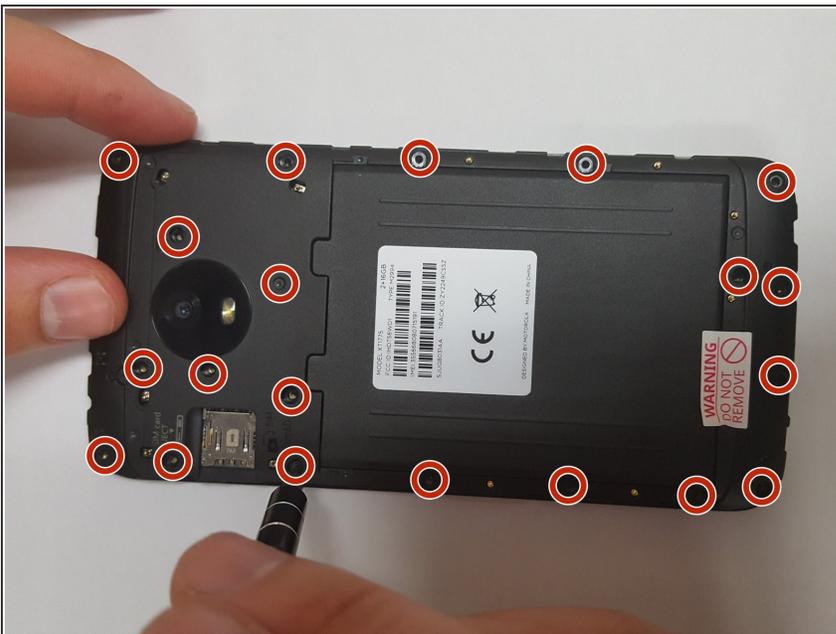

- Use the T4 Torx Screwdriver to remove the 17 3.2 mm screws in the back panel covering the battery.

Step 3



- Lift up and remove the back panel.

Step 4



- After removing the back panel, use the spudger to lift and detach the Battery Flux Cable from the Motherboard.

Step 5



- Wedge the spudger between the battery and the phone to lift the battery up and remove the battery. There will be slight resistance to this but the battery will not be damaged by this. It is just the adhesive tape.

To reassemble your device, follow these instructions in reverse order.

After completing this guide, [calibrate your newly-installed battery](#).