




Olympus Stylus 410 Logic Board Replacement

Written By: Rory Aronson

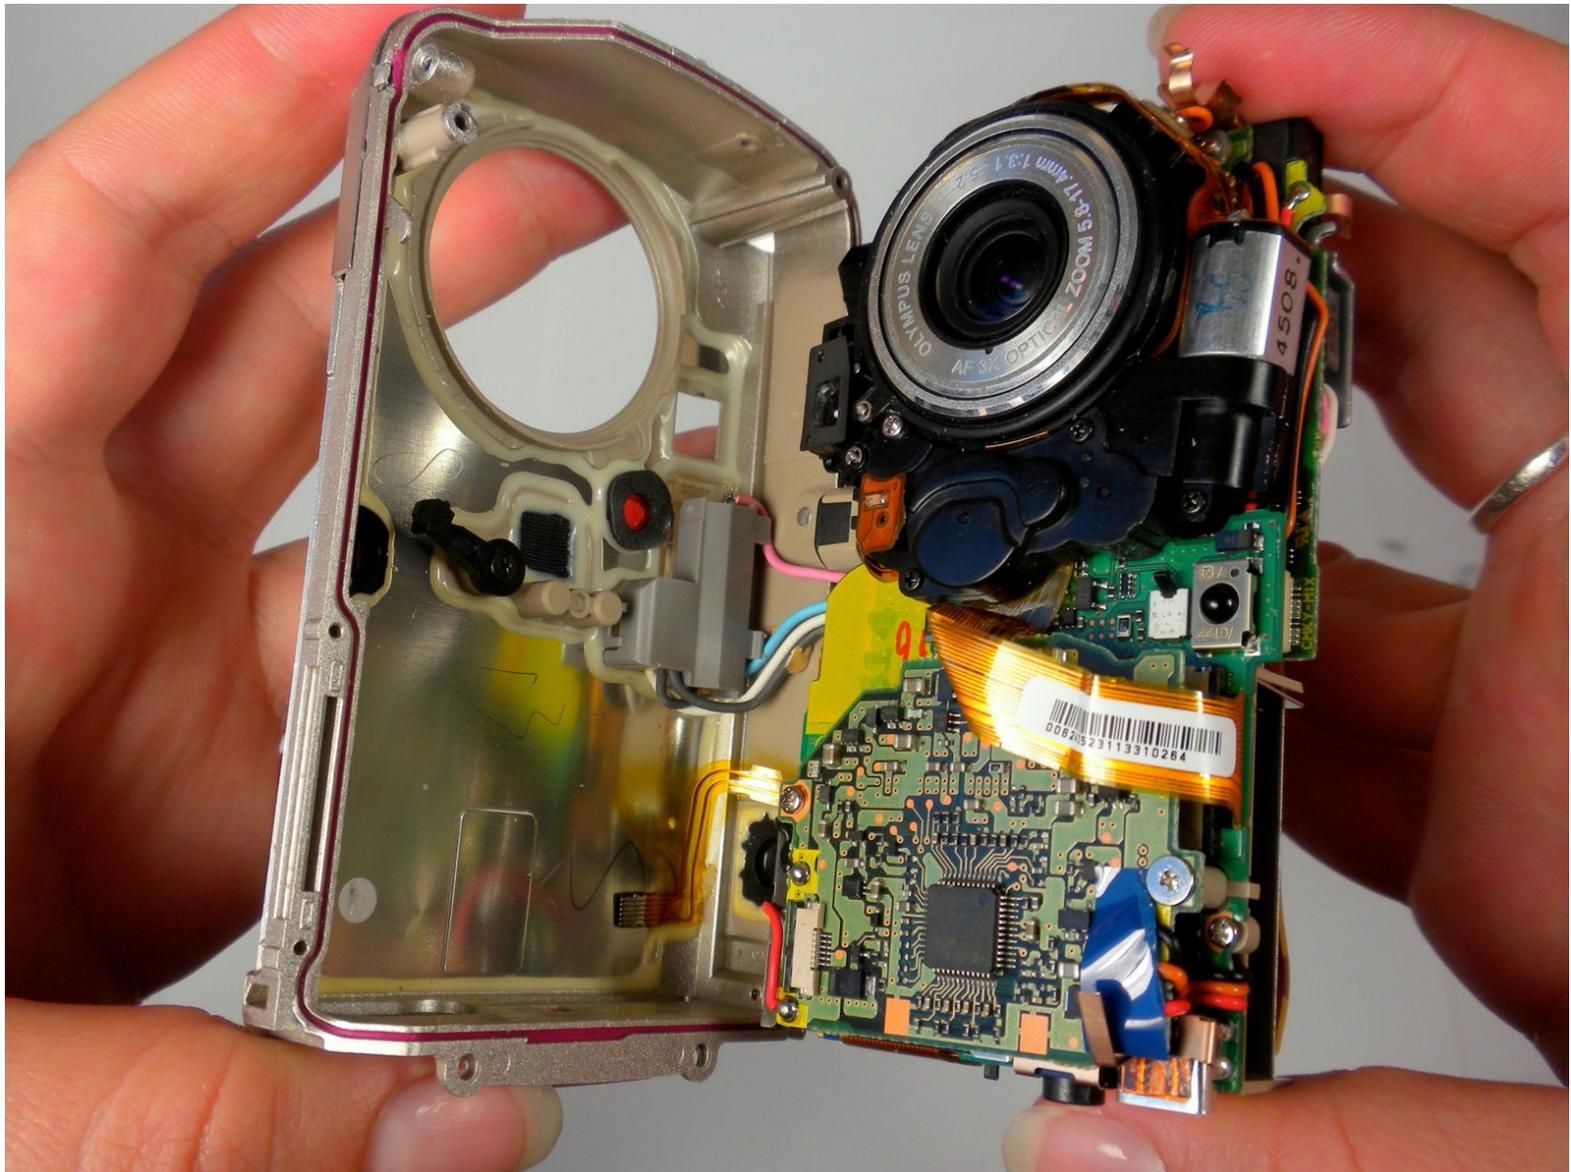


INTRODUCTION

If your Olympus Stylus 410 no longer functions properly because of a faulty logic board, use this guide to install a new one.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Slider

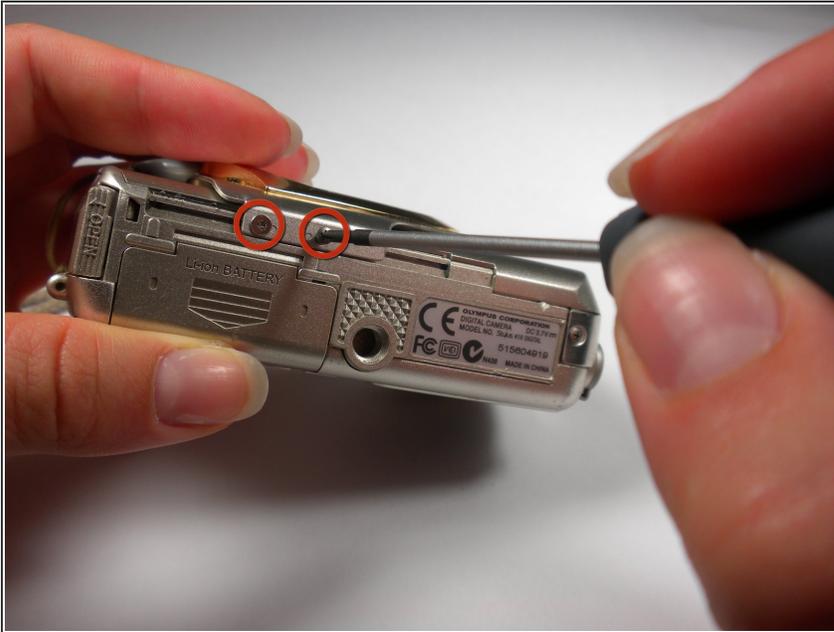

- Locate the 2 screws on the bottom of the slider.
- Remove both screws with a #00 Phillips screwdriver.

Step 2



- Gently pull on the bottom of the slider until it comes off the lower track.
- There is a little piece that connects the slider to the track. Be sure not to lose this as it is needed to put the slider back on.

Step 3




- Lift the slider up until it comes off the upper track.

Step 4




- The slider should now be free from the body of the camera.

Step 5 — Outer Case

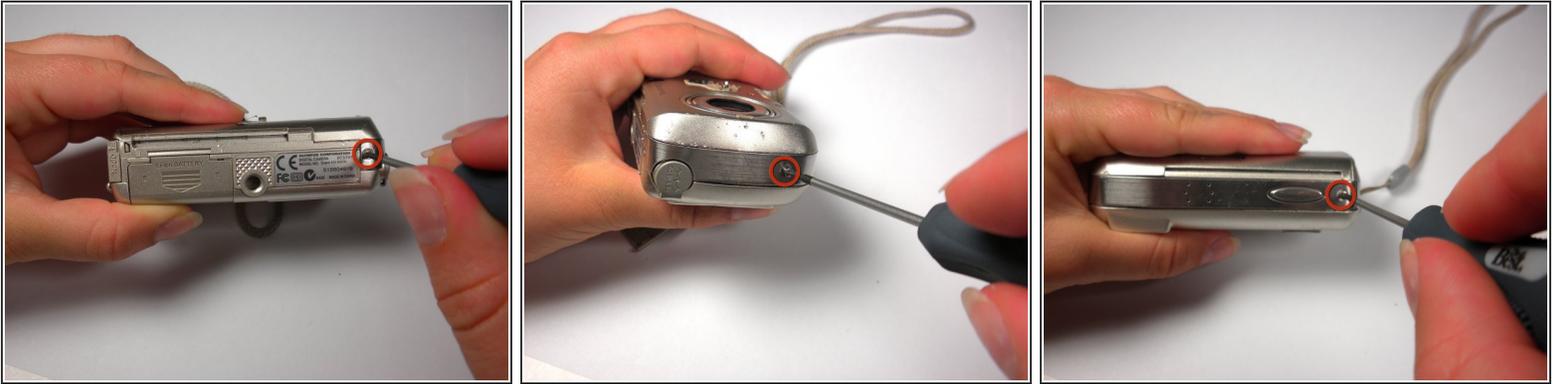

- Locate the 3 screws on the outer metal band and remove them with a #00 Phillips screwdriver.

Step 6

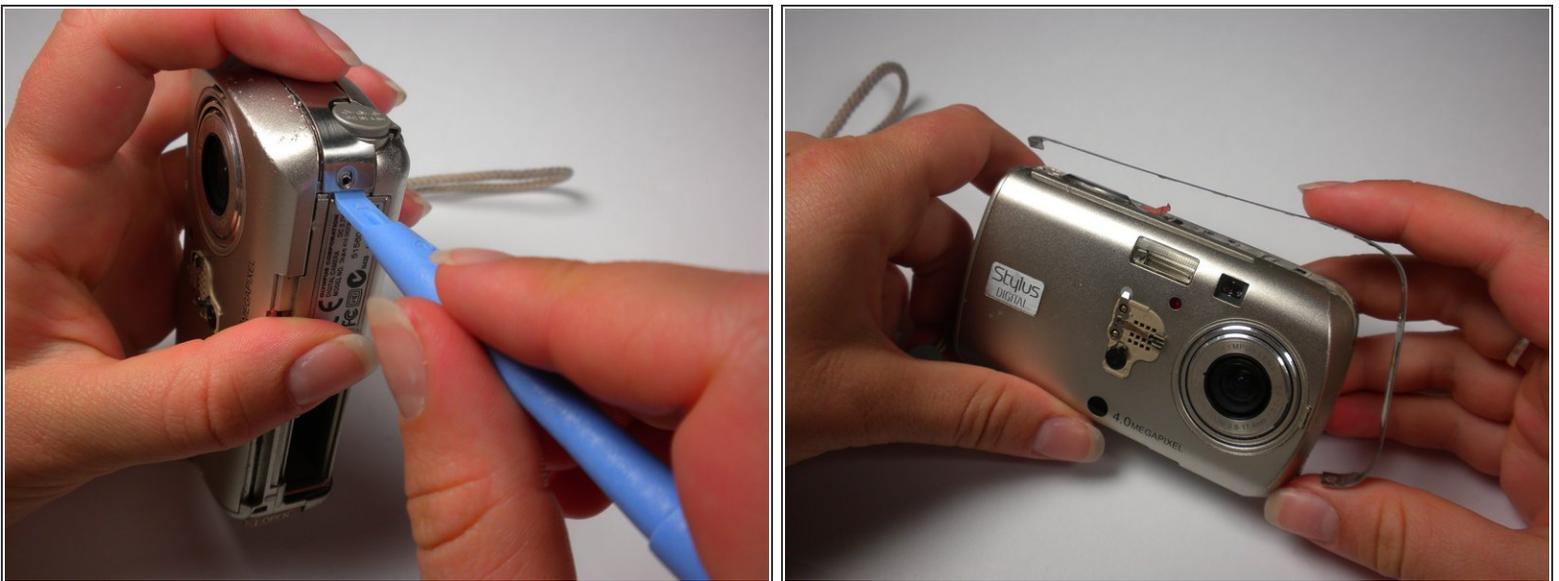

- Use the spudger to peel off the outer metal band, starting from the bottom of the camera.

⚠ The metal band is attached to the camera with glue in addition to screws. Be careful not to bend the band when removing it from the camera.

Step 7



- The shutter button can now be removed. It is not connected to the camera and can be lifted off.

Step 8




- Remove the memory card.
- Locate and remove the 2 screws using a #00 Phillips screwdriver.

Step 9





- Use a spudger around the edge of the case to loosen it.
- Carefully wiggle the back case off. This may require a fair amount of force.

Step 10

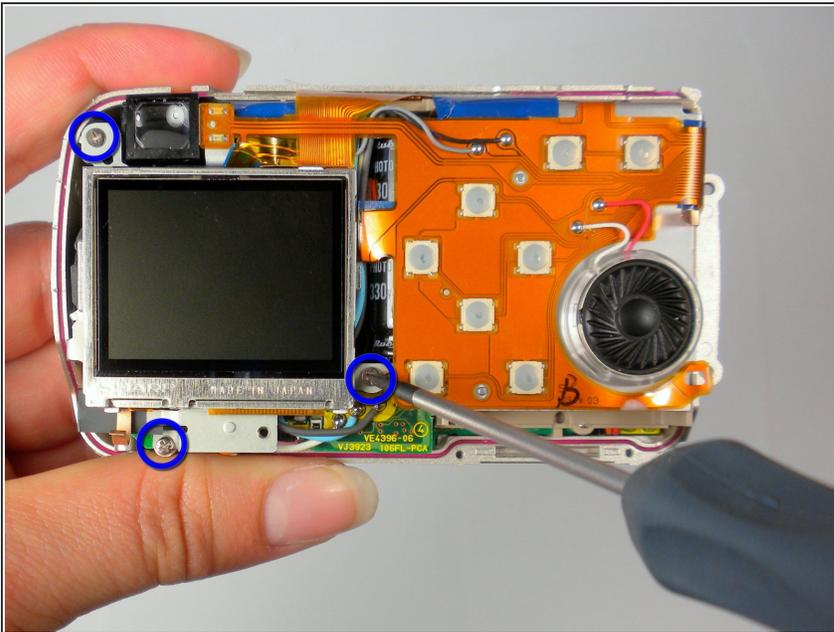

- Locate the 3 internal screws holding on the front of the case. Remove them with a #00 Phillips screwdriver.

Step 11

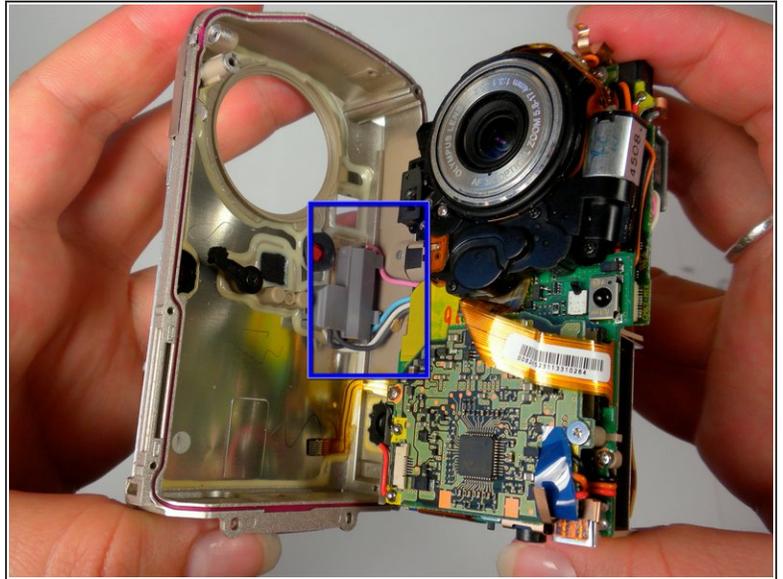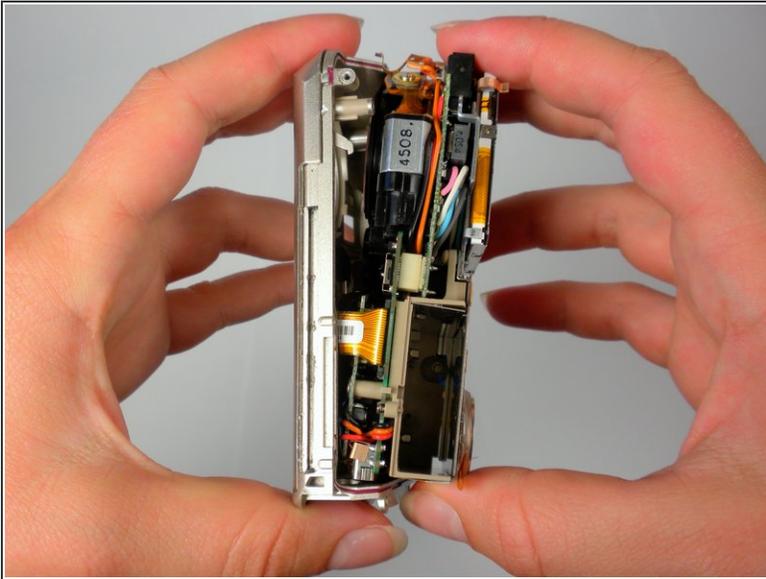

- While grasping the interior and the front case, gently pull until they start to come apart. Some light wiggling may be required.
- Be careful not to completely pull the front case off because it will still be connected with wires.

To reassemble your device, follow these instructions in reverse order.