




Oppo X9000 Speaker Drivers Replacement

Replace the speaker drivers on your Oppo X9000.

Written By: Sara Dafoe

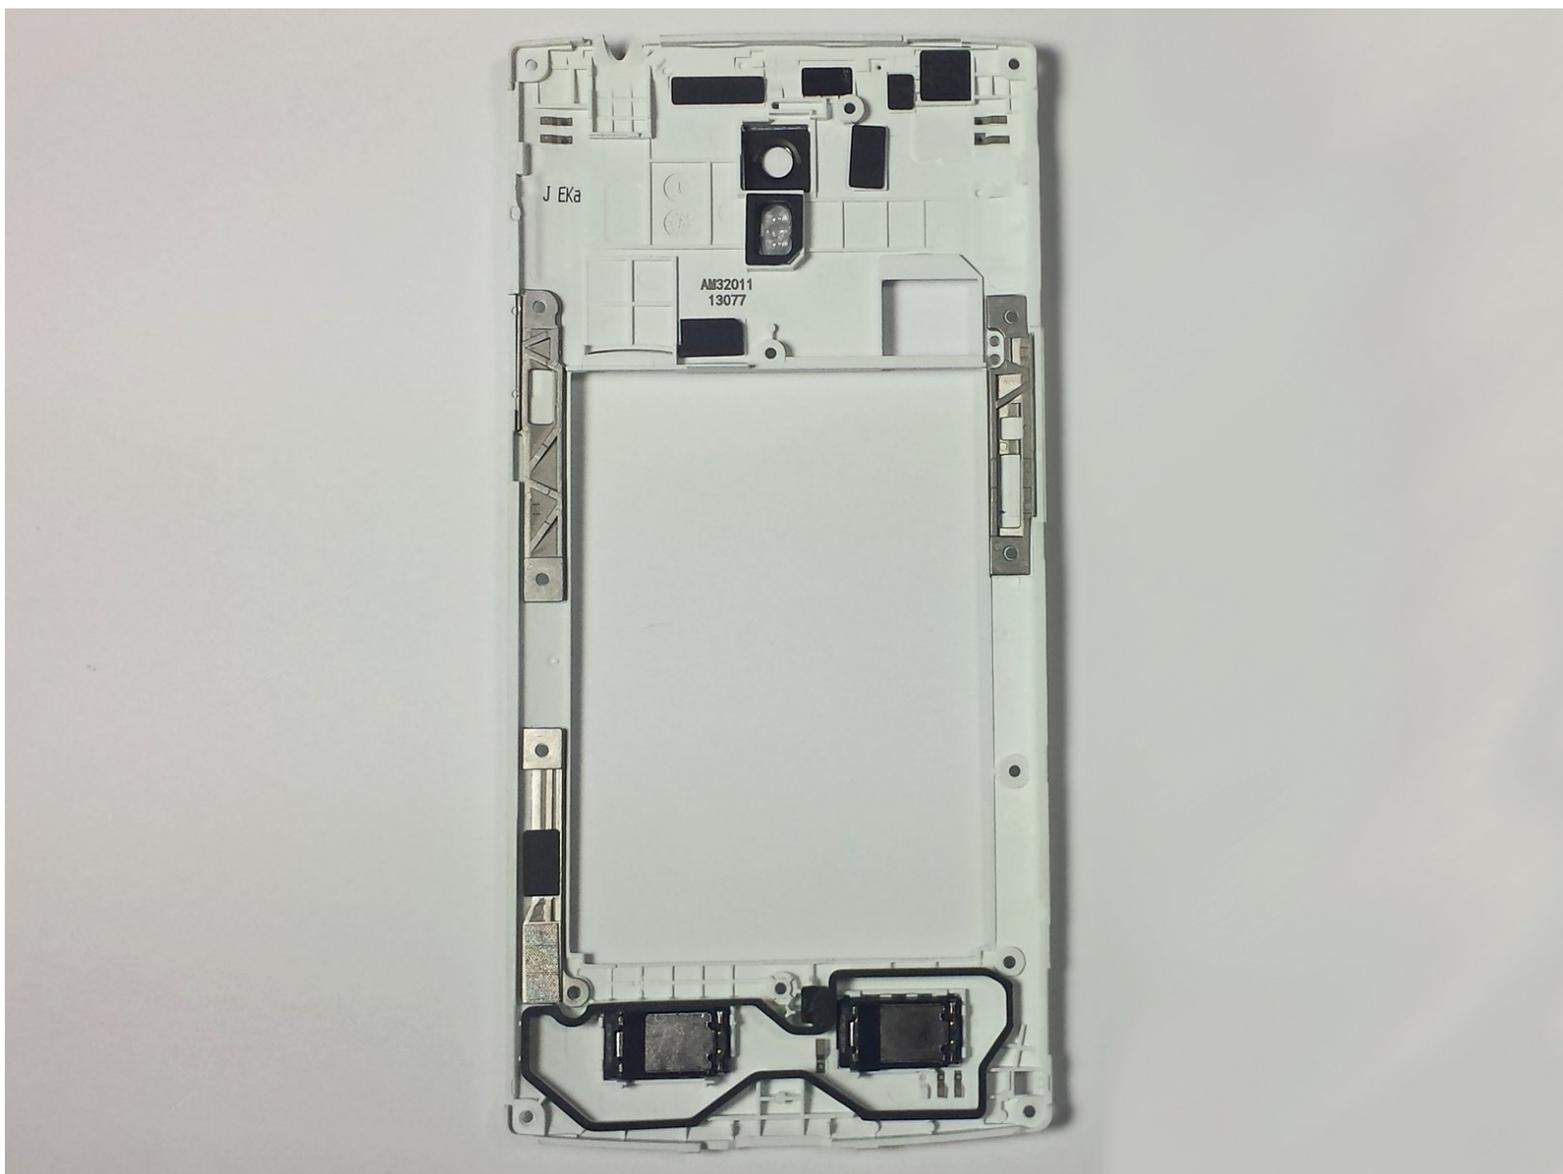

INTRODUCTION

The speaker drivers are relatively easy to replace, and are located under the chassis.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Removing the Back Cover



- Turn the phone over so that you are facing the back side of the phone.
- With your fingers, pry the back cover up starting from the top of the phone near the headphone jack and camera.
- Completely remove the back cover by moving down the sides and bottom with your fingers.

Step 2 — Removing the Battery



- With your finger, remove the battery from the phone by gently lifting the top-right corner nearest to the camera.

Step 3 — Remove the Back Panel Screws



- Remove the twelve exposed 3.6 mm Phillips screws on the rear of the phone using the 3.6 mm Phillips screwdriver.
- ⚠ Store all the screws in a safe place where you will not lose them.

Step 4 — Remove the Rubber Stoppers





- Remove the three circular rubber screw covers on the back of the phone by slipping the spudger into the border between the rubber cover and the chassis. In one motion, pry the stopper out of the hole. This can take some force.

Step 5 — Remove the Newly Exposed Screws





- With the 3.6 mm Phillips screwdriver, remove the three newly exposed 3.6mm Phillips screws.

Step 6 — Lift off the Back Panel

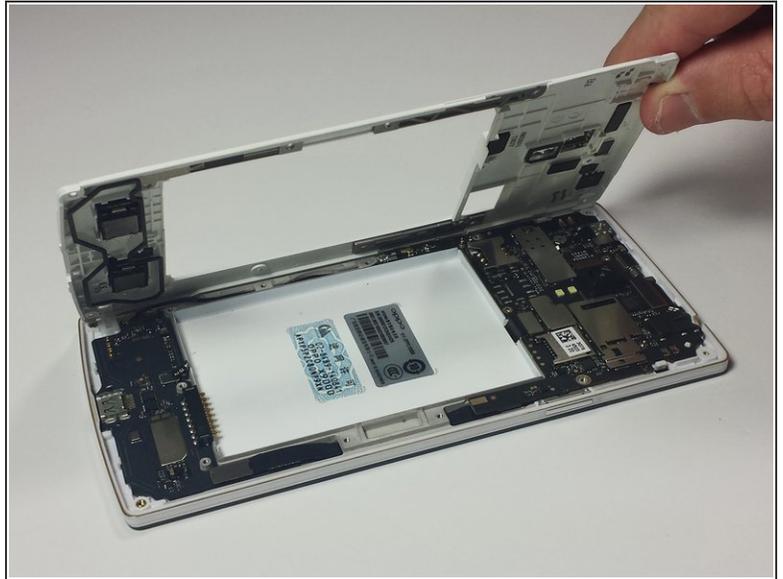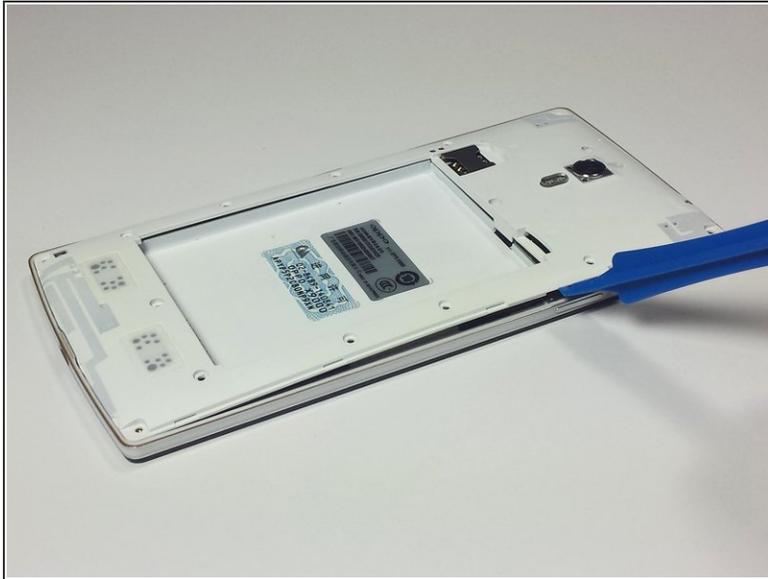

- Insert the plastic opening tool underneath the chassis near the power button and pry the chassis from the phone. This should take a little force.

Step 7 — Remove the Speaker Drivers

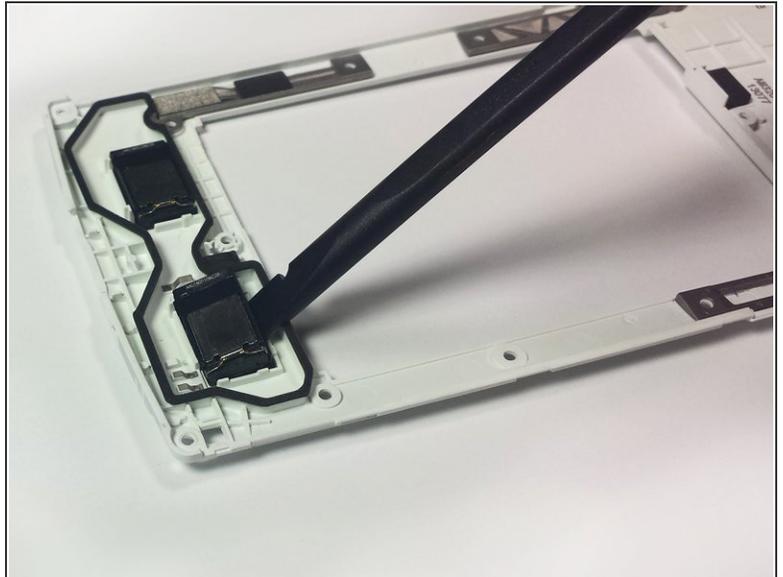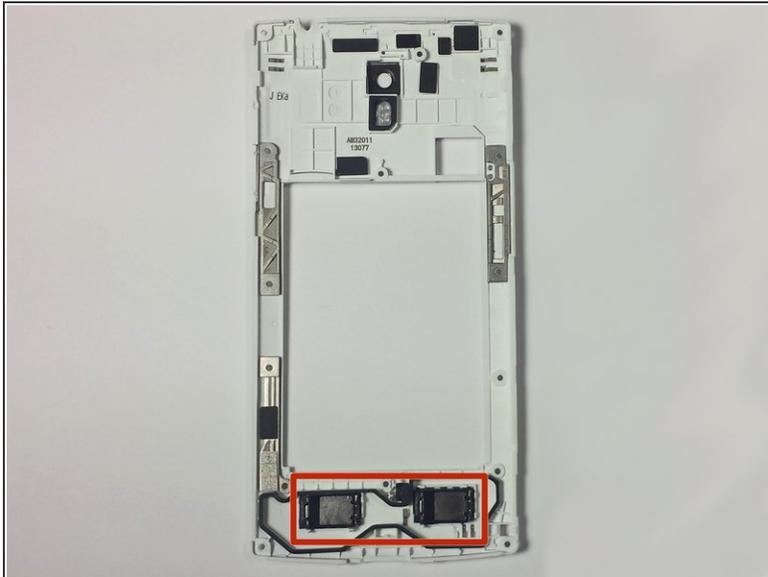

- Using the flat end of the spudger, pry the speaker drivers off of the chassis.

To reassemble your device, follow these instructions in reverse order.