




Oster BLSTSS-PZO Power Cord Replacement

The power cord is responsible for providing power to your device. This guide will instruct you on how to replace the power cord.

Written By: Loren Hyer

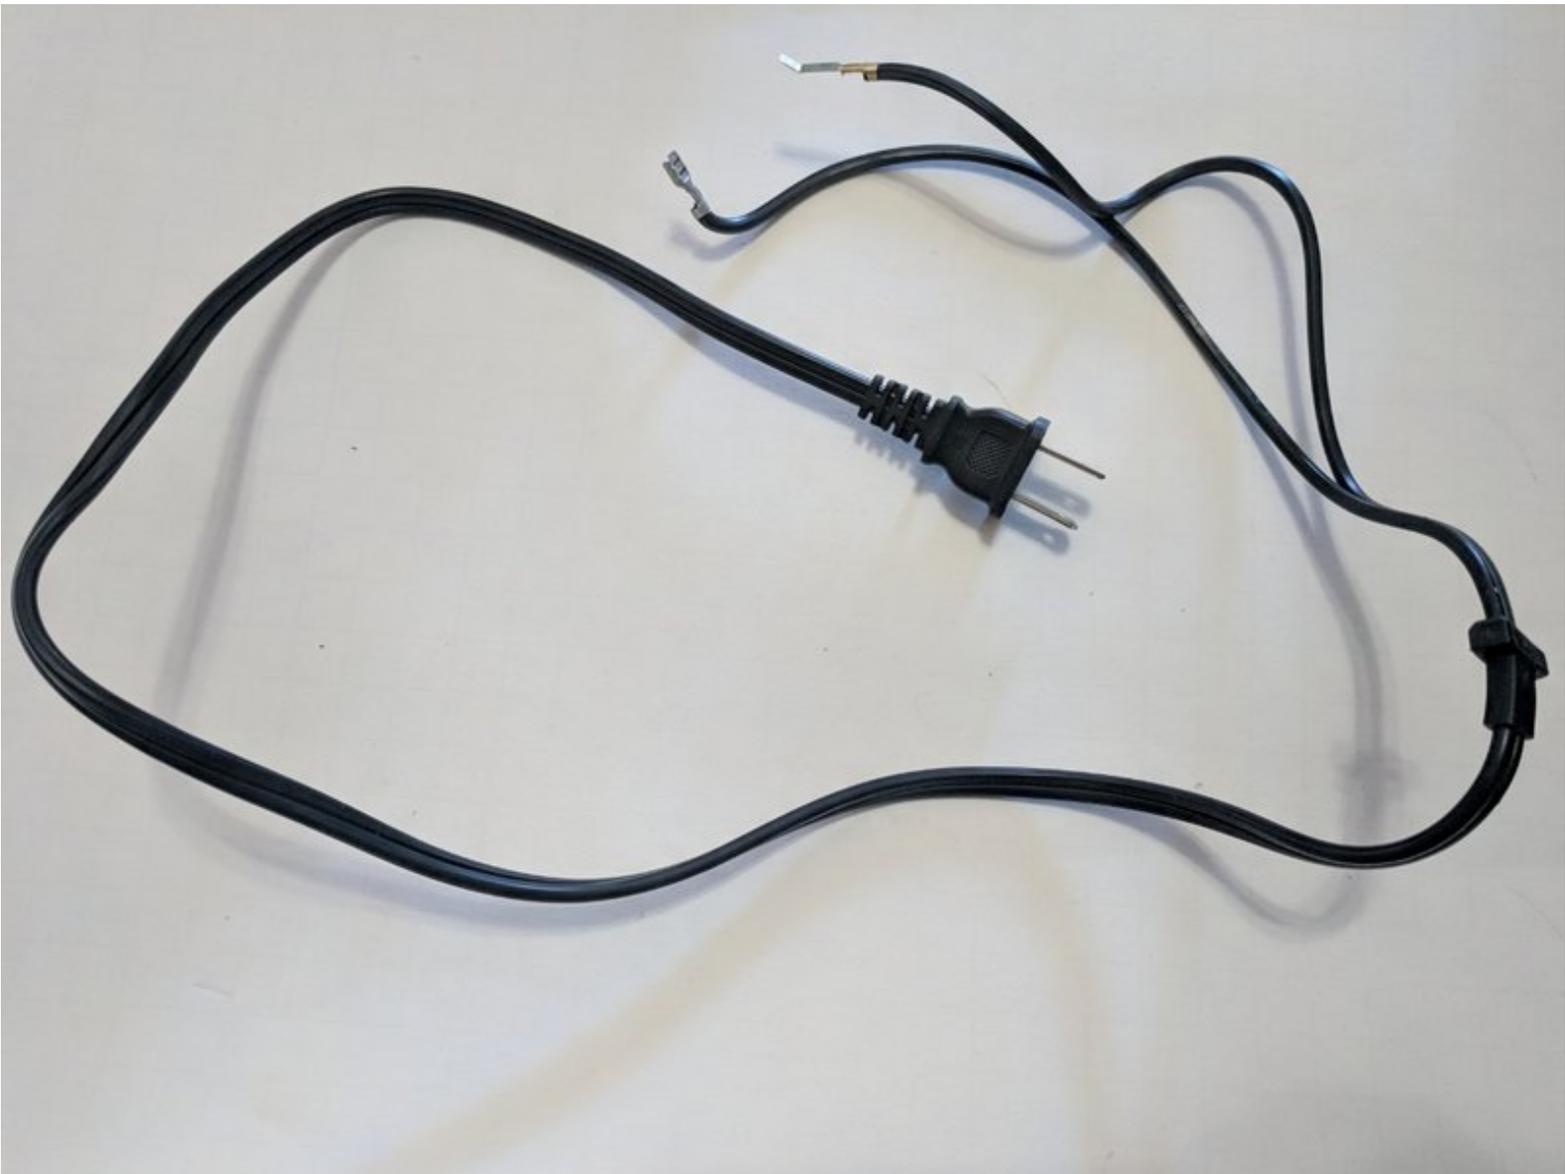

INTRODUCTION

The power cord is responsible for providing power to your device. This guide will instruct you on how to replace the power cord.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Circuitboard




- Use the prying tools to open the four plastic screw holes on the bottom of the blender.

Step 2





- Use the Phillips #1 Screwdriver to unscrew the four 16 mm screws and remove the plastic bottom.

Step 3

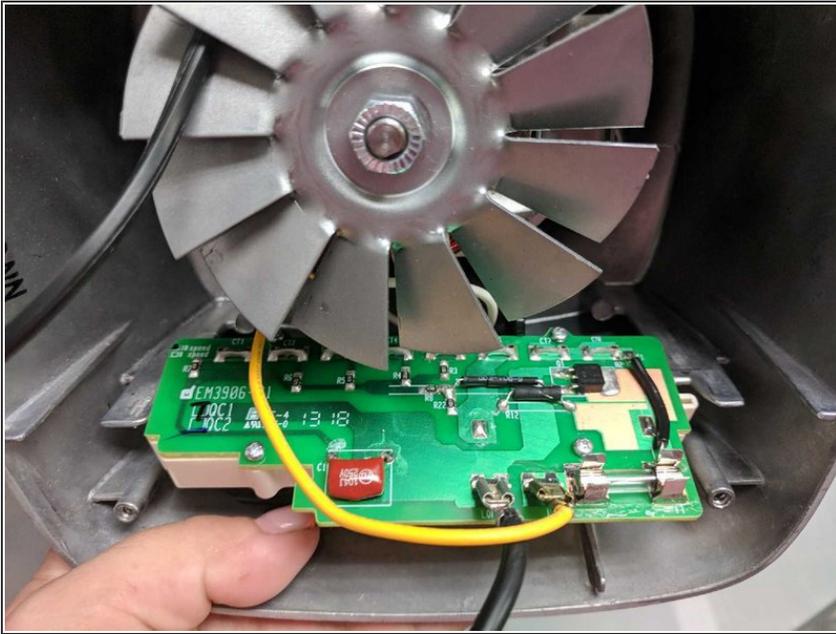


- Gently remove the circuit board.

Step 4

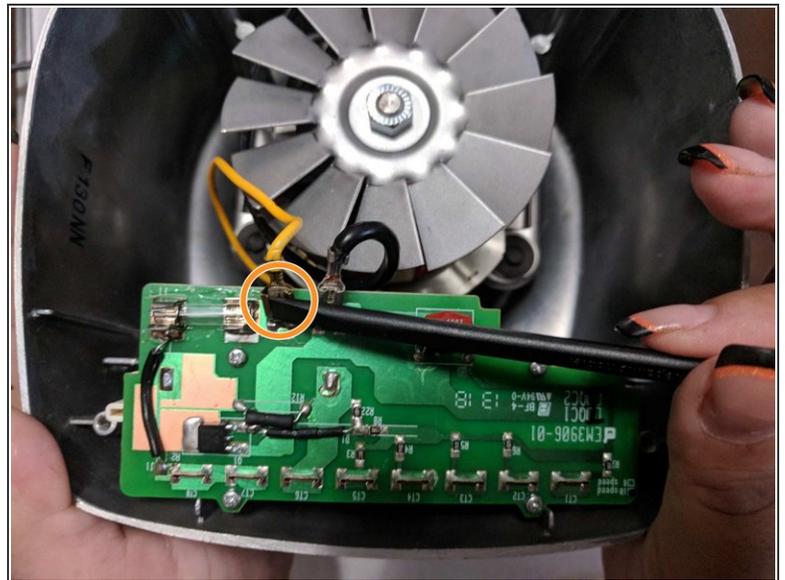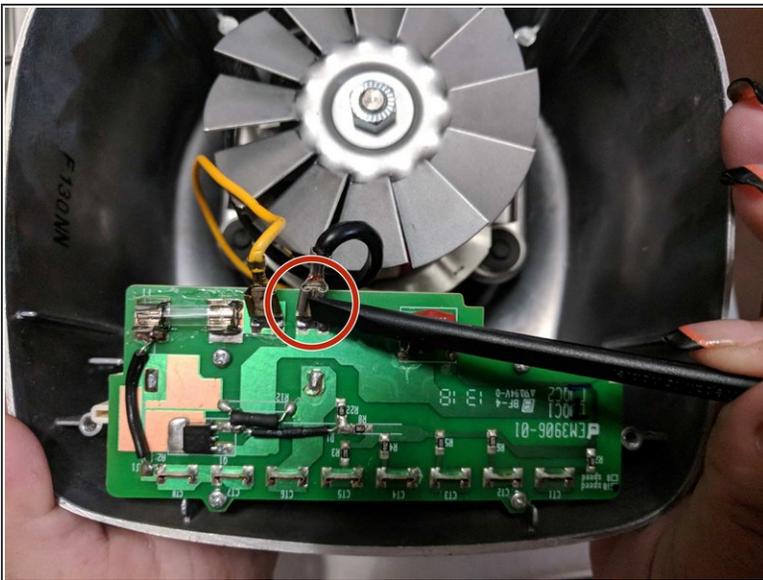


- Use the spudger to detach the black wire from the circuit board.
- Repeat for yellow wire.

Step 5

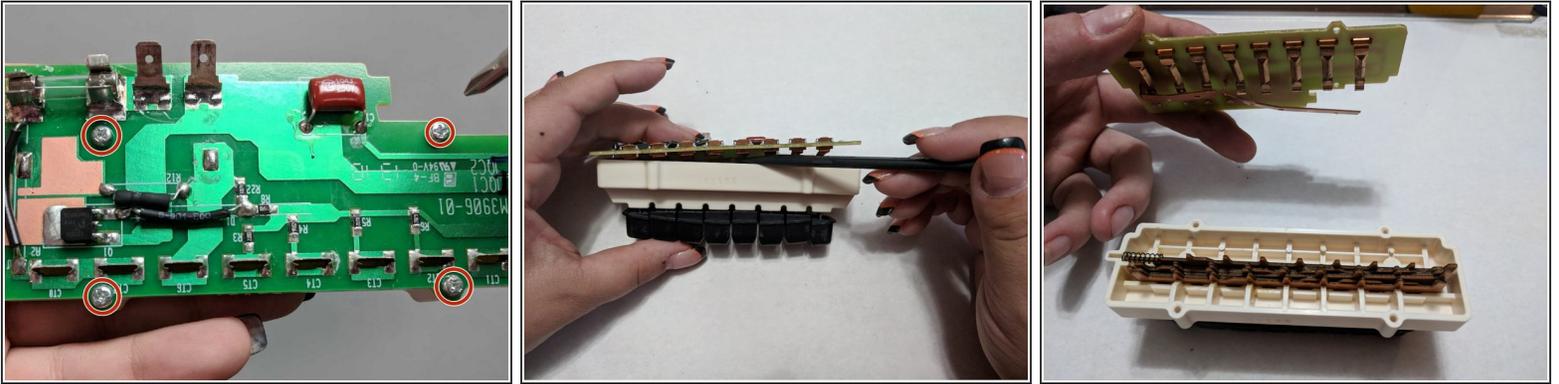


- Use the Phillips #1 to remove the four 8mm screws.
- Use the metal spudger to detach the circuit board from the buttons.
- Gently pull and release circuit board from buttons.

Step 6 — Power Cord

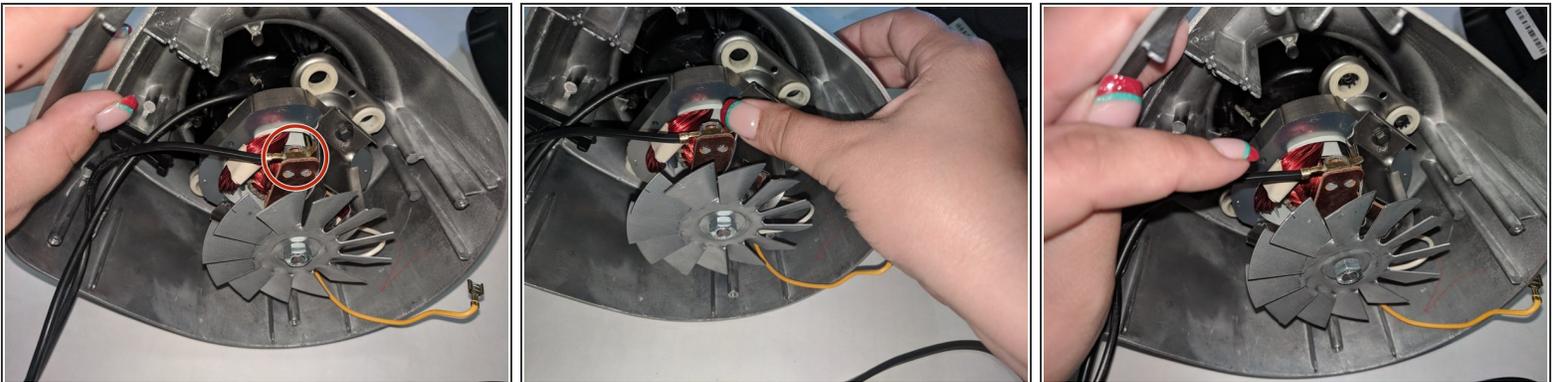

- Locate metal prong on the end of the power cord.
- Bend metal prong until it's straight with your finger.



Step 7

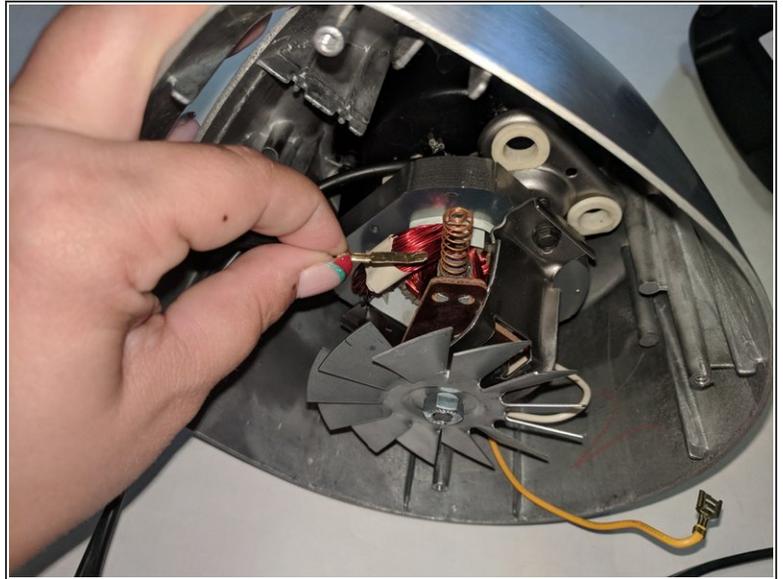

 Spring will pop out when you pull out metal prong

- Pull prong out of the hole.

Step 8

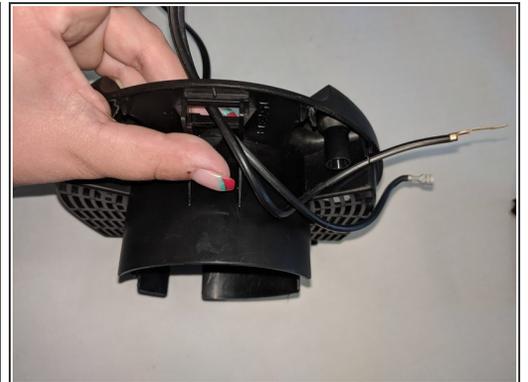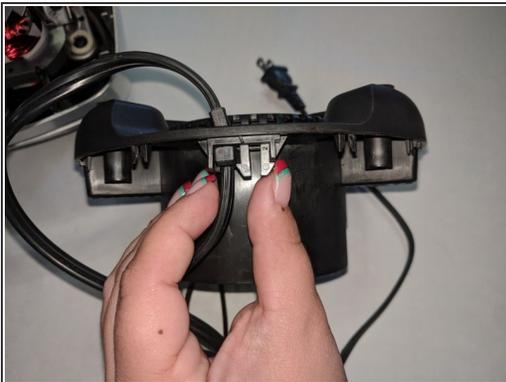

- Pinch plastic prongs on base of blender to remove plastic securing device.
- Remove plastic securing device.
- Pull power cord out of blender base.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-23 11:32:04 PM (MST).

