



# Oster Blend-N-Go My Blend Drinking Lid Seal Replacement

Remove drinking Lid Assembly seal.

Written By: Paul Long



---

## INTRODUCTION

Use this guide to replace your old or damaged Drinking Lid Seal.

---

### TOOLS:

- [iFixit Opening Tools](#) (1)
-

## Step 1 — Blender Bottle



- Grip the blender base with one hand and blender bottle with the other hand.
- Rotate the blender bottle a quarter turn counterclockwise .
- Lift the blender bottle out of the blender base. The blade assembly should still be attached to the blender bottle.

## Step 2



- Grip the blade assembly with one hand and blender bottle with the other hand.
- Rotate the blade assembly counterclockwise until it is completely unscrewed from the blender bottle.
- Lift the blender bottle to separate it from the blade assembly.

## Step 3 — Drinking Lid Assembly



- After removing the blade assembly from the blender bottle, ensure that your drinking lid assembly has its seal placed in the seal bed.

## Step 4



- Grab the blender bottle with one hand and the drinking lid assembly with the other.
- Place the drinking lid assembly onto the blender bottle and twist it clockwise until it is tight around the blender bottle.

## Step 5 — Drinking Lid Seal




- After separating the drinking lid assembly from the blender bottle, position the plastic opening tool on either side of the seal in the drinking lid assembly.
- Wedge the tool between seal and seal seat wall.

## Step 6



- Gently pry the seal up while lifting seal out of the seal seat.

## Step 7

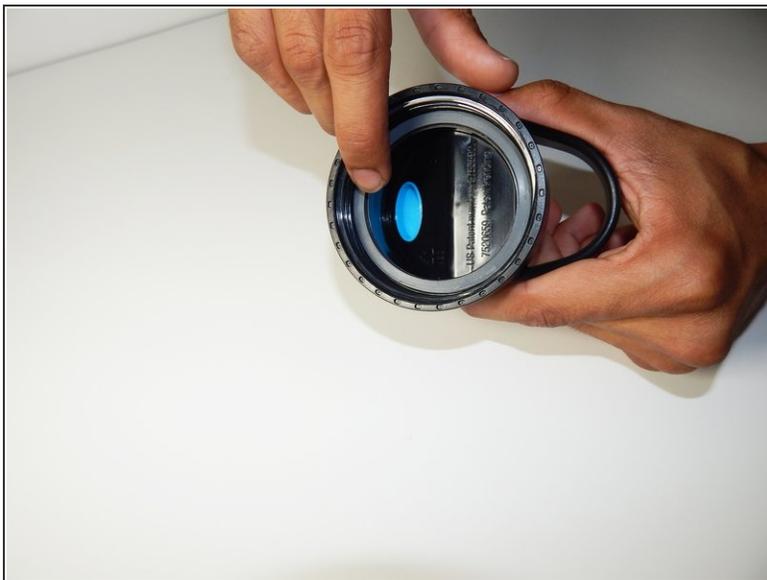

- Press new seal into seal seat with finger.

To reassemble your device, follow these instructions in reverse order.