



Purple SmartVP Mount Replacement

Replace a damaged or broken mount affixed to your device.

Written By: Brian Maulucci



 **TOOLS:**


- Flathead Screwdriver (1)
 - T10 Torx Screwdriver (1)
-

Step 1 — Mount





- Remove the top bar by removing the 5cm hex T10 screws on the back of the device as shown. Then gently pull off the top bar from the main component.

Step 2

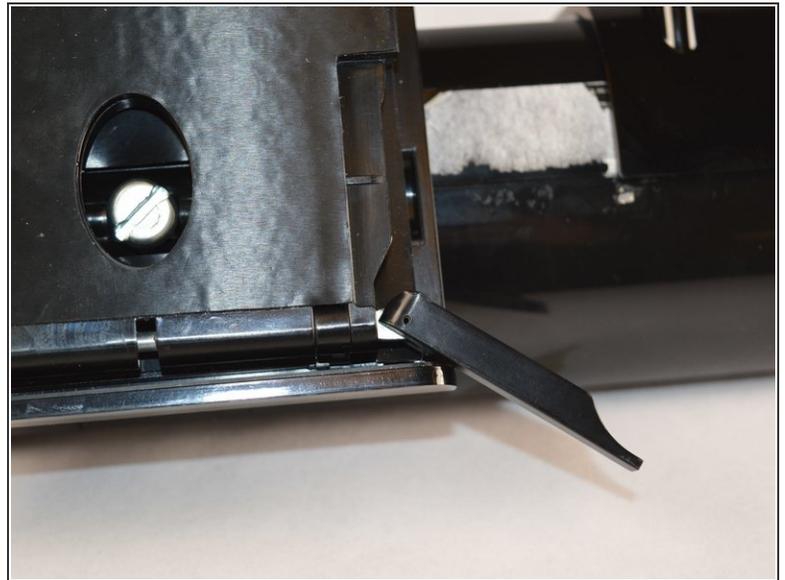

- Locate and release the flap on the side of your device's mount. This will allow you to slide the adjustable portion of the mount.

Step 3

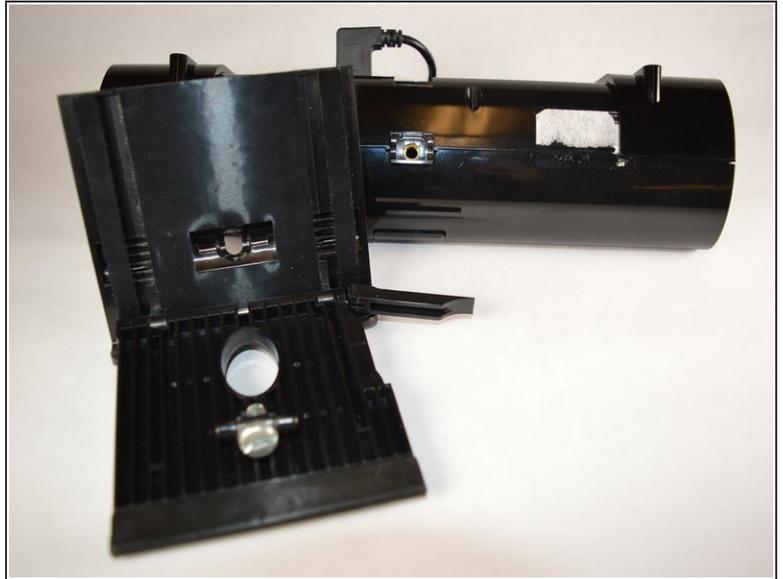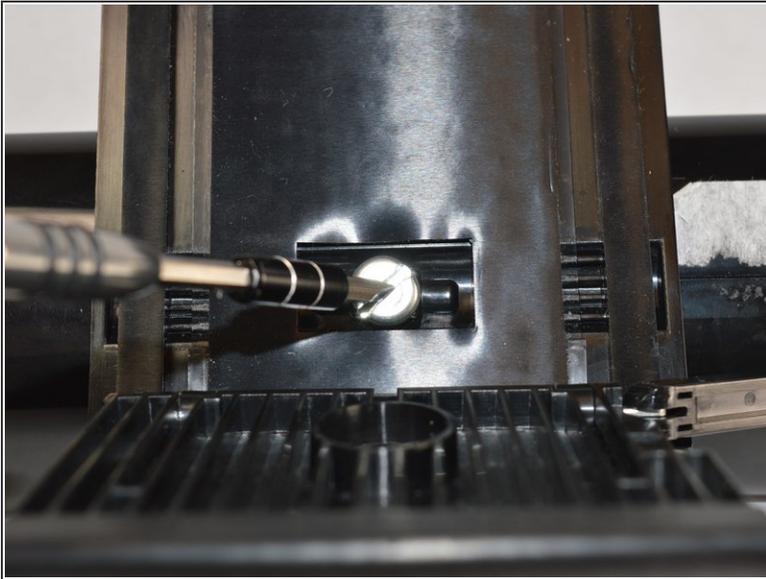

- Using a #4.0 flathead screwdriver, unscrew your mount from the bottom and remove the 1.2cm screw.

To reassemble your device, follow these instructions in reverse order.