



# RedOctane X-Plorer Auxiliary Port Replacement

This guide will show you how to replace the auxiliary port on the RedOctane X-Plorer located at the bottom of the guitar.

Written By: Riley



---

## INTRODUCTION

You can easily access the auxiliary port through the guitar neck. This guide will show you how to replace the auxiliary port located at the bottom of the guitar.

---

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Rear Case



- Remove the strap by pulling it off of the mounts located on the body and neck.

## Step 2




- Remove the nine 12mm Phillips #1 screws around the perimeter of the case with a screwdriver.
- Remove the two 15mm Phillips #1 screws connecting the body panel to the neck panel with a screwdriver.
- ⓘ These screws can also be Torx on some models.
- Pull off the rear case.

### Step 3



- Remove the five 12mm Phillips #1 screws along the neck with a screwdriver.
- Pull off the top shell of the neck to expose the internal features.

### Step 4 — Auxiliary Port

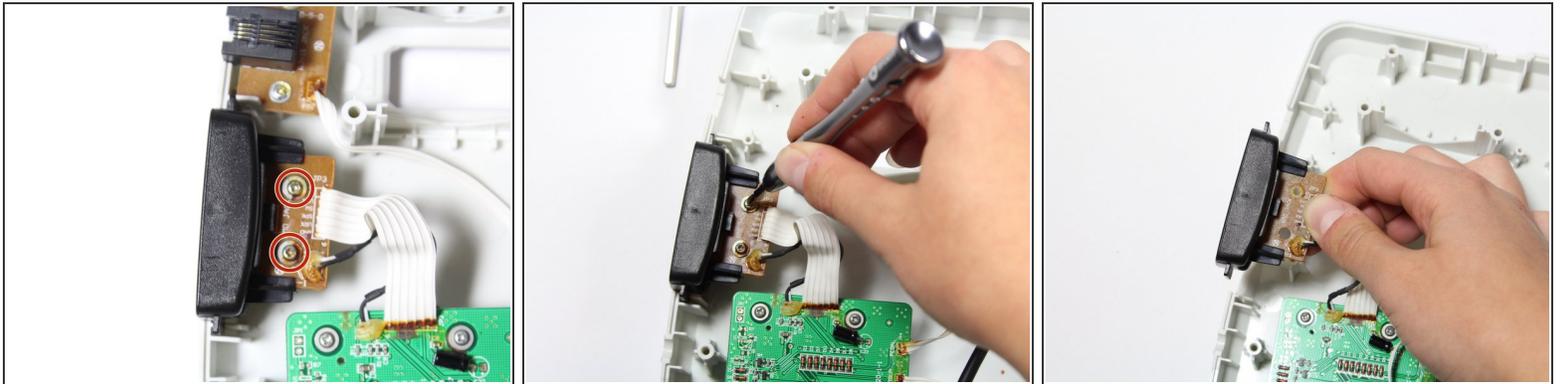

- Remove the two 10mm Phillips #1 screws from the auxiliary port board using a screwdriver.
- Gently lift up on the auxiliary port to remove it from the case.

To reassemble your device, follow these instructions in reverse order.