



Revlon Perfect Heat Jumbo 3 Barrel Waver Teardown

This guide will show step by step instructions on how to disassemble the Revlon Perfect Heat Jumbo 3 Barrel Waver.

Written By: Kyle Weeks



 **TOOLS:**

- Screwdriver (1)
Phillips
-

Step 1 — Lever and Spring





 Make sure your the device is unplugged before starting this teardown.

 The device used in this tear-down is missing the lever and spring.

- Remove these items by lifting up on the lever until it pops out of place. The spring should come out easily.

Step 2 — Securing Screws

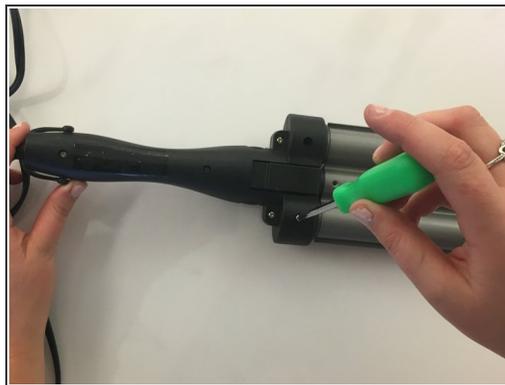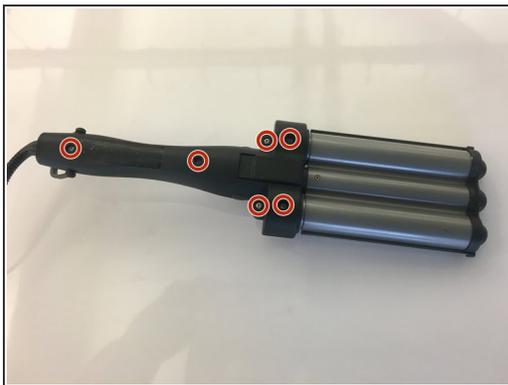

- Remove all of the screws on the back of the plastic covering.

Step 3 — Handle Casing




- Remove the plastic handle cover by lifting it straight up.

Step 4 — Circuit Securing Screw



- Remove the small black screw that is holding the circuit board in place.

Step 5 — Power Cord

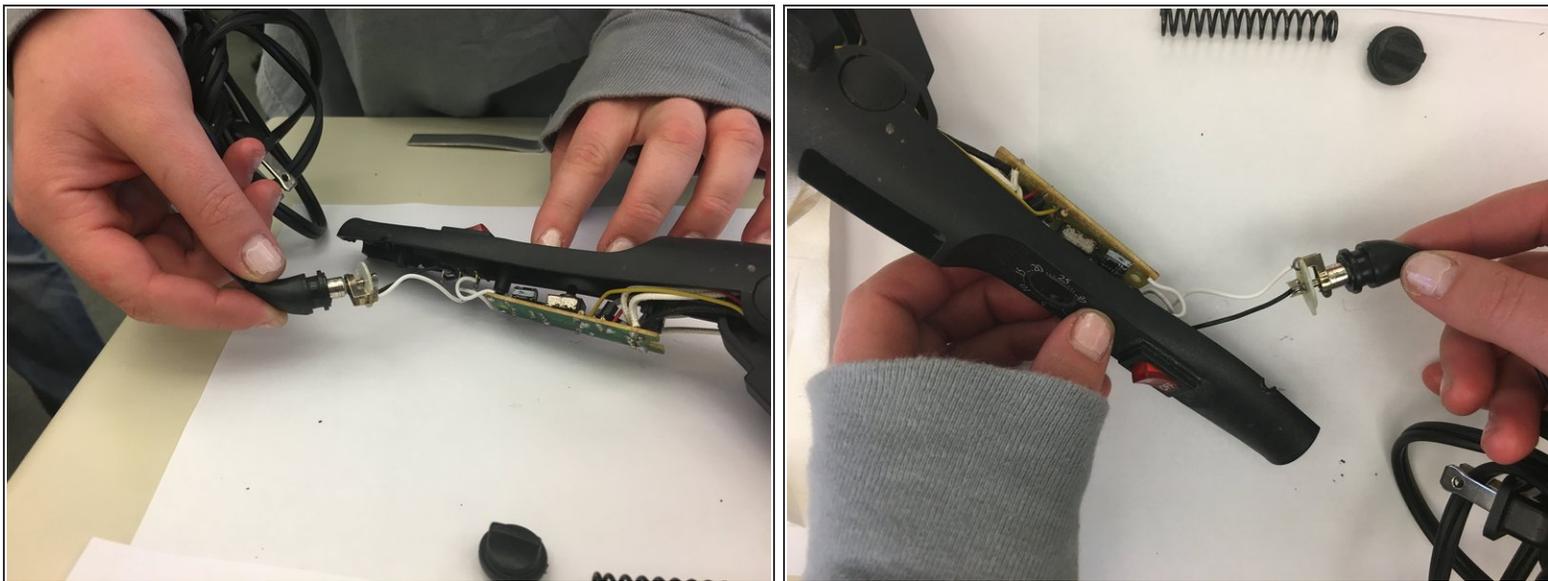

- Remove the power cord from the power port of the Waver by holding the port with one hand and pulling on the cord with the other hand.

Step 6 — Metal Heating Cylinders



- Remove the two metal cylinders by sliding them down the length of the inner soft cylinders.


 The internal ceramic cylinders are very soft and tear easily. Be careful not to damage them.

Step 7 — Cylinder Securing Fixtures



- Remove the plastic cylinder holders by lifting them up and along the length of the cylinder.

Step 8 — Rear Metal Plate

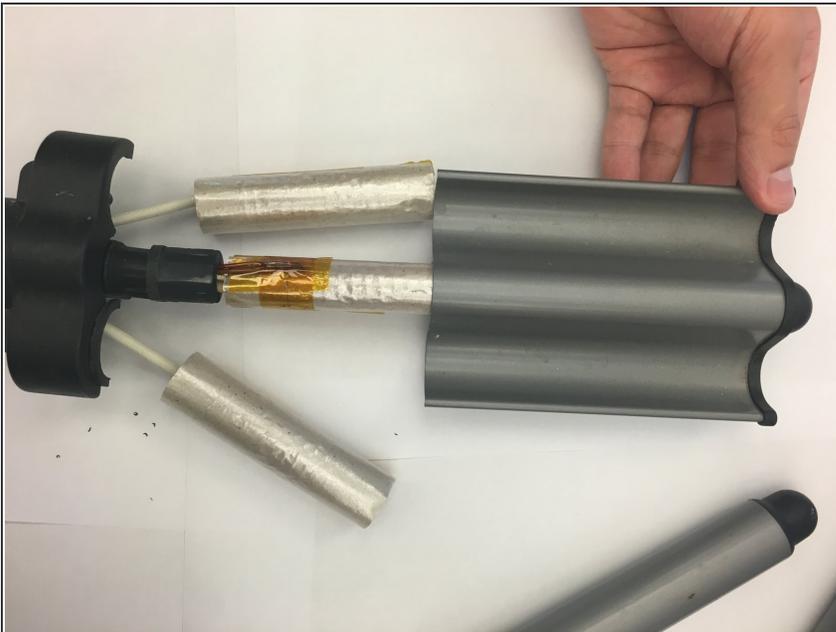

- Similar to step 4, remove the back metal plate by sliding down the length of the intern cylinder.
- ⚠ The internal cylinder is very soft and tears easily. Be careful not to damage it.

Step 9 — Heat Control Dial



- Gently lift the circuit board and tilt it to the side.
- Lift the dial straight up from the circuit board. It should come off easily.

Step 10 — Full Teardown



- Here are all of the safely removeable components of the waver