



Samsung Eternity Antenna/Speaker Replacement

In certain cases you might need to get in your phone and replace the speaker or antenna. Here's how...

Written By: Matthew Kidd



INTRODUCTION

You will need to find a clean area to work in and have the necessary tools. Follow this guide to gain access to your cellphone's antenna/speaker module.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Back Case



- Remove the back battery cover.

Step 2




- Remove the phone's battery.

Step 3



- Remove six (4.28 x 1.25)mm screws.

Step 4

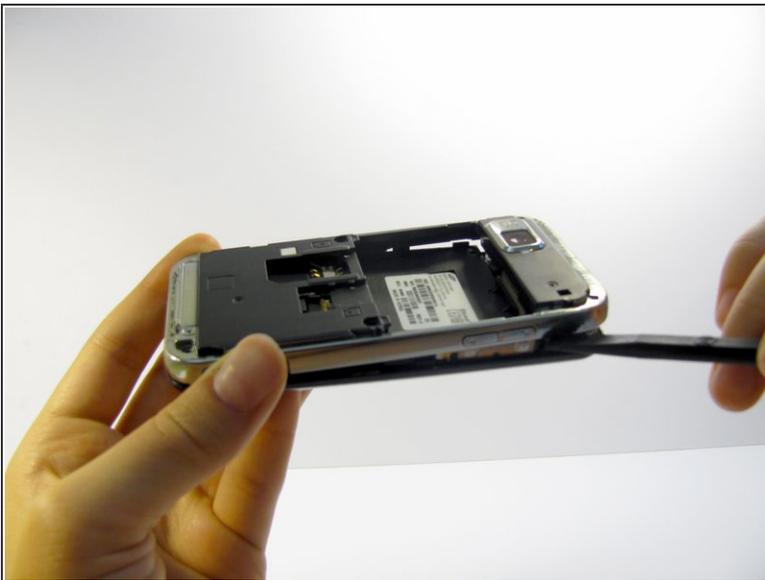


- Use the spudger to gently pry the silver plastic back plate from the body of the phone.

Step 5 — Antenna/Speaker




- Pop the antenna plug off of its socket with a pair of metal tweezers.

Step 6

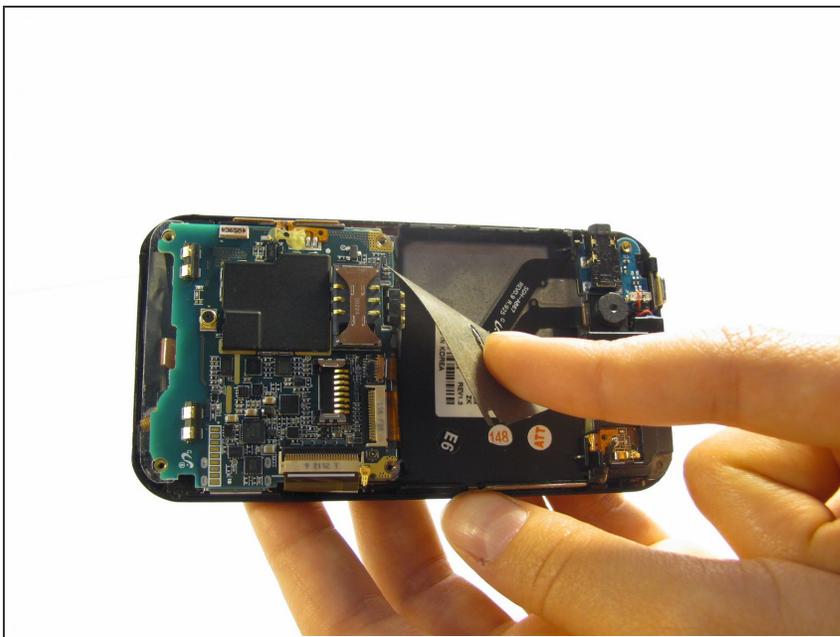


- Peel off the Identification sticker.

Step 7

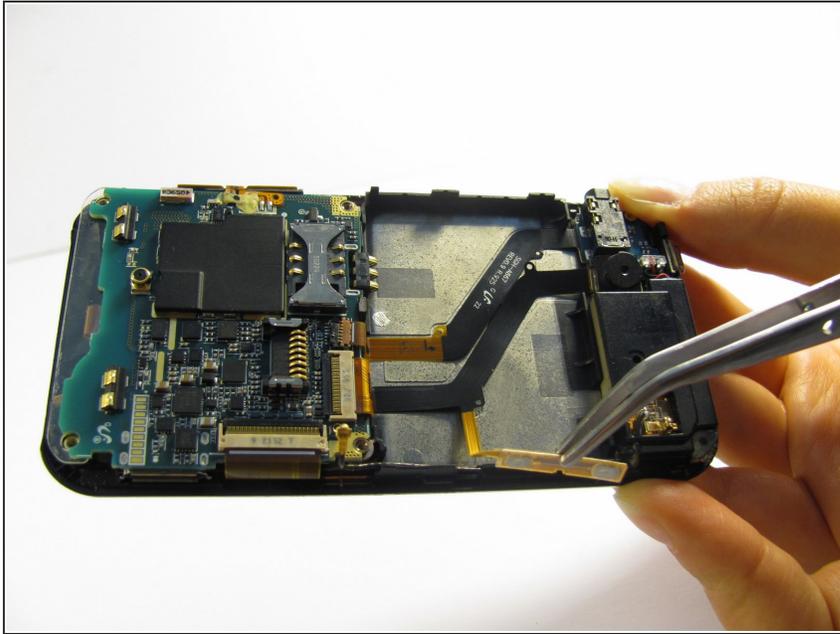


- Peel the button sensor on the side of the motherboard off of the case.

Step 8

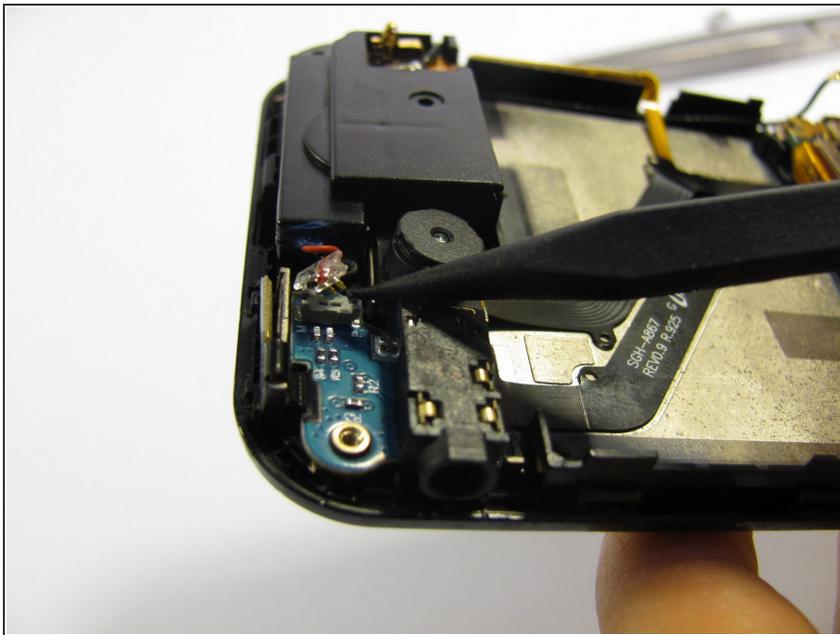

- Pop the speaker plug out of its socket.

Step 9

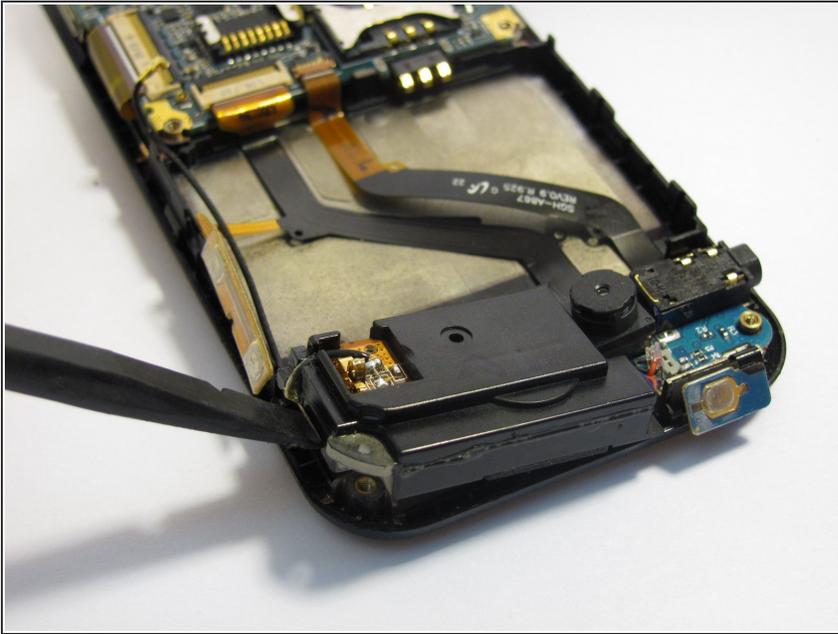

- Pry the antennae/speaker component out of its casing. You need to use a little force to get the piece to pop out.

Step 10



- You will now be able to replace the antenna/speaker module.

To reassemble your device, follow these instructions in reverse order.