




# Snapfon ez One Speaker Replacement

This guide will give a detailed list of instructions of how to remove the speaker of the phone in order to replace it with a new one.

Written By: John Bender

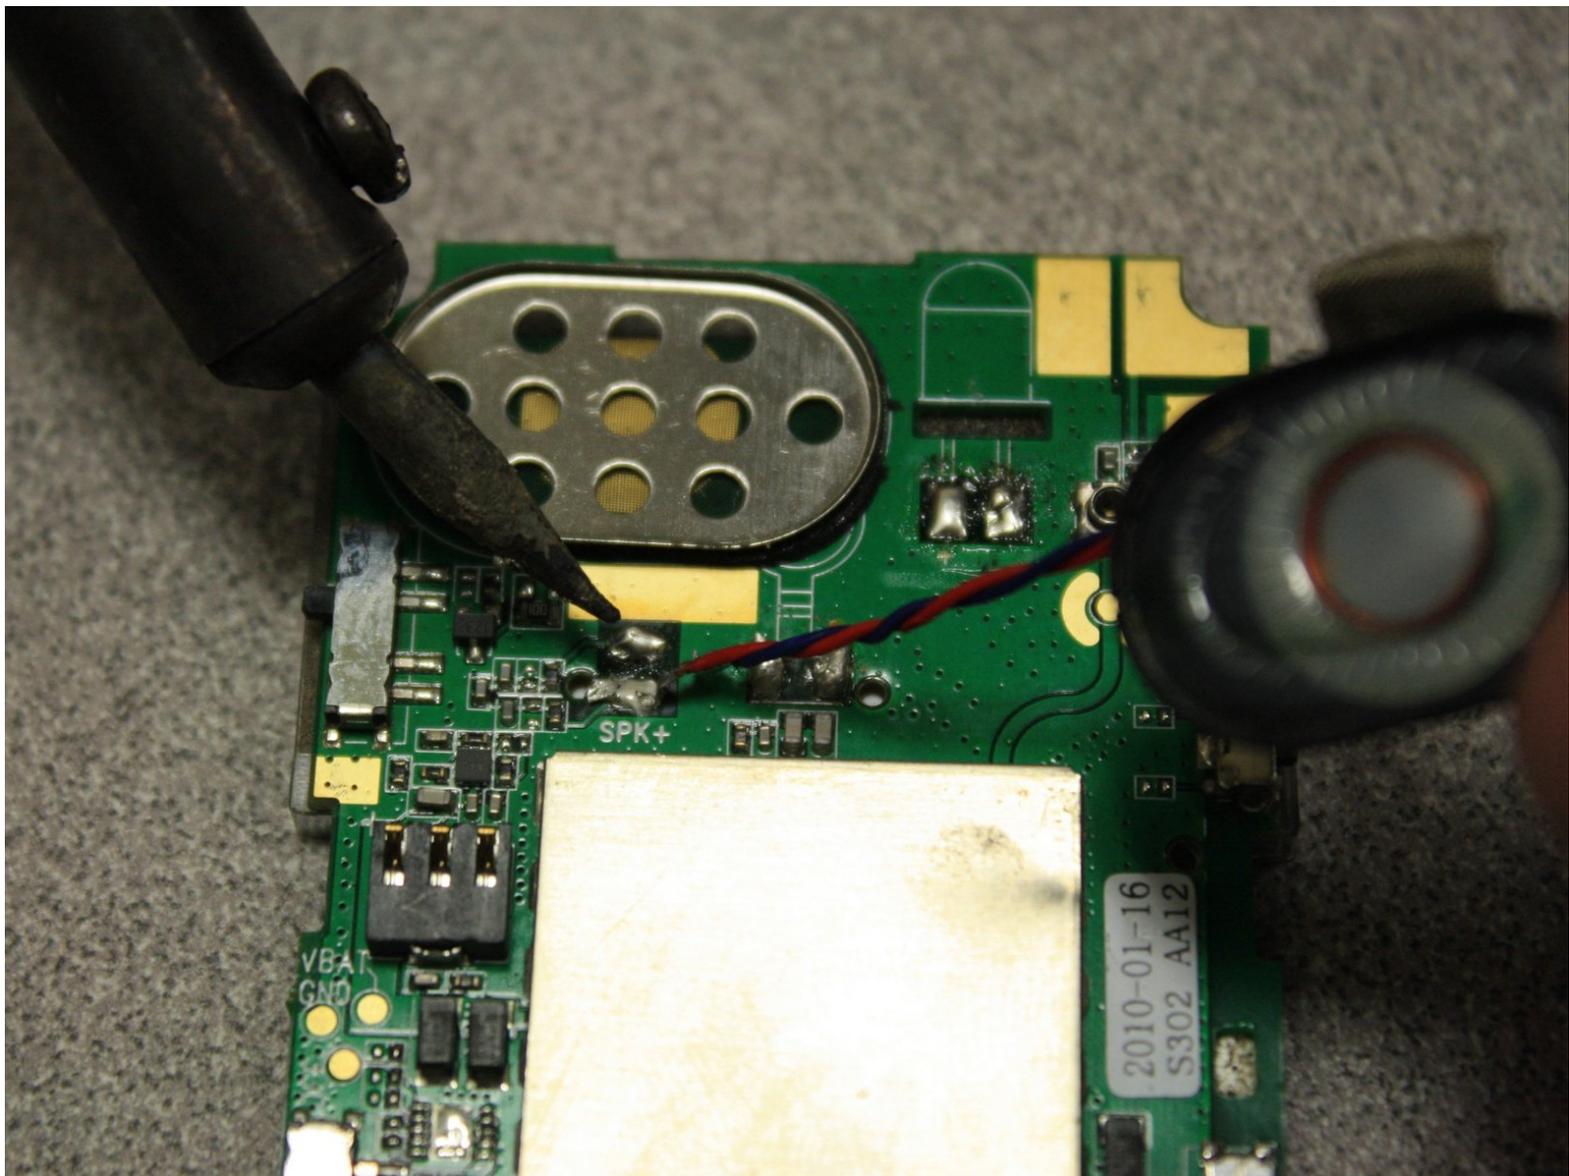

---

## INTRODUCTION

The speaker is the component of the phone that allows the user to hear sound emitted from the device. The speaker is part of the system that converts electrical signals into sound waves.

---

### TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [Soldering Iron](#) (1)
-

## Step 1 — Remove the battery cover




- Make sure the phone is turned off by pressing the power off button to ensure no data is lost.
- Remove the back battery cover by sliding it downward and pushing simultaneously.
- ⓘ Picture rights belong to Snapfon®. Picture is used for educational purposes only. No copyright infringement intended.

## Step 2 — Remove the battery

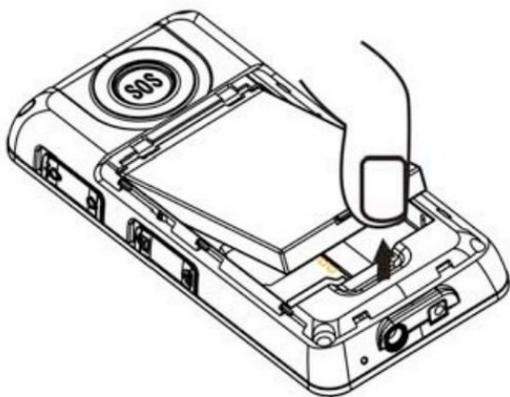


- Using either your thumb or the opening tools, remove the battery by prying the battery out in the direction of the arrow.
- ⓘ If removing battery is for the replacement of a new battery make sure to properly dispose of the old battery at a recycling center.
- ⓘ Picture rights belong to Snapfon®. Picture is used for educational purposes only. No copyright infringement intended.

### Step 3 — Removing the plastic inserts

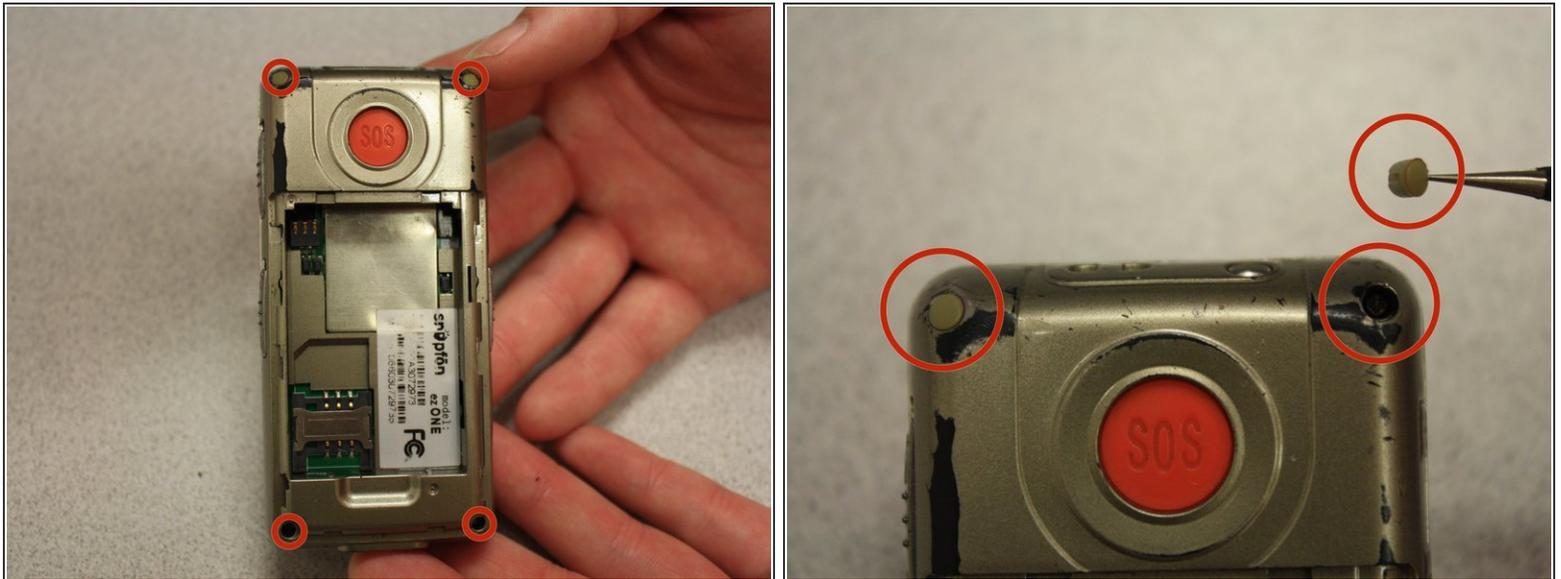

- Remove the rubber inserts from the screw holes using the black metal tweezers. This is done by inserting the tip of the metal tweezers down around the plastic insert.

### Step 4 — Remove the shield screws

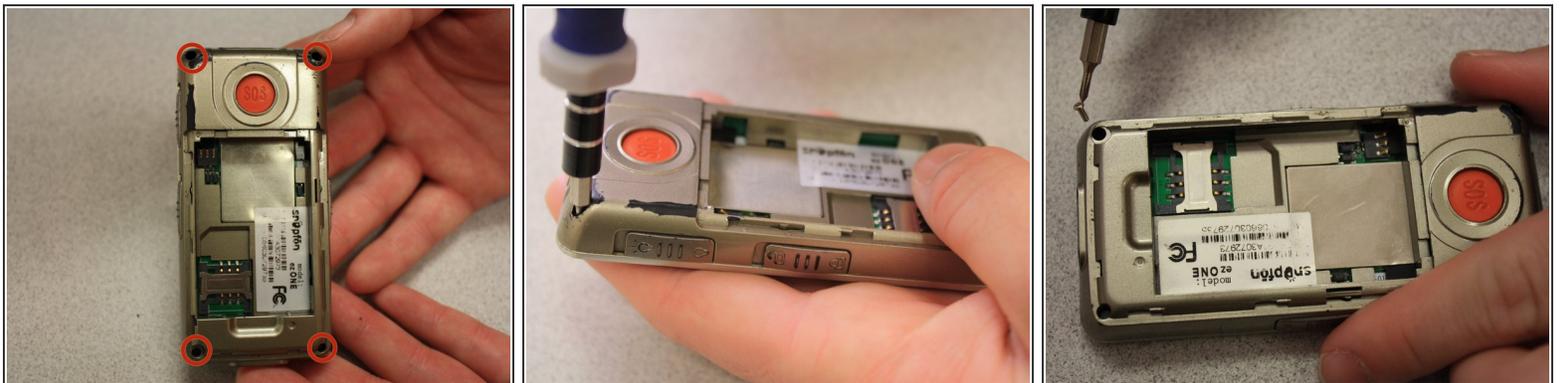

- Remove the four 3.1mm Phillips #00 screws from the corners.
- ⓘ This is done by turning the screwdriver counter clockwise using little torque.

## Step 5 — Separate the case



- Separate the phone's front case from the back case.
- There is an intermediate decorative outlay around the front cases perimeter. This should be removed as well.

## Step 6 — Remove the volume slider



- Remove the volume slider button by using the tweezers to pry it out.
- ⓘ The volume slider button may fall out during the separation of the front and back cases, this is ok.

## Step 7 — Remove the motherboard




- Using the opening tools, separate the circuit board from the inside of the back case by prying between the circuit board and the case as shown.
- The last picture is a view of the back of the circuit board.

## Step 8 — Speaker




- Remove SOS button from circuit board with tweezers.

## Step 9

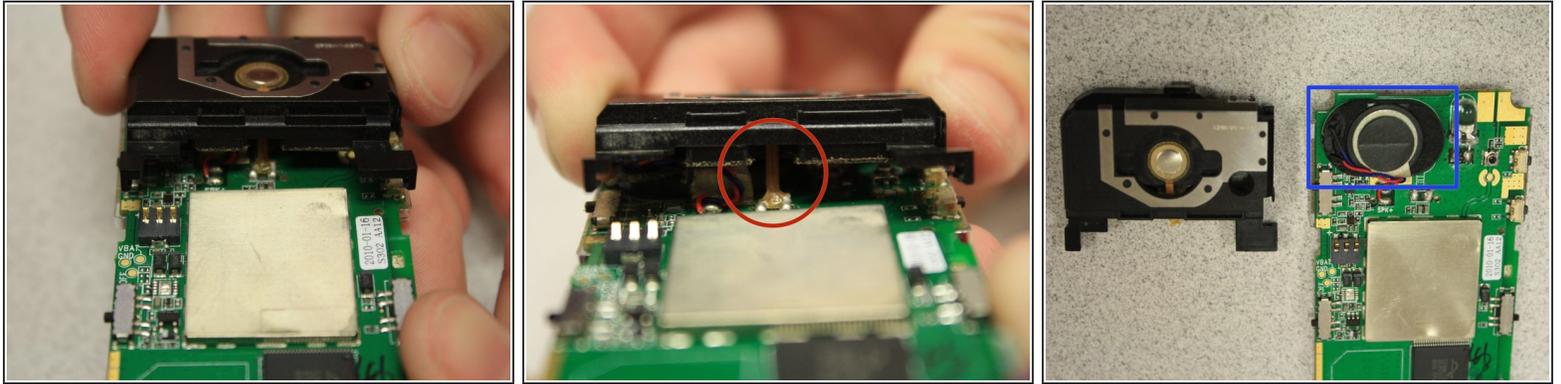



- Pull black casing from the circuit board with fingers.
- ⓘ The black casing will not be able to be fully removed at this point
  - To fully remove the black casing, desolder the SOS button cable from the circuit board with a soldering iron.
- ⚠ The solder iron creates high temperatures that may cause bodily harm.
  - Once the black casing is removed, the speaker will now be exposed.

## Step 10

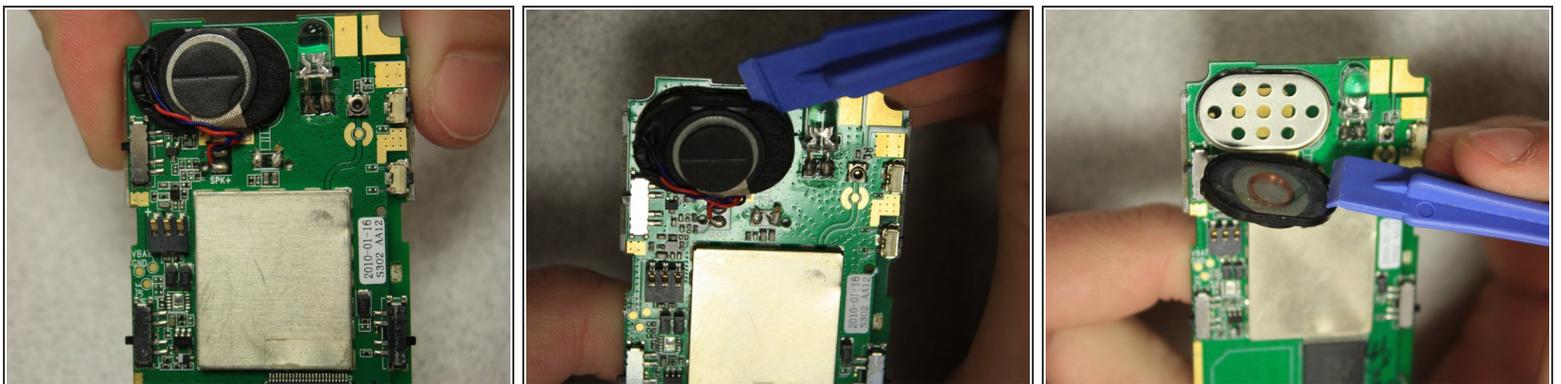

- With the plastic opening tools, pry off the speaker from the circuit board.

## Step 11

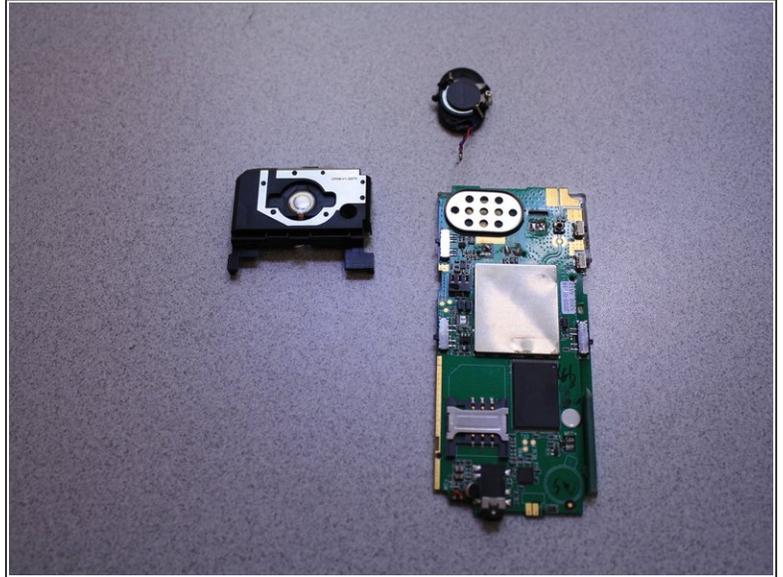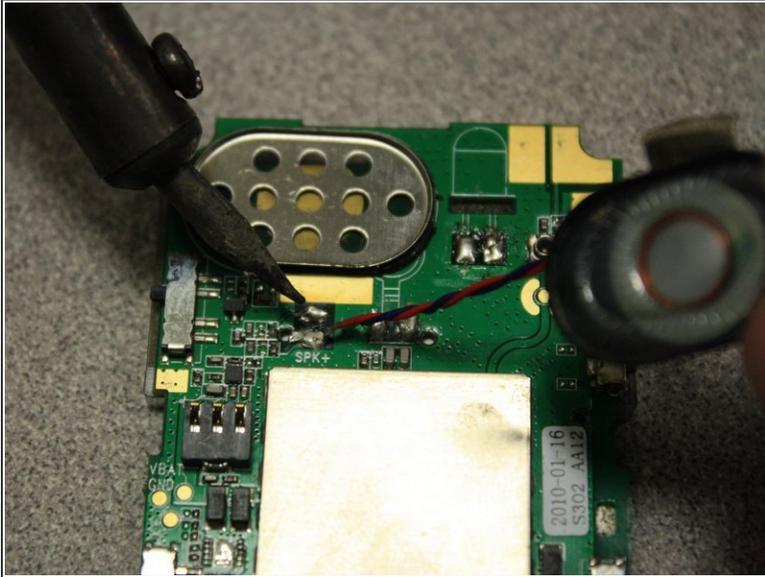

- Desolder the speaker cables from the base of the circuit board with the soldering iron.
- ⚠ The soldering iron creates high temperatures that may cause bodily harm.
- ➡ Melt the new speaker wires to the circuit board with the soldering iron.

To reassemble your device, follow these instructions in reverse order.