



iPhone 5s Camera Bracket Replacement

Camera bracket prereq before battery removal.


Written By: Sam Goldheart



 **TOOLS:**

- [Phillips #000 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Camera Bracket

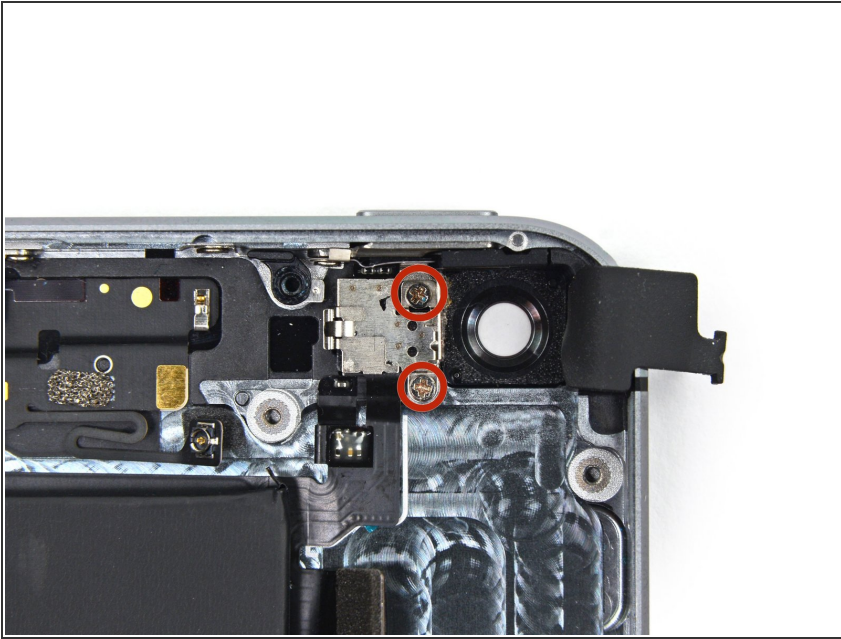


- Remove the two 1.6 mm Phillips #000 screws securing the rear-facing camera bracket.

Step 2



- Remove the rear-facing camera bracket from the rear case.

Step 3

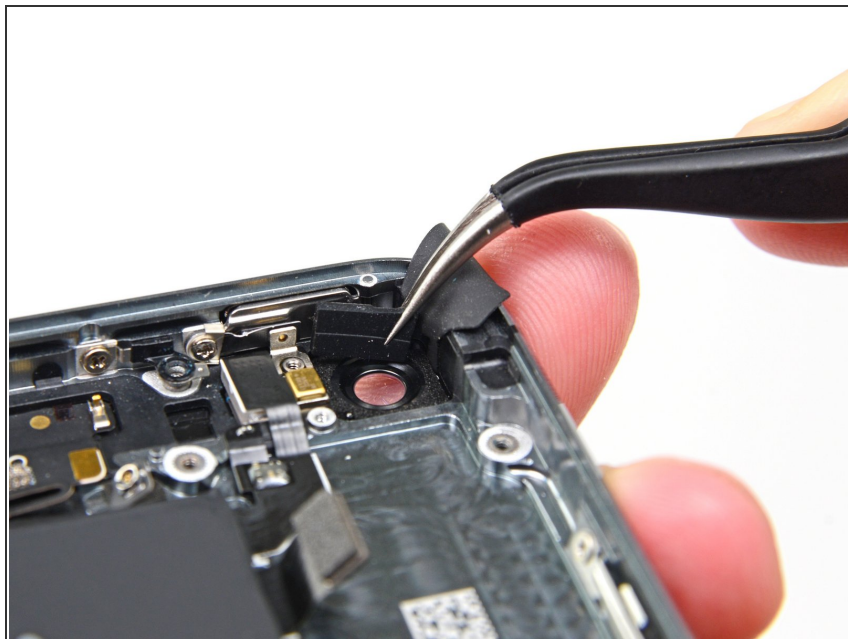

- Remove the rubber camera bumper from the case.

To reassemble your device, follow these instructions in reverse order.